

Activity 1:

Change the logo in the following files:


1. manifest.json

```
1 {
2
3
4   "manifest_version": 3,
5   "name": "AI Browser Extension for Code Generation",
6   "version": "1.0",
7   "description": "Test automation code generator",
8   "permissions": [
9     "storage",
10    "activeTab",
11    "scripting",
12    "tabs",
13    "sidePanel"
14  ],
15   "host_permissions": [
16     "<all_urls>"
17  ],
18   "action": {
19     "default_title": "Extension for AI Code Generation",
20     "default_icon": {
21       "16": "assets/images/logo-small.png",
22       "32": "assets/images/logo-small.png",
23       "48": "assets/images/logo-small.png",
24       "128": "assets/images/logo-small.png"
25     },
26     "icons": {
27       "16": "assets/images/logo-small.png",
28       "32": "assets/images/logo-small.png",
29       "48": "assets/images/logo-small.png",
30       "128": "assets/images/logo-small.png"
31     },
32     "side_panel": {
33       "default_path": "panel.html"
34     },
35     "background": {
36       "service_worker": "bg.js"
37     }
38   }
39 }
```


2. appConfig.js

```
1 export const appConfig = {
2   appName: 'AI Code Generator',
3   logoPath: 'assets/images/logo-small.png',
4   colors: {
5     primary: '#f97316', // vibrant orange
6     primaryLight: '#fb923c', // lighter orange for hover
7     accent: '#6366f1', // modern indigo
8     success: '#22c55e',
9     successDark: '#16a34a',
10    danger: '#ef4444',
11    darkBg: '#1a1b26', // deep navy-charcoal
12    panelBg: '#262838', // elevated panel surface
13    mutedText: '#9ca3af',
14    // Inspector toggle / gradient accents
15    gradientStart: '#7c3aed', // violet
16    shadowColor: 'rgba(124,58,237,0.35)',
17    shadowColorHover: 'rgba(124,58,237,0.5)',
18    shadowColorActive: 'rgba(99,102,241,0.25)',
19    borderWhite: 'rgba(255,255,255,0.12)'
20  }
21 };
```


Successfully changed the logo.

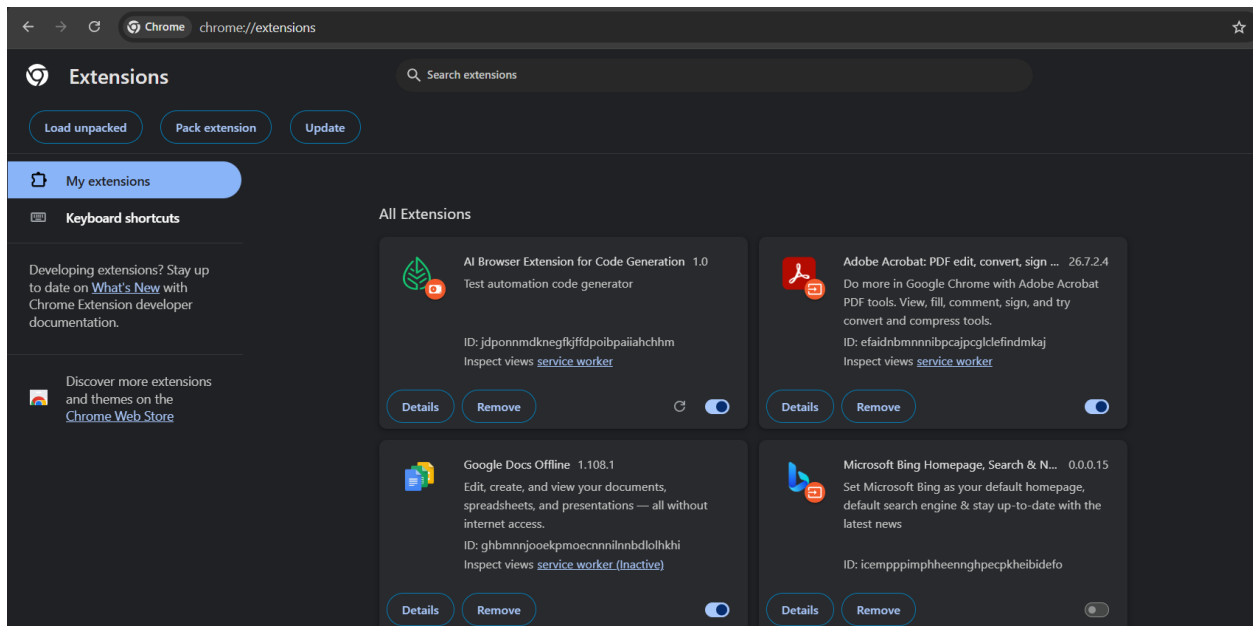

Activity2:

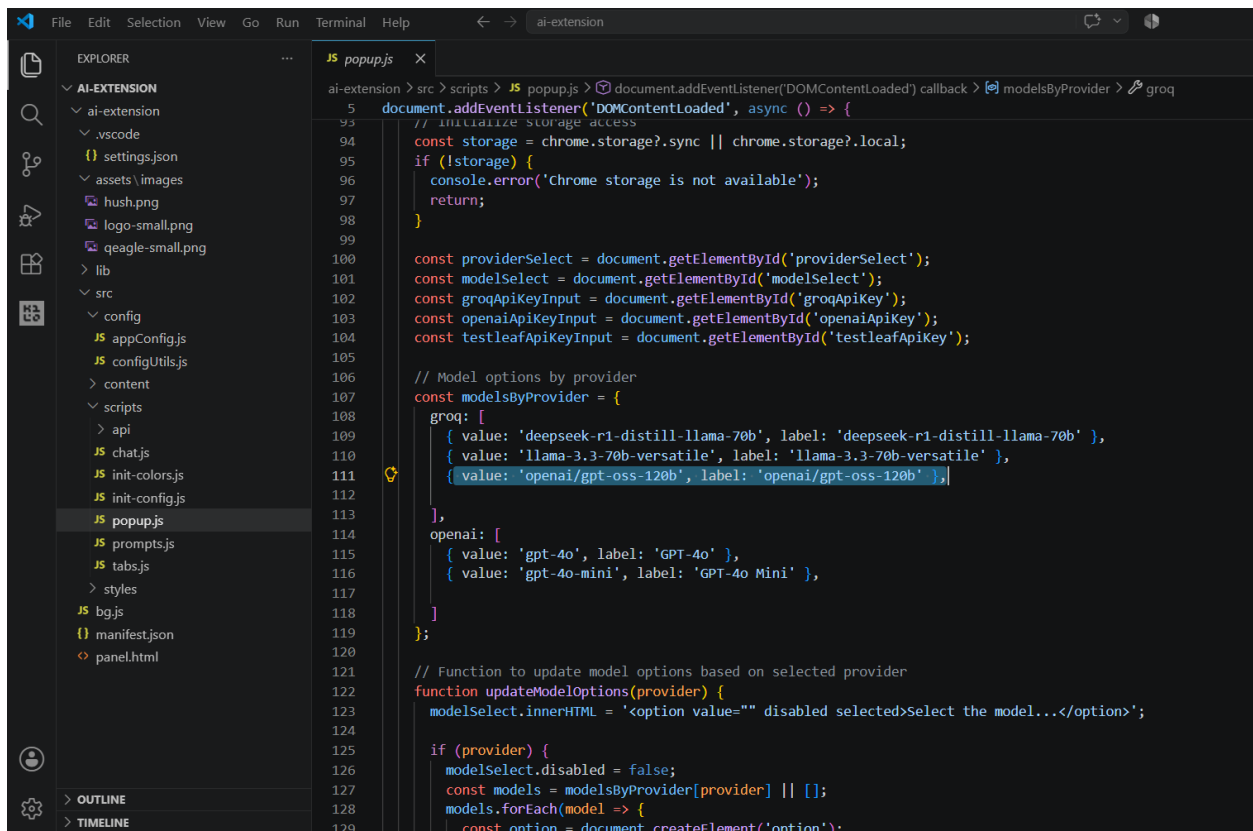



Add "openai/gpt-oss-120b" to the existing list

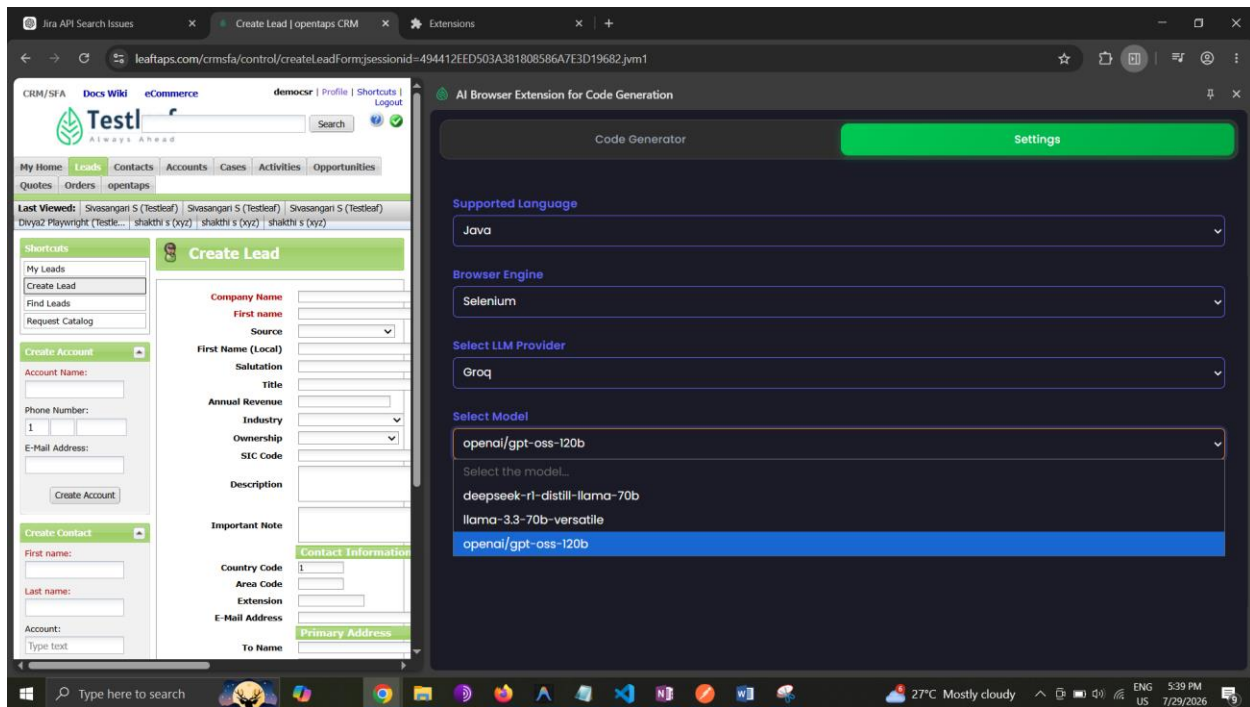


Activity 3:

Implement Playwright with TypeScript

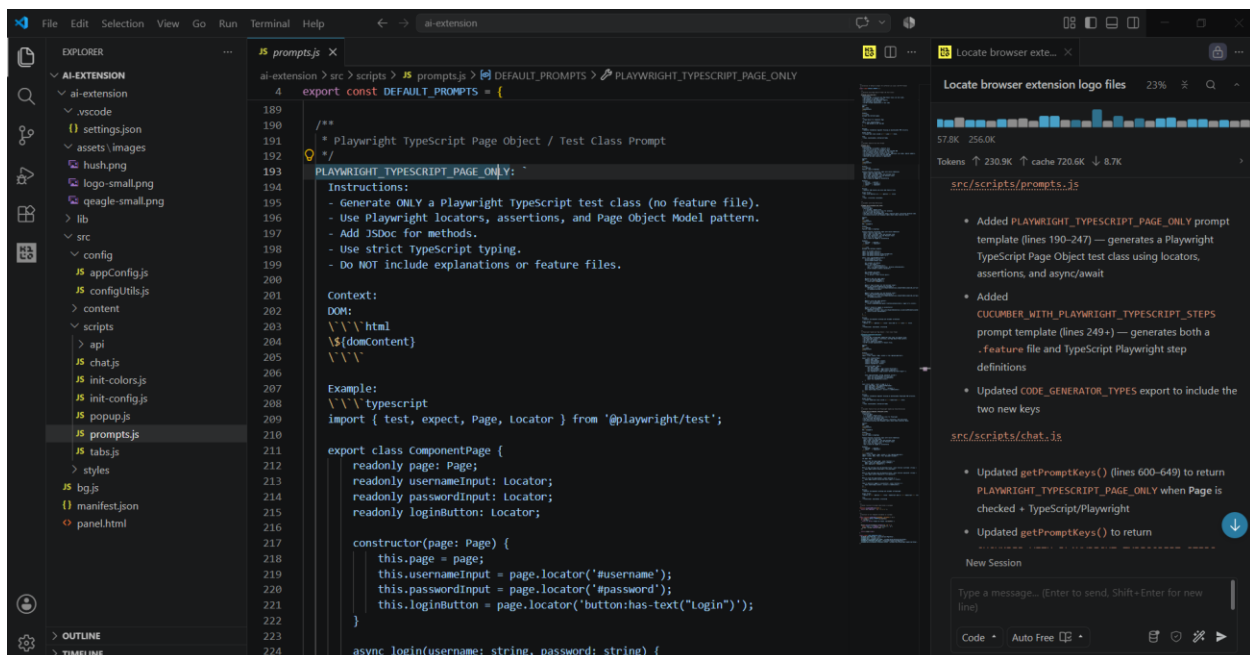

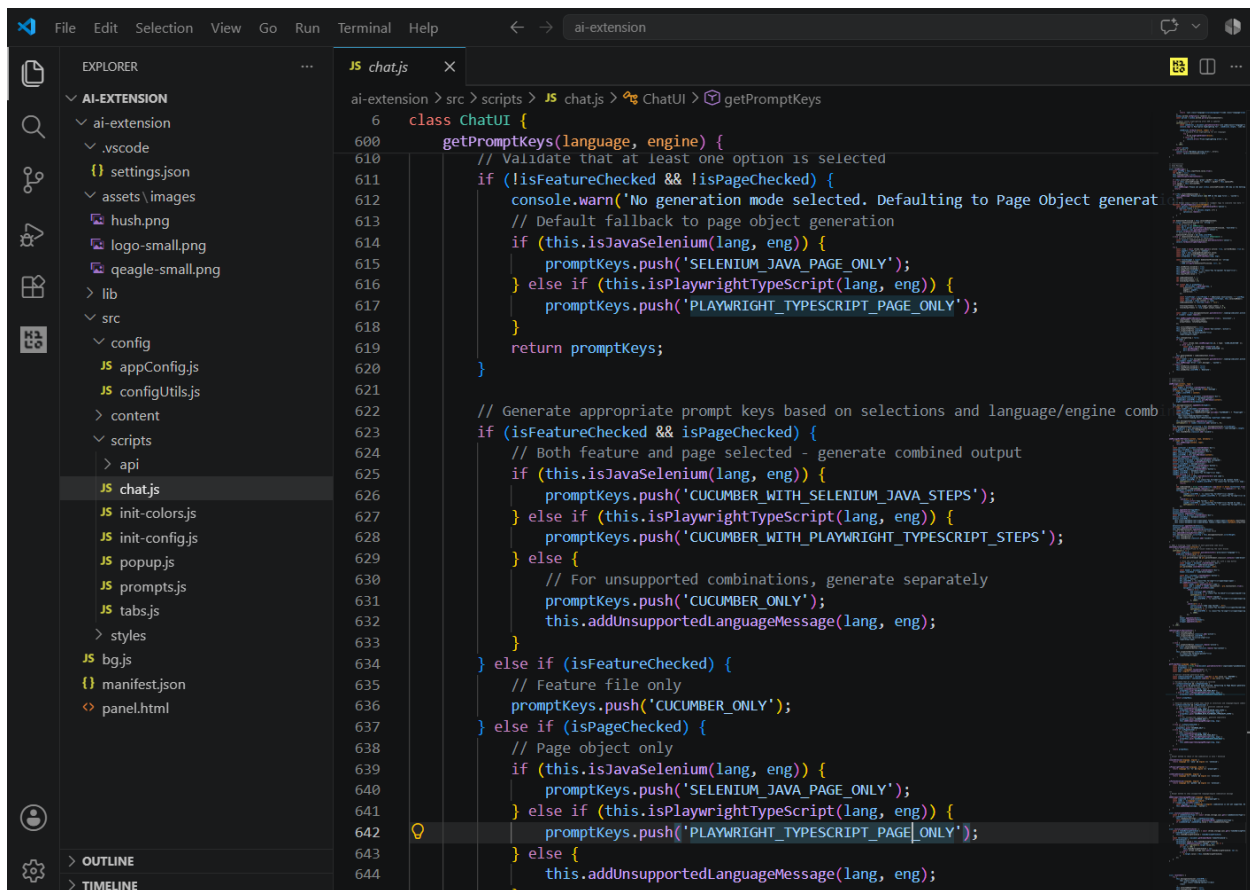

```
6 class ChatUI {
600   getPromptKeys(language, engine) {
610     // Validate that at least one option is selected
611     if (!isFeatureChecked && !isPageChecked) {
612       console.warn('No generation mode selected. Defaulting to Page Object generation');
613       // Default fallback to page object generation
614       if (this.isJavaSelenium(lang, eng)) {
615         promptKeys.push('SELENIUM_JAVA_PAGE_ONLY');
616       } else if (this.isPlaywrightTypeScript(lang, eng)) {
617         promptKeys.push('PLAYWRIGHT_TYPESCRIPT_PAGE_ONLY');
618       }
619       return promptKeys;
620     }
621
622     // Generate appropriate prompt keys based on selections and language/engine combination
623     if (isFeatureChecked && isPageChecked) {
624       // Both feature and page selected - generate combined output
625       if (this.isJavaSelenium(lang, eng)) {
626         promptKeys.push('CUCUMBER_WITH_SELENIUM_JAVA_STEPS');
627       } else if (this.isPlaywrightTypeScript(lang, eng)) {
628         promptKeys.push('CUCUMBER_WITH_PLAYWRIGHT_TYPESCRIPT_STEPS');
629       } else {
630         // For unsupported combinations, generate separately
631         promptKeys.push('CUCUMBER_ONLY');
632         this.addUnsupportedLanguageMessage(lang, eng);
633       }
634     } else if (isFeatureChecked) {
635       // Feature file only
636       promptKeys.push('CUCUMBER_ONLY');
637     } else if (isPageChecked) {
638       // Page object only
639       if (this.isJavaSelenium(lang, eng)) {
640         promptKeys.push('SELENIUM_JAVA_PAGE_ONLY');
641       } else if (this.isPlaywrightTypeScript(lang, eng)) {
642         promptKeys.push('PLAYWRIGHT_TYPESCRIPT_PAGE_ONLY');
643       } else {
644         this.addUnsupportedLanguageMessage(lang, eng);
645       }
646     }
647   }
648 }
```

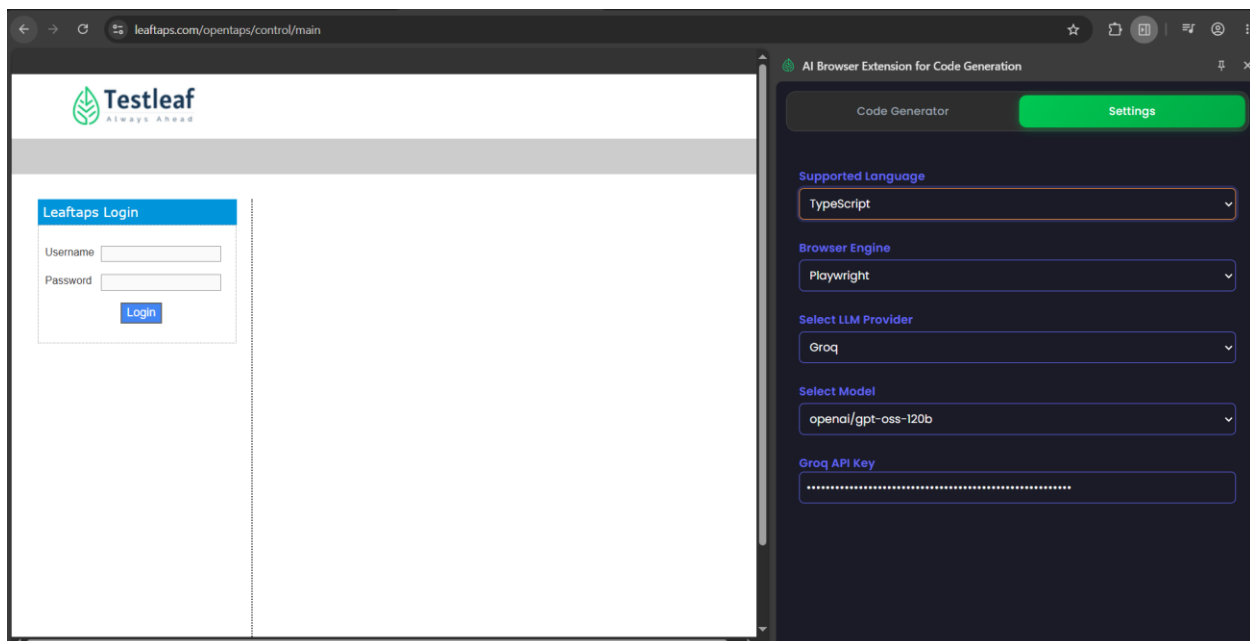

leafstaps.com/opentaps/control/main

Testleaf

Always Ahead

Leafstaps Login

Username

Password

Login

AI Browser Extension for Code Generation

Code Generator

Settings

☐ Feature File

☒ Page Class

Reset Chat

Copy

```
import { Page, Locator, expect } from '@playwright/test';

/**
 * Page Object Model for the login screen containing the username in
 * Provides actions and assertions related to the username field.
 */
export class LoginPage {
  readonly page: Page;
  readonly usernameInput: Locator;

  /**
   * Initializes locators.
   * @param page - Playwright Page instance.
   */
  constructor(page: Page) {
    this.page = page;
    // Combines id and class selector for robustness
  }
}
```