




Session 01 / DLH-in-a-box
handover

Repository Orientation And Product Mental Model

One hour handover deck

40-45 min narrative / 10-15 min checkpoint /
5 min Q&A

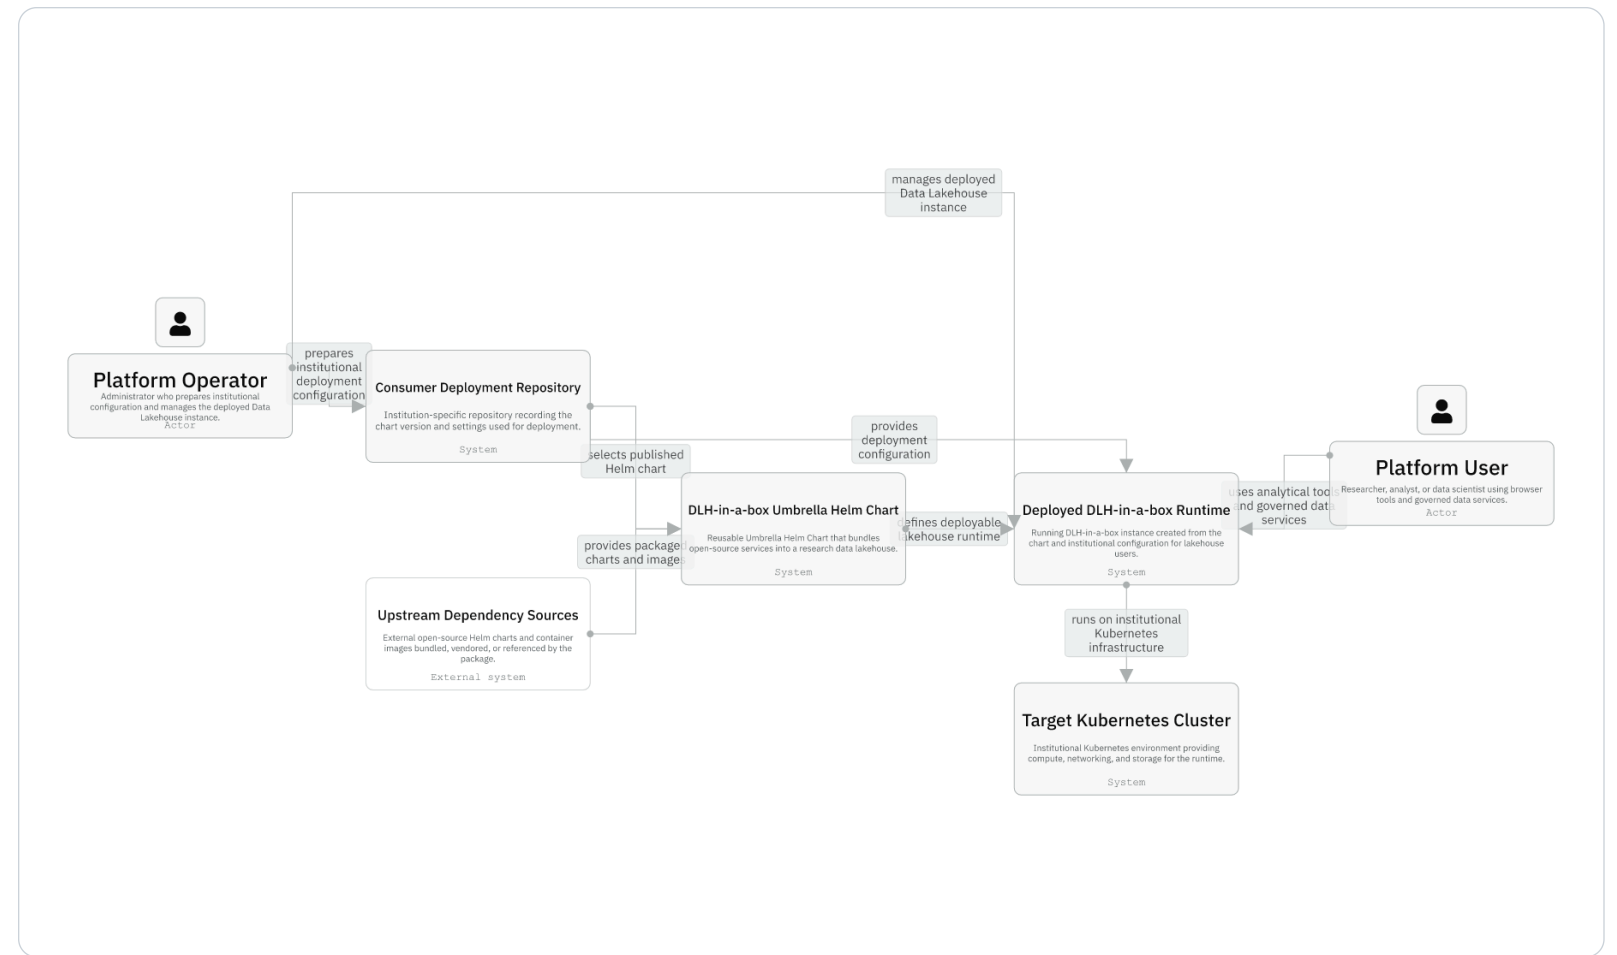

The repo is a reusable umbrella chart product, not a deployment repository or cluster bootstrap kit.

Session path

- 1 **Problem and boundary**
- 2 **Repo shape**
- 3 **First-success path**
- 4 **Where to change things**

Session rhythm

40-45 min narrative
10-15 min checkpoint
5 min Q&A

Presenter notes carry the script and demo prompts.

The one-sentence product story

What the repository publishes


- One Helm chart named dlh-in-a-box.
- One install surface for login, query services, storage, browser tools, and access control.
- A reusable chart product consumed by institution-specific deployment repositories.
- A set of examples, scripts, and docs that define the supported operating lanes.




**One Helm
chart named
dlh-in-a-box.**

Repo shape: source, examples, scripts, guides

- The chart is the deployable product.
- Examples document supported install shapes.
- Scripts and workflows keep local and CI validation aligned.
- Guides explain ownership at the directory boundary.

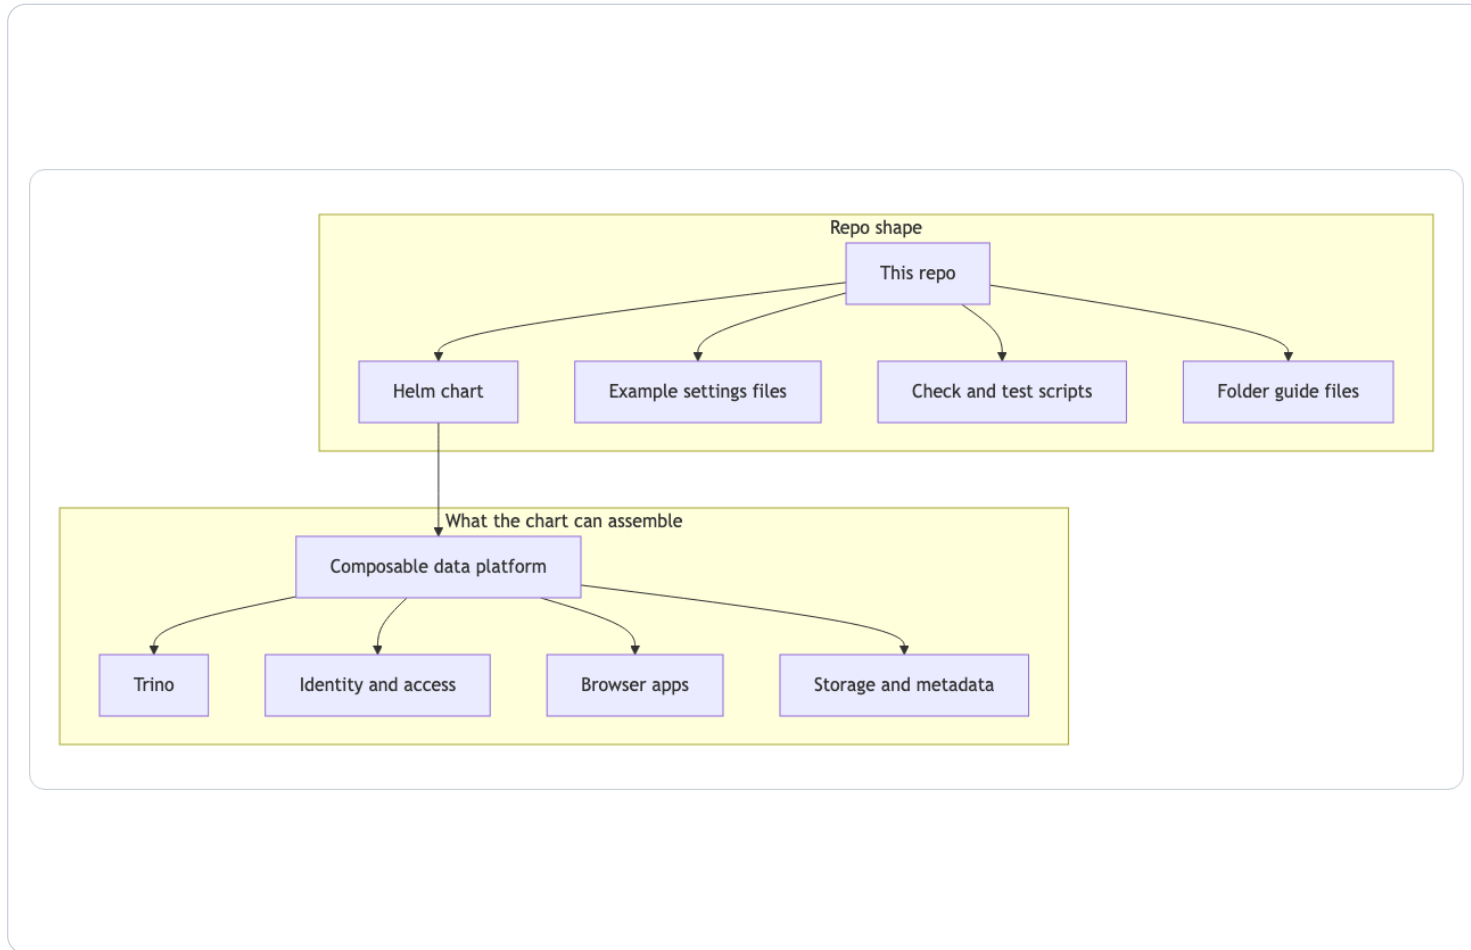

Context: product, consumer repo, runtime

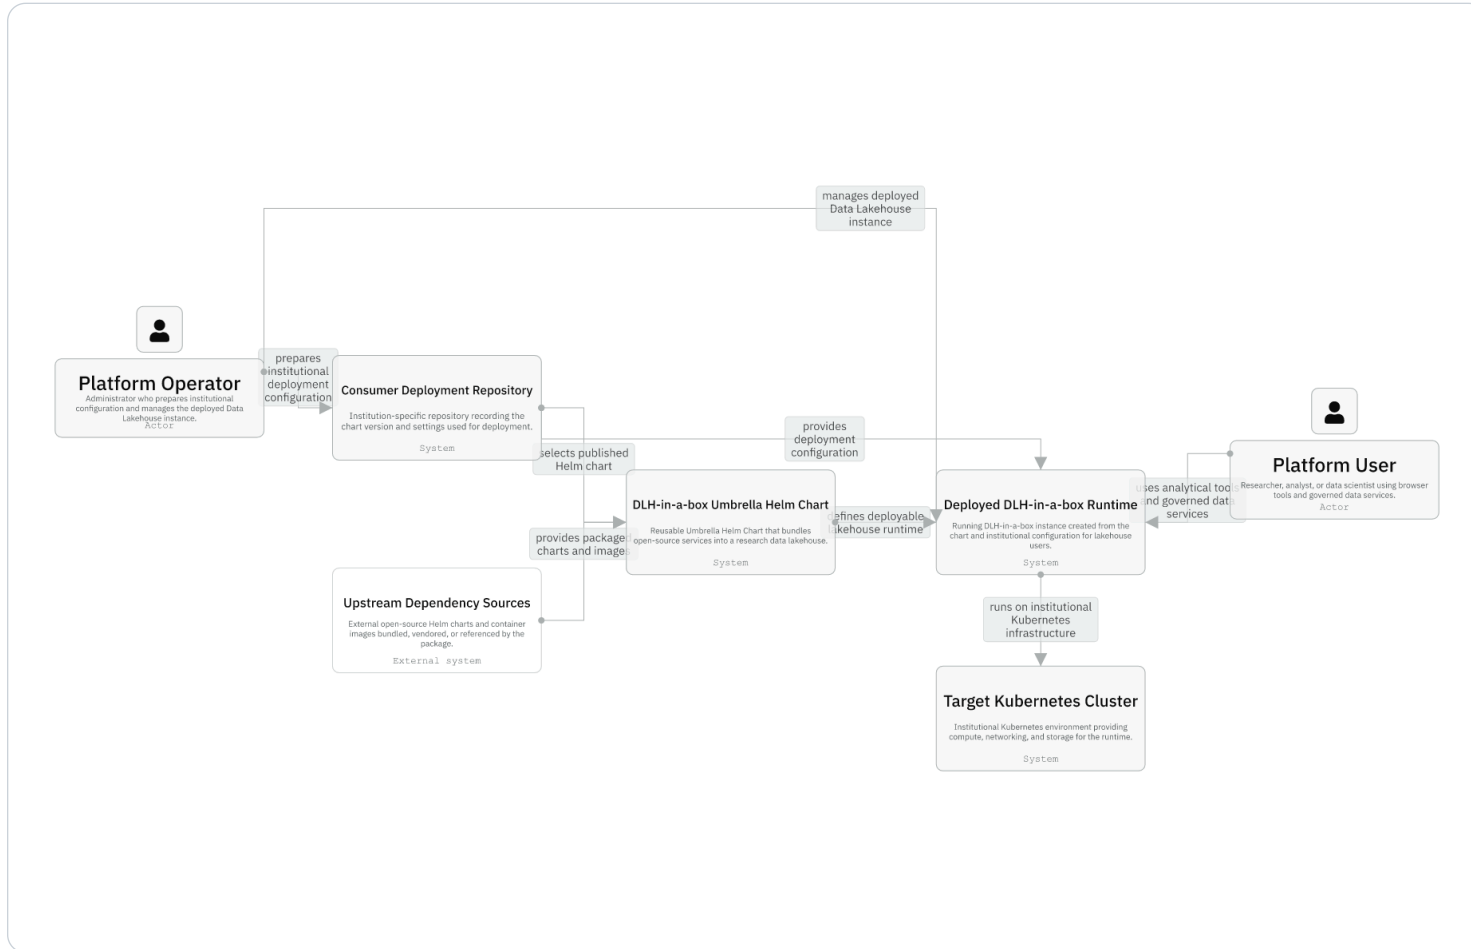

- Operators prepare institutional configuration.
- Consumer repos select chart versions and provide settings.
- The chart defines a generic lakehouse runtime.
- Users experience the deployed runtime, not this source repo directly.

What this repo is and is not

It is	It is not
A Helm umbrella chart product	A cluster bootstrap toolkit
A reproducible package of upstream and local chart material	A replacement for upstream product documentation
A values contract plus examples and validation	A source of real production secrets or DNS
A maintainer workflow with CI parity	An institution's governance approval process

First success is deliberately small

Recommended newcomer path

- Start with examples/values-local.yaml.
- Refresh dependencies before rendering or installing.
- Use make smoke-install only when validating auth-heavy behavior.
- Treat values-local-auth.yaml as the smoke profile, not the easiest manual start.

**Start with
examples/values-
local.yaml.**

Guided checkpoint: orient a new maintainer

```
./hack/helm-dependency-update.sh

helm template dlh charts/dlh-in-a-box -f
examples/values-local.yaml >/tmp/dlh-local.yaml

helm lint charts/dlh-in-a-box -f
examples/values-local.yaml
```

Checkpoint questions

- Can they say which files explain the install path?
- Can they explain why smoke-install is a stronger but heavier path?
- Can they find the chart guide and template guide without searching randomly?

If you need to change X, start here

Change request	Start with
Chart metadata, dependency list, publish version	charts/dlh-in-a-box/Chart.yaml
Shared defaults or public values contract	charts/dlh-in-a-box/values.yaml and values.schema.json
Supported install profile	examples/*.yaml
Local validation or smoke behavior	hack/*.sh
CI or release behavior	.github/workflows/*.yaml

Session 01 landing

What the inheriting team should now be able to do

- They can describe the repo in one sentence.
- They can distinguish chart product from deployed runtime.
- They know the safest first manual path.
- They have a first lookup map for future changes.

Leave-behind

Use the PPTX notes as a presenter script and source-map.md as the reference trail.