




Session 03 / Values overlays
and first success

Install Profiles And First Successful Deployment

One hour handover deck

40-45 min narrative / 10-15 min checkpoint /
5 min Q&A

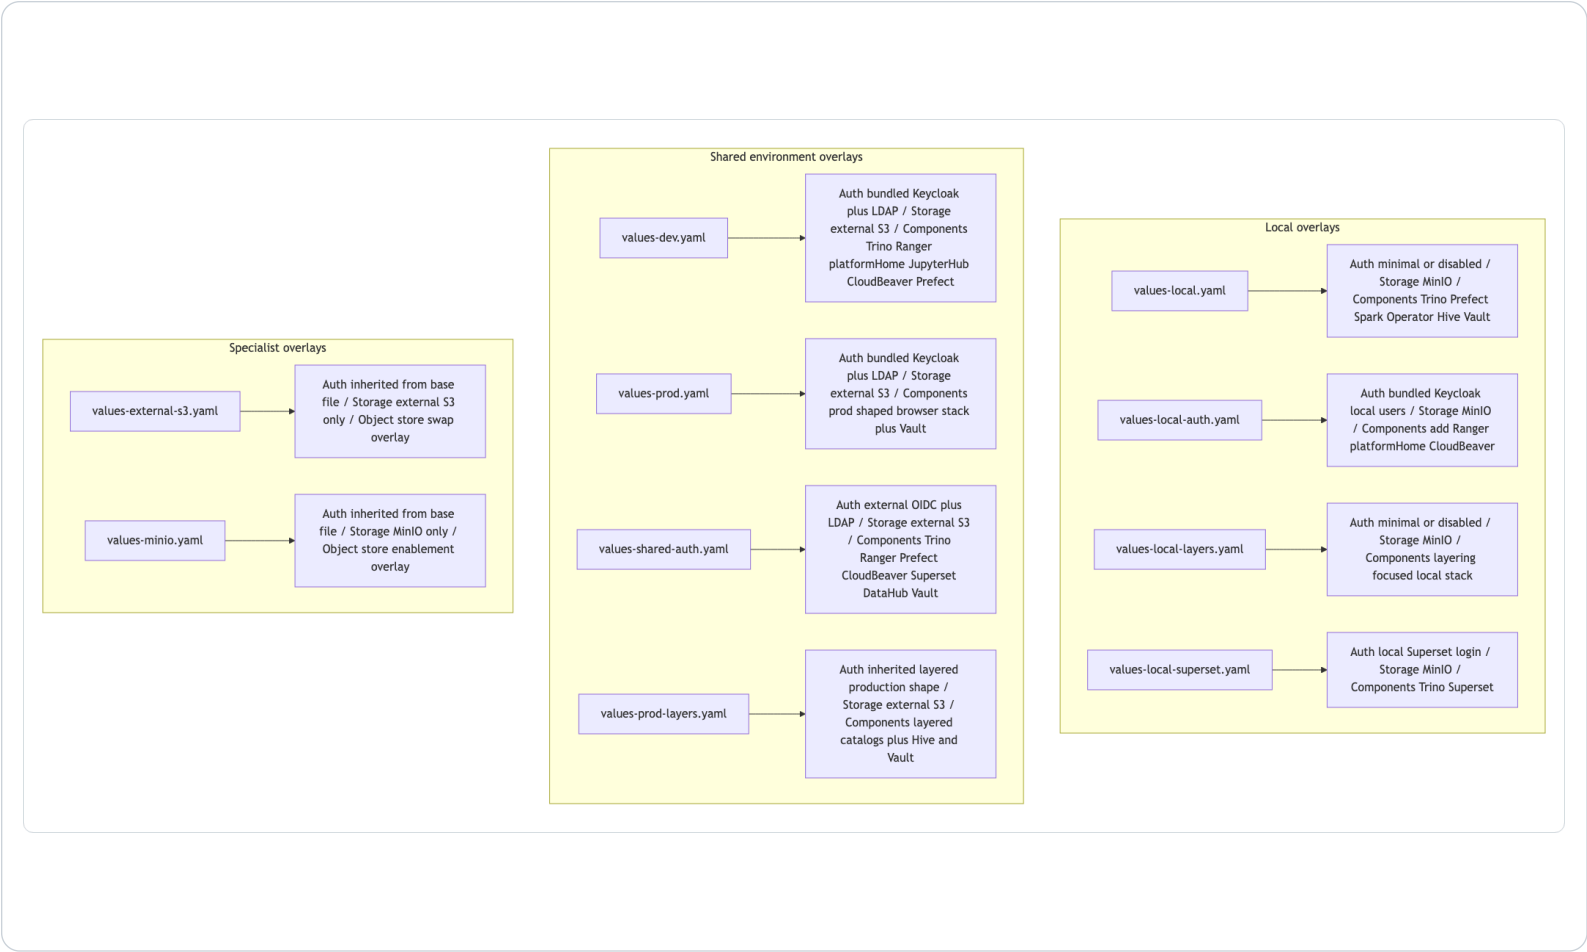

Examples are not samples in a bag; they are the documented install profiles the repo maintains.

Session path

- 1 **Prerequisites**
- 2 **Profile taxonomy**
- 3 **Local versus shared**
- 4 **Demo checkpoints**

Session rhythm

40-45 min narrative
10-15 min checkpoint
5 min Q&A

Presenter notes carry the script and demo prompts.

Prerequisites are operational, not optional


Before any install path

- A working Kubernetes cluster and current kubectl context.
- Helm installed; CI currently uses Helm v3.12.0.
- Enough cluster capacity for several services and jobs.
- Docker and kind only when using the disposable local path or Mermaid rendering.

**A working
Kubernetes
cluster and
current
kubectl
context.**

Example files fall into two classes

- Full profiles are meant to stand alone.
- Specialist overlays modify one concern and must be layered after a base profile.
- Local profiles can carry disposable credentials.
- Shared profiles expect real DNS, TLS, secrets, and identity inputs.

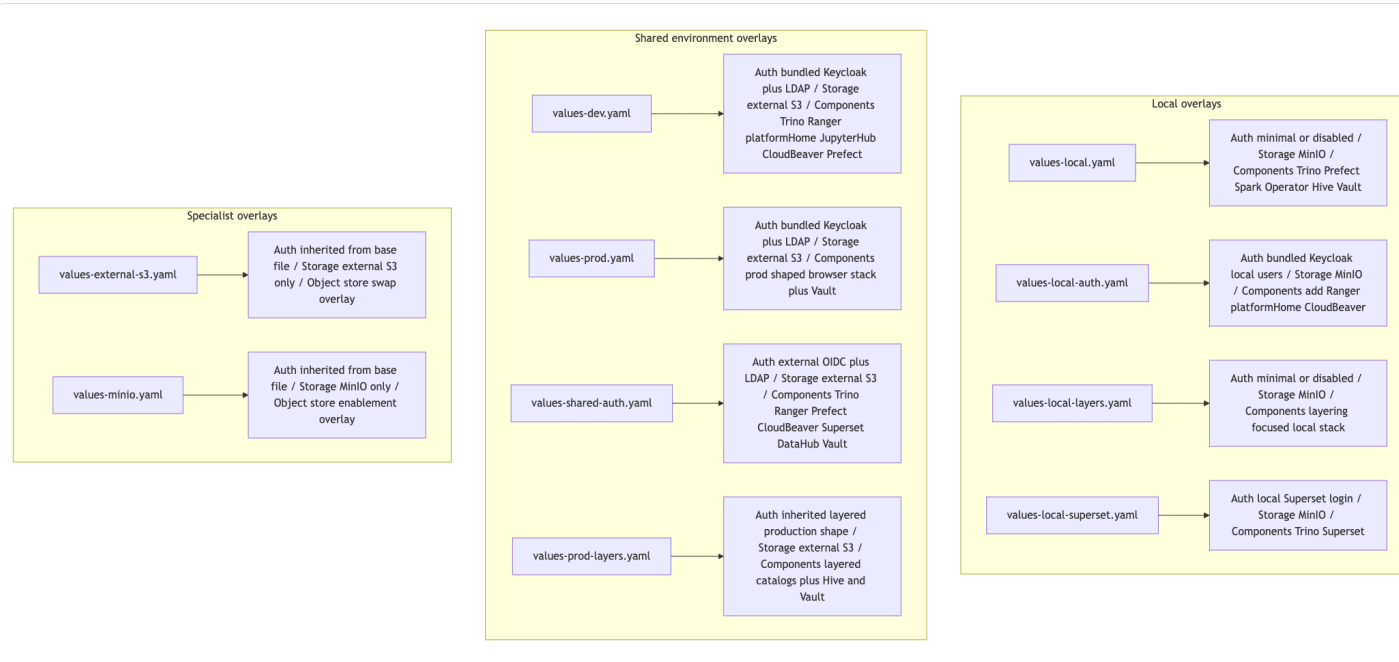

Which profile should I start with?

Profile	Use when	Caveat
values-local.yaml	Fastest local first success	Does not test browser auth flows
values-local-auth.yaml	Smoke test login, proxies, Ranger	Use make smoke-install normally
values-dev.yaml	Shared development baseline	Needs real hostnames, secrets, LDAP
values-prod.yaml	Production-shaped baseline	Still not turnkey production
values-shared-auth.yaml	External OIDC exists	Does not bundle Keycloak

The first manual path is intentionally smaller

What `values-local.yaml` proves

- Trino plus Hive plus MinIO wiring.
- Prefect server and worker local setup.
- Spark Operator and Vault defaults.
- Core rendering and install flow without browser SSO complexity.

**Trino plus
Hive plus
MinIO wiring.**

The smoke path is intentionally stronger

What values-local-auth.yaml proves

- Bundled Keycloak with local demo users.
- OIDC client wiring and oauth2-proxy entryptoints.
- Ranger bootstrap and local-user sync.
- platformHome launchpad and protected app access.

**Bundled
Keycloak
with local
demo users.**

Secrets and inputs by profile class

Class	Secret posture	Maintainer habit
Disposable local	Inline demo values may exist	Keep them local-only and documented
Auth-heavy smoke	Script seeds demo Secrets	Do not run plain Helm and expect success
Shared dev/prod	External secret delivery expected	Never add inline real secrets
Specialist storage	Inherits base auth and app shape	Layer after the full profile

Guided checkpoint: choose and render a profile

```
./hack/helm-dependency-update.sh

helm template dlh charts/dlh-in-a-box -f
examples/values-local.yaml >/tmp/dlh-local.yaml

helm template dlh charts/dlh-in-a-box -f
examples/values-dev.yaml -f examples/values-
external-s3.yaml >/tmp/dlh-dev-s3.yaml
```

Checkpoint questions

- Can they explain which one is standalone and which one is layered?
- Can they name what the local render proves and what it skips?

Common first-time failures

Most failures have a short cause list

- Dependencies or Chart.lock are stale.
- kubectl points at the wrong cluster.
- The cluster is too small for the chosen profile.
- The auth-heavy local profile was run without the smoke script's demo Secrets.

**Dependencies
or Chart.lock
are stale.**

Session 03 landing

What the inheriting team should now be able to do

- They can choose the right values file for a goal.
- They know full profiles versus specialist overlays.
- They understand why first-success and smoke paths are different.

Leave-behind

Use the PPTX notes as a presenter script and source-map.md as the reference trail.