TM Forum Specification

Resource Function Activation and Configuration User Guide

TMF664

Maturity Level: General Availability (GA)	Team Approved Date: 24-Sep-2026
Release Status: Preview	Approval status: Team Approved
Version: 5.0.0	IPR Mode: RAND

Notice

Copyright © TM Forum 2026. All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to TM FORUM, except as needed for the purpose of developing any document or deliverable produced by a TM FORUM Collaboration Project Team (in which case the rules applicable to copyrights, as set forth in the TM FORUM IPR Policy, must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by TM FORUM or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and TM FORUM DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Direct inquiries to the TM Forum office:

100 Enterprise Drive
Suite 301 #1649
Rockaway, NJ 070866, USA
Tel No. +1 862 227 1648
TM Forum Web Page: www.tmforum.org

Table of Contents

Notice . . . i
Introduction . . . 1
Managed Resources . . . 1
Supporting Entities . . . 1
Sample Use Cases . . . 2
Use Case 1: Activating a New Firewall Function . . . 2
Use Case 2: Healing a Failed Resource Function . . . 2
Use Case 3: Scaling a Resource Function . . . 2
Use Case 4: Migrating a Resource Function . . . 3
Support of polymorphism and extension patterns . . . 4
RESOURCE MODEL . . . 5
Managed Entity and Task Resource Models . . . 5
ResourceFunction resource . . . 5
Monitor resource . . . 64
Heal resource . . . 70
Scale resource . . . 74
Migrate resource . . . 78
Notification Resource Models . . . 82
ResourceFunction . . . 84
Monitor . . . 87
Heal . . . 90
Scale . . . 93
Migrate . . . 96
API OPERATIONS . . . 100
Operations on ResourceFunction . . . 100
Retrieves a resourceFunction by ID . . . 100
List or find resourceFunction objects . . . 103
Creates a resourceFunction . . . 105
Updates partially a resourceFunction . . . 108
Deletes a resourceFunction . . . 116
Operations on Monitor . . . 117
Retrieves a monitor by ID . . . 117
List or find monitor objects . . . 126

© TM Forum 2026. All Rights Reserved.

Operations on Heal . . . 126
Retrieves a heal by ID . . . 127
List or find heal objects . . . 127
Creates a heal . . . 129
Deletes a heal . . . 130
Operations on Scale . . . 130
Retrieves a scale by ID . . . 130
List or find scale objects . . . 131
Creates a scale . . . 132
Deletes a scale . . . 134
Operations on Migrate . . . 134
Retrieves a migrate by ID . . . 135
List or find migrate objects . . . 136
Creates a migrate . . . 137
Deletes a migrate . . . 140
API NOTIFICATIONS . . . 141
Register listener . . . 141
Unregister listener . . . 142
Publish Event to listener . . . 142
Acknowledgements . . . 144
Release History . . . 144
Contributors to Document . . . 144

© TM Forum 2026. All Rights Reserved.

Introduction

The following document is the user guide of the REST API for **Resource Function Activation and Configuration** (TMF664). It includes the model definition as well as all available operations.

This API manages the lifecycle and configuration of Resource Functions, which are abstract representations of network or IT functions.

Managed Resources

- **ResourceFunction**: The core resource representing a configurable network or IT function.
- **Heal**: A task resource used to request the healing or restoration of a Resource Function to a healthy state.
- **Scale**: A task resource used to request scaling (e.g., scale out/in) of a Resource Function.
- **Migrate**: A task resource used to request the migration of a Resource Function from one location or environment to another.
- **Monitor**: A mechanism used to track activation and configuration of Services and Resources. Specifically for Resource Functions, a Monitor can be used to track the progress of activation or of other tasks related to resource functions (such as healing, scaling, migration).

These resources are interconnected. For instance, `Heal`, `Scale`, and `Migrate` operations act upon a `ResourceFunction`. Monitoring (`Monitor`) is used to observe the state changes and progress of these operations.

Supporting Entities

The API also utilizes supporting entities to describe the relationships and connectivity within Resource Functions. One such entity is `ResourceGraph`, which focuses on the relationships and connectivity specifically between Resource Functions, contrasting with the more general 'Graph' entity from the Topology API, which describes broader network topology.

© TM Forum 2026. All Rights Reserved.

Sample Use Cases

This section outlines typical use cases for the TMF664 Resource Function Activation and Configuration API.

Use Case 1: Activating a New Firewall Function

An enterprise wants to deploy a new firewall function (a `ResourceFunction`) for a medium-to-large enterprise customer.

1. **Create ResourceFunction**: A POST request to `/resourceFunction` with details of the firewall (Operating System, MaxTraffic, keywords, IPAddressing features).
2. **Monitor Activation**: A `Monitor` resource is automatically created or referenced to track the activation process.
3. **Check State**: Subsequent GET requests to the `ResourceFunction` or `Monitor` allow checking the `lifecycleState` and `state` (e.g., from `creating` to `operating`).

Use Case 2: Healing a Failed Resource Function

A deployed firewall function (a `ResourceFunction`) experiences an SLA violation.

1. **Create Heal Operation**: A POST request to `/heal` is made, referencing the problematic `ResourceFunction` and specifying the `cause` (e.g., "SLA violation") and `degreeOfHealing` (e.g., "restoreToStateBeforeFailure").
2. **Monitor Healing**: A `Monitor` resource tracks the progress of the `Heal` operation.
3. **Check Healing State**: GET requests to the `Heal` and `Monitor` resources show the healing `state` (e.g., `inProgress`, `completed`).

Use Case 3: Scaling a Resource Function

An increase in network traffic requires scaling up the firewall function.

1. **Create Scale Operation**: A POST request to `/scale` is made, referencing the `ResourceFunction` and specifying the `scaleType` (e.g., "scaleOut"), `aspectId` (e.g., "Quick Access Memory"), and `numberOfSteps`.
2. **Monitor Scaling**: A `Monitor` resource tracks the progress of the `Scale` operation.
3. **Check Scaling State**: GET requests to the `Scale` and `Monitor` resources show the scaling `state`.

© TM Forum 2026. All Rights Reserved.

Use Case 4: Migrating a Resource Function

A planned data center migration requires moving a firewall function to a new location.

1. **Create Migrate Operation**: A POST request to `/migrate` is made, referencing the `ResourceFunction`, specifying the `cause` ("planned"), and providing new `addConnectionPoint` and `removeConnectionPoint` details.
2. **Monitor Migration**: A `Monitor` resource tracks the progress of the `Migrate` operation.
3. **Check Migration State**: GET requests to the `Migrate` and `Monitor` resources show the migration `state`.

© TM Forum 2026. All Rights Reserved.

Support of polymorphism and extension patterns

Support of polymorphic collections and types and schema based extension is provided by means of a list of generic meta-attributes that we describe below. Polymorphism in collections occurs when entities inherit from base entities, for instance a BillingAccount and SettlementAccount inheriting properties from the abstract Account entity.

Generic support of polymorphism and pattern extensions is described in the TMF API Guidelines, Part 2 (TMF630).

The @type attribute provides a way to represent the actual class type of an entity. For example, within a list of Account instances some may be instances of BillingAccount where other could be instances of SettlementAccount. The @type gives this information. All resources and sub-resources of this API have a @type attributes that can be provided when this is useful.

The @referredType can be used within reference entities (like for instance an AccountRef object) to explicitly denote the actual entity type of the referred class. Notice that in reference entities the @type, when used, denotes the class type of the reference itself, such as BillingAccountRef or SettlementAccountRef, and not the class type of the referred object. However since reference classes are rarely sub-classed, @type is generally not useful in reference objects.

The @schemaLocation property can be used in resources to allow specifying user-defined properties of an Entity or to specify the expected characteristics of an entity.

The @baseType attribute gives a way to provide explicitly the base of class of a given resource that has been extended.

© TM Forum 2026. All Rights Reserved.

RESOURCE MODEL

Managed Entity and Task Resource Models

ResourceFunction resource

A ResourceFunction is a configurable network or IT function, such as a deep packet inspector or a firewall. It represents a behavior that transforms inputs into outputs, independently of its underlying implementation. This API enables the activation, configuration, and lifecycle management of these functions.

Resource model

© TM Forum 2026. All Rights Reserved.

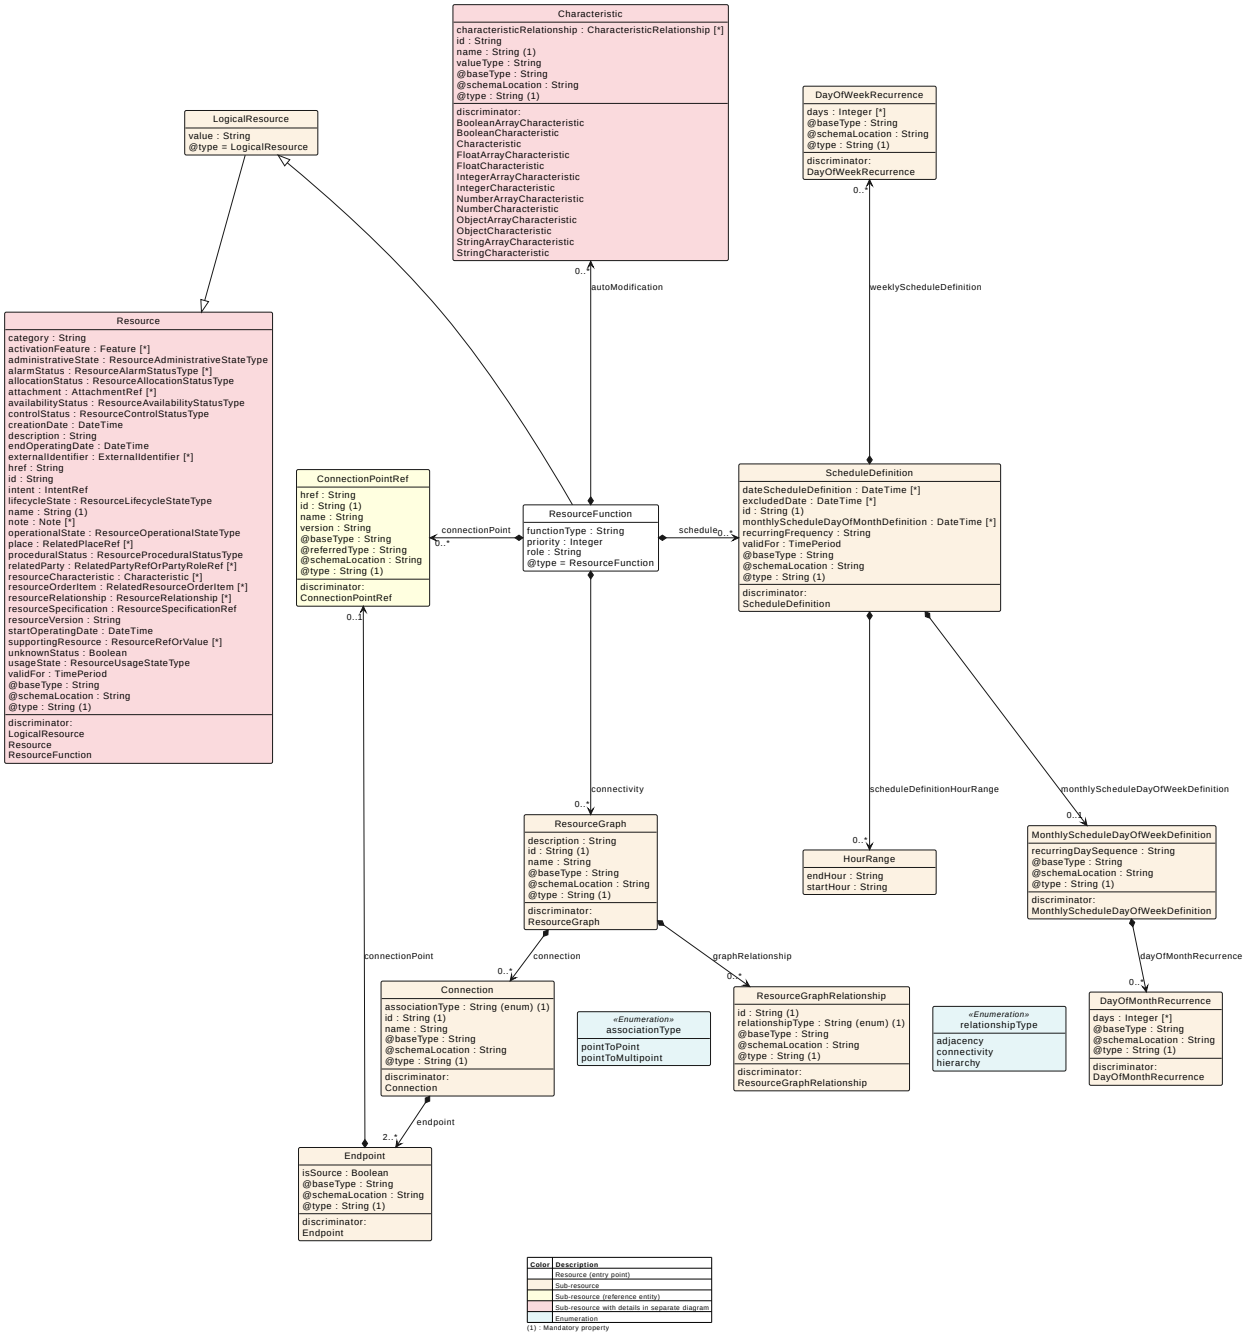


Figure 1 - ResourceFunction

© TM Forum 2026. All Rights Reserved.

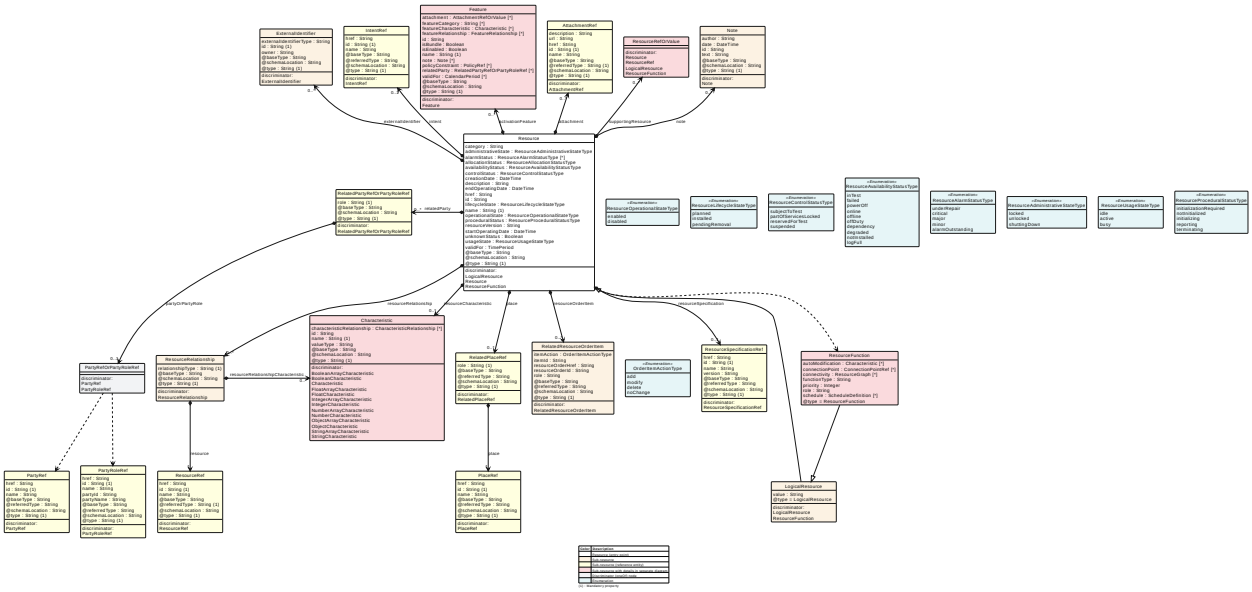


Figure 2 - Resource

© TM Forum 2026. All Rights Reserved.

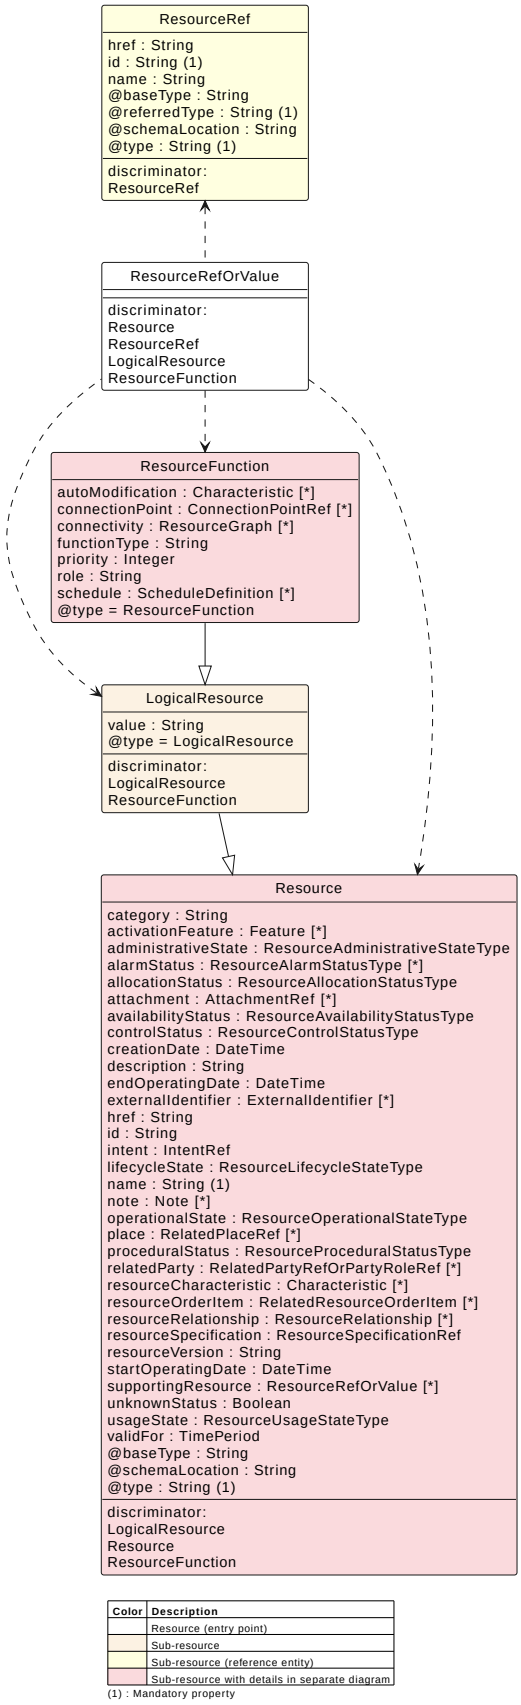


Figure 3 - ResourceRefOrValue

© TM Forum 2026. All Rights Reserved.

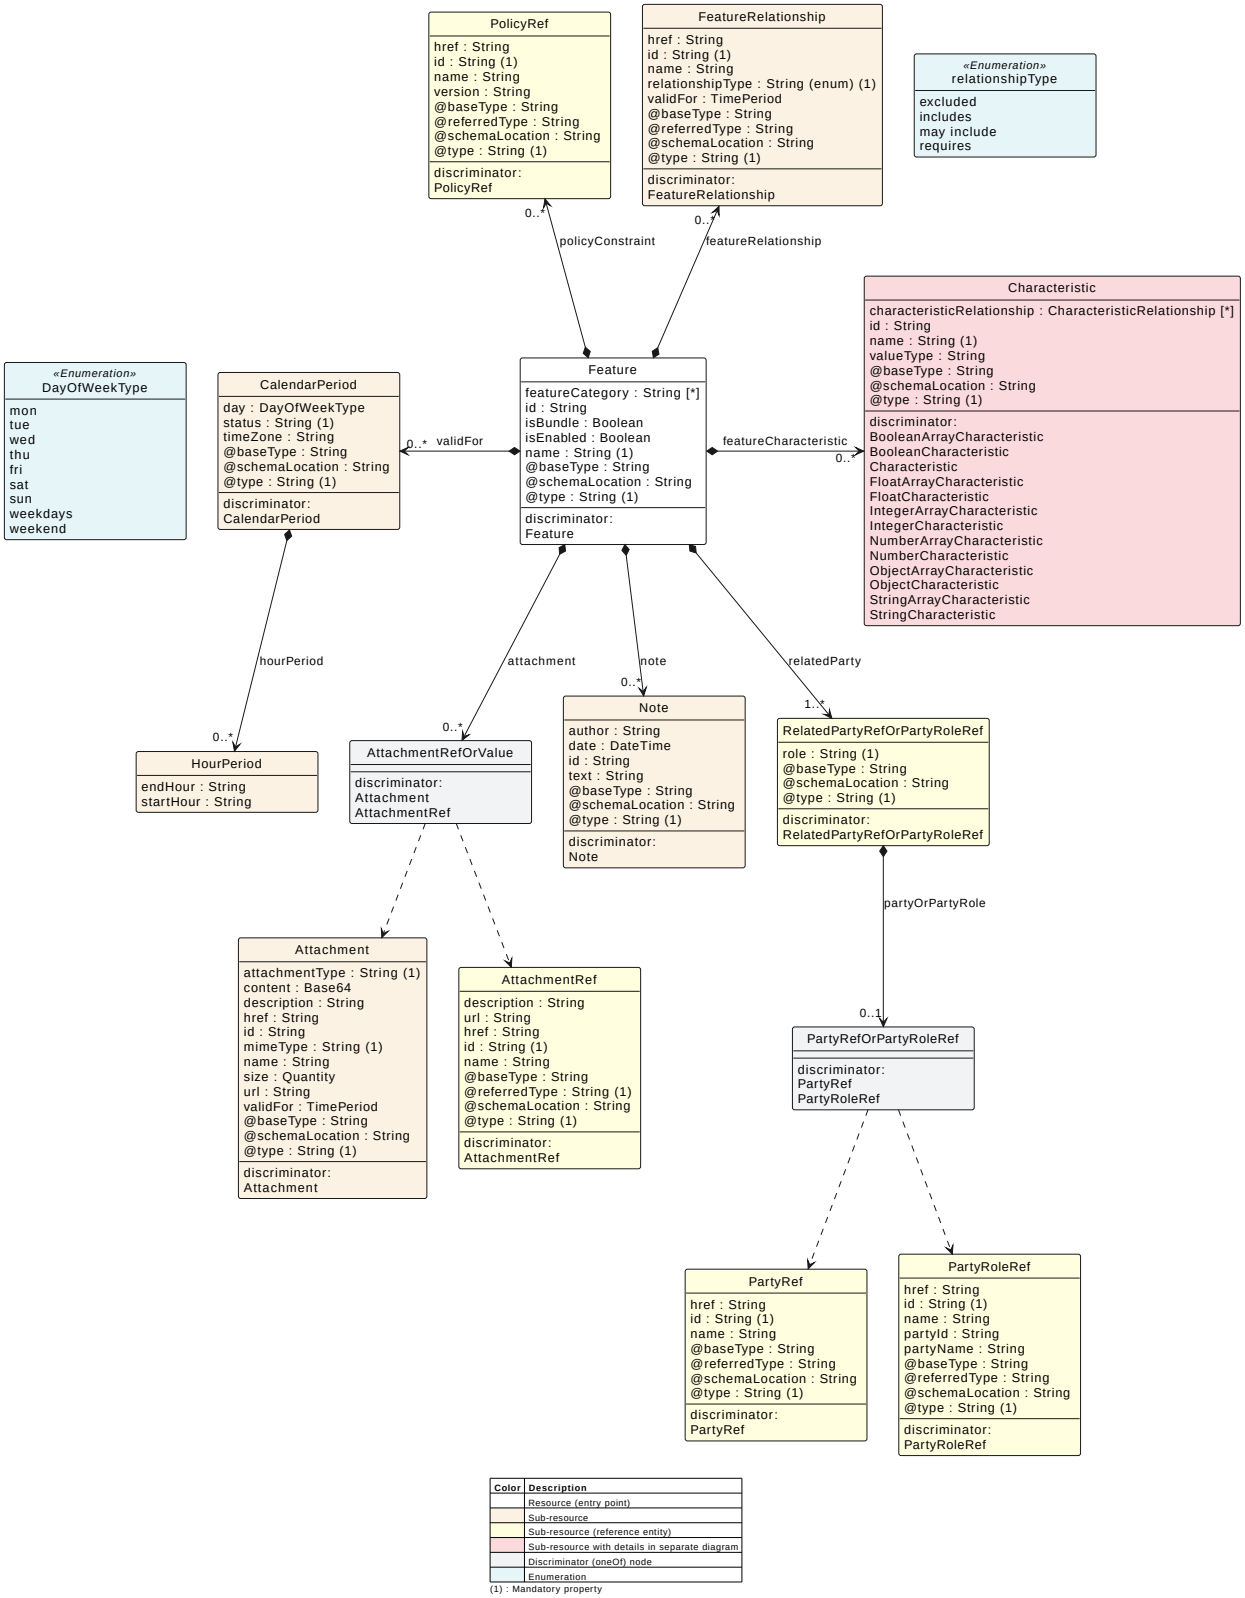


Figure 4 - Feature

© TM Forum 2026. All Rights Reserved.

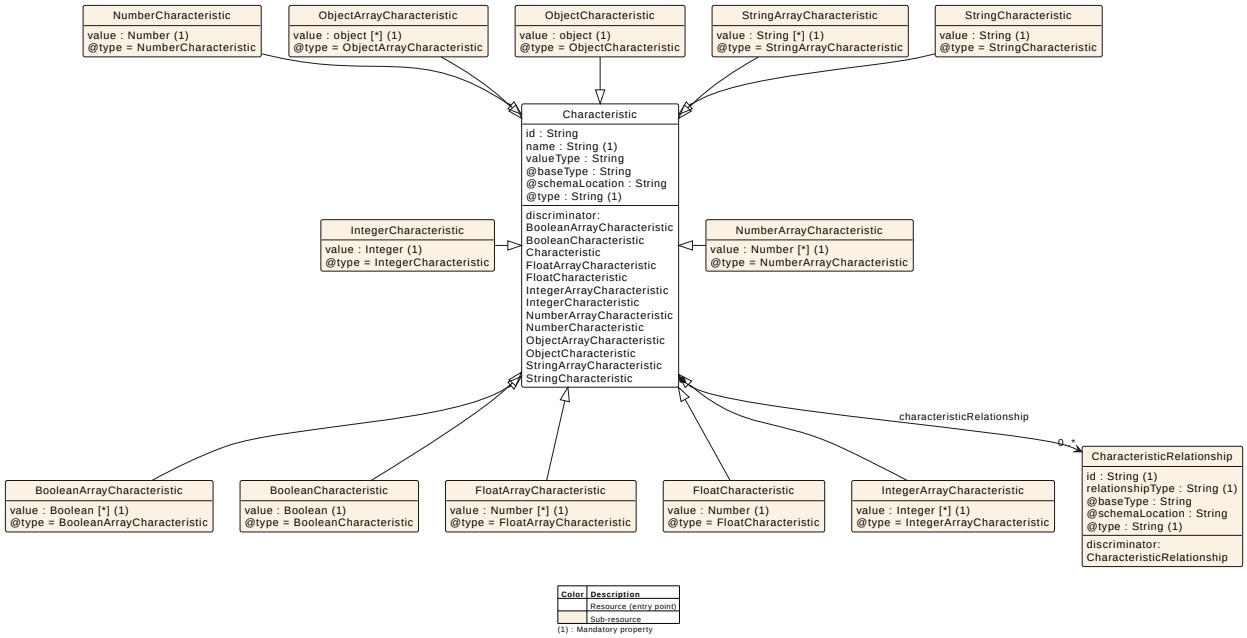


Figure 5 - Characteristic

Field descriptions

ResourceFunction fields

activationFeature	A Feature [0..*]. Configuration features; see TMF664 Resource Function Activation API.

© TM Forum 2026. All Rights Reserved.

administrativeState	A ResourceAdministrativeStateType. Value enumeration for the 'resourceAdministrativeState' of a Resource; the administrative state attribute (defined by ITU-T X.731/ITU-T M.3701) represents permission to use ('unlocked') or prohibition against using ('locked') the resource imposed through the management services; it is single valued and read-write by management functions; defined values: 'locked': The resource is administratively prohibited from performing services for its users; 'shutdown': Use of the resource is administratively permitted to existing instances of use only. While the system remains in the shutting down state the manager may at any time cause the managed object to revert to the unlocked state; 'unlocked': The resource is administratively permitted to perform services for its users; this is independent of its inherent operability. ENUMERATED with values: * locked * unlocked * shuttingDown

© TM Forum 2026. All Rights Reserved.

alarmStatus	A ResourceAlarmStatusType [0..*]. Value enumeration for the 'resourceAlarmStatus' of a Resource; the alarm status attribute (defined by ITU-T X.731/ITU-T M.3701) represents the severity status of fault for a resource; it is multi-valued and read-only by management functions, each value represents an existing severity; defined values: 'underRepair': The resource is currently being repaired; 'critical': One or more critical alarms indicating a fault have been detected in the resource, and have not been cleared; 'major': One or more major alarms indicating a fault have been detected in the resource, and have not yet been cleared; 'minor': One or more minor alarms indicating a fault have been detected in the resource, and have not yet been cleared; 'alarmOutstanding': One or more alarms have been detected in the resource. The condition may or may not be disabling. If the operational state is 'enabled', additional attributes, particular to the managed object class, may indicate the nature and cause of the condition and the services that are affected. ENUMERATED with values: * underRepair * critical * major * minor * alarmOutstanding
allocationStatus	A ResourceAllocationStatusType. Values for the 'allocationStatus' of a Resource; for example: 'available', 'reserved', 'allocated' and 'partiallyAllocated'.
attachment	An AttachmentRef [0..*]. A list of references to attachments associated with this resource.

© TM Forum 2026. All Rights Reserved.

autoModification	A Characteristic [0..*]. List of automatic modifications that can be applied to a Resource Function, such as scaling actions or automated healing procedures. For example, it could describe parameters for auto-scaling a firewall or auto-healing a network appliance. Characteristic can be instantiated as * BooleanArrayCharacteristic * BooleanCharacteristic * FloatArrayCharacteristic * FloatCharacteristic * IntegerArrayCharacteristic * IntegerCharacteristic * NumberArrayCharacteristic * NumberCharacteristic * ObjectArrayCharacteristic * ObjectCharacteristic * StringArrayCharacteristic * StringCharacteristic

© TM Forum 2026. All Rights Reserved.

availabilityStatus	A ResourceAvailabilityStatusType. Value enumeration for the 'resourceAvailabilityStatus' of a Resource; the availability status attribute (defined by ITU-T X.731/ITU-T M.3701) represents the availability of the resource for either carrying service or for being in other states, such as in testing; it is single valued and read-only by management functions; defined values: 'inTest': The resource is undergoing a test procedure. If the administrative state is 'locked' or 'shuttingDown', then normal users are precluded from using the resource, and the controlStatus attribute has the value 'reservedForTest'. Tests that do not exclude additional users can be present in any operational or administrative state but the 'reservedForTest' condition should not be present; 'failed': The resource has an internal fault that prevents it from operating. The operational state is 'disabled'; 'powerOff': The resource requires power to be applied and is not powered on. The operational state is 'disabled'; 'online': The resource is available for use. The operational state is 'enabled'; 'offline': The resource requires a routine operation to be performed to place it on line and make it available for use. The operation may be manual or automatic, or both. The operational state is 'disabled'; 'offDuty': The resource has been made inactive by an internal control process in accordance with a predetermined time schedule. Under normal conditions the control process can be expected to reactivate the resource at some scheduled time, and it is therefore considered to be optional. The operational state is 'enabled' or 'disabled'; 'dependency': The resource cannot operate because some other resource on which it depends (i.e., a resource not represented by the same managed object) is unavailable. The operational state is 'disabled'; 'degraded': The service available from the resource is degraded in some respect, such as in speed or operating capacity. Failure of a test or an unacceptable performance measurement has established that some or all services are not functional or are degraded due to the presence of a defect. However, the resource remains available for service, either because some services are satisfactory or because degraded service is preferable to

© TM Forum 2026. All Rights Reserved.

~~category~~	DEPRECATED A String. Category of the concrete resource. e.g Gold, Silver for MSISDN concrete resource; NOTE: this property is misleading and therefore is deprecated.
connectionPoint	A ConnectionPointRef [0..*]. External connection points of the Resource Function. Each entry is a reference to a ConnectionPoint resource (a service access point where inputs and outputs of the function are available). There is no dedicated TMF API that exposes ConnectionPoint as a standalone managed resource.
connectivity	A ResourceGraph [0..*]. Internal connectivity of contained resource functions.
controlStatus	A ResourceControlStatusType. Value enumeration for the 'resourceControlStatus' of a Resource; the control status attribute (defined by ITU-T X.731/ITU-T M.3701) indicates that the resource is under some kind of control; it is single valued and read-only by management functions; defined values: 'subjectToTest': The resource is available to normal users, but tests may be conducted on it simultaneously at unpredictable times, which may cause it to exhibit unusual characteristics to users; 'partOfServicesLocked': This value indicates whether a manager has administratively restricted a particular part of a service from the user(s) of a resource. The administrative state is 'unlocked'. Examples are incoming service barred, outgoing service barred, write locked by media key, read locked; 'reservedForTest': The resource has been made administratively unavailable to normal users because it is undergoing a test procedure. The administrative state is 'locked'; 'suspended': Service has been administratively suspended to the users of the resource. The resource may retain knowledge of current users and/or requests for usage, depending upon the managed object class definition, but does not resume performing services until the suspended condition is revoked. The administrative state is 'unlocked'. ENUMERATED with values: * subjectToTest * partOfServicesLocked * reservedForTest * suspended

© TM Forum 2026. All Rights Reserved.

creationDate	A DateTime. The point in time when the resource was created.
description	A String. Free-text description of the resource.
endOperatingDate	A DateTime. The point in time till the resource is operating.
externalIdentifier	An ExternalIdentifier [0..*]. An identification of this resource that is owned by or originates in a software system different from the current system. The structure identifies the system itself, the nature of the resource within the system and the unique ID of the resource within the system. It is anticipated that multiple external IDs can be held for a single resource, e.g. if the resource passed through multiple systems on the way to the current system.
functionType	A String. A type of the Resource Function as specified by the provider of the API.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
intent	An IntentRef. Intent reference, for when Intent is used by other entities.
lifecycleState	A ResourceLifecycleStateType. Value enumeration for the 'resourceLifecycleState' of a Resource; the lifecycle state attribute (defined by ITU-T X.731/ITU-T M.3701) represents the planned and tracked state of a physical or logical resource; it is single valued and read-write by management functions; defined values: 'planned', 'installed', 'pendingRemoval'. ENUMERATED with values: * planned * installed * pendingRemoval
name	A String [1]. The name of the resource.
note	A Note [0..*]. A list of notes associated with this resource.

© TM Forum 2026. All Rights Reserved.

operationalState	A ResourceOperationalStateType. Value enumeration for the 'resourceOperationalState' of a Resource; the operational state attribute (defined by ITU-T X.731/ITU-T M.3701) tracks whether or not the resource is installed and working; it is single valued and read-only by management functions; defined values: 'disabled': The resource is totally inoperable and unable to provide service to the user(s); 'enabled': The resource is partially or fully operable and available for use. ENUMERATED with values: * enabled * disabled
place	A RelatedPlaceRef [0..*]. A list of references to places related to this Resource, differentiated by their role (e.g., installation place, usage place).
priority	An Integer32. Priority of the Resource Function. In a contention scenario (e.g., resource limitations, conflicting requests, or automated actions), a higher priority value indicates that this Resource Function or its associated operations should be favored or executed first.

© TM Forum 2026. All Rights Reserved.

proceduralStatus	A ResourceProceduralStatusType. Value enumeration for the 'resourceProceduralStatus' of a Resource; the procedural status attribute (defined by ITU-T X.731/ITU-T M.3701) represents a sequence of phases through which the resource needs to progress; it is single valued and read-only by management functions; defined values: 'initializationRequired': The resource requires initialization to be invoked by the manager before it can perform its normal functions, and this procedure has not been initiated. The manager may be able to invoke such initialization through an action. The operational state is 'disabled'; 'notInitialized': The resource requires initialization before it can perform its normal functions, and this procedure has not been initiated. The resource initializes itself autonomously, but the operational state may be either 'disabled' or 'enabled', depending upon the managed object class definition; 'initializing': The resource requires initialization before it can perform its normal functions, and this procedure has been initiated but is not yet complete. The operational state may be 'disabled' or 'enabled', depending upon the managed object class definition; 'reporting': The resource has completed some processing operation and is notifying the results of the operation, e.g., a test process is sending its results. The operational state is 'enabled'; 'terminating': The resource is in a termination phase. If the resource does not reinitialize itself autonomously, the operational state is 'disabled'. Otherwise, the operational state may be either 'disabled' or 'enabled', depending upon the managed object class definition. ENUMERATED with values: * initializationRequired * notInitialized * initializing * reporting * terminating
relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. A list of Parties or PartyRoles related to this resource, differentiated by their role (e.g., owner, user, installer).

© TM Forum 2026. All Rights Reserved.

resourceCharacteristic	A Characteristic [0..*]. A list of Characteristics of this resource. Characteristic can be instantiated as * BooleanArrayCharacteristic * BooleanCharacteristic * FloatArrayCharacteristic * FloatCharacteristic * IntegerArrayCharacteristic * IntegerCharacteristic * NumberArrayCharacteristic * NumberCharacteristic * ObjectArrayCharacteristic * ObjectCharacteristic * StringArrayCharacteristic * StringCharacteristic
resourceOrderItem	A RelatedResourceOrderItem [0..*]. A list of resource order items related to this resource.
resourceRelationship	A ResourceRelationship [0..*]. A list of relationships between this resource and other resources, differentiated by relationshipType.
resourceSpecification	A ResourceSpecificationRef. Resources are physical or non-physical components (or some combination of these) within an enterprise's infrastructure or inventory. They are typically consumed or used by services (for example a physical port assigned to a service) or contribute to the realization of a Product (for example, a SIM card). They can be drawn from the Application, Computing and Network domains, and include, for example, Network Elements, software, IT systems, content and information, and technology components. A ResourceSpecification is an abstract base class for representing a generic means for implementing a particular type of Resource. In essence, a ResourceSpecification defines the common attributes and relationships of a set of related Resources, while Resource defines a specific instance that is based on a particular ResourceSpecification.

© TM Forum 2026. All Rights Reserved.

resourceVersion	A String. A field that identifies the specific version of an instance of a resource. NOTE: At some point in the future (v6) this will be aligned with the new Version pattern, and then this property would need to be renamed to **version**.
role	A String. Role of the Resource Function. Used when Resource Function is a component of a composite Resource Function and the exact role of the service within the composite is not clear from descriptor/location.
schedule	A ScheduleDefinition [0..*]. This defines the schedule for the Resource Function, detailing recurring frequencies, excluded dates, and time ranges for its activation or operation. This is an embedded sub-entity defining the schedule.
startOperatingDate	A DateTime. The point in time from which the resource is operating.
supportingResource	A ResourceRefOrValue [0..*]. A collection of resources that support this resource (bundling, link Resource Specification).
unknownStatus	A Boolean. The unknown status attribute (defined by ITU-T X.731/ITU-T M.3701) indicate that the state of the resource represented by the managed object is unknown. It is single valued and read-only by management functions.
usageState	A ResourceUsageStateType. Value enumeration for the 'resourceUsageState' of a Resource; the usage state attribute (defined by ITU-T X.731/ITU-T M.3701) tracks whether the resource is currently in use and if it can accept additional users or not; it is single-valued and read-only by management functions; defined values: 'idle': The resource is not currently in use; 'active': The resource is in use, and has sufficient spare operating capacity to provide for additional users simultaneously; 'busy': The resource is in use, but it has no spare operating capacity to provide for additional users at this instant. ENUMERATED with values: * idle * active * busy

© TM Forum 2026. All Rights Reserved.

validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A String. The value of the logical resource. E.g '0746712345' for MSISDN's.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Feature sub-resource fields

Configuration feature.

attachment	An AttachmentRefOrValue [0..*]. Attachments relevant to this Feature, such as documentation.
featureCategory	A String [0..*]. Collection of feature categories.
featureCharacteristic	A Characteristic [0..*]. This is a list of Characteristics for a particular feature. Characteristic can be instantiated as * BooleanArrayCharacteristic * BooleanCharacteristic * FloatArrayCharacteristic * FloatCharacteristic * IntegerArrayCharacteristic * IntegerCharacteristic * NumberArrayCharacteristic * NumberCharacteristic * ObjectArrayCharacteristic * ObjectCharacteristic * StringArrayCharacteristic * StringCharacteristic
featureRelationship	A FeatureRelationship [0..*]. Collection of feature relationships.
id	A String. Unique identifier.
isBundle	A Boolean. True if this is a feature group. Default is false.
isEnabled	A Boolean. True if this feature is enabled. Default is true.

© TM Forum 2026. All Rights Reserved.

name	A String [1]. The name for the feature.
note	A Note [0..*]. Notes relevant to this Feature.
policyConstraint	A PolicyRef [0..*]. Reference to manage a list of feature specification policy constraints.
relatedParty	A RelatedPartyRefOrPartyRoleRef [1..*]. Party that may be relevant to this Feature.
validFor	A CalendarPeriod [0..*]. Validity period of this Feature.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Attachment sub-resource fields

Complements the description of an element (for instance a product) through video, pictures...

attachmentType	A String [1]. A business characterization of the purpose of the attachment, for example logo, instructionManual, contractCopy.
content	A Base64. The actual contents of the attachment object, embedded inline and encoded as base64. Mutually exclusive with url.
description	A String. A narrative text describing the content of the attachment.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
mimeType	A String [1]. A technical characterization of the attachment content format using an IETF Media Type, for example application/pdf or image/png. Note: this property is named mimeType for historical reasons.
name	A String. The name of the attachment.
size	A Quantity. An amount in a given unit.

© TM Forum 2026. All Rights Reserved.

url	A String. The URL pointing to the attachment content held in an external system, such as a content management system or document repository. Mutually exclusive with content.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

AttachmentRef sub-resource fields

Attachment reference. An attachment complements the description of an element (for instance a product) through video, pictures.

~~description~~	DEPRECATED A String. A narrative text describing the content of the attachment. DEPRECATED: will be removed in v6.
href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
~~url~~	DEPRECATED A String. Link to the attachment media/content. DEPRECATED: will be removed in v6.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String [1]. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Characteristic sub-resource fields

Describes a given characteristic of an object or entity through a name/value pair. This is an

© TM Forum 2026. All Rights Reserved.

abstract base class, the actual value is in one of the strongly-typed subclasses : StringCharacteristic, ObjectCharacteristic, FloatCharacteristic, BooleanCharacteristic, NumberCharacteristic, IntegerCharacteristic, StringArrayCharacteristic, ObjectArray Characteristic, BooleanArrayCharacteristic, NumberArrayCharacteristic, IntegerArray Characteristic...

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.
	Characteristic can be instantiated as * BooleanArrayCharacteristic * BooleanCharacteristic * FloatArrayCharacteristic * FloatCharacteristic * IntegerArrayCharacteristic * IntegerCharacteristic * NumberArrayCharacteristic * NumberCharacteristic * ObjectArrayCharacteristic * ObjectCharacteristic * StringArrayCharacteristic * StringCharacteristic
value	This property is present in subclasses

CharacteristicRelationship sub-resource fields

Another Characteristic that is related to the current Characteristic;.

id	A String [1]. Unique identifier of the characteristic.
relationshipType	A String [1]. The type of relationship.
@baseType	A String. When sub-classing, this defines the super-class.

© TM Forum 2026. All Rights Reserved.

@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

BooleanArrayCharacteristic sub-resource fields

A characteristic which value is an array of Boolean(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Boolean [1..*]. A characteristic which value is an array of Boolean(s).
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

BooleanCharacteristic sub-resource fields

A characteristic which value is a Boolean.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Boolean [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.

© TM Forum 2026. All Rights Reserved.

@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

FloatArrayCharacteristic sub-resource fields

A characteristic which value is an array of Float(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Float [1..*]. A characteristic which value is an array of Float(s).
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

FloatCharacteristic sub-resource fields

A characteristic which value is a Float.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Float [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

IntegerArrayCharacteristic sub-resource fields

© TM Forum 2026. All Rights Reserved.

A characteristic which value is an array of Integer(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	An Integer [1..*]. A characteristic which value is an array of Integer(s).
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

IntegerCharacteristic sub-resource fields

A characteristic which value is a Integer.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	An Integer [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

NumberArrayCharacteristic sub-resource fields

A characteristic which value is an array of Number(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.

© TM Forum 2026. All Rights Reserved.

id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Number [1..*]. A characteristic which value is an array of Number(s).
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

NumberCharacteristic sub-resource fields

A characteristic which value is a Number.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A Number [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ObjectArrayCharacteristic sub-resource fields

A characteristic which value is an array of Object(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A valueType [1..*]. Collection of characteristic values.

© TM Forum 2026. All Rights Reserved.

valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ObjectCharacteristic sub-resource fields

A characteristic which value is a Object.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A valueType_2 [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

StringArrayCharacteristic sub-resource fields

A characteristic which value is an array of String(s).

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A String [1..*]. Collection of string characteristics.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.

© TM Forum 2026. All Rights Reserved.

@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

StringCharacteristic sub-resource fields

A characteristic which value is a String.

characteristicRelationship	A CharacteristicRelationship [0..*]. Collection of characteristic relationships.
id	A String. Unique identifier of the characteristic.
name	A String [1]. Name of the characteristic.
value	A String [1]. Value of the characteristic.
valueType	A String. Data type of the value of the characteristic.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

FeatureRelationship sub-resource fields

Configuration feature.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. This is the name of the target feature.
relationshipType	A String [1]. This is the type of the feature relationship. ENUMERATED with values: * excluded * includes * may include * requires
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.

© TM Forum 2026. All Rights Reserved.

@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Note sub-resource fields

Extra information about a given entity.

author	A String. Author of the note.
date	A DateTime. Date of the note.
id	A String. Identifier of the note within its containing entity.
text	A String. Text of the note.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

PolicyRef sub-resource fields

Reference to managed Policy object.

href	A String. Hyperlink reference.
id	A String [1]. Unique identifier.
name	A String. Name of the referred entity.
version	A String.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

RelatedPartyRefOrPartyRoleRef sub-resource fields

© TM Forum 2026. All Rights Reserved.

RelatedParty reference. A related party defines party or party role or its reference, linked to a specific entity.

partyOrPartyRole	A PartyRefOrPartyRoleRef.
role	A String [1]. Role played by the related party or party role in the context of the specific entity it is linked to. Such as 'initiator', 'customer', 'salesAgent', 'user'.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

PartyRef sub-resource fields

A Party reference.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. ENUMERATED with values: * PartyRef

PartyRoleRef sub-resource fields

Party role reference. A party role represents the part played by a party in a given context.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
partyId	A String. The identifier of the engaged party that is linked to the PartyRole object.

© TM Forum 2026. All Rights Reserved.

partyName	A String. The name of the engaged party that is linked to the PartyRole object.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. ENUMERATED with values: * PartyRoleRef

CalendarPeriod sub-resource fields

The CalendarPeriod schema represents a period of time within a calendar, defining various attributes such as the applicable day, timezone, hour period, and status. It is designed to capture information about the availability or status of a calendar period, which can be used in scheduling, booking, or resource allocation applications.

day	A DayOfWeekType. Possible values for the days of the week. ENUMERATED with values: * mon * tue * wed * thu * fri * sat * sun * weekdays * weekend
hourPeriod	A HourPeriod [0..*]. Start and end time range in 24-hour HH:mm format.
status	A String [1]. Indication of the availability of the calendar period (e.g.: available, booked, etc.).
timeZone	A String. Indication of the timezone applicable to the calendar information in ISO 8601 timezone: either 'Z' for UTC or an offset like +02:00 or -05:30.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.

© TM Forum 2026. All Rights Reserved.

@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

HourPeriod sub-resource fields

Hour interval.

endHour	A String. The end of the hour period, expressed in 24-hour HH:mm format (e.g., 12:00 for noon, 23:59 for one minute before midnight).
startHour	A String. The beginning of the hour period, expressed in 24-hour HH:mm format (e.g., 09:00 for 9 AM, 17:30 for 5:30 PM).

ConnectionPointRef sub-resource fields

Reference to a ConnectionPoint resource. A ConnectionPoint is modeled as a Resource that serves as a service access point (SAP) for a Resource Function, facilitating its interaction with other components by defining its input and/or output interfaces (for example, a REST API endpoint, a message queue topic, or a CORBA operation). There is no dedicated TMF API that exposes ConnectionPoint as a standalone managed resource; this reference acts as a lightweight pointer to a ConnectionPoint resource without embedding its full implementation details.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
version	A String. Connection point version.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ResourceGraph sub-resource fields

Resource graph. This entity focuses on the relationships and connectivity specifically

© TM Forum 2026. All Rights Reserved.

between Resource Functions, contrasting with the more general 'Graph' entity from the Topology API, which describes broader network topology.

connection	A Connection [1..*]. Resource graph edges.
description	A String. Description of the resource graph.
graphRelationship	A ResourceGraphRelationship [0..*]. Relationships to other resource graphs.
id	A String [1]. Locally unique identifier of the resource graph.
name	A String. Descriptive name for the resource graph.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Connection sub-resource fields

An edge in a resource graph.

associationType	A String [1]. The type of association for this connection. 'pointToPoint' indicates a direct, one-to-one link between two endpoints. 'pointToMultipoint' indicates a connection from one endpoint to multiple other endpoints, forming a distribution or broadcast type of link. ENUMERATED with values: * pointToPoint * pointToMultipoint
endpoint	An Endpoint [2..*]. Resource graph vertices connected by this edge.
id	A String [1]. Locally unique identifier for graph edge.
name	A String. Descriptive name for graph edge.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

© TM Forum 2026. All Rights Reserved.

Endpoint sub-resource fields

A vertex in a resource graph.

connectionPoint	A ConnectionPointRef. Reference to a ConnectionPoint resource. A ConnectionPoint is modeled as a Resource that serves as a service access point (SAP) for a Resource Function, facilitating its interaction with other components by defining its input and/or output interfaces (for example, a REST API endpoint, a message queue topic, or a CORBA operation). There is no dedicated TMF API that exposes ConnectionPoint as a standalone managed resource; this reference acts as a lightweight pointer to a ConnectionPoint resource without embedding its full implementation details.
isSource	A Boolean. Indicates the directionality of the endpoint within a connection. If `true`, the endpoint acts as a source, sending data. If `false`, it acts as a sink, receiving data. If all endpoints in a multi-point connection are marked as `true` (sources) and `false` (sinks) respectively, it implies that specific roles are assigned, e.g., one source to multiple sinks. If `isSource` is `true` for all participating endpoints in a connection, it would imply a bidirectional communication capability for each. Default is `true`.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ResourceGraphRelationship sub-resource fields

Used to describe relationship between ResourceGraph items. These relationships could have an impact on resource function connectivity.

id	A String [1]. Id of the related ResourceGraph item (must be in the same ResourceGraph).

© TM Forum 2026. All Rights Reserved.

relationshipType	A String [1]. Relationship type, such as adjacency, connectivity, or hierarchy. ENUMERATED with values: * adjacency * connectivity * hierarchy
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ExternalIdentifier sub-resource fields

An identification of an entity that is owned by or originates in a software system different from the current system, for example a ProductOrder handed off from a commerce platform into an order handling system. The structure identifies the system itself, the nature of the entity within the system (e.g. class name) and the unique ID of the entity within the system. It is anticipated that multiple external IDs can be held for a single entity, e.g. if the entity passed through multiple systems on the way to the current system. In this case the consumer is expected to sequence the IDs in the array in reverse order of provenance, i.e. most recent system first in the list.

externalIdentifierType	A String. Type of the identification, typically would be the type of the entity within the external system.
id	A String [1]. Identification of the entity within the external system.
owner	A String. Name of the external system that owns the entity.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

IntentRef sub-resource fields

Intent reference, for when Intent is used by other entities.

href	A String. The URI of the referred entity.

© TM Forum 2026. All Rights Reserved.

id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

RelatedPlaceRef sub-resource fields

Use role to distinguish the context of the place being referenced (such as `delivery-entrance`). Use `@referredType` to distinguish the specific Place sub-type (such as a `GeographicAddress`). Use `@type` to extend (eg: as RefOrValue).

place	A PlaceRef [1]. A reference to a physical Place.
role	A String [1]. The context in which this Place is being used.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The kind of Place that is being referenced.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

PlaceRef sub-resource fields

A reference to a physical Place.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The specific sub-type of Place being referred to (such as a `GeographicAddress`).

© TM Forum 2026. All Rights Reserved.

@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

RelatedResourceOrderItem sub-resource fields

RelatedResourceOrderItem (a ResourceOrder item) .The resource order item which triggered resource creation/change/termination.

itemAction	An OrderItemActionType. Action to be performed on the entity managed by the item. ENUMERATED with values: * add * modify * delete * noChange
itemId	A String. Identifier of the order item where the resource was managed.
resourceOrderHref	A String. Reference of the related entity.
resourceOrderId	A String. Unique identifier of a related entity.
role	A String. Role of the resource order item for this resource.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ResourceRelationship sub-resource fields

Linked resources to the one instantiate, such as [bundled] if the resource is a bundle and you want to describe the bundled resources inside this bundle; [reliesOn] if the resource needs another already owned resource to rely on (e.g. an option on an already owned mobile access resource) [targets] or [isTargeted] (depending on the way of expressing the link) for any other kind of links that may be useful.

© TM Forum 2026. All Rights Reserved.

relationshipType	A String [1]. Type of the resource relationship, such as [bundled] if the resource is a bundle and you want to describe the bundled resources inside this bundle; [relies On] if the resource needs another already owned resource to rely on (eg: an option on an already owned mobile access resource) [targets] or [isTargeted] (depending on the way of expressing the link) for any other kind of links that may be useful.
resource	A ResourceRef [1]. Resource reference, for when Resource is used by other entities.
resourceRelationshipCharacteristic	A Characteristic [0..*]. Describes a given characteristic of an object or entity through a name/value pair. This is an abstract base class, the actual value is in one of the strongly-typed subclasses : StringCharacteristic, ObjectCharacteristic, FloatCharacteristic, BooleanCharacteristic, NumberCharacteristic, IntegerCharacteristic, StringArrayCharacteristic, ObjectArrayCharacteristic, BooleanArrayCharacteristic, NumberArrayCharacteristic, IntegerArrayCharacteristic... Characteristic can be instantiated as * BooleanArrayCharacteristic * BooleanCharacteristic * FloatArrayCharacteristic * FloatCharacteristic * IntegerArrayCharacteristic * IntegerCharacteristic * NumberArrayCharacteristic * NumberCharacteristic * ObjectArrayCharacteristic * ObjectCharacteristic * StringArrayCharacteristic * StringCharacteristic
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

© TM Forum 2026. All Rights Reserved.

ResourceRef sub-resource fields

Resource reference, for when Resource is used by other entities.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ResourceSpecificationRef sub-resource fields

Resources are physical or non-physical components (or some combination of these) within an enterprise's infrastructure or inventory. They are typically consumed or used by services (for example a physical port assigned to a service) or contribute to the realization of a Product (for example, a SIM card). They can be drawn from the Application, Computing and Network domains, and include, for example, Network Elements, software, IT systems, content and information, and technology components. A ResourceSpecification is an abstract base class for representing a generic means for implementing a particular type of Resource. In essence, a ResourceSpecification defines the common attributes and relationships of a set of related Resources, while Resource defines a specific instance that is based on a particular ResourceSpecification.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
version	A String. Resource Specification version.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.

© TM Forum 2026. All Rights Reserved.

@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ScheduleDefinition sub-resource fields

The schedule definition for running jobs.

dateScheduleDefinition	A DateTime [0..*]. The date schedule is used to define a schedule that is based on specific dates and times. Each value must be a valid IETF RFC 3339 date-time string (e.g., '2015-12-31T23:59:59Z', '2013-02-28T09:00:00-05:00').
excludedDate	A DateTime [0..*]. A list of specific dates that should be excluded from the Schedule Definition.
id	A String [1]. Identifier of the schedule definition, it should be locally unique.
monthlyScheduleDayOfMonthDefinition	A DateTime [0..*]. The schedule definition for running the threshold job.
monthlyScheduleDayOfWeekDefinition	A MonthlyScheduleDayOfWeekDefinition.
recurringFrequency	A String. A recurring frequency to run a job within day that is included in schedule definition, for example: every 5 minutes, 15 minute, 30 minutes, 1 hour.
scheduleDefinitionHourRange	A HourRange [0..*]. A list of time ranges within a specific day that the schedule will be active on, for example 08:00-12:00, 16:00-19:00.
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
weeklyScheduleDefinition	A DayOfWeekRecurrence [0..*]. The weekly schedule is used to define a schedule that is based on the days of the week, e.g. a schedule that will be active only on Monday and Tuesday.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

MonthlyScheduleDayOfWeekDefinition sub-resource fields

© TM Forum 2026. All Rights Reserved.

Base Extensible schema for use in TMForum Open-APIs - When used for in a schema it means that the Entity described by the schema MUST be extended with the @type.

dayOfMonthRecurrence	A DayOfMonthRecurrence [0..*]. Specifies recurrence on particular days of the month (1–31).
recurringDaySequence	A String.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

DayOfMonthRecurrence sub-resource fields

Specifies recurrence on particular days of the month (1–31).

days	An Integer [0..*]. List of days in the month on which recurrence occurs.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

HourRange sub-resource fields

Represents a range of hours within a single day. The range can have only a start time, only an end time, or both. Times must be specified in 24-hour HH:mm format.

endHour	A String. The end of the hour range, expressed in 24-hour HH:mm format (e.g., 12:00 for noon, 23:59 for one minute before midnight).
startHour	A String. The beginning of the hour range, expressed in 24-hour HH:mm format (e.g., 09:00 for 9 AM, 17:30 for 5:30 PM).

DayOfWeekRecurrence sub-resource fields

Base Extensible schema for use in TMForum Open-APIs - When used for in a schema it means that the Entity described by the schema MUST be extended with the @type.

© TM Forum 2026. All Rights Reserved.

days	An Integer [0..*]. List of days in the week on which recurrence occurs.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Resource sub-resource fields

Resource is an abstract entity that describes the common set of attributes shared by all concrete resources (e.g. TPE, EQUIPMENT) in the inventory.

activationFeature	A Feature [0..*]. Configuration features; see TMF664 Resource Function Activation API.
administrativeState	A ResourceAdministrativeStateType. Value enumeration for the 'resourceAdministrativeState' of a Resource; the administrative state attribute (defined by ITU-T X.731/ITU-T M.3701) represents permission to use ('unlocked') or prohibition against using ('locked') the resource imposed through the management services; it is single valued and read-write by management functions; defined values: 'locked': The resource is administratively prohibited from performing services for its users; 'shutdown': Use of the resource is administratively permitted to existing instances of use only. While the system remains in the shutting down state the manager may at any time cause the managed object to revert to the unlocked state; 'unlocked': The resource is administratively permitted to perform services for its users; this is independent of its inherent operability. ENUMERATED with values: * locked * unlocked * shuttingDown

© TM Forum 2026. All Rights Reserved.

alarmStatus	A ResourceAlarmStatusType [0..*]. Value enumeration for the 'resourceAlarmStatus' of a Resource; the alarm status attribute (defined by ITU-T X.731/ITU-T M.3701) represents the severity status of fault for a resource; it is multi-valued and read-only by management functions, each value represents an existing severity; defined values: 'underRepair': The resource is currently being repaired; 'critical': One or more critical alarms indicating a fault have been detected in the resource, and have not been cleared; 'major': One or more major alarms indicating a fault have been detected in the resource, and have not yet been cleared; 'minor': One or more minor alarms indicating a fault have been detected in the resource, and have not yet been cleared; 'alarmOutstanding': One or more alarms have been detected in the resource. The condition may or may not be disabling. If the operational state is 'enabled', additional attributes, particular to the managed object class, may indicate the nature and cause of the condition and the services that are affected. ENUMERATED with values: * underRepair * critical * major * minor * alarmOutstanding
allocationStatus	A ResourceAllocationStatusType. Values for the 'allocationStatus' of a Resource; for example: 'available', 'reserved', 'allocated' and 'partiallyAllocated'.
attachment	An AttachmentRef [0..*]. A list of references to attachments associated with this resource.

© TM Forum 2026. All Rights Reserved.

availabilityStatus	A ResourceAvailabilityStatusType. Value enumeration for the 'resourceAvailabilityStatus' of a Resource; the availability status attribute (defined by ITU-T X.731/ITU-T M.3701) represents the availability of the resource for either carrying service or for being in other states, such as in testing; it is single valued and read-only by management functions; defined values: 'inTest': The resource is undergoing a test procedure. If the administrative state is 'locked' or 'shuttingDown', then normal users are precluded from using the resource, and the controlStatus attribute has the value 'reservedForTest'. Tests that do not exclude additional users can be present in any operational or administrative state but the 'reservedForTest' condition should not be present; 'failed': The resource has an internal fault that prevents it from operating. The operational state is 'disabled'; 'powerOff': The resource requires power to be applied and is not powered on. The operational state is 'disabled'; 'online': The resource is available for use. The operational state is 'enabled'; 'offline': The resource requires a routine operation to be performed to place it on line and make it available for use. The operation may be manual or automatic, or both. The operational state is 'disabled'; 'offDuty': The resource has been made inactive by an internal control process in accordance with a predetermined time schedule. Under normal conditions the control process can be expected to reactivate the resource at some scheduled time, and it is therefore considered to be optional. The operational state is 'enabled' or 'disabled'; 'dependency': The resource cannot operate because some other resource on which it depends (i.e., a resource not represented by the same managed object) is unavailable. The operational state is 'disabled'; 'degraded': The service available from the resource is degraded in some respect, such as in speed or operating capacity. Failure of a test or an unacceptable performance measurement has established that some or all services are not functional or are degraded due to the presence of a defect. However, the resource remains available for service, either because some services are satisfactory or because degraded service is preferable to no service at all. Object specific attributes may be defined

© TM Forum 2026. All Rights Reserved.

~~category~~	DEPRECATED A String. Category of the concrete resource. e.g Gold, Silver for MSISDN concrete resource; NOTE: this property is misleading and therefore is deprecated.
controlStatus	A ResourceControlStatusType. Value enumeration for the 'resourceControlStatus' of a Resource; the control status attribute (defined by ITU-T X.731/ITU-T M.3701) indicates that the resource is under some kind of control; it is single valued and read-only by management functions; defined values: 'subjectToTest': The resource is available to normal users, but tests may be conducted on it simultaneously at unpredictable times, which may cause it to exhibit unusual characteristics to users; 'partOfServicesLocked': This value indicates whether a manager has administratively restricted a particular part of a service from the user(s) of a resource. The administrative state is 'unlocked'. Examples are incoming service barred, outgoing service barred, write locked by media key, read locked; 'reservedForTest': The resource has been made administratively unavailable to normal users because it is undergoing a test procedure. The administrative state is 'locked'; 'suspended': Service has been administratively suspended to the users of the resource. The resource may retain knowledge of current users and/or requests for usage, depending upon the managed object class definition, but does not resume performing services until the suspended condition is revoked. The administrative state is 'unlocked'. ENUMERATED with values: * subjectToTest * partOfServicesLocked * reservedForTest * suspended
creationDate	A DateTime. The point in time when the resource was created.
description	A String. Free-text description of the resource.
endOperatingDate	A DateTime. The point in time till the resource is operating.

© TM Forum 2026. All Rights Reserved.

externalIdentifier	An ExternalIdentifier [0..*]. An identification of this resource that is owned by or originates in a software system different from the current system. The structure identifies the system itself, the nature of the resource within the system and the unique ID of the resource within the system. It is anticipated that multiple external IDs can be held for a single resource, e.g. if the resource passed through multiple systems on the way to the current system.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
intent	An IntentRef. Intent reference, for when Intent is used by other entities.
lifecycleState	A ResourceLifecycleStateType. Value enumeration for the 'resourceLifecycleState' of a Resource; the lifecycle state attribute (defined by ITU-T X.731/ITU-T M.3701) represents the planned and tracked state of a physical or logical resource; it is single valued and read-write by management functions; defined values: 'planned', 'installed', 'pendingRemoval'. ENUMERATED with values: * planned * installed * pendingRemoval
name	A String [1]. The name of the resource.
note	A Note [0..*]. A list of notes associated with this resource.
operationalState	A ResourceOperationalStateType. Value enumeration for the 'resourceOperationalState' of a Resource; the operational state attribute (defined by ITU-T X.731/ITU-T M.3701) tracks whether or not the resource is installed and working; it is single valued and read-only by management functions; defined values: 'disabled': The resource is totally inoperable and unable to provide service to the user(s); 'enabled': The resource is partially or fully operable and available for use. ENUMERATED with values: * enabled * disabled

© TM Forum 2026. All Rights Reserved.

place	A RelatedPlaceRef [0..*]. A list of references to places related to this Resource, differentiated by their role (e.g., installation place, usage place).
proceduralStatus	A ResourceProceduralStatusType. Value enumeration for the 'resourceProceduralStatus' of a Resource; the procedural status attribute (defined by ITU-T X.731/ITU-T M.3701) represents a sequence of phases through which the resource needs to progress; it is single valued and read-only by management functions; defined values: 'initializationRequired': The resource requires initialization to be invoked by the manager before it can perform its normal functions, and this procedure has not been initiated. The manager may be able to invoke such initialization through an action. The operational state is 'disabled'; 'notInitialized': The resource requires initialization before it can perform its normal functions, and this procedure has not been initiated. The resource initializes itself autonomously, but the operational state may be either 'disabled' or 'enabled', depending upon the managed object class definition; 'initializing': The resource requires initialization before it can perform its normal functions, and this procedure has been initiated but is not yet complete. The operational state may be 'disabled' or 'enabled', depending upon the managed object class definition; 'reporting': The resource has completed some processing operation and is notifying the results of the operation, e.g., a test process is sending its results. The operational state is 'enabled'; 'terminating': The resource is in a termination phase. If the resource does not reinitialize itself autonomously, the operational state is 'disabled'. Otherwise, the operational state may be either 'disabled' or 'enabled', depending upon the managed object class definition. ENUMERATED with values: * initializationRequired * notInitialized * initializing * reporting * terminating

© TM Forum 2026. All Rights Reserved.

relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. A list of Parties or PartyRoles related to this resource, differentiated by their role (e.g., owner, user, installer).
resourceCharacteristic	A Characteristic [0..*]. A list of Characteristics of this resource. Characteristic can be instantiated as * BooleanArrayCharacteristic * BooleanCharacteristic * FloatArrayCharacteristic * FloatCharacteristic * IntegerArrayCharacteristic * IntegerCharacteristic * NumberArrayCharacteristic * NumberCharacteristic * ObjectArrayCharacteristic * ObjectCharacteristic * StringArrayCharacteristic * StringCharacteristic
resourceOrderItem	A RelatedResourceOrderItem [0..*]. A list of resource order items related to this resource.
resourceRelationship	A ResourceRelationship [0..*]. A list of relationships between this resource and other resources, differentiated by relationshipType.

© TM Forum 2026. All Rights Reserved.

resourceSpecification	A ResourceSpecificationRef. Resources are physical or non-physical components (or some combination of these) within an enterprise's infrastructure or inventory. They are typically consumed or used by services (for example a physical port assigned to a service) or contribute to the realization of a Product (for example, a SIM card). They can be drawn from the Application, Computing and Network domains, and include, for example, Network Elements, software, IT systems, content and information, and technology components. A ResourceSpecification is an abstract base class for representing a generic means for implementing a particular type of Resource. In essence, a ResourceSpecification defines the common attributes and relationships of a set of related Resources, while Resource defines a specific instance that is based on a particular ResourceSpecification.
resourceVersion	A String. A field that identifies the specific version of an instance of a resource. NOTE: At some point in the future (v6) this will be aligned with the new Version pattern, and then this property would need to be renamed to **version**.
startOperatingDate	A DateTime. The point in time from which the resource is operating.
supportingResource	A ResourceRefOrValue [0..*]. A collection of resources that support this resource (bundling, link Resource Specification).
unknownStatus	A Boolean. The unknown status attribute (defined by ITU-T X.731/ITU-T M.3701) indicate that the state of the resource represented by the managed object is unknown. It is single valued and read-only by management functions.

© TM Forum 2026. All Rights Reserved.

usageState	A ResourceUsageStateType. Value enumeration for the 'resourceUsageState' of a Resource; the usage state attribute (defined by ITU-T X.731/ITU-T M.3701) tracks whether the resource is currently in use and if it can accept additional users or not; it is single-valued and read-only by management functions; defined values: 'idle': The resource is not currently in use; 'active': The resource is in use, and has sufficient spare operating capacity to provide for additional users simultaneously; 'busy': The resource is in use, but it has no spare operating capacity to provide for additional users at this instant. ENUMERATED with values: * idle * active * busy
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.
	Resource can be instantiated as * LogicalResource * ResourceFunction
value	This property is present in subclasses

LogicalResource sub-resource fields

Logic resource is a type of resource that describes the common set of attributes shared by all concrete logical resources (e.g. TPE, MSISDN, IP Addresses) in the inventory.

activationFeature	A Feature [0..*]. Configuration features; see TMF664 Resource Function Activation API.

© TM Forum 2026. All Rights Reserved.

administrativeState	A ResourceAdministrativeStateType. Value enumeration for the 'resourceAdministrativeState' of a Resource; the administrative state attribute (defined by ITU-T X.731/ITU-T M.3701) represents permission to use ('unlocked') or prohibition against using ('locked') the resource imposed through the management services; it is single valued and read-write by management functions; defined values: 'locked': The resource is administratively prohibited from performing services for its users; 'shutdown': Use of the resource is administratively permitted to existing instances of use only. While the system remains in the shutting down state the manager may at any time cause the managed object to revert to the unlocked state; 'unlocked': The resource is administratively permitted to perform services for its users; this is independent of its inherent operability. ENUMERATED with values: * locked * unlocked * shuttingDown

© TM Forum 2026. All Rights Reserved.

alarmStatus	A ResourceAlarmStatusType [0..*]. Value enumeration for the 'resourceAlarmStatus' of a Resource; the alarm status attribute (defined by ITU-T X.731/ITU-T M.3701) represents the severity status of fault for a resource; it is multi-valued and read-only by management functions, each value represents an existing severity; defined values: 'underRepair': The resource is currently being repaired; 'critical': One or more critical alarms indicating a fault have been detected in the resource, and have not been cleared; 'major': One or more major alarms indicating a fault have been detected in the resource, and have not yet been cleared; 'minor': One or more minor alarms indicating a fault have been detected in the resource, and have not yet been cleared; 'alarmOutstanding': One or more alarms have been detected in the resource. The condition may or may not be disabling. If the operational state is 'enabled', additional attributes, particular to the managed object class, may indicate the nature and cause of the condition and the services that are affected. ENUMERATED with values: * underRepair * critical * major * minor * alarmOutstanding
allocationStatus	A ResourceAllocationStatusType. Values for the 'allocationStatus' of a Resource; for example: 'available', 'reserved', 'allocated' and 'partiallyAllocated'.
attachment	An AttachmentRef [0..*]. A list of references to attachments associated with this resource.

© TM Forum 2026. All Rights Reserved.

availabilityStatus	A ResourceAvailabilityStatusType. Value enumeration for the 'resourceAvailabilityStatus' of a Resource; the availability status attribute (defined by ITU-T X.731/ITU-T M.3701) represents the availability of the resource for either carrying service or for being in other states, such as in testing; it is single valued and read-only by management functions; defined values: 'inTest': The resource is undergoing a test procedure. If the administrative state is 'locked' or 'shuttingDown', then normal users are precluded from using the resource, and the controlStatus attribute has the value 'reservedForTest'. Tests that do not exclude additional users can be present in any operational or administrative state but the 'reservedForTest' condition should not be present; 'failed': The resource has an internal fault that prevents it from operating. The operational state is 'disabled'; 'powerOff': The resource requires power to be applied and is not powered on. The operational state is 'disabled'; 'online': The resource is available for use. The operational state is 'enabled'; 'offline': The resource requires a routine operation to be performed to place it on line and make it available for use. The operation may be manual or automatic, or both. The operational state is 'disabled'; 'offDuty': The resource has been made inactive by an internal control process in accordance with a predetermined time schedule. Under normal conditions the control process can be expected to reactivate the resource at some scheduled time, and it is therefore considered to be optional. The operational state is 'enabled' or 'disabled'; 'dependency': The resource cannot operate because some other resource on which it depends (i.e., a resource not represented by the same managed object) is unavailable. The operational state is 'disabled'; 'degraded': The service available from the resource is degraded in some respect, such as in speed or operating capacity. Failure of a test or an unacceptable performance measurement has established that some or all services are not functional or are degraded due to the presence of a defect. However, the resource remains available for service, either because some services are satisfactory or because degraded service is preferable to no service at all. Object specific attributes may be defined

© TM Forum 2026. All Rights Reserved.

~~category~~	DEPRECATED A String. Category of the concrete resource. e.g Gold, Silver for MSISDN concrete resource; NOTE: this property is misleading and therefore is deprecated.
controlStatus	A ResourceControlStatusType. Value enumeration for the 'resourceControlStatus' of a Resource; the control status attribute (defined by ITU-T X.731/ITU-T M.3701) indicates that the resource is under some kind of control; it is single valued and read-only by management functions; defined values: 'subjectToTest': The resource is available to normal users, but tests may be conducted on it simultaneously at unpredictable times, which may cause it to exhibit unusual characteristics to users; 'partOfServicesLocked': This value indicates whether a manager has administratively restricted a particular part of a service from the user(s) of a resource. The administrative state is 'unlocked'. Examples are incoming service barred, outgoing service barred, write locked by media key, read locked; 'reservedForTest': The resource has been made administratively unavailable to normal users because it is undergoing a test procedure. The administrative state is 'locked'; 'suspended': Service has been administratively suspended to the users of the resource. The resource may retain knowledge of current users and/or requests for usage, depending upon the managed object class definition, but does not resume performing services until the suspended condition is revoked. The administrative state is 'unlocked'. ENUMERATED with values: * subjectToTest * partOfServicesLocked * reservedForTest * suspended
creationDate	A DateTime. The point in time when the resource was created.
description	A String. Free-text description of the resource.
endOperatingDate	A DateTime. The point in time till the resource is operating.

© TM Forum 2026. All Rights Reserved.

externalIdentifier	An ExternalIdentifier [0..*]. An identification of this resource that is owned by or originates in a software system different from the current system. The structure identifies the system itself, the nature of the resource within the system and the unique ID of the resource within the system. It is anticipated that multiple external IDs can be held for a single resource, e.g. if the resource passed through multiple systems on the way to the current system.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
intent	An IntentRef. Intent reference, for when Intent is used by other entities.
lifecycleState	A ResourceLifecycleStateType. Value enumeration for the 'resourceLifecycleState' of a Resource; the lifecycle state attribute (defined by ITU-T X.731/ITU-T M.3701) represents the planned and tracked state of a physical or logical resource; it is single valued and read-write by management functions; defined values: 'planned', 'installed', 'pendingRemoval'. ENUMERATED with values: * planned * installed * pendingRemoval
name	A String [1]. The name of the resource.
note	A Note [0..*]. A list of notes associated with this resource.
operationalState	A ResourceOperationalStateType. Value enumeration for the 'resourceOperationalState' of a Resource; the operational state attribute (defined by ITU-T X.731/ITU-T M.3701) tracks whether or not the resource is installed and working; it is single valued and read-only by management functions; defined values: 'disabled': The resource is totally inoperable and unable to provide service to the user(s); 'enabled': The resource is partially or fully operable and available for use. ENUMERATED with values: * enabled * disabled

© TM Forum 2026. All Rights Reserved.

place	A RelatedPlaceRef [0..*]. A list of references to places related to this Resource, differentiated by their role (e.g., installation place, usage place).
proceduralStatus	A ResourceProceduralStatusType. Value enumeration for the 'resourceProceduralStatus' of a Resource; the procedural status attribute (defined by ITU-T X.731/ITU-T M.3701) represents a sequence of phases through which the resource needs to progress; it is single valued and read-only by management functions; defined values: 'initializationRequired': The resource requires initialization to be invoked by the manager before it can perform its normal functions, and this procedure has not been initiated. The manager may be able to invoke such initialization through an action. The operational state is 'disabled'; 'notInitialized': The resource requires initialization before it can perform its normal functions, and this procedure has not been initiated. The resource initializes itself autonomously, but the operational state may be either 'disabled' or 'enabled', depending upon the managed object class definition; 'initializing': The resource requires initialization before it can perform its normal functions, and this procedure has been initiated but is not yet complete. The operational state may be 'disabled' or 'enabled', depending upon the managed object class definition; 'reporting': The resource has completed some processing operation and is notifying the results of the operation, e.g., a test process is sending its results. The operational state is 'enabled'; 'terminating': The resource is in a termination phase. If the resource does not reinitialize itself autonomously, the operational state is 'disabled'. Otherwise, the operational state may be either 'disabled' or 'enabled', depending upon the managed object class definition. ENUMERATED with values: * initializationRequired * notInitialized * initializing * reporting * terminating

© TM Forum 2026. All Rights Reserved.

relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. A list of Parties or PartyRoles related to this resource, differentiated by their role (e.g., owner, user, installer).
resourceCharacteristic	A Characteristic [0..*]. A list of Characteristics of this resource. Characteristic can be instantiated as * BooleanArrayCharacteristic * BooleanCharacteristic * FloatArrayCharacteristic * FloatCharacteristic * IntegerArrayCharacteristic * IntegerCharacteristic * NumberArrayCharacteristic * NumberCharacteristic * ObjectArrayCharacteristic * ObjectCharacteristic * StringArrayCharacteristic * StringCharacteristic
resourceOrderItem	A RelatedResourceOrderItem [0..*]. A list of resource order items related to this resource.
resourceRelationship	A ResourceRelationship [0..*]. A list of relationships between this resource and other resources, differentiated by relationshipType.

© TM Forum 2026. All Rights Reserved.

resourceSpecification	A ResourceSpecificationRef. Resources are physical or non-physical components (or some combination of these) within an enterprise's infrastructure or inventory. They are typically consumed or used by services (for example a physical port assigned to a service) or contribute to the realization of a Product (for example, a SIM card). They can be drawn from the Application, Computing and Network domains, and include, for example, Network Elements, software, IT systems, content and information, and technology components. A ResourceSpecification is an abstract base class for representing a generic means for implementing a particular type of Resource. In essence, a ResourceSpecification defines the common attributes and relationships of a set of related Resources, while Resource defines a specific instance that is based on a particular ResourceSpecification.
resourceVersion	A String. A field that identifies the specific version of an instance of a resource. NOTE: At some point in the future (v6) this will be aligned with the new Version pattern, and then this property would need to be renamed to **version**.
startOperatingDate	A DateTime. The point in time from which the resource is operating.
supportingResource	A ResourceRefOrValue [0..*]. A collection of resources that support this resource (bundling, link Resource Specification).
unknownStatus	A Boolean. The unknown status attribute (defined by ITU-T X.731/ITU-T M.3701) indicate that the state of the resource represented by the managed object is unknown. It is single valued and read-only by management functions.

© TM Forum 2026. All Rights Reserved.

usageState	A ResourceUsageStateType. Value enumeration for the 'resourceUsageState' of a Resource; the usage state attribute (defined by ITU-T X.731/ITU-T M.3701) tracks whether the resource is currently in use and if it can accept additional users or not; it is single-valued and read-only by management functions; defined values: 'idle': The resource is not currently in use; 'active': The resource is in use, and has sufficient spare operating capacity to provide for additional users simultaneously; 'busy': The resource is in use, but it has no spare operating capacity to provide for additional users at this instant. ENUMERATED with values: * idle * active * busy
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.
value	A String. The value of the logical resource. E.g '0746712345' for MSISDN's.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.
	LogicalResource can be instantiated as * Resource * ResourceFunction

Json representation sample(s)

We provide below a JSON representation as example of the 'ResourceFunction' resource object.

```
{
  "@type": "ResourceFunction",
  "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
  "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
  "name": "Medium to Large Enterprise Firewall - Model 134985.3",
  "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
  "category": "Security",
```

© TM Forum 2026. All Rights Reserved.

```
  "resourceSpecification": {
    "@type": "ResourceSpecificationRef",
    "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
    "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
    "@referredType": "ResourceFunctionSpecification"
  },
  "resourceCharacteristic": [
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "OperatingSystem",
      "value": "Linux"
    },
    {
      "@type": "NumberCharacteristic",
      "@baseType": "Characteristic",
      "name": "MaxTraffic",
      "value": 1000
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "FirmwareVersion",
      "value": "1.2.3"
    }
  ],
  "activationFeature": [
    {
      "@type": "Feature",
      "id": "h776f845f-z20a-468f-v54m-9e07fe3bd28l",
      "name": "L2&L3"
    },
    {
      "@type": "Feature",
      "id": "g535f845f-032a-468f-a86e-9e07fe3bc85b",
      "name": "OSI-L4"
    },
    {
      "@type": "Feature",
      "id": "k463345f-011a-463a-a92f-4h2kfe3bc44b",
      "name": "OSI-L7"
    },
    {
      "@type": "Feature",
      "id": "f78g245f-671a-468f-a95j-9e07fe3bc98b",
      "name": "tarpit"
    },
    {
      "@type": "Feature",
      "id": "l22m455f-671a-499d-a95j-8h46fe3bc88c",
      "name": "log",
      "featureCharacteristic": [
        {
          "@type": "NumberCharacteristic",
          "@baseType": "Characteristic",
          "name": "logSize",
          "value": 500
        }
      ]
```


© TM Forum 2026. All Rights Reserved.

```
      },
      {
        "@type": "Feature",
        "id": "db723e27-58d3-4120-b564-af199cb32bd3",
        "name": "IPAddressing"
      }
    ],
    "connectionPoint": [
      {
        "id": "82a48c39-787b-49b6-b919-4d8d7319c584",
        "href": "/resourceInventory/v5/resource/82a48c39-787b-49b6-b919-4d8d7319c584",
        "@type": "ConnectionPointRef",
        "@referredType": "Endpoint",
        "name": "CP1.1"
      },
      {
        "id": "9af2fa2c-08b2-474d-8eb2-174c6a02f021",
        "href": "/resourceInventory/v5/resource/9af2fa2c-08b2-474d-8eb2-174c6a02f021",
        "@type": "ConnectionPointRef",
        "@referredType": "ConnectionPoint",
        "name": "CP1.4"
      }
    ],
    "resourceRelationship": [
      {
        "@type": "ResourceRelationship",
        "resource": {
          "@type": "ResourceRef",
          "id": "179ed458-6053-4be5-be14-e71be8be4440",
          "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-e71be8be4440",
          "@referredType": "LogicalResource",
          "name": "SWI.1"
        },
        "relationshipType": "contains"
      }
    ],
    "connectivity": [
      {
        "@type": "ResourceGraph",
        "id": "graph1",
        "name": "Internal Network Graph",
        "description": "Internal connectivity graph for the firewall function",
        "connection": [
          {
            "@type": "Connection",
            "id": "conn1",
            "name": "Input to Processing",
            "associationType": "pointToPoint",
            "endpoint": [
              {
                "@type": "Endpoint",
                "connectionPoint": {
                  "id": "cp1",
                  "href": "/resourceInventory/v5/connectionPoint/cp1",
                  "@type": "ConnectionPointRef",
                  "@referredType": "Endpoint",
                  "name": "Input Port 1"
                }
              },
              {
```


© TM Forum 2026. All Rights Reserved.

```
              "@type": "Endpoint",
              "connectionPoint": {
                "id": "proc1",
                "href": "/resourceInventory/v5/connectionPoint/proc1",
                "@type": "ConnectionPointRef",
                "@referredType": "Endpoint",
                "name": "Processing Unit 1"
              }
            }
          ]
        },
        {
          "@type": "Connection",
          "id": "conn2",
          "name": "Processing to Output",
          "associationType": "pointToPoint",
          "endpoint": [
            {
              "@type": "Endpoint",
              "connectionPoint": {
                "id": "proc1",
                "href": "/resourceInventory/v5/connectionPoint/proc1",
                "@type": "ConnectionPointRef",
                "@referredType": "Endpoint",
                "name": "Processing Unit 1"
              }
            },
            {
              "@type": "Endpoint",
              "connectionPoint": {
                "id": "cp2",
                "href": "/resourceInventory/v5/connectionPoint/cp2",
                "@type": "ConnectionPointRef",
                "@referredType": "Endpoint",
                "name": "Output Port 1"
              }
            }
          ]
        }
      ]
    }
  ]
}
```


Monitor resource

A mechanism used to track activation and configuration of Services and Resources. Specifically for Resource Functions, a Monitor can be used to track the progress of activation or of other tasks related to resource functions (such as healing, scaling, migration).

Resource model

© TM Forum 2026. All Rights Reserved.

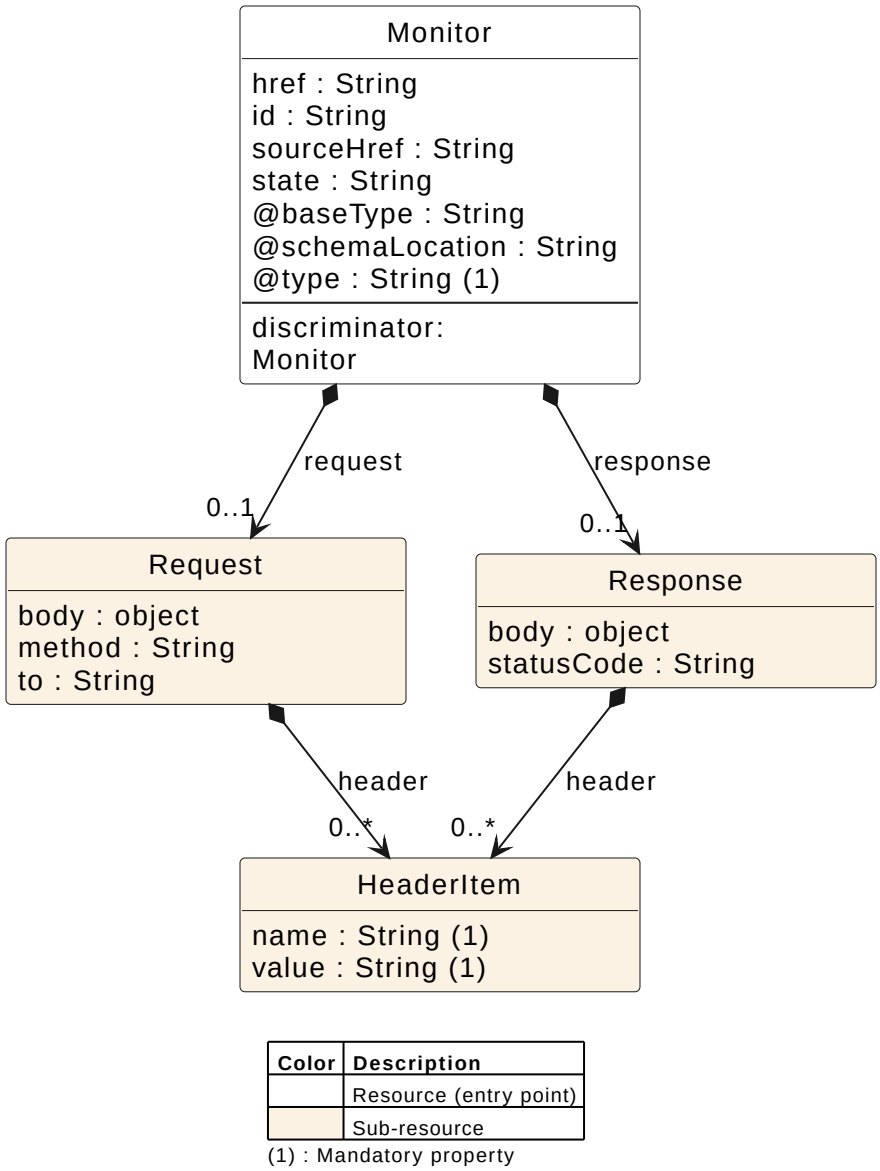


Figure 6 - Monitor

Field descriptions

Monitor fields

href	A String. Hyperlink reference.
id	A String. Unique identifier.
request	A Request. A response to a request.
response	A Response. A response to a request.
sourceHref	A String. The monitored resource href.

© TM Forum 2026. All Rights Reserved.

state	A String. The Monitor state of the resource. inProgress, in Error, completed.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Request sub-resource fields

A response to a request.

body	A bodyType. The body of the request. For example for an HTTP request might contain content of a form .
header	A HeaderItem [1..*]. Items included in the header of the request. For example for an HTTP request might contain requested locale, basic authentication.
method	A String. The protocol of the request, e.g. http.
to	A String. The target of the request, e.g. a URL for an HTTP request.

HeaderItem sub-resource fields

An item typically included in a request or response.

name	A String [1]. The name of the header item, e.g. locale.
value	A String [1]. The value of the header item, e.g. en-us.

Response sub-resource fields

A response to a request.

body	A bodyType_2. The body of the response.
header	A HeaderItem [1..*]. Items included in the header of the response. For example for an HTTP response might contain negotiated locale.
statusCode	A String. The status of the response. For example for an HTTP response would be codes such as 200, 400, etc.

© TM Forum 2026. All Rights Reserved.

Json representation sample(s)

We provide below a JSON representation as example of the 'Monitor' resource object.


```
{
  "@type": "Monitor",
  "id": "3bc72846-3516-4504-86ce-63a4954f7c00",
  "href": "/resourceFunctionActivation/v5/monitor/3bc72846-3516-4504-86ce-
63a4954f7c00",
  "sourceHref": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-
9ed0-52bc72d82386",
  "state": "inProgress",
  "request": {
    "method": "POST",
    "to": "/resourceFunctionActivation/v5/resourceFunction",
    "header": [
      {
        "name": "accept",
        "value": "application/json"
      }
    ],
    "body": {
      "name": "Medium to Large Enterprise Firewall - Model 134985.3",
      "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
      "@type": "ResourceFunction",
      "resourceStatus": "operating",
      "category": "Security",
      "resourceSpecification": {
        "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
        "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
        "@type": "ResourceFunctionSpecificationRef",
        "@referredType": "ResourceFunctionSpecification"
      },
      "resourceCharacteristic": [
        {
          "@type": "StringCharacteristic",
          "@baseType": "Characteristic",
          "name": "OperatingSystem",
          "value": "Android Pie"
        },
        {
          "@type": "NumberCharacteristic",
          "@baseType": "Characteristic",
          "name": "MaxTraffic",
          "value": 25
        }
      ],
      "feature": [
        {
          "id": "h776f845f-z20a-468f-v54m-9e07fe3bd28l",
          "name": "L2&L3",
          "featureCharacteristic": [
            {
              "@type": "StringCharacteristic",
              "@baseType": "Characteristic",
              "name": "Protocol",
```


© TM Forum 2026. All Rights Reserved.

```
              "value": "TCP/IP"
            }
          ]
        },
        {
          "id": "g535f845f-032a-468f-a86e-9e07fe3bc85b",
          "name": "OSI-L4",
          "featureCharacteristic": [
            {
              "@type": "StringCharacteristic",
              "@baseType": "Characteristic",
              "name": "PortRange",
              "value": "80-8080"
            }
          ]
        },
        {
          "id": "k463345f-011a-463a-a92f-4h2kfe3bc44b",
          "name": "OSI-L7",
          "featureCharacteristic": [
            {
              "@type": "StringCharacteristic",
              "@baseType": "Characteristic",
              "name": "Application",
              "value": "HTTP"
            }
          ]
        },
        {
          "id": "f78g245f-671a-468f-a95j-9e07fe3bc98b",
          "name": "tarpit",
          "featureCharacteristic": [
            {
              "@type": "StringCharacteristic",
              "@baseType": "Characteristic",
              "name": "DelayMs",
              "value": "5000"
            }
          ]
        },
        {
          "id": "l22m455f-671a-499d-a95j-8h46fe3bc88c",
          "name": "log",
          "featureCharacteristic": [
            {
              "@type": "NumberCharacteristic",
              "@baseType": "Characteristic",
              "name": "logSize",
              "value": 8000
            }
          ]
        },
        {
          "id": "db723e27-58d3-4120-b564-af199cb32bd3",
          "name": "IPAddressing"
        }
      ]
    }
  },
  "response": {
```


© TM Forum 2026. All Rights Reserved.

```
    "statusCode": "202 Accepted",
    "header": [
      {
        "name": "content-type",
        "value": "application/json"
      },
      {
        "name": "location",
        "value": "/resourceFunctionActivation/v5/resourceFunction/91f13709-593d-4175-
a5e5-ce0ee95db0d5"
      },
      {
        "name": "link",
        "value": "</resourceFunctionActivation/v5/monitor/3bc72846-3516-4504-86ce-
63a4954f7c00>;rel=related;title=monitor,</resourceFunctionActivation/v5/resourceFunctio
n/acd6cbde-22a1-4f42-9ed0-
52bc72d82386>;rel=self,</resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-
4f42-9ed0-52bc72d82386>;rel=canonical"
      }
    ],
    "body": {
      "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
      "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
      "name": "Medium to Large Enterprise Firewall - Model 134985.3",
      "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
      "@type": "ResourceFunction",
      "@baseType": "LogicalResource",
      "resourceStatus": "installing",
      "category": "Security",
      "resourceSpecification": {
        "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
        "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
        "@type": "ResourceFunctionSpecification",
        "@baseType": "LogicalResourceSpecification"
      },
      "resourceCharacteristic": [
        {
          "@type": "StringCharacteristic",
          "@baseType": "Characteristic",
          "name": "OperatingSystem",
          "value": "Android Pie"
        },
        {
          "@type": "NumberCharacteristic",
          "@baseType": "Characteristic",
          "name": "MaxTraffic",
          "value": 25
        }
      ],
      "feature": [
        {
          "id": "h776f845f-z20a-468f-v54m-9e07fe3bd28l",
          "name": "L2&L3"
        },
        {
          "id": "g535f845f-032a-468f-a86e-9e07fe3bc85b",
          "name": "OSI-L4"
```


© TM Forum 2026. All Rights Reserved.

```
        },
        {
          "id": "k463345f-011a-463a-a92f-4h2kfe3bc44b",
          "name": "OSI-L7"
        },
        {
          "id": "f78g245f-671a-468f-a95j-9e07fe3bc98b",
          "name": "tarpit"
        },
        {
          "id": "l22m455f-671a-499d-a95j-8h46fe3bc88c",
          "name": "log",
          "featureCharacteristic": [
            {
              "@type": "NumberCharacteristic",
              "@baseType": "Characteristic",
              "name": "logSize",
              "value": 8000
            }
          ]
        },
        {
          "id": "db723e27-58d3-4120-b564-af199cb32bd3",
          "name": "IPAddressing"
        }
      ],
      "connectionPoint": [],
      "resourceRelationship": [
        {
          "resource": {
            "@type": "LogicalResource",
            "@referredType": "LogicalResource",
            "id": "179ed458-6053-4be5-be14-e71be8be4440",
            "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-
e71be8be4440",
            "name": "SWI.1"
          },
          "relationshipType": "contains"
        }
      ],
      "connectivity": []
    }
  }
}
```


Heal resource

Task resource used to request the healing of a Resource Function. Healing restores a Resource Function to a healthy or operational state following a failure, performance degradation, SLA violation, or other adverse condition. The Heal task references the target Resource Function, specifies the cause and desired degree of healing, and optionally defines the action to be taken (as a narrative description or executable script). Progress is tracked through the task state model.

Resource model

© TM Forum 2026. All Rights Reserved.

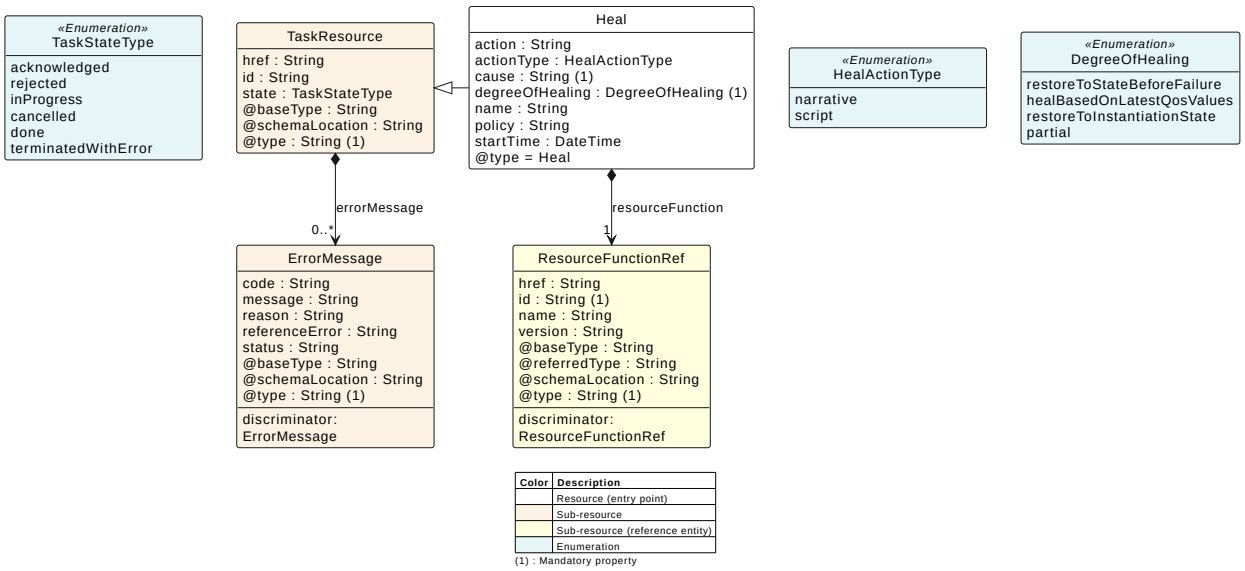


Figure 7 - Heal

Field descriptions

Heal fields

action	A String. The specific action to be performed as part of the heal process. This can be a narrative description of a manual action or a reference to an executable script/ command.
actionType	A HealActionType. The type of action to be performed: 'narrative' for a descriptive manual action, or 'script' for an executable script or command. ENUMERATED with values: * narrative * script
cause	A String [1]. Reason why healing is being requested.

© TM Forum 2026. All Rights Reserved.

degreeOfHealing	A DegreeOfHealing [1]. Indicates the degree of healing required: 'restoreToStateBeforeFailure' restores the Resource Function to its state before the failure occurred; 'healBasedOnLatestQosValues' heals based on the latest QoS values; 'restoreToInstantiationState' restores to the instantiation state; 'partial' applies a partial healing action. ENUMERATED with values: * restoreToStateBeforeFailure * healBasedOnLatestQosValues * restoreToInstantiationState * partial
errorMessage	An ErrorMessage [0..*]. A list of error message contains the error that caused the termination of the task.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
name	A String. Name of the Heal task resource.
policy	A String. A descriptive policy or set of rules that guides the heal process.
resourceFunction	A ResourceFunctionRef [1]. Resource Function reference.
startTime	A DateTime. The date and time at which the heal action should commence. This allows a scheduled delay before execution begins.
state	A TaskStateType. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ErrorMessage sub-resource fields

© TM Forum 2026. All Rights Reserved.

Represents an Error.

code	A String. Error code.
message	A String. More details and corrective actions related to the error.
reason	A String. Explanation of the reason for the error.
referenceError	A String. URI of documentation describing the error.
status	A String. Error code extension like sys-ABC-2001.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ResourceFunctionRef sub-resource fields

Resource Function reference.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
version	A String. Resource function version.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Json representation sample(s)

We provide below a JSON representation as example of the 'Heal' resource object.

```
{
  "@type": "Heal",
  "id": "heal-001",
  "href": "/resourceFunctionActivation/v5/heal/heal-001",
```

© TM Forum 2026. All Rights Reserved.

```
  "name": "Automated Network Repair",
  "action": "Run automated diagnostic and repair script",
  "actionType": "script",
  "startTime": "2026-03-04T12:30:00Z",
  "resourceFunction": {
    "@type": "ResourceFunctionRef",
    "id": "rf-001",
    "href": "/resourceFunctionActivation/v5/resourceFunction/rf-001",
    "@referredType": "ResourceFunction"
  },
  "cause": "Network device failure detected",
  "degreeOfHealing": "restoreToStateBeforeFailure",
  "policy": "Standard network recovery policy v2.0",
  "state": "inProgress"
}
```


Scale resource

Task resource used to request scaling of a Resource Function. Scaling adjusts the capacity of a Resource Function along a specified aspect (such as CPU, memory, or bandwidth). Horizontal scaling (scaleOut, scaleIn) adds or removes instances, while vertical scaling (scaleUp, scaleDown) increases or decreases the capacity of existing instances. The Scale task references the target Resource Function, specifies the scale type and number of steps, and tracks progress through the task state model.

Resource model

© TM Forum 2026. All Rights Reserved.

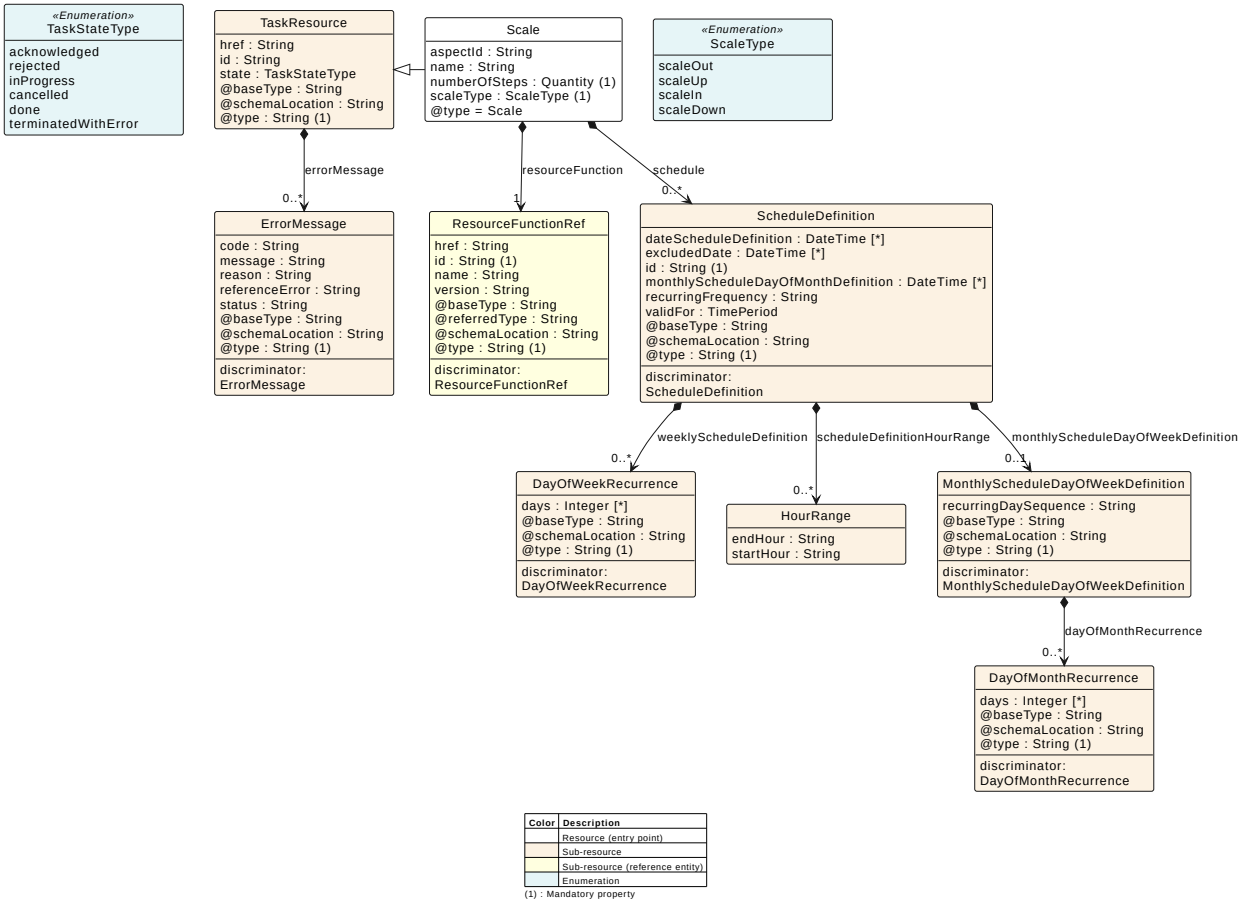


Figure 8 - Scale

Field descriptions

Scale fields

aspectId	A String. Scaling aspect is the dimension along which the Resource Function needs to be scaled. The id of the aspect is provided here.
errorMessage	An ErrorMessage [0..*]. A list of error message contains the error that caused the termination of the task.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
name	A String. Name of the Scale task resource.
numberOfSteps	A Quantity [1]. An amount in a given unit.
resourceFunction	A ResourceFunctionRef [1]. Resource Function reference.

© TM Forum 2026. All Rights Reserved.

scaleType	A ScaleType [1]. Type of scaling requested: 'scaleOut' adds capacity by provisioning additional instances; 'scaleUp' increases the capacity of existing instances; 'scaleIn' removes instances to reduce capacity; 'scaleDown' decreases the capacity of existing instances. ENUMERATED with values: * scaleOut * scaleUp * scaleIn * scaleDown
schedule	A ScheduleDefinition [0..*]. This defines the schedule for the Scale task, detailing recurring frequencies, excluded dates, and time ranges for its activation or operation. This is an embedded sub-entity defining the schedule.
state	A TaskStateType. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ErrorMessage sub-resource fields

Represents an Error.

See [ErrorMessage] for details.

ResourceFunctionRef sub-resource fields

Resource Function reference.

See [ResourceFunctionRef] for details.

ScheduleDefinition sub-resource fields

© TM Forum 2026. All Rights Reserved.

The schedule definition for running jobs.

See [ScheduleDefinition] for details.

MonthlyScheduleDayOfWeekDefinition sub-resource fields

Base Extensible schema for use in TMForum Open-APIs - When used for in a schema it means that the Entity described by the schema MUST be extended with the @type.

See [MonthlyScheduleDayOfWeekDefinition] for details.

DayOfMonthRecurrence sub-resource fields

Specifies recurrence on particular days of the month (1–31).

See [DayOfMonthRecurrence] for details.

HourRange sub-resource fields

Represents a range of hours within a single day. The range can have only a start time, only an end time, or both. Times must be specified in 24-hour HH:mm format.

See [HourRange] for details.

DayOfWeekRecurrence sub-resource fields

Base Extensible schema for use in TMForum Open-APIs - When used for in a schema it means that the Entity described by the schema MUST be extended with the @type.

See [DayOfWeekRecurrence] for details.

Json representation sample(s)

We provide below a JSON representation as example of the 'Scale' resource object.


```
{
  "@type": "Scale",
  "id": "4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
  "href": "/resourceFunctionActivation/v5/scale/4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
  "name": "Increase Memory for Web Server",
  "resourceFunction": {
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction",
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386"
  },
  "scaleType": "scaleOut",
  "aspectId": "Quick Access Memory",
```


© TM Forum 2026. All Rights Reserved.

```
  "numberOfSteps": {
    "amount": 2,
    "units": "GB"
  },
  "schedule": [
    {
      "@type": "ScheduleDefinition",
      "id": "b32c19f3-0297-4dd4-93c7-87c3a4fee14e",
      "recurringFrequency": "daily",
      "scheduleDefinitionHourRange": [
        {
          "startHour": "02:00",
          "endHour": "04:00"
        }
      ]
    }
  ],
  "state": "inProgress"
}
```


Migrate resource

Task resource used to request the migration of a Resource Function. Migration in this context refers to moving a Resource Function from one location (e.g., host, network segment, or geographic area) to another, potentially involving changes to its connection points, characteristics, or administrative state. This task initiates and tracks the process of relocation while maintaining service continuity where possible.

Resource model

© TM Forum 2026. All Rights Reserved.

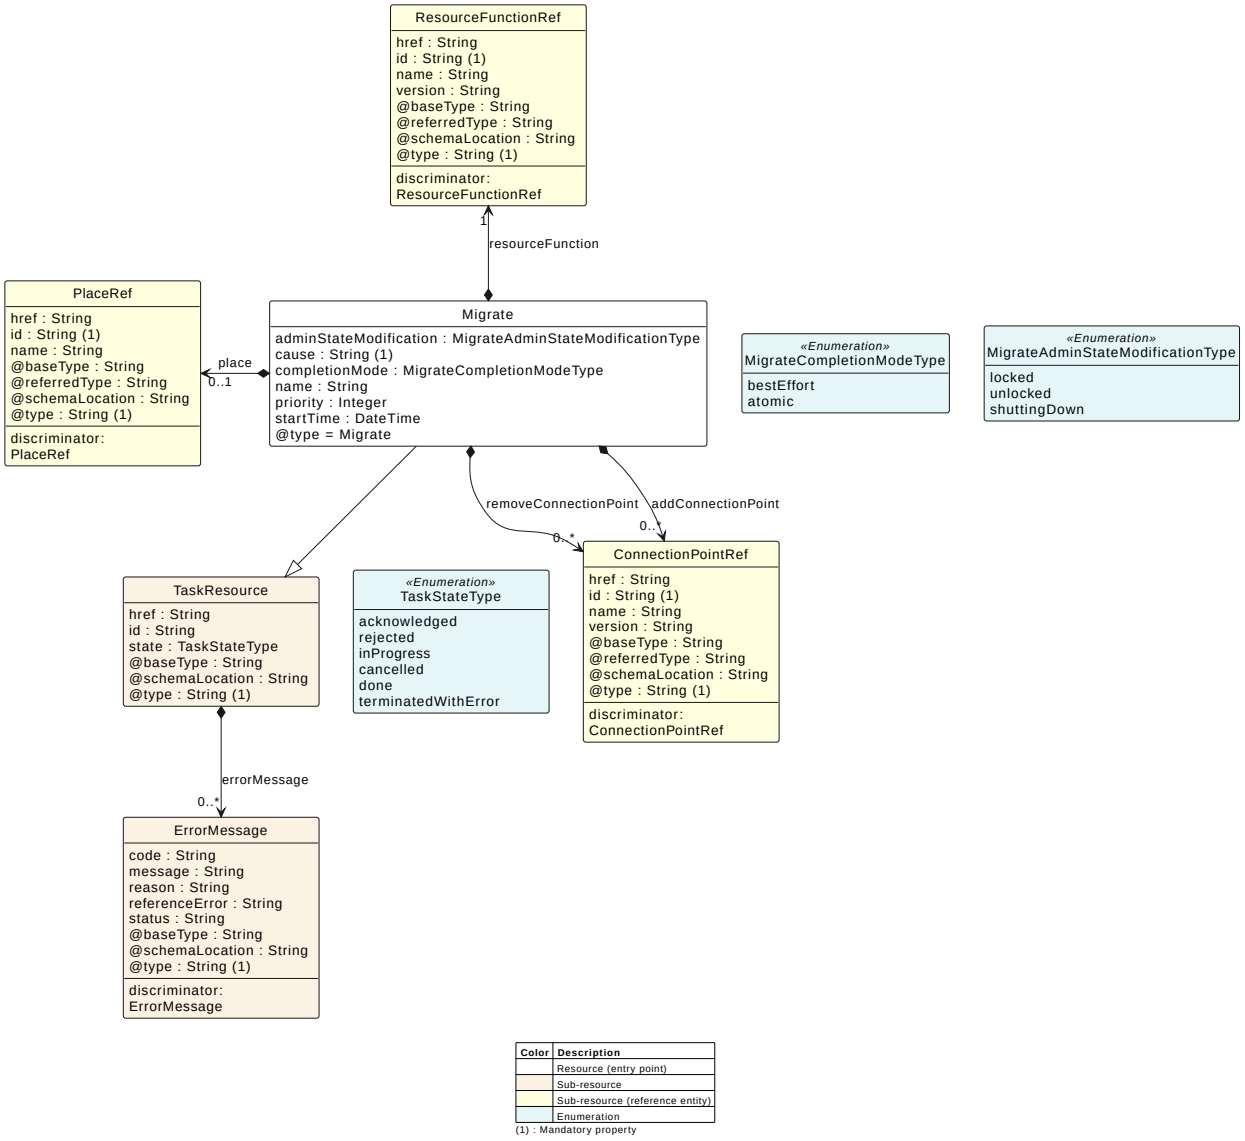


Figure 9 - Migrate

Field descriptions

Migrate fields

addConnectionPoint	A ConnectionPointRef [0..*]. Connection points to be added when the Resource Function is migrated. Each entry is a reference to a ConnectionPoint resource (a service access point on the Resource Function). There is no dedicated TMF API that exposes ConnectionPoint as a standalone managed resource.

© TM Forum 2026. All Rights Reserved.

adminStateModification	A MigrateAdminStateModificationType. SubState required before migrate is carried out. ENUMERATED with values: * locked * unlocked * shuttingDown
cause	A String [1]. Reason why migration is being requested.
completionMode	A MigrateCompletionModeType. Specifies how the migration operation should be completed: 'bestEffort' means the system will attempt to complete as much of the migration as possible, even if some parts fail, while 'atomic' means the entire migration operation must succeed or fail as a single, indivisible unit, ensuring full consistency. ENUMERATED with values: * bestEffort * atomic
errorMessage	An ErrorMessage [0..*]. A list of error message contains the error that caused the termination of the task.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
name	A String. Name of the Migrate task resource.
place	A PlaceRef. A reference to a physical Place.
priority	An Integer64. Priority of the migrate operation.
removeConnectionPoint	A ConnectionPointRef [0..*]. Connection points to be removed when the Resource Function is migrated. Each entry is a reference to a ConnectionPoint resource (a service access point on the Resource Function). There is no dedicated TMF API that exposes ConnectionPoint as a standalone managed resource.
resourceFunction	A ResourceFunctionRef [1]. Resource Function reference.
startTime	A DateTime. The date and time at which the migration should commence. This allows a scheduled delay before execution begins.

© TM Forum 2026. All Rights Reserved.

state	A TaskStateType. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ConnectionPointRef sub-resource fields

Reference to a ConnectionPoint resource. A ConnectionPoint is modeled as a Resource that serves as a service access point (SAP) for a Resource Function, facilitating its interaction with other components by defining its input and/or output interfaces (for example, a REST API endpoint, a message queue topic, or a CORBA operation). There is no dedicated TMF API that exposes ConnectionPoint as a standalone managed resource; this reference acts as a lightweight pointer to a ConnectionPoint resource without embedding its full implementation details.

See [ConnectionPointRef] for details.

ErrorMessage sub-resource fields

Represents an Error.

See [ErrorMessage] for details.

PlaceRef sub-resource fields

A reference to a physical Place.

See [PlaceRef] for details.

ResourceFunctionRef sub-resource fields

Resource Function reference.

See [ResourceFunctionRef] for details.

© TM Forum 2026. All Rights Reserved.

Json representation sample(s)

We provide below a JSON representation as example of the 'Migrate' resource object.


```
{
  "@type": "Migrate",
  "id": "afccfc16-a28e-4f3b-81e0-1cf7ba649ef9",
  "href": "/resourceFunctionActivation/v5/migrate/afccfc16-a28e-4f3b-81e0-
1cf7ba649ef9",
  "name": "Move Location",
  "resourceFunction": {
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction",
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386"
  },
  "cause": "planned",
  "adminStateModification": "locked",
  "removeConnectionPoint": [
    {
      "@type": "ConnectionPointRef",
      "@referredType": "ConnectionPoint",
      "id": "97111c52-ca05-457b-9980-3783d471f92f",
      "href": "/resourceInventory/v5/resource/97111c52-ca05-457b-9980-3783d471f92f",
      "name": "CP-NYC-1"
    }
  ],
  "addConnectionPoint": [
    {
      "@type": "ConnectionPointRef",
      "@referredType": "ConnectionPoint",
      "id": "95ae4067-72af-4495-905d-b92ec5f9c310",
      "href": "/resourceInventory/v5/resource/95ae4067-72af-4495-905d-b92ec5f9c310",
      "name": "CP-LA-1"
    }
  ],
  "priority": 1,
  "startTime": "2019-08-19T04:00:00Z",
  "completionMode": "bestEffort",
  "place": {
    "@type": "PlaceRef",
    "id": "72a41352-7a2c-4baa-8df6-cab6845f6369",
    "@referredType": "GeographicLocation",
    "href": "/geographicLocation/v5/geographicLocation/72a41352-7a2c-4baa-8df6-
cab6845f6369"
  }
}
```


Notification Resource Models

19 notifications are defined for this API.

Notifications related to ResourceFunction:

© TM Forum 2026. All Rights Reserved.

- Create Event
- Delete Event
- Attribute Value Change Event
- State Change Event

Notifications related to Monitor:

- Create Event
- Delete Event
- State Change Event

Notifications related to Heal:

- Create Event
- Delete Event
- Attribute Value Change Event
- State Change Event

Notifications related to Scale:

- Create Event
- Delete Event
- Attribute Value Change Event
- State Change Event

Notifications related to Migrate:

- Create Event
- Delete Event
- Attribute Value Change Event
- State Change Event

The notification structure for all notifications in this API follow the pattern depicted by the figure below. A notification event resource (depicted by "SpecificEvent" placeholder) is a sub class of a generic Event structure containing at least an id of the event occurrence (eventId), an event timestamp (eventTime), and the name of the resource (eventType). This notification structure owns an event payload structure ("SpecificEventPayload" placeholder) linked to the resource concerned by the notification using the resource name

© TM Forum 2026. All Rights Reserved.

as access field ("resourceName" placeholder).

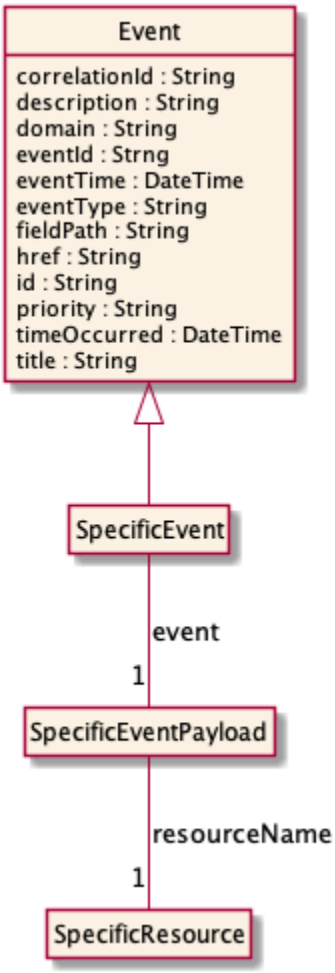


Figure 10 Notification Pattern

ResourceFunction

Create Event

Message example for ResourceFunctionCreateEvent event

```
Content-Type: application/json
{
  "@type": "ResourceFunctionCreateEvent",
  "id": "evt-rf-001",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-rf-001",
  "correlationId": "726ffbd5-a47f",
  "description": "ResourceFunctionCreateEvent illustration",
  "eventId": "00001",
  "eventTime": "2024-08-25T12:23:18.121Z",
  "eventType": "ResourceFunctionCreateEvent",
  "timeOccurred": "2024-08-25T12:23:17.823Z",
  "title": "ResourceFunctionCreateEvent",
```

© TM Forum 2026. All Rights Reserved.

```
  "event": {
    "resourceFunction": {
      "@type": "ResourceFunction",
      "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
      "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
      "name": "Medium to Large Enterprise Firewall - Model 134985.3",
      "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
      "category": "Security",
      "resourceSpecification": {
        "@type": "ResourceSpecificationRef",
        "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
        "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
        "@referredType": "ResourceFunctionSpecification"
      }
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```


Delete Event

Message example for ResourceFunctionDeleteEvent event


```
Content-Type: application/json
{
  "@type": "ResourceFunctionDeleteEvent",
  "id": "evt-rf-004",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-rf-004",
  "correlationId": "90cfc73d-gh5t",
  "description": "ResourceFunctionDeleteEvent illustration",
  "eventId": "00004",
  "eventTime": "2024-08-28T16:42:27.121Z",
  "eventType": "ResourceFunctionDeleteEvent",
  "timeOccurred": "2024-08-28T16:42:26.823Z",
  "title": "ResourceFunctionDeleteEvent",
  "event": {
    "resourceFunction": {
      "@type": "ResourceFunction",
      "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
      "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
```


© TM Forum 2026. All Rights Reserved.

```
52bc72d82386"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

Attribute Value Change Event

Message example for ResourceFunctionAttributeValueChangeEvent event

```
Content-Type: application/json
{
  "id": "evt-rf-002",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-rf-002",
  "correlationId": "90kl90-Hj6",
  "description": "ResourceFunctionAttributeValueChangeEvent illustration",
  "eventId": "00002",
  "eventTime": "2024-08-26T10:15:25.121Z",
  "eventType": "ResourceFunctionAttributeValueChangeEvent",
  "timeOccurred": "2024-08-26T10:15:24.823Z",
  "title": "ResourceFunctionAttributeValueChangeEvent",
  "event": {
    "resourceFunction": {
      "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
      "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
      "@type": "ResourceFunction",
      "description": "Updated description for firewall configuration"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
```

© TM Forum 2026. All Rights Reserved.

```
  "@type": "ResourceFunctionAttributeValueChangeEvent",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

State Change Event

Message example for ResourceFunctionStateChangeEvent event

```
Content-Type: application/json
{
  "@type": "ResourceFunctionStateChangeEvent",
  "id": "evt-rf-003",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-rf-003",
  "correlationId": "g56Iht-pi33",
  "description": "ResourceFunctionStateChangeEvent illustration",
  "eventId": "00003",
  "eventTime": "2024-08-27T14:42:26.121Z",
  "eventType": "ResourceFunctionStateChangeEvent",
  "timeOccurred": "2024-08-27T14:42:25.823Z",
  "title": "ResourceFunctionStateChangeEvent",
  "event": {
    "resourceFunction": {
      "@type": "ResourceFunction",
      "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
      "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
      "operationalState": "enabled"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

Monitor

Create Event

Example message for a Monitor creation event, including initial status and details.

```
Content-Type: application/json
```

© TM Forum 2026. All Rights Reserved.

```
{
  "@type": "MonitorCreateEvent",
  "id": "evt-mon-001",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-mon-001",
  "correlationId": "mon-726ffbd5",
  "description": "MonitorCreateEvent illustration",
  "eventId": "00001",
  "eventTime": "2024-08-25T12:30:18.121Z",
  "eventType": "MonitorCreateEvent",
  "timeOccurred": "2024-08-25T12:30:17.823Z",
  "title": "MonitorCreateEvent",
  "event": {
    "monitor": {
      "@type": "Monitor",
      "id": "3bc72846-3516-4504-86ce-63a4954f7c00",
      "href": "/resourceFunctionActivation/v5/monitor/3bc72846-3516-4504-86ce-
63a4954f7c00",
      "sourceHref": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-
4f42-9ed0-52bc72d82386",
      "state": "InProgress"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```


Delete Event

Example message for a Monitor deletion event.


```
Content-Type: application/json
{
  "@type": "MonitorDeleteEvent",
  "id": "evt-mon-004",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-mon-004",
  "correlationId": "mon-90cfc73d",
  "description": "MonitorDeleteEvent illustration",
  "eventId": "00004",
  "eventTime": "2024-08-25T12:45:27.121Z",
  "eventType": "MonitorDeleteEvent",
  "timeOccurred": "2024-08-25T12:45:26.823Z",
  "title": "MonitorDeleteEvent",
  "event": {
    "monitor": {
```


© TM Forum 2026. All Rights Reserved.

```
      "@type": "Monitor",
      "id": "3bc72846-3516-4504-86ce-63a4954f7c00",
      "href": "/resourceFunctionActivation/v5/monitor/3bc72846-3516-4504-86ce-
63a4954f7c00"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

State Change Event

Example message for an event indicating a change in a Monitor's operational state.

```
Content-Type: application/json
{
  "@type": "MonitorStateChangeEvent",
  "id": "evt-mon-003",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-mon-003",
  "correlationId": "mon-g56Iht",
  "description": "MonitorStateChangeEvent illustration",
  "eventId": "00003",
  "eventTime": "2024-08-25T12:40:26.121Z",
  "eventType": "MonitorStateChangeEvent",
  "timeOccurred": "2024-08-25T12:40:25.823Z",
  "title": "MonitorStateChangeEvent",
  "event": {
    "monitor": {
      "@type": "Monitor",
      "id": "3bc72846-3516-4504-86ce-63a4954f7c00",
      "href": "/resourceFunctionActivation/v5/monitor/3bc72846-3516-4504-86ce-
63a4954f7c00",
      "state": "Complete"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
```

© TM Forum 2026. All Rights Reserved.

```
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

Heal

Create Event

Message example for HealCreateEvent event

```
Content-Type: application/json
{
  "@type": "HealCreateEvent",
  "id": "evt-heal-001",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-heal-
001",
  "correlationId": "heal-726ffbd5",
  "description": "HealCreateEvent illustration",
  "eventId": "00001",
  "eventTime": "2024-08-25T13:00:18.121Z",
  "eventType": "HealCreateEvent",
  "timeOccurred": "2024-08-25T13:00:17.823Z",
  "title": "HealCreateEvent",
  "event": {
    "heal": {
      "id": "c6015b3d-64ad-432d-b7a5-9a9fa3430aa4",
      "href": "/resourceFunctionActivation/v5/heal/c6015b3d-64ad-432d-b7a5-
9a9fa3430aa4",
      "@type": "Heal",
      "name": "SLA Violation",
      "cause": "SLA violation",
      "degreeOfHealing": "restoreToStateBeforeFailure",
      "state": "inProgress",
      "resourceFunction": {
        "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
        "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-
9ed0-52bc72d82386",
        "@type": "ResourceFunctionRef",
        "@referredType": "ResourceFunction"
      }
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
```

© TM Forum 2026. All Rights Reserved.

```
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

Delete Event

Message example for HealDeleteEvent event

```
Content-Type: application/json
{
  "@type": "HealDeleteEvent",
  "id": "evt-heal-004",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-heal-
004",
  "correlationId": "heal-90cfc73d",
  "description": "HealDeleteEvent illustration",
  "eventId": "00004",
  "eventTime": "2024-08-25T13:30:27.121Z",
  "eventType": "HealDeleteEvent",
  "timeOccurred": "2024-08-25T13:30:26.823Z",
  "title": "HealDeleteEvent",
  "event": {
    "heal": {
      "id": "c6015b3d-64ad-432d-b7a5-9a9fa3430aa4",
      "href": "/resourceFunctionActivation/v5/heal/c6015b3d-64ad-432d-b7a5-
9a9fa3430aa4",
      "@type": "Heal"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

Attribute Value Change Event

Message example for HealAttributeValueChangeEvent event

```
Content-Type: application/json
{
  "@type": "HealAttributeValueChangeEvent",
```

© TM Forum 2026. All Rights Reserved.

```
  "id": "evt-heal-002",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-heal-
002",
  "correlationId": "heal-90kl90",
  "description": "HealAttributeValueChangeEvent illustration",
  "eventId": "00002",
  "eventTime": "2024-08-25T13:10:25.121Z",
  "eventType": "HealAttributeValueChangeEvent",
  "timeOccurred": "2024-08-25T13:10:24.823Z",
  "title": "HealAttributeValueChangeEvent",
  "event": {
    "heal": {
      "@type": "Heal",
      "id": "c6015b3d-64ad-432d-b7a5-9a9fa3430aa4",
      "href": "/resourceFunctionActivation/v5/heal/c6015b3d-64ad-432d-b7a5-
9a9fa3430aa4",
      "degreeOfHealing": "healBasedOnLatestQosValues"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```


State Change Event

Message example for HealStateChangeEvent event


```
Content-Type: application/json
{
  "@type": "HealStateChangeEvent",
  "id": "evt-heal-003",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-heal-
003",
  "correlationId": "heal-g56Iht",
  "description": "HealStateChangeEvent illustration",
  "eventId": "00003",
  "eventTime": "2024-08-25T13:20:26.121Z",
  "eventType": "HealStateChangeEvent",
  "timeOccurred": "2024-08-25T13:20:25.823Z",
  "title": "HealStateChangeEvent",
  "event": {
    "heal": {
      "id": "c6015b3d-64ad-432d-b7a5-9a9fa3430aa4",
      "href": "/resourceFunctionActivation/v5/heal/c6015b3d-64ad-432d-b7a5-
```


© TM Forum 2026. All Rights Reserved.

```
9a9fa3430aa4",
      "@type": "Heal",
      "state": "done"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

Scale

Create Event

Message example for ScaleCreateEvent event

```
Content-Type: application/json
{
  "@type": "ScaleCreateEvent",
  "id": "evt-scale-001",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-scale-
001",
  "correlationId": "scale-726ffbd5",
  "description": "ScaleCreateEvent illustration",
  "eventId": "00001",
  "eventTime": "2024-08-25T14:00:18.121Z",
  "eventType": "ScaleCreateEvent",
  "timeOccurred": "2024-08-25T14:00:17.823Z",
  "title": "ScaleCreateEvent",
  "event": {
    "scale": {
      "@type": "Scale",
      "id": "4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
      "href": "/resourceFunctionActivation/v5/scale/4a41a328-1cf3-4674-bdd7-
c43129fbfa7c",
      "name": "Increase Memory",
      "scaleType": "scaleOut",
      "aspectId": "Quick Access Memory",
      "numberOfSteps": {
        "amount": 2,
        "units": "GB"
      },
      "state": "inProgress",
      "resourceFunction": {
        "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
```

© TM Forum 2026. All Rights Reserved.

```
        "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-
9ed0-52bc72d82386",
        "@type": "ResourceFunctionRef",
        "@referredType": "ResourceFunction"
      }
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```


Delete Event

Message example for ScaleDeleteEvent event


```
Content-Type: application/json
{
  "@type": "ScaleDeleteEvent",
  "id": "evt-scale-004",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-scale-
004",
  "correlationId": "scale-90cfc73d",
  "description": "ScaleDeleteEvent illustration",
  "eventId": "00004",
  "eventTime": "2024-08-25T14:30:27.121Z",
  "eventType": "ScaleDeleteEvent",
  "timeOccurred": "2024-08-25T14:30:26.823Z",
  "title": "ScaleDeleteEvent",
  "event": {
    "scale": {
      "id": "4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
      "href": "/resourceFunctionActivation/v5/scale/4a41a328-1cf3-4674-bdd7-
c43129fbfa7c",
      "@type": "Scale"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
```


© TM Forum 2026. All Rights Reserved.

```
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

Attribute Value Change Event

Message example for ScaleAttributeValueChangeEvent event

```
Content-Type: application/json
{
  "@type": "ScaleAttributeValueChangeEvent",
  "id": "evt-scale-002",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-scale-
002",
  "correlationId": "scale-90kl90",
  "description": "ScaleAttributeValueChangeEvent illustration",
  "eventId": "00002",
  "eventTime": "2024-08-25T14:10:25.121Z",
  "eventType": "ScaleAttributeValueChangeEvent",
  "timeOccurred": "2024-08-25T14:10:24.823Z",
  "title": "ScaleAttributeValueChangeEvent",
  "event": {
    "scale": {
      "@type": "Scale",
      "id": "4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
      "href": "/resourceFunctionActivation/v5/scale/4a41a328-1cf3-4674-bdd7-
c43129fbfa7c",
      "numberOfSteps": {
        "amount": 4,
        "units": "GB"
      }
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

© TM Forum 2026. All Rights Reserved.

State Change Event

Message example for ScaleStateChangeEvent event

```
Content-Type: application/json
{
  "@type": "ScaleStateChangeEvent",
  "id": "evt-scale-003",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-scale-
003",
  "correlationId": "scale-g56Iht",
  "description": "ScaleStateChangeEvent illustration",
  "eventId": "00003",
  "eventTime": "2024-08-25T14:20:26.121Z",
  "eventType": "ScaleStateChangeEvent",
  "timeOccurred": "2024-08-25T14:20:25.823Z",
  "title": "ScaleStateChangeEvent",
  "event": {
    "scale": {
      "id": "4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
      "href": "/resourceFunctionActivation/v5/scale/4a41a328-1cf3-4674-bdd7-
c43129fbfa7c",
      "@type": "Scale",
      "state": "done"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```

Migrate

Create Event

Message example for MigrateCreateEvent event

```
Content-Type: application/json
{
  "@type": "MigrateCreateEvent",
  "id": "evt-migrate-001",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-migrate-
001",
```

© TM Forum 2026. All Rights Reserved.

```
  "correlationId": "migrate-726ffbd5",
  "description": "MigrateCreateEvent illustration",
  "eventId": "00001",
  "eventTime": "2024-08-25T15:00:18.121Z",
  "eventType": "MigrateCreateEvent",
  "timeOccurred": "2024-08-25T15:00:17.823Z",
  "title": "MigrateCreateEvent",
  "event": {
    "migrate": {
      "id": "afccfc16-a28e-4f3b-81e0-1cf7ba649ef9",
      "href": "/resourceFunctionActivation/v5/migrate/afccfc16-a28e-4f3b-81e0-
1cf7ba649ef9",
      "@type": "Migrate",
      "name": "Move Location",
      "cause": "planned",
      "state": "inProgress",
      "priority": 1,
      "resourceFunction": {
        "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
        "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-
9ed0-52bc72d82386",
        "@type": "ResourceFunctionRef",
        "@referredType": "ResourceFunction"
      }
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```


Delete Event

Message example for MigrateDeleteEvent event


```
Content-Type: application/json
{
  "@type": "MigrateDeleteEvent",
  "id": "evt-migrate-004",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-migrate-
004",
  "correlationId": "migrate-90cfc73d",
  "description": "MigrateDeleteEvent illustration",
  "eventId": "00004",
  "eventTime": "2024-08-25T15:30:27.121Z",
```


© TM Forum 2026. All Rights Reserved.

```
  "eventType": "MigrateDeleteEvent",
  "timeOccurred": "2024-08-25T15:30:26.823Z",
  "title": "MigrateDeleteEvent",
  "event": {
    "migrate": {
      "id": "afccfc16-a28e-4f3b-81e0-1cf7ba649ef9",
      "href": "/resourceFunctionActivation/v5/migrate/afccfc16-a28e-4f3b-81e0-
1cf7ba649ef9",
      "@type": "Migrate"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```


Attribute Value Change Event

Message example for MigrateAttributeValueChangeEvent event


```
Content-Type: application/json
{
  "@type": "MigrateAttributeValueChangeEvent",
  "id": "evt-migrate-002",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-migrate-
002",
  "correlationId": "migrate-90kl90",
  "description": "MigrateAttributeValueChangeEvent illustration",
  "eventId": "00002",
  "eventTime": "2024-08-25T15:10:25.121Z",
  "eventType": "MigrateAttributeValueChangeEvent",
  "timeOccurred": "2024-08-25T15:10:24.823Z",
  "title": "MigrateAttributeValueChangeEvent",
  "event": {
    "migrate": {
      "@type": "Migrate",
      "id": "afccfc16-a28e-4f3b-81e0-1cf7ba649ef9",
      "href": "/resourceFunctionActivation/v5/migrate/afccfc16-a28e-4f3b-81e0-
1cf7ba649ef9",
      "priority": 2
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
```


© TM Forum 2026. All Rights Reserved.

```
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```


State Change Event

Message example for MigrateStateChangeEvent event


```
Content-Type: application/json
{
  "@type": "MigrateStateChangeEvent",
  "id": "evt-migrate-003",
  "href": "https://serverRoot/tmf-api/resourceFunctionActivation/v5/event/evt-migrate-
003",
  "correlationId": "migrate-g56Iht",
  "description": "MigrateStateChangeEvent illustration",
  "eventId": "00003",
  "eventTime": "2024-08-25T15:20:26.121Z",
  "eventType": "MigrateStateChangeEvent",
  "timeOccurred": "2024-08-25T15:20:25.823Z",
  "title": "MigrateStateChangeEvent",
  "event": {
    "migrate": {
      "id": "afccfc16-a28e-4f3b-81e0-1cf7ba649ef9",
      "href": "/resourceFunctionActivation/v5/migrate/afccfc16-a28e-4f3b-81e0-
1cf7ba649ef9",
      "@type": "Migrate",
      "state": "done"
    }
  },
  "reportingSystem": {
    "id": "439",
    "name": "APP-869",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "455",
    "name": "APP-84",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@schemaLocation": "https://serverRoot/tmf-api/schemas/event.json"
}
```


© TM Forum 2026. All Rights Reserved.

API OPERATIONS

Remember the following Uniform Contract:

Operation on Entities	Uniform API Operation	Description
Query Entities	GET Resource	GET must be used to retrieve a representation of a resource.
Create Entity	POST Resource	POST must be used to create a new resource
Partial Update of an Entity	PATCH Resource	PATCH must be used to partially update a resource
Remove an Entity	DELETE Resource	DELETE must be used to remove a resource
Execute an Action on an Entity	POST on TASK Resource	POST must be used to execute Task Resources
Other Request Methods	POST on TASK Resource	GET and POST must not be used to tunnel other request methods.

Filtering and attribute selection rules are described in the TMF REST Design Guidelines.

Notifications are also described in a subsequent section.

Operations on ResourceFunction

Retrieves a resourceFunction by ID

`GET /resourceFunction/{id}?fields=…`

Description

This operation retrieves a ResourceFunction entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a ResourceFunction from its unique identifier

Request

© TM Forum 2026. All Rights Reserved.

```
GET /resourceFunction/acd6cbde-22a1-4f42-9ed0-52bc72d82386
Content-Type: application/json
```

Response

```
200

{
  "@type": "ResourceFunction",
  "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
  "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
  "name": "Medium to Large Enterprise Firewall - Model 134985.3",
  "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
  "category": "Security",
  "resourceSpecification": {
    "@type": "ResourceSpecificationRef",
    "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
    "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
    "@referredType": "ResourceFunctionSpecification"
  },
  "resourceCharacteristic": [
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "OperatingSystem",
      "value": "Linux"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "keywords",
      "value": "firewall, security"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "language",
      "value": "English"
    }
  ],
  "connectionPoint": [
    {
      "id": "cp1",
      "href": "/resourceInventory/v5/connectionPoint/cp1",
      "name": "Input Port 1",
      "@type": "ConnectionPointRef",
      "@referredType": "Endpoint"
    },
    {
      "id": "cp2",
      "href": "/resourceInventory/v5/connectionPoint/cp2",
      "name": "Output Port 1",
      "@type": "ConnectionPointRef",
```

© TM Forum 2026. All Rights Reserved.

```
        "@referredType": "Endpoint"
      }
    ],
    "resourceRelationship": [
      {
        "@type": "ResourceRelationship",
        "resource": {
          "@type": "ResourceRef",
          "id": "179ed458-6053-4be5-be14-e71be8be4440",
          "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-e71be8be4440",
          "@referredType": "LogicalResource",
          "name": "SWI.1"
        },
        "relationshipType": "contains"
      },
      {
        "@type": "ResourceRelationship",
        "resource": {
          "@type": "ResourceRef",
          "id": "d66a404f-9464-47b8-92f5-7a3de88cfb40",
          "href": "/resourceInventory/v5/resource/d66a404f-9464-47b8-92f5-7a3de88cfb40",
          "@referredType": "LogicalResource",
          "name": "SWI.2"
        },
        "relationshipType": "contains"
      }
    ],
    "connectivity": [
      {
        "@type": "ResourceGraph",
        "id": "graph1",
        "name": "Internal Network Graph",
        "description": "Internal connectivity graph for the firewall function",
        "connection": [
          {
            "@type": "Connection",
            "id": "conn1",
            "name": "Input to Processing",
            "associationType": "pointToPoint",
            "endpoint": [
              {
                "@type": "Endpoint"
              },
              {
                "@type": "Endpoint"
              }
            ]
          },
          {
            "@type": "Connection",
            "id": "conn2",
            "name": "Processing to Output",
            "associationType": "pointToPoint",
            "endpoint": [
              {
                "@type": "Endpoint"
              },
              {
                "@type": "Endpoint"
              }
```


© TM Forum 2026. All Rights Reserved.

```
          ]
        }
      ]
    }
  ]
}
```

List or find resourceFunction objects

`GET /resourceFunction?fields=…&{filtering}`

Description

This operation list ResourceFunction entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a list of ResourceFunctions

Request

```
GET /resourceFunction?fields=id,href,name,description,category,@type
Content-Type: application/json
```

Response

```
200

[
  {
    "@type": "ResourceFunction",
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "name": "Medium to Large Enterprise Firewall - Model 134985.3",
    "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
    "category": "Security",
    "resourceSpecification": {
      "@type": "ResourceSpecificationRef",
      "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
      "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
      "@referredType": "ResourceFunctionSpecification"
    },
    "resourceCharacteristic": [
      {
        "@type": "StringCharacteristic",
        "@baseType": "Characteristic",
```

© TM Forum 2026. All Rights Reserved.

```
        "name": "OperatingSystem",
        "value": "Linux"
      },
      {
        "@type": "NumberCharacteristic",
        "@baseType": "Characteristic",
        "name": "MaxTraffic",
        "value": 1000
      }
    ],
    "connectionPoint": [
      {
        "id": "82a48c39-787b-49b6-b919-4d8d7319c584",
        "href": "/resourceInventory/v5/resource/82a48c39-787b-49b6-b919-4d8d7319c584",
        "@type": "ConnectionPointRef",
        "@referredType": "Endpoint",
        "name": "CP1.1"
      }
    ]
  },
  {
    "@type": "ResourceFunction",
    "id": "resource-function-002",
    "href": "/resourceFunctionActivation/v5/resourceFunction/resource-function-002",
    "name": "Small Office Router - Model XYZ",
    "description": "Router for small office/home office environments",
    "category": "Network",
    "resourceSpecification": {
      "@type": "ResourceSpecificationRef",
      "id": "router-spec-001",
      "href": "/resourceCatalog/v5/resourceSpecification/router-spec-001",
      "@referredType": "ResourceFunctionSpecification"
    },
    "resourceCharacteristic": [
      {
        "@type": "StringCharacteristic",
        "@baseType": "Characteristic",
        "name": "OperatingSystem",
        "value": "RouterOS"
      },
      {
        "@type": "NumberCharacteristic",
        "@baseType": "Characteristic",
        "name": "MaxBandwidth",
        "value": 100
      }
    ],
    "connectionPoint": [
      {
        "id": "router-cp-001",
        "href": "/resourceInventory/v5/resource/router-cp-001",
        "@type": "ConnectionPointRef",
        "@referredType": "Endpoint",
        "name": "WAN Port"
      }
    ]
  }
]
```


© TM Forum 2026. All Rights Reserved.

Creates a resourceFunction

POST /resourceFunction?fields=…&{filtering}

Description

This operation creates a ResourceFunction entity.

Mandatory Attributes

Mandatory Attributes	Rule
name	
resourceSpecification.id	
@type	

Usage samples

Creation of a new ResourceFunction

Request

```
POST /resourceFunction
Content-Type: application/json

{
  "@type": "ResourceFunction",
  "name": "Medium to Large Enterprise Firewall - Model 134985.3",
  "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
  "category": "Security",
  "resourceSpecification": {
    "@type": "ResourceSpecificationRef",
    "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
    "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
    "@referredType": "ResourceFunctionSpecification"
  },
  "resourceCharacteristic": [
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "OperatingSystem",
      "value": "Linux"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "keywords",
      "value": "firewall, security"
    },
    {
```

© TM Forum 2026. All Rights Reserved.

```
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "language",
      "value": "English"
    }
  ]
}
```

Response

```
201

{
  "@type": "ResourceFunction",
  "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
  "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
  "name": "Medium to Large Enterprise Firewall - Model 134985.3",
  "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
  "category": "Security",
  "resourceSpecification": {
    "@type": "ResourceSpecificationRef",
    "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
    "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
    "@referredType": "ResourceFunctionSpecification"
  },
  "resourceCharacteristic": [
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "OperatingSystem",
      "value": "Linux"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "keywords",
      "value": "firewall, security"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "language",
      "value": "English"
    }
  ],
  "connectionPoint": [
    {
      "id": "cp1",
      "href": "/resourceInventory/v5/connectionPoint/cp1",
      "name": "Input Port 1",
      "@type": "ConnectionPointRef",
      "@referredType": "Endpoint"
    },
    {
```

© TM Forum 2026. All Rights Reserved.

```
      "id": "cp2",
      "href": "/resourceInventory/v5/connectionPoint/cp2",
      "name": "Output Port 1",
      "@type": "ConnectionPointRef",
      "@referredType": "Endpoint"
    }
  ],
  "resourceRelationship": [
    {
      "@type": "ResourceRelationship",
      "resource": {
        "@type": "ResourceRef",
        "id": "179ed458-6053-4be5-be14-e71be8be4440",
        "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-e71be8be4440",
        "@referredType": "LogicalResource",
        "name": "SWI.1"
      },
      "relationshipType": "contains"
    },
    {
      "@type": "ResourceRelationship",
      "resource": {
        "@type": "ResourceRef",
        "id": "d66a404f-9464-47b8-92f5-7a3de88cfb40",
        "href": "/resourceInventory/v5/resource/d66a404f-9464-47b8-92f5-7a3de88cfb40",
        "@referredType": "LogicalResource",
        "name": "SWI.2"
      },
      "relationshipType": "contains"
    }
  ],
  "connectivity": [
    {
      "@type": "ResourceGraph",
      "id": "graph1",
      "name": "Internal Network Graph",
      "description": "Internal connectivity graph for the firewall function",
      "connection": [
        {
          "@type": "Connection",
          "id": "conn1",
          "name": "Input to Processing",
          "associationType": "pointToPoint",
          "endpoint": [
            {
              "@type": "Endpoint"
            },
            {
              "@type": "Endpoint"
            }
          ]
        },
        {
          "@type": "Connection",
          "id": "conn2",
          "name": "Processing to Output",
          "associationType": "pointToPoint",
          "endpoint": [
            {
              "@type": "Endpoint"
```


© TM Forum 2026. All Rights Reserved.

```
            },
            {
              "@type": "Endpoint"
            }
          ]
        }
      ]
    }
  ]
}
```

Updates partially a resourceFunction

`PATCH /resourceFunction/{id}?fields=…`

Description

This operation allows partial updates of a ResourceFunction entity. Support of json/merge (https://tools.ietf.org/html/rfc7396) is mandatory, support of json/patch (http://tools.ietf.org/html/rfc5789) is optional. Note: If the update operation yields to the creation of sub-resources or relationships, the same rules concerning mandatory sub-resource attributes and default value settings in the POST operation applies to the PATCH operation. Hence these tables are not repeated here.

Patchable and Non Patchable Attributes

Non Patchable Attributes	Rule
href	
id	
usageState	
@baseType	@baseType is immutable
@schemaLocation	@schemaLocation is immutable
@type	@type is immutable

Patchable Attributes	Rule
activationFeature	
administrativeState	
alarmStatus	
allocationStatus	
attachment	

© TM Forum 2026. All Rights Reserved.

Patchable Attributes	Rule
autoModification	
availabilityStatus	
category	
connectionPoint	
connectivity	
controlStatus	
creationDate	
description	
endOperatingDate	
externalIdentifier	
functionType	
intent	
lifecycleState	
name	
note	
operationalState	
place	
priority	
proceduralStatus	
relatedParty	
resourceCharacteristic	
resourceOrderItem	
resourceRelationship	
resourceSpecification	
resourceVersion	
role	
schedule	
startOperatingDate	
supportingResource	

© TM Forum 2026. All Rights Reserved.

Patchable Attributes	Rule
unknownStatus	
validFor	
value	

Usage samples

Partial update of a ResourceFunction using merge-patch+json

Request

```
PATCH /resourceFunction/acd6cbde-22a1-4f42-9ed0-52bc72d82386
Content-Type: application/merge-patch+json

{
  "@type": "ResourceFunction",
  "name": "Updated Enterprise Firewall",
  "description": "This firewall now serves a wider range of enterprise customers."
}
```

Response

```
200

{
  "@type": "ResourceFunction",
  "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
  "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
  "name": "Updated Enterprise Firewall",
  "description": "This firewall now serves a wider range of enterprise customers.",
  "category": "Security",
  "resourceSpecification": {
    "@type": "ResourceSpecificationRef",
    "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
    "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
    "@referredType": "ResourceFunctionSpecification"
  },
  "resourceCharacteristic": [
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "OperatingSystem",
      "value": "Linux"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "MaxTraffic",
      "value": "100Mbps"
```

© TM Forum 2026. All Rights Reserved.

```
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "keywords",
      "value": "firewall, security"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "language",
      "value": "English"
    }
  ],
  "connectionPoint": [
    {
      "id": "cp1",
      "href": "/resourceInventory/v5/connectionPoint/cp1",
      "name": "Input Port 1",
      "@type": "ConnectionPointRef",
      "@referredType": "Endpoint"
    },
    {
      "id": "cp2",
      "href": "/resourceInventory/v5/connectionPoint/cp2",
      "name": "Output Port 1",
      "@type": "ConnectionPointRef",
      "@referredType": "Endpoint"
    }
  ],
  "resourceRelationship": [
    {
      "@type": "ResourceRelationship",
      "resource": {
        "@type": "ResourceRef",
        "id": "179ed458-6053-4be5-be14-e71be8be4440",
        "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-e71be8be4440",
        "@referredType": "LogicalResource",
        "name": "SWI.1"
      },
      "relationshipType": "contains"
    }
  ],
  "connectivity": [
    {
      "@type": "ResourceGraph",
      "id": "graph1",
      "name": "Internal Network Graph",
      "description": "Internal connectivity graph for the firewall function",
      "connection": [
        {
          "@type": "Connection",
          "id": "conn1",
          "name": "Input to Processing",
          "associationType": "pointToPoint",
          "endpoint": [
            {
              "@type": "Endpoint"
            },
            {
```


© TM Forum 2026. All Rights Reserved.

```
              "@type": "Endpoint"
            }
          ]
        },
        {
          "@type": "Connection",
          "id": "conn2",
          "name": "Processing to Output",
          "associationType": "pointToPoint",
          "endpoint": [
            {
              "@type": "Endpoint"
            },
            {
              "@type": "Endpoint"
            }
          ]
        }
      ]
    }
  ]
}
```

Partial update of a ResourceFunction using JSON Patch

Request

```
PATCH /resourceFunction/acd6cbde-22a1-4f42-9ed0-52bc72d82386
Content-Type: application/json-patch+json

[
  {
    "op": "replace",
    "path": "/name",
    "value": "Updated Resource Function Name"
  }
]
```

Response

```
200

{
  "@type": "ResourceFunction",
  "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
  "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
  "name": "Updated Resource Function Name",
  "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
  "category": "Security",
  "resourceSpecification": {
    "@type": "ResourceSpecificationRef",
    "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
```

© TM Forum 2026. All Rights Reserved.

```
    "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
    "@referredType": "ResourceFunctionSpecification"
  },
  "resourceCharacteristic": [
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "OperatingSystem",
      "value": "Linux"
    },
    {
      "@type": "NumberCharacteristic",
      "@baseType": "Characteristic",
      "name": "MaxTraffic",
      "value": 1000
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "keywords",
      "value": "firewall, security"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "language",
      "value": "English"
    }
  ],
  "connectionPoint": [
    {
      "id": "cp1",
      "href": "/resourceInventory/v5/connectionPoint/cp1",
      "name": "Input Port 1",
      "@type": "ConnectionPointRef",
      "@referredType": "Endpoint"
    },
    {
      "id": "cp2",
      "href": "/resourceInventory/v5/connectionPoint/cp2",
      "name": "Output Port 1",
      "@type": "ConnectionPointRef",
      "@referredType": "Endpoint"
    }
  ],
  "resourceRelationship": [
    {
      "@type": "ResourceRelationship",
      "resource": {
        "@type": "ResourceRef",
        "id": "179ed458-6053-4be5-be14-e71be8be4440",
        "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-e71be8be4440",
        "@referredType": "LogicalResource",
        "name": "SWI.1"
      },
      "relationshipType": "contains"
    }
  ],
  "connectivity": [
```


© TM Forum 2026. All Rights Reserved.

```
    {
      "@type": "ResourceGraph",
      "id": "graph1",
      "name": "Internal Network Graph",
      "description": "Internal connectivity graph for the firewall function",
      "connection": [
        {
          "@type": "Connection",
          "id": "conn1",
          "name": "Input to Processing",
          "associationType": "pointToPoint",
          "endpoint": [
            {
              "@type": "Endpoint"
            },
            {
              "@type": "Endpoint"
            }
          ]
        },
        {
          "@type": "Connection",
          "id": "conn2",
          "name": "Processing to Output",
          "associationType": "pointToPoint",
          "endpoint": [
            {
              "@type": "Endpoint"
            },
            {
              "@type": "Endpoint"
            }
          ]
        }
      ]
    }
  ]
}
```

Partial update of a ResourceFunction using JSON Patch Query

Request

```
PATCH /resourceFunction/acd6cbde-22a1-4f42-9ed0-52bc72d82386
Content-Type: application/json-patch-query+json

[
  {
    "op": "replace",
    "path": "/resourceCharacteristic?name=OperatingSystem/value",
    "value": "Windows"
  }
]
```

Response

© TM Forum 2026. All Rights Reserved.

```
200

{
  "@type": "ResourceFunction",
  "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
  "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
  "name": "Updated Enterprise Firewall",
  "description": "This firewall now serves a wider range of enterprise customers.",
  "category": "Security",
  "resourceSpecification": {
    "@type": "ResourceSpecificationRef",
    "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
    "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
    "@referredType": "ResourceFunctionSpecification"
  },
  "resourceCharacteristic": [
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "OperatingSystem",
      "value": "Linux"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "MaxTraffic",
      "value": "100Mbps"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "keywords",
      "value": "firewall, security"
    },
    {
      "@type": "StringCharacteristic",
      "@baseType": "Characteristic",
      "name": "language",
      "value": "English"
    }
  ],
  "connectionPoint": [
    {
      "id": "cp1",
      "href": "/resourceInventory/v5/connectionPoint/cp1",
      "name": "Input Port 1",
      "@type": "ConnectionPointRef",
      "@referredType": "Endpoint"
    },
    {
      "id": "cp2",
      "href": "/resourceInventory/v5/connectionPoint/cp2",
      "name": "Output Port 1",
      "@type": "ConnectionPointRef",
      "@referredType": "Endpoint"
    }
  ],
```

© TM Forum 2026. All Rights Reserved.

```
  "resourceRelationship": [
    {
      "@type": "ResourceRelationship",
      "resource": {
        "@type": "ResourceRef",
        "id": "179ed458-6053-4be5-be14-e71be8be4440",
        "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-e71be8be4440",
        "@referredType": "LogicalResource",
        "name": "SWI.1"
      },
      "relationshipType": "contains"
    }
  ],
  "connectivity": [
    {
      "@type": "ResourceGraph",
      "id": "graph1",
      "name": "Internal Network Graph",
      "description": "Internal connectivity graph for the firewall function",
      "connection": [
        {
          "@type": "Connection",
          "id": "conn1",
          "name": "Input to Processing",
          "associationType": "pointToPoint",
          "endpoint": [
            {
              "@type": "Endpoint"
            },
            {
              "@type": "Endpoint"
            }
          ]
        },
        {
          "@type": "Connection",
          "id": "conn2",
          "name": "Processing to Output",
          "associationType": "pointToPoint",
          "endpoint": [
            {
              "@type": "Endpoint"
            },
            {
              "@type": "Endpoint"
            }
          ]
        }
      ]
    }
  ]
}
```


Deletes a resourceFunction

`DELETE /resourceFunction/{id}?{filtering}`

© TM Forum 2026. All Rights Reserved.

Description

This operation deletes a ResourceFunction entity.

Operations on Monitor

Retrieves a monitor by ID

`GET /monitor/{id}?fields=…`

Description

This operation retrieves a Monitor entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a Monitor from its unique identifier to check its status or collected data.

Request

```
GET /monitor/3bc72846-3516-4504-86ce-63a4954f7c00
Content-Type: application/json
```

Response

```
200

{
  "@type": "Monitor",
  "href": "/resourceFunctionActivation/v5/monitor/3bc72846-3516-4504-86ce-
63a4954f7c00",
  "id": "3bc72846-3516-4504-86ce-63a4954f7c00",
  "sourceHref": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-
9ed0-52bc72d82386",
  "state": "Complete",
  "request": {
    "method": "POST",
    "to": "/resourceFunctionActivation/v5/resourceFunction",
    "header": [
      {
        "name": "accept",
        "value": "application/json"
      }
    ],
    "body": {
      "name": "Medium to Large Enterprise Firewall - Model 134985.3",
      "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
      "@type": "ResourceFunction",
```

© TM Forum 2026. All Rights Reserved.

```
      "lifecycleState": "operating",
      "category": "Security",
      "resourceSpecification": {
        "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
        "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
        "@type": "ResourceFunctionSpecificationRef",
        "@referredType": "ResourceFunctionSpecification"
      },
      "resourceCharacteristic": [
        {
          "name": "OperatingSystem",
          "value": "Android Pie",
          "@type": "StringCharacteristic",
          "@baseType": "Characteristic"
        },
        {
          "name": "keywords",
          "value": "Medium Enterprise",
          "@type": "StringCharacteristic",
          "@baseType": "Characteristic"
        },
        {
          "name": "language",
          "value": "en",
          "@type": "StringCharacteristic",
          "@baseType": "Characteristic"
        }
      ],
      "feature": [
        {
          "id": "l22m455f-671a-499d-a95j-8h46fe3bc88c",
          "name": "log",
          "featureCharacteristic": [
            {
              "name": "logSize",
              "value": 8000,
              "@type": "NumberCharacteristic",
              "@baseType": "Characteristic"
            }
          ],
          "@type": "Feature"
        }
      ]
    }
  },
  "response": {
    "statusCode": "202 Accepted",
    "header": [
      {
        "name": "content-type",
        "value": "application/json"
      },
      {
        "name": "location",
        "value": "/resourceFunctionActivation/v5/resourceFunction/91f13709-593d-4175-
a5e5-ce0ee95db0d5"
      },
      {
        "name": "link",
```


© TM Forum 2026. All Rights Reserved.

```
        "value": "</resourceFunctionActivation/v5/monitor/3bc72846-3516-4504-86ce-
63a4954f7c00>;rel=related;title=monitor,</resourceFunctionActivation/v5/resourceFunctio
n/acd6cbde-22a1-4f42-9ed0-
52bc72d82386>;rel=self,</resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-
4f42-9ed0-52bc72d82386>;rel=canonical"
      }
    ],
    "body": {
      "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
      "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
      "name": "Medium to Large Enterprise Firewall - Model 134985.3",
      "description": "This is a type of firewall to be used for our medium to large
enterprise customers",
      "@type": "ResourceFunction",
      "lifecycleState": "operating",
      "category": "Security",
      "resourceSpecification": {
        "id": "5fc91de8-88be-4c7c-8b3c-e08ccc53b889",
        "href": "/resourceCatalog/v5/resourceSpecification/5fc91de8-88be-4c7c-8b3c-
e08ccc53b889",
        "@type": "ResourceFunctionSpecificationRef",
        "@referredType": "ResourceFunctionSpecification"
      },
      "resourceCharacteristic": [
        {
          "name": "OperatingSystem",
          "value": "Android Pie",
          "@type": "StringCharacteristic",
          "@baseType": "Characteristic"
        },
        {
          "name": "MaxTraffic",
          "value": 25,
          "@type": "NumberCharacteristic",
          "@baseType": "Characteristic"
        },
        {
          "name": "keywords",
          "value": "Medium Enterprise",
          "@type": "StringCharacteristic",
          "@baseType": "Characteristic"
        },
        {
          "name": "language",
          "value": "English",
          "@type": "StringCharacteristic",
          "@baseType": "Characteristic"
        }
      ],
      "feature": [
        {
          "id": "h776f845f-z20a-468f-v54m-9e07fe3bd28l",
          "name": "L2&L3",
          "@type": "Feature"
        },
        {
          "id": "g535f845f-032a-468f-a86e-9e07fe3bc85b",
          "name": "OSI-L4",
          "@type": "Feature"
```


© TM Forum 2026. All Rights Reserved.

```
        },
        {
          "id": "k463345f-011a-463a-a92f-4h2kfe3bc44b",
          "name": "OSI-L7",
          "@type": "Feature"
        },
        {
          "id": "f78g245f-671a-468f-a95j-9e07fe3bc98b",
          "name": "tarpit",
          "@type": "Feature"
        },
        {
          "id": "l22m455f-671a-499d-a95j-8h46fe3bc88c",
          "name": "log",
          "featureCharacteristic": [
            {
              "name": "logSize",
              "value": 2000,
              "@type": "NumberCharacteristic",
              "@baseType": "Characteristic"
            }
          ],
          "@type": "Feature"
        },
        {
          "id": "db723e27-58d3-4120-b564-af199cb32bd3",
          "name": "IPAddressing",
          "featureRelationship": [
            {
              "relationshipType": "requires",
              "id": "43883a81-58ef-45af-ace4-993298ae8361",
              "name": "IPv5Addressing",
              "@type": "FeatureRelationship"
            },
            {
              "relationshipType": "requires",
              "id": "b85f845f-011a-468f-a90e-9e07fe3bc90a",
              "name": "IPv6Addressing",
              "@type": "FeatureRelationship"
            }
          ],
          "@type": "Feature"
        },
        {
          "id": "43883a81-58ef-45af-ace4-993298ae8361",
          "name": "IPv5Addressing",
          "@type": "Feature"
        },
        {
          "id": "b85f845f-011a-468f-a90e-9e07fe3bc90a",
          "name": "IPv6Addressing",
          "isEnabled": false,
          "@type": "Feature"
        }
      ],
      "connectionPoint": [
        {
          "id": "82a48c39-787b-49b6-b919-4d8d7319c584",
          "href": "/resourceInventory/v5/resource/82a48c39-787b-49b6-b919-
4d8d7319c584",
```


© TM Forum 2026. All Rights Reserved.

```
          "@type": "Feature",
          "@referredType": "Endpoint",
          "name": "CP1.1"
        },
        {
          "id": "2da750ad-cdb2-4337-a823-dd3f294d458c",
          "href": "/resourceInventory/v5/resource/2da750ad-cdb2-4337-a823-
dd3f294d458c",
          "@type": "Feature",
          "@referredType": "Endpoint",
          "name": "CP3.2"
        },
        {
          "id": "ecc5eb54-b032-409d-9213-604b5ebb74ac",
          "href": "/resourceInventory/v5/resource/ecc5eb54-b032-409d-9213-
604b5ebb74ac",
          "@type": "Feature",
          "@referredType": "Endpoint",
          "name": "CP5.2"
        },
        {
          "id": "9af2fa2c-08b2-474d-8eb2-174c6a02f021",
          "href": "/resourceInventory/v5/resource/9af2fa2c-08b2-474d-8eb2-
174c6a02f021",
          "@type": "Feature",
          "@referredType": "Endpoint",
          "name": "CP1.4"
        }
      ],
      "resourceRelationship": [
        {
          "resource": {
            "id": "179ed458-6053-4be5-be14-e71be8be4440",
            "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-
e71be8be4440",
            "@type": "Feature",
            "@referredType": "Endpoint",
            "name": "SWI.1"
          },
          "relationshipType": "contains"
        },
        {
          "resource": {
            "id": "d66a404f-9464-47b8-92f5-7a3de88cfb40",
            "href": "/resourceInventory/v5/resource/d66a404f-9464-47b8-92f5-
7a3de88cfb40",
            "@type": "Feature",
            "@referredType": "Endpoint",
            "name": "SWI.2"
          },
          "relationshipType": "contains"
        },
        {
          "resource": {
            "id": "c47b1f3a-d74b-4594-9596-b1f2ace66365",
            "href": "/resourceInventory/v5/resource/c47b1f3a-d74b-4594-9596-
b1f2ace66365",
            "@type": "Feature",
            "@referredType": "Endpoint",
            "name": "SWI.3"
```


© TM Forum 2026. All Rights Reserved.

```
          },
          "relationshipType": "contains"
        },
        {
          "resource": {
            "id": "fb126b4f-5d2e-4fb3-8e94-3d0a721a6cbc",
            "href": "/resourceInventory/v5/resource/",
            "@type": "Feature",
            "@referredType": "Endpoint",
            "name": "SWI.4"
          },
          "relationshipType": "contains"
        },
        {
          "resource": {
            "id": "11c59a1e-f15d-4cc0-9ae5-aaa20380ccdc",
            "href": "/resourceInventory/v5/resource/11c59a1e-f15d-4cc0-9ae5-
aaa20380ccdc",
            "@type": "Feature",
            "@referredType": "Endpoint",
            "name": "SWI.5"
          },
          "relationshipType": "contains"
        }
      ],
      "connectivity": [
        {
          "id": "5921a308-322c-40fe-80e8-c2a7bc0ba546",
          "name": "Internal Connectivity Graph",
          "@type": "ConnectionPointRef",
          "connection": [
            {
              "name": "AdjacencyPair1",
              "@type": "Connection",
              "associationType": "pointtoPoint",
              "endpoint": [
                {
                  "id": "179ed458-6053-4be5-be14-e71be8be4440",
                  "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-
e71be8be4440",
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.1",
                  "isRoot": true,
                  "connectionPoint": {
                    "id": "8c237137-46b1-4eac-9b20-0f2b35f5ffb2",
                    "href": "/resourceInventory/v5/resource/8c237137-46b1-4eac-9b20-
0f2b35f5ffb2",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP1.2"
                  }
                },
                {
                  "id": "d66a404f-9464-47b8-92f5-7a3de88cfb40",
                  "href": "/resourceInventory/v5/resource/d66a404f-9464-47b8-92f5-
7a3de88cfb4032",
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.2",
```


© TM Forum 2026. All Rights Reserved.

```
                  "isRoot": false,
                  "connectionPoint": {
                    "id": "c8937fec-1923-4bdc-99d1-4a168f14d445",
                    "href": "/resourceInventory/v5/resource/c8937fec-1923-4bdc-99d1-
4a168f14d445",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP2.1"
                  }
                }
              ]
            },
            {
              "name": "AdjacencyPair2",
              "@type": "Connection",
              "associationType": "pointtoPoint",
              "endpoint": [
                {
                  "id": "d66a404f-9464-47b8-92f5-7a3de88cfb40",
                  "href": "/resourceInventory/v5/resource/d66a404f-9464-47b8-92f5-
7a3de88cfb40",
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.2",
                  "isRoot": true,
                  "connectionPoint": {
                    "id": "acbdf06a-1f2e-4815-8db5-4220bc87ade2",
                    "href": "/resourceInventory/v5/resource/acbdf06a-1f2e-4815-8db5-
4220bc87ade2",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP2.2"
                  }
                },
                {
                  "id": "c47b1f3a-d74b-4594-9596-b1f2ace66365",
                  "href": "/resourceInventory/v5/resource/c47b1f3a-d74b-4594-9596-
b1f2ace66365",
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.3",
                  "isRoot": false,
                  "connectionPoint": {
                    "id": "0564e364-dd52-461b-a9f6-718e342e2217",
                    "href": "/resourceInventory/v5/resource/0564e364-dd52-461b-a9f6-
718e342e2217",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP3.1"
                  }
                }
              ]
            },
            {
              "name": "AdjacencyPair3",
              "@type": "Connection",
              "associationType": "pointtoPoint",
              "endpoint": [
                {
                  "id": "c47b1f3a-d74b-4594-9596-b1f2ace66365",
```


© TM Forum 2026. All Rights Reserved.

```
                  "href": "/resourceInventory/v5/resource/c47b1f3a-d74b-4594-9596-
b1f2ace66365",
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.3",
                  "isRoot": true,
                  "connectionPoint": {
                    "id": "14ae7a86-8d6e-407e-adf0-f99505e48b67",
                    "href": "/resourceInventory/v5/resource/14ae7a86-8d6e-407e-adf0-
f99505e48b67",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP3.3"
                  }
                },
                {
                  "id": "fb126b4f-5d2e-4fb3-8e94-3d0a721a6cbc",
                  "href": "/resourceInventory/v5/resource/fb126b4f-5d2e-4fb3-8e94-
3d0a721a6cbc",
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.4",
                  "isRoot": false,
                  "connectionPoint": {
                    "id": "98b5906c-bbd0-4bb9-8551-1eaac552a4a3",
                    "href": "/resourceInventory/v5/resource/98b5906c-bbd0-4bb9-8551-
1eaac552a4a3",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP4.1"
                  }
                }
              ]
            },
            {
              "name": "AdjacencyPair4",
              "@type": "Connection",
              "associationType": "pointtoPoint",
              "endpoint": [
                {
                  "id": "fb126b4f-5d2e-4fb3-8e94-3d0a721a6cbc",
                  "href": "/resourceInventory/v5/resource/fb126b4f-5d2e-4fb3-8e94-
3d0a721a6cbc",
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.4",
                  "isRoot": true,
                  "connectionPoint": {
                    "id": "415a8aa1-5d8b-4a7b-a886-cfb248fba864",
                    "href": "/resourceInventory/v5/resource/415a8aa1-5d8b-4a7b-a886-
cfb248fba864",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP4.2"
                  }
                },
                {
                  "id": "11c59a1e-f15d-4cc0-9ae5-aaa20380ccdc",
                  "href": "/resourceInventory/v5/resource/11c59a1e-f15d-4cc0-9ae5-
aaa20380ccdc",
```


© TM Forum 2026. All Rights Reserved.

```
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.5",
                  "isRoot": false,
                  "connectionPoint": {
                    "id": "29bf728a-08c1-4bb9-84b0-5ad63468b1fb",
                    "href": "/resourceInventory/v5/resource/29bf728a-08c1-4bb9-84b0-
5ad63468b1fb",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP5.1"
                  }
                }
              ]
            },
            {
              "name": "AdjacencyPair5",
              "@type": "Connection",
              "associationType": "pointtoPoint",
              "endpoint": [
                {
                  "id": "11c59a1e-f15d-4cc0-9ae5-aaa20380ccdc",
                  "href": "/resourceInventory/v5/resource/11c59a1e-f15d-4cc0-9ae5-
aaa20380ccdc",
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.5",
                  "isRoot": true,
                  "connectionPoint": {
                    "id": "e26d911c-3e61-409c-bcca-c7500e12b5a6",
                    "href": "/resourceInventory/v5/resource/e26d911c-3e61-409c-bcca-
c7500e12b5a6",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP5.3"
                  }
                },
                {
                  "id": "179ed458-6053-4be5-be14-e71be8be4440",
                  "href": "/resourceInventory/v5/resource/179ed458-6053-4be5-be14-
e71be8be4440",
                  "@type": "Endpoint",
                  "@referredType": "Endpoint",
                  "name": "SWI.1",
                  "isRoot": false,
                  "connectionPoint": {
                    "id": "62606a50-3cce-4225-b862-3b9ac72ef8ca",
                    "href": "/resourceInventory/v5/resource/62606a50-3cce-4225-b862-
3b9ac72ef8ca",
                    "@type": "Feature",
                    "@referredType": "Endpoint",
                    "name": "CP1.3"
                  }
                }
              ]
            }
          ]
        }
      ]
    }
```


© TM Forum 2026. All Rights Reserved.

```
  }
}
```

List or find monitor objects

`GET /monitor?fields=…&{filtering}`

Description

This operation list Monitor entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a filtered or paginated list of Monitors to view active monitoring instances.

Request

```
GET /monitor?fields=id,href,sourceHref,state,@type
Content-Type: application/json
```

Response

```
200

[
  {
    "@type": "Monitor",
    "href": "/resourceFunctionActivation/v5/monitor/monitor-001",
    "id": "monitor-001",
    "sourceHref": "/resourceFunctionActivation/v5/resourceFunction/rf-005",
    "state": "inProgress"
  },
  {
    "@type": "Monitor",
    "href": "/resourceFunctionActivation/v5/monitor/monitor-002",
    "id": "monitor-002",
    "sourceHref": "/resourceFunctionActivation/v5/heal/heal-001",
    "state": "completed"
  }
]
```

Operations on Heal

© TM Forum 2026. All Rights Reserved.

Retrieves a heal by ID

GET /heal/{id}?fields=…

Description

This operation retrieves a Heal entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a Heal operation from its unique identifier

Request

```
GET /heal/c6015b3d-64ad-432d-b7a5-9a9fa3430aa4
Content-Type: application/json
```

Response

```
200

{
  "@type": "Heal",
  "href": "/resourceFunctionActivation/v5/heal/c6015b3d-64ad-432d-b7a5-9a9fa3430aa4",
  "id": "c6015b3d-64ad-432d-b7a5-9a9fa3430aa4",
  "name": "SLA Violation Healing",
  "action": "healResourceFunction",
  "actionType": "script",
  "resourceFunction": {
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction"
  },
  "cause": "SLA violation",
  "degreeOfHealing": "restoreToStateBeforeFailure",
  "state": "inProgress",
  "startTime": "2019-08-17T13:11:51Z"
}
```

List or find heal objects

GET /heal?fields=…&{filtering}

Description

This operation list Heal entities. Attribute selection is enabled for all first level attributes.

© TM Forum 2026. All Rights Reserved.

Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a list of Heal task entities

Request

```
GET /heal?fields=id,href,name,cause,degreeOfHealing,state&offset=0&limit=10
Content-Type: application/json
```

Response

```
200

[
  {
    "@type": "Heal",
    "id": "heal-001",
    "href": "/resourceFunctionActivation/v5/heal/heal-001",
    "name": "Automated Network Repair",
    "action": "Run automated diagnostic and repair script",
    "actionType": "script",
    "startTime": "2026-03-04T12:30:00Z",
    "resourceFunction": {
      "@type": "ResourceFunctionRef",
      "id": "rf-001",
      "href": "/resourceFunctionActivation/v5/resourceFunction/rf-001",
      "@referredType": "ResourceFunction"
    },
    "cause": "Network device failure detected",
    "degreeOfHealing": "restoreToStateBeforeFailure",
    "policy": "Standard network recovery policy v2.0",
    "state": "inProgress"
  },
  {
    "@type": "Heal",
    "id": "heal-002",
    "href": "/resourceFunctionActivation/v5/heal/heal-002",
    "name": "Manual Service Restoration",
    "action": "Manually restart affected services",
    "actionType": "narrative",
    "startTime": "2026-03-04T13:00:00Z",
    "resourceFunction": {
      "@type": "ResourceFunctionRef",
      "id": "rf-002",
      "href": "/resourceFunctionActivation/v5/resourceFunction/rf-002",
      "@referredType": "ResourceFunction"
    },
    "cause": "Human error during configuration",
    "degreeOfHealing": "partial",
    "policy": "Manual intervention protocol",
    "state": "done"
```

© TM Forum 2026. All Rights Reserved.

```
  }
]
```

Creates a heal

`POST /heal?fields=…&{filtering}`

Description

This operation creates a Heal entity.

Mandatory Attributes

Mandatory Attributes	Rule
cause	
degreeOfHealing	
resourceFunction	
@type	

Usage samples

Create a new Heal operation

Request

```
POST /heal
Content-Type: application/json

{
  "@type": "Heal",
  "resourceFunction": {
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction"
  },
  "cause": "SLA violation",
  "degreeOfHealing": "restoreToStateBeforeFailure",
  "name": "SLA Violation",
  "action": "healResourceFunction",
  "actionType": "script",
  "startTime": "2019-08-17T13:11:51Z"
}
```

Response

© TM Forum 2026. All Rights Reserved.

```
201

{
  "@type": "Heal",
  "href": "/resourceFunctionActivation/v5/heal/c6015b3d-64ad-432d-b7a5-9a9fa3430aa4",
  "id": "c6015b3d-64ad-432d-b7a5-9a9fa3430aa4",
  "name": "SLA Violation Healing",
  "action": "healResourceFunction",
  "actionType": "script",
  "resourceFunction": {
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction"
  },
  "cause": "SLA violation",
  "degreeOfHealing": "restoreToStateBeforeFailure",
  "state": "inProgress",
  "startTime": "2019-08-17T13:11:51Z"
}
```

Deletes a heal

`DELETE /heal/{id}?{filtering}`

Description

This operation deletes a Heal entity.

Operations on Scale

Retrieves a scale by ID

`GET /scale/{id}?fields=…`

Description

This operation retrieves a Scale entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a Scale operation from its unique identifier

Request

```
GET /scale/4a41a328-1cf3-4674-bdd7-c43129fbfa7c
Content-Type: application/json
```

© TM Forum 2026. All Rights Reserved.

Response

```
200

{
  "@type": "Scale",
  "href": "/resourceFunctionActivation/v5/scale/4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
  "id": "4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
  "name": "Increase Memory for Web Server",
  "resourceFunction": {
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction"
  },
  "state": "inProgress",
  "scaleType": "scaleOut",
  "aspectId": "Quick Access Memory",
  "numberOfSteps": {
    "amount": 2,
    "units": "GB"
  },
  "schedule": [
    {
      "@type": "ScheduleDefinition",
      "id": "b32c19f3-0297-4dd4-93c7-87c3a4fee14e",
      "recurringFrequency": "daily",
      "scheduleDefinitionHourRange": [
        {
          "startHour": "02:00",
          "endHour": "04:00"
        }
      ]
    }
  ]
}
```

List or find scale objects

`GET /scale?fields=…&{filtering}`

Description

This operation list Scale entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a list of Scale task entities

Request

© TM Forum 2026. All Rights Reserved.

```
GET
/scale?fields=id,href,name,scaleType,aspectId,numberOfSteps,state,@type&offset=0&limit=
10
Content-Type: application/json
```

Response

```
200

[
  {
    "@type": "Scale",
    "id": "scale-001",
    "href": "/resourceFunctionActivation/v5/scale/scale-001",
    "name": "Increase CPU for Analytics Service",
    "resourceFunction": {
      "@type": "ResourceFunctionRef",
      "@referredType": "ResourceFunction",
      "id": "rf-006",
      "href": "/resourceFunctionActivation/v5/resourceFunction/rf-006"
    },
    "scaleType": "scaleUp",
    "aspectId": "CPU_Cores",
    "numberOfSteps": {
      "amount": 4,
      "units": "core"
    },
    "state": "done"
  },
  {
    "@type": "Scale",
    "id": "scale-002",
    "href": "/resourceFunctionActivation/v5/scale/scale-002",
    "name": "Add instances to Load Balancer",
    "resourceFunction": {
      "@type": "ResourceFunctionRef",
      "@referredType": "ResourceFunction",
      "id": "rf-007",
      "href": "/resourceFunctionActivation/v5/resourceFunction/rf-007"
    },
    "scaleType": "scaleOut",
    "aspectId": "Instances",
    "numberOfSteps": {
      "amount": 2,
      "units": "instance"
    },
    "state": "inProgress"
  }
]
```

Creates a scale

POST /scale?fields=…&{filtering}

© TM Forum 2026. All Rights Reserved.

Description

This operation creates a Scale entity.

Mandatory Attributes

Mandatory Attributes	Rule
numberOfSteps	
resourceFunction	
scaleType	
@type	

Usage samples

Create a new Scale operation

Request

```
POST /scale
Content-Type: application/json

{
  "@type": "Scale",
  "resourceFunction": {
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction"
  },
  "scaleType": "scaleOut",
  "numberOfSteps": {
    "amount": 2,
    "units": "GB"
  },
  "name": "Increase Memory for Web Server",
  "aspectId": "Quick Access Memory",
  "schedule": [
    {
      "@type": "ScheduleDefinition",
      "id": "b32c19f3-0297-4dd4-93c7-87c3a4fee14e",
      "recurringFrequency": "daily",
      "scheduleDefinitionHourRange": [
        {
          "startHour": "02:00",
          "endHour": "04:00"
        }
      ]
    }
  ]
```

© TM Forum 2026. All Rights Reserved.

```
}
```

Response

```
201

{
  "@type": "Scale",
  "href": "/resourceFunctionActivation/v5/scale/4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
  "id": "4a41a328-1cf3-4674-bdd7-c43129fbfa7c",
  "name": "Increase Memory for Web Server",
  "resourceFunction": {
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction"
  },
  "state": "inProgress",
  "scaleType": "scaleOut",
  "aspectId": "Quick Access Memory",
  "numberOfSteps": {
    "amount": 2,
    "units": "GB"
  },
  "schedule": [
    {
      "@type": "ScheduleDefinition",
      "id": "b32c19f3-0297-4dd4-93c7-87c3a4fee14e",
      "recurringFrequency": "daily",
      "scheduleDefinitionHourRange": [
        {
          "startHour": "02:00",
          "endHour": "04:00"
        }
      ]
    }
  ]
}
```

Deletes a scale

`DELETE /scale/{id}?{filtering}`

Description

This operation deletes a Scale entity.

Operations on Migrate

© TM Forum 2026. All Rights Reserved.

Retrieves a migrate by ID

`GET /migrate/{id}?fields=…`

Description

This operation retrieves a Migrate entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a Migrate operation from its unique identifier

Request

```
GET /migrate/afccfc16-a28e-4f3b-81e0-1cf7ba649ef9
Content-Type: application/json
```

Response

```
200

{
  "@type": "Migrate",
  "href": "/resourceFunctionActivation/v5/migrate/afccfc16-a28e-4f3b-81e0-
1cf7ba649ef9",
  "id": "afccfc16-a28e-4f3b-81e0-1cf7ba649ef9",
  "name": "Migrate Resource Function from NYC to LA",
  "resourceFunction": {
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction"
  },
  "state": "inProgress",
  "cause": "planned",
  "adminStateModification": "locked",
  "addConnectionPoint": [
    {
      "@type": "ConnectionPointRef",
      "@referredType": "ConnectionPoint",
      "id": "95ae4067-72af-4495-905d-b92ec5f9c310",
      "href": "/resourceInventory/v5/resource/95ae4067-72af-4495-905d-b92ec5f9c310",
      "name": "CP-LA-1"
    }
  ],
  "removeConnectionPoint": [
    {
      "@type": "ConnectionPointRef",
      "@referredType": "ConnectionPoint",
      "id": "82a48c39-787b-49b6-b919-4d8d7319c584",
      "href": "/resourceInventory/v5/resource/82a48c39-787b-49b6-b919-4d8d7319c584",
```

© TM Forum 2026. All Rights Reserved.

```
      "name": "CP-NYC-1"
    }
  ],
  "priority": 1,
  "startTime": "2019-08-19T04:00:00Z",
  "completionMode": "bestEffort",
  "place": {
    "@type": "PlaceRef",
    "id": "72a41352-7a2c-4baa-8df6-cab6845f6369",
    "href": "/geographicLocation/v5/geographicLocation/72a41352-7a2c-4baa-8df6-
cab6845f6369",
    "@referredType": "GeographicLocation"
  }
}
```


List or find migrate objects

`GET /migrate?fields=…&{filtering}`

Description

This operation list Migrate entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a list of Migrate task entities

Request

```
GET /migrate?fields=id,href,name,cause,state,priority,@type&offset=0&limit=10
Content-Type: application/json
```

Response


```
200

[
  {
    "@type": "Migrate",
    "href": "/resourceFunctionActivation/v5/migrate/migrate-001",
    "id": "migrate-001",
    "name": "Move Web Server to New Data Center",
    "resourceFunction": {
      "@type": "ResourceFunctionRef",
      "@referredType": "ResourceFunction",
      "id": "rf-003",
      "href": "/resourceFunctionActivation/v5/resourceFunction/rf-003"
    },
    "cause": "Data center relocation",
```


© TM Forum 2026. All Rights Reserved.

```
    "adminStateModification": "locked",
    "removeConnectionPoint": [
      {
        "@type": "ConnectionPointRef",
        "@referredType": "ConnectionPoint",
        "id": "cp-old-01",
        "href": "/resourceInventory/v5/resource/cp-old-01",
        "name": "Old_CP_1"
      }
    ],
    "addConnectionPoint": [
      {
        "@type": "ConnectionPointRef",
        "@referredType": "ConnectionPoint",
        "id": "cp-new-01",
        "href": "/resourceInventory/v5/resource/cp-new-01",
        "name": "New_CP_1"
      }
    ],
    "priority": 2,
    "startTime": "2026-03-05T00:00:00Z",
    "completionMode": "atomic",
    "place": {
      "@type": "PlaceRef",
      "id": "loc-new-dc",
      "@referredType": "GeographicLocation",
      "href": "/geographicLocation/v5/geographicLocation/loc-new-dc"
    },
    "state": "acknowledged"
  },
  {
    "@type": "Migrate",
    "id": "migrate-002",
    "href": "/resourceFunctionActivation/v5/migrate/migrate-002",
    "name": "Upgrade Database Host",
    "resourceFunction": {
      "@type": "ResourceFunctionRef",
      "@referredType": "ResourceFunction",
      "id": "rf-004",
      "href": "/resourceFunctionActivation/v5/resourceFunction/rf-004"
    },
    "cause": "Hardware refresh",
    "adminStateModification": "unlocked",
    "priority": 1,
    "startTime": "2026-03-06T00:00:00Z",
    "completionMode": "bestEffort",
    "state": "inProgress"
  }
]
```


Creates a migrate

`POST /migrate?fields=…&{filtering}`

Description

This operation creates a Migrate entity.

© TM Forum 2026. All Rights Reserved.

Mandatory Attributes

Mandatory Attributes	Rule
cause	
resourceFunction	
@type	

Usage samples

Create a new Migrate operation

Request

```
POST /migrate
Content-Type: application/json

{
  "@type": "Migrate",
  "resourceFunction": {
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction"
  },
  "cause": "planned",
  "name": "Migrate Resource Function from NYC to LA",
  "adminStateModification": "locked",
  "addConnectionPoint": [
    {
      "@type": "ConnectionPointRef",
      "@referredType": "ConnectionPoint",
      "id": "95ae4067-72af-4495-905d-b92ec5f9c310",
      "href": "/resourceInventory/v5/resource/95ae4067-72af-4495-905d-b92ec5f9c310",
      "name": "CP-LA-1"
    }
  ],
  "removeConnectionPoint": [
    {
      "@type": "ConnectionPointRef",
      "@referredType": "ConnectionPoint",
      "id": "82a48c39-787b-49b6-b919-4d8d7319c584",
      "href": "/resourceInventory/v5/resource/82a48c39-787b-49b6-b919-4d8d7319c584",
      "name": "CP-NYC-1"
    }
  ],
  "priority": 1,
  "startTime": "2019-08-19T04:00:00Z",
  "completionMode": "bestEffort",
  "place": {
    "@type": "PlaceRef",
    "id": "72a41352-7a2c-4baa-8df6-cab6845f6369",
    "href": "/geographicLocation/v5/geographicLocation/72a41352-7a2c-4baa-8df6-
```

© TM Forum 2026. All Rights Reserved.

```
cab6845f6369",
    "@referredType": "GeographicLocation"
  }
}
```

Response

```
201

{
  "@type": "Migrate",
  "href": "/resourceFunctionActivation/v5/migrate/afccfc16-a28e-4f3b-81e0-
1cf7ba649ef9",
  "id": "afccfc16-a28e-4f3b-81e0-1cf7ba649ef9",
  "name": "Migrate Resource Function from NYC to LA",
  "resourceFunction": {
    "id": "acd6cbde-22a1-4f42-9ed0-52bc72d82386",
    "href": "/resourceFunctionActivation/v5/resourceFunction/acd6cbde-22a1-4f42-9ed0-
52bc72d82386",
    "@type": "ResourceFunctionRef",
    "@referredType": "ResourceFunction"
  },
  "state": "inProgress",
  "cause": "planned",
  "adminStateModification": "locked",
  "addConnectionPoint": [
    {
      "@type": "ConnectionPointRef",
      "@referredType": "ConnectionPoint",
      "id": "95ae4067-72af-4495-905d-b92ec5f9c310",
      "href": "/resourceInventory/v5/resource/95ae4067-72af-4495-905d-b92ec5f9c310",
      "name": "CP-LA-1"
    }
  ],
  "removeConnectionPoint": [
    {
      "@type": "ConnectionPointRef",
      "@referredType": "ConnectionPoint",
      "id": "82a48c39-787b-49b6-b919-4d8d7319c584",
      "href": "/resourceInventory/v5/resource/82a48c39-787b-49b6-b919-4d8d7319c584",
      "name": "CP-NYC-1"
    }
  ],
  "priority": 1,
  "startTime": "2019-08-19T04:00:00Z",
  "completionMode": "bestEffort",
  "place": {
    "@type": "PlaceRef",
    "id": "72a41352-7a2c-4baa-8df6-cab6845f6369",
    "href": "/geographicLocation/v5/geographicLocation/72a41352-7a2c-4baa-8df6-
cab6845f6369",
    "@referredType": "GeographicLocation"
  }
}
```

© TM Forum 2026. All Rights Reserved.

Deletes a migrate

`DELETE /migrate/{id}?{filtering}`

Description

This operation deletes a Migrate entity.

© TM Forum 2026. All Rights Reserved.

API NOTIFICATIONS

For every single of operation on the entities use the following templates and provide sample REST notification POST calls.

It is assumed that the Pub/Sub uses the Register and UnRegister mechanisms described in the REST Guidelines reproduced below.

Register listener

POST /hub

Description

Sets the communication endpoint address the service instance must use to deliver information about its health state, execution state, failures and metrics. Subsequent POST calls will be rejected by the service if it does not support multiple listeners. In this case DELETE /api/hub/{id} must be called before an endpoint can be created again.

Behavior

Returns HTTP/1.1 status code 204 if the request was successful.

Returns HTTP/1.1 status code 409 if request is not successful.

Usage Samples

Here's an example of a request for registering a listener.

Request

```
POST /api/hub

Accept: application/json

{
    "callback": "http://in.listener.com"
}
```

Response

```
201

Content-Type: application/json

Location: /api/hub/42
```

© TM Forum 2026. All Rights Reserved.

```
{
    "id":"42",
    "callback": "http://in.listener.com",
    "query":""
}
```

Unregister listener

DELETE /hub/{id}

Description

Clears the communication endpoint address that was set by creating the Hub..

Behavior

Returns HTTP/1.1 status code 204 if the request was successful.

Returns HTTP/1.1 status code 404 if the resource is not found.

Usage Samples

Here's an example of a request for un-registering a listener.

Request

```
DELETE /api/hub/42

Accept: application/json
```

Response

```
204
```

Publish Event to listener

POST /client/listener

Description

Clears the communication endpoint address that was set by creating the Hub.

Provides to a registered listener the description of the event that was raised. The /client/listener url is the callback url passed when registering the listener.

© TM Forum 2026. All Rights Reserved.

Behavior

Returns HTTP/1.1 status code 201 if the service is able to set the configuration.

Usage Samples

Here's an example of a notification received by the listener. In this example "EVENT TYPE" should be replaced by one of the notification types supported by this API (see Notification resources Models section) and EVENT BODY refers to the data structure of the given notification type.

Request

```
POST /client/listener

Accept: application/json

{
    "event": {
        EVENT BODY
    },
    "eventType": "EVENT_TYPE"
}
```

Response

```
201
```

For detailed examples on the general TM Forum notification mechanism, see the TMF REST Design Guidelines.

© TM Forum 2026. All Rights Reserved.

Acknowledgements

Release History

Release Number	Date	Release led by:	Description
Version 5.0.0	2026-02-26	Sarabjit Gandhi (Jio Platforms Limited) & Jonathan Goldberg (TM Forum)	Uplift to OpenAPI Specification (OAS) version 3.0.1, align with v5 guidelines, and address review comments.

Contributors to Document

Sarabjit Gandhi	Jio Platforms Limited
Jonathan Goldberg	TM Forum
Vance Smith	Sigscale

© TM Forum 2026. All Rights Reserved.