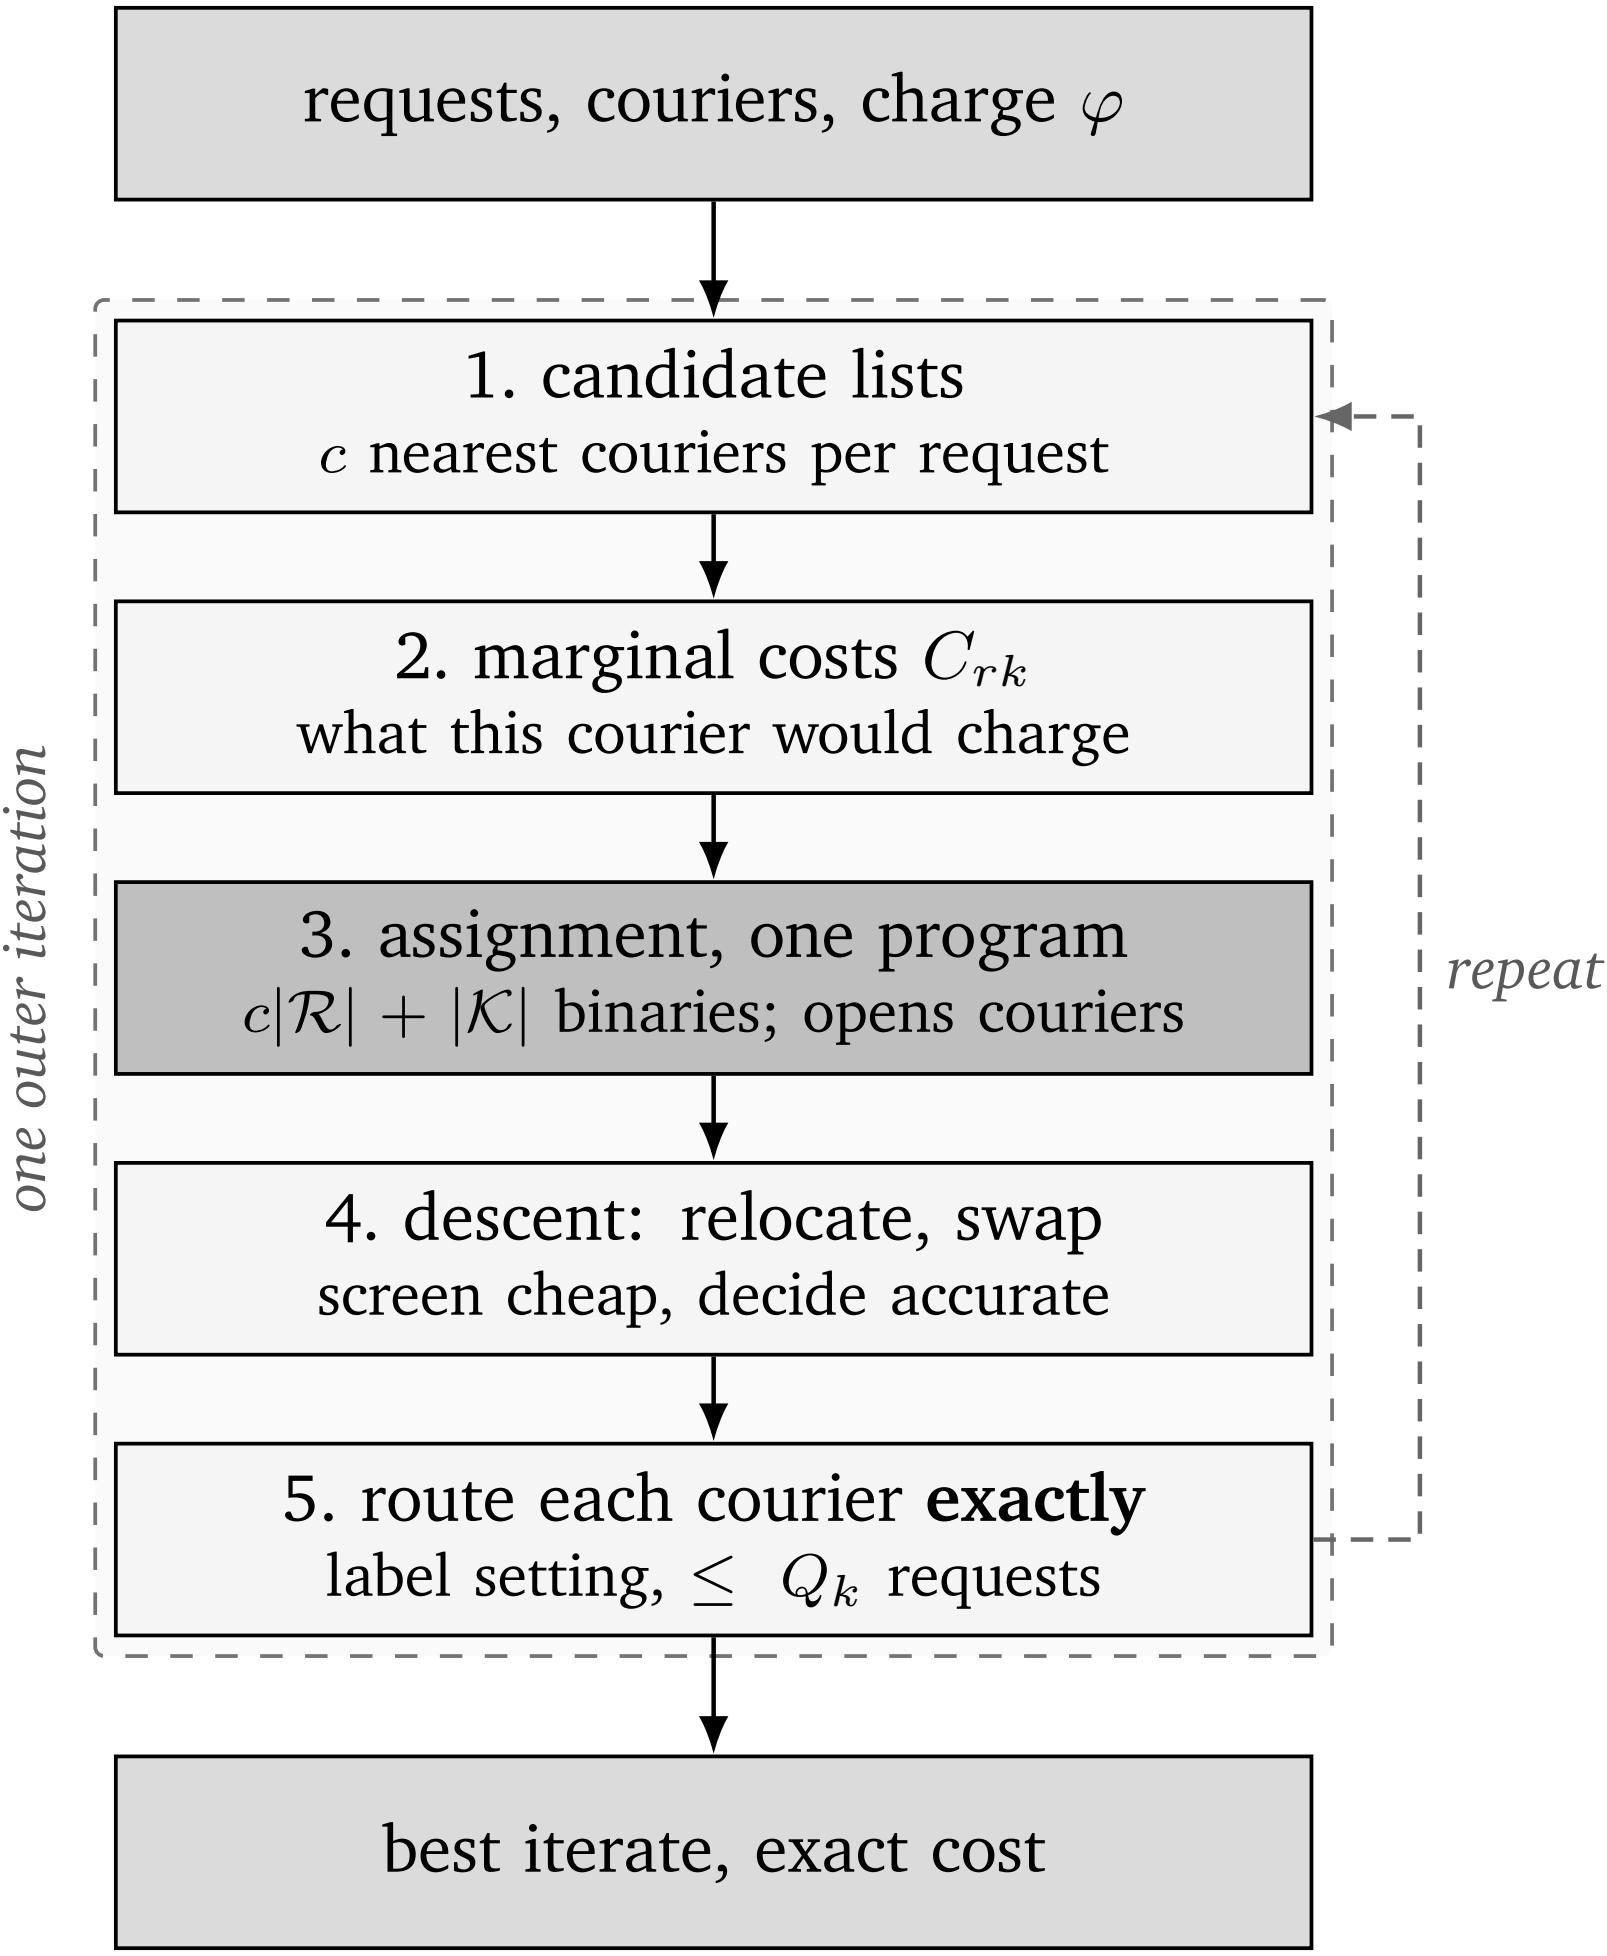

requests, couriers, charge φ
1. candidate lists
c nearest couriers per request
2. marginal costs C_{rk}
what this courier would charge
3. assignment, one program
$c|\mathcal{R}| + |\mathcal{K}|$ binaries; opens couriers
4. descent: relocate, swap
screen cheap, decide accurate
5. route each courier **exactly**
label setting, $\leq$ Q_k requests
best iterate, exact cost
one outer iteration
repeat