

The screenshot shows a code editor interface with a dark theme. On the left is the Explorer sidebar, which lists the project structure:


- SECOND-CLASS
  - node\_modules
  - public
  - src
    - components
      - about.js
      - contact.js
      - Form.css
      - form.js
      - home.js
      - register.js
    - app.js
    - index.js
  - package-lock.json
  - package.json
- OUTLINE
- TIMELINE


The file `app.js` is selected in the Explorer and is displayed in the main editor area. The code is a React component definition:

```
src > JS app.js > ...
1 import React from 'react';
2 import Form from './components/form.js';
3 import About from './components/about.js';
4 import Home from './components/home.js';
5 import Contact from './components/contact.js';
6 import Register from './components/register.js'
7 function App() {
8   return (
9     <div className="App">
10    <Form />
11    <About />
12    <Home />
13    <Contact />
14    <Register />
15  </div>
16);
17}
18
19 export default App;
```

The status bar at the bottom shows the following information:

- Bootstrap v5.3.7
- 0 △ 0
- Ln 20, Col 1
- Spaces: 2
- UTF-8
- CRLF

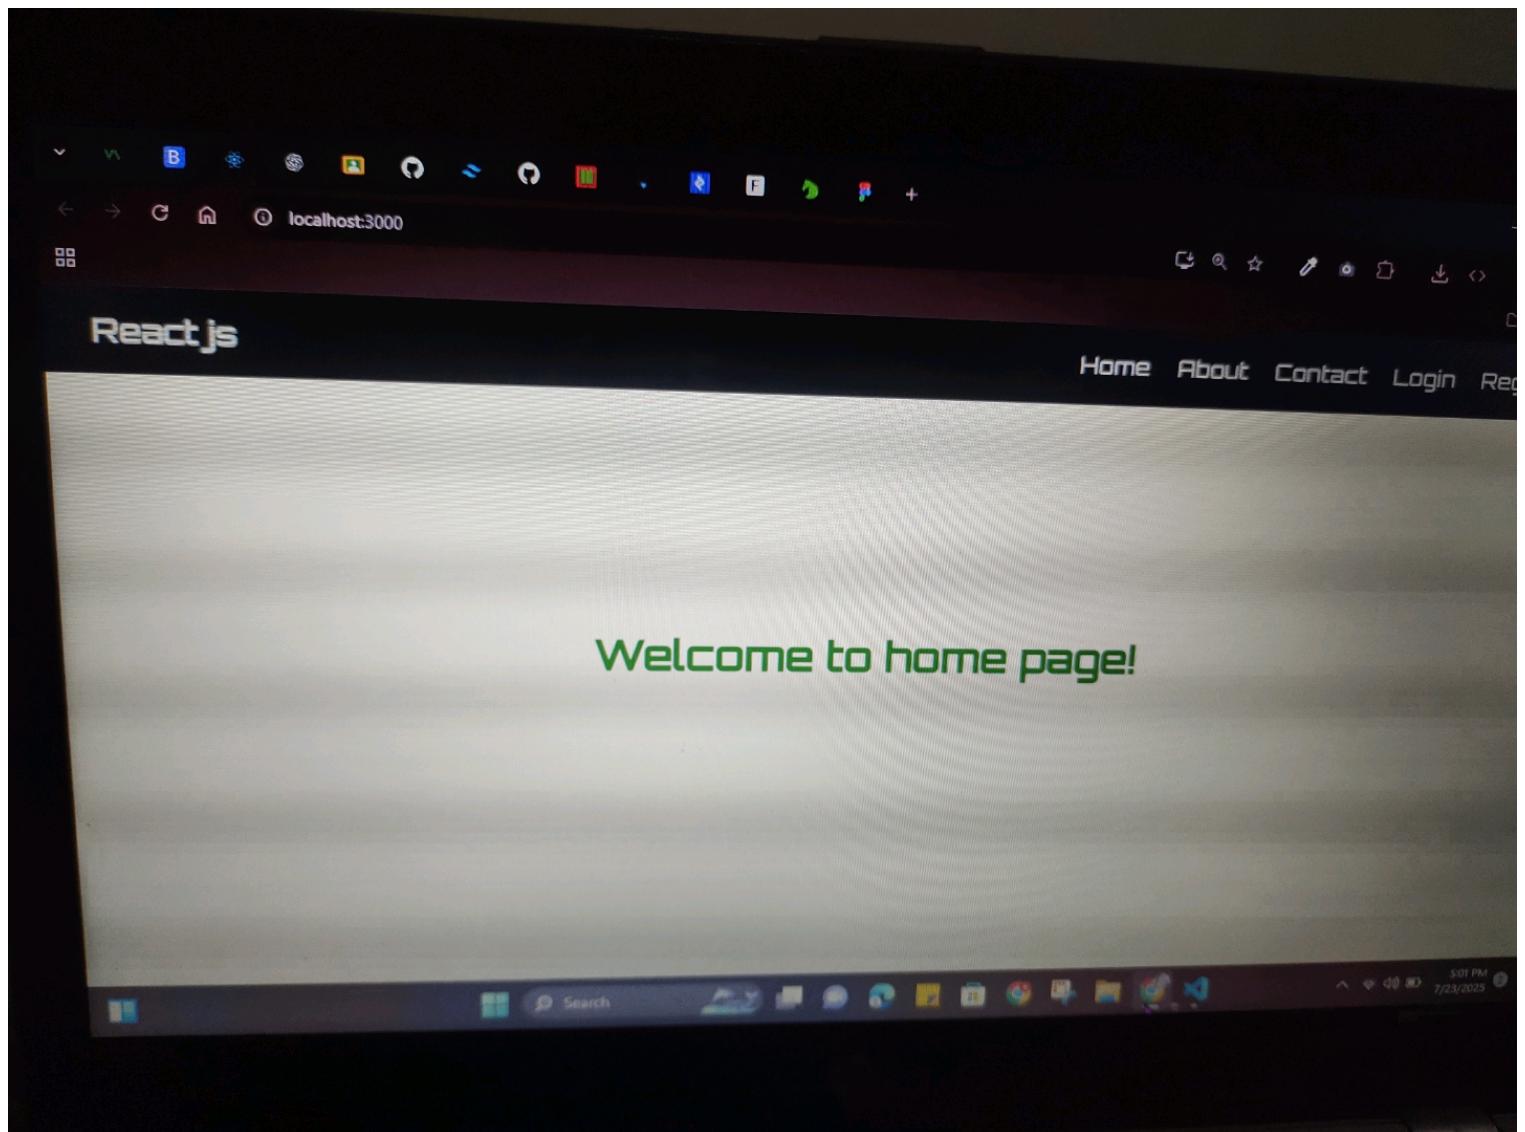

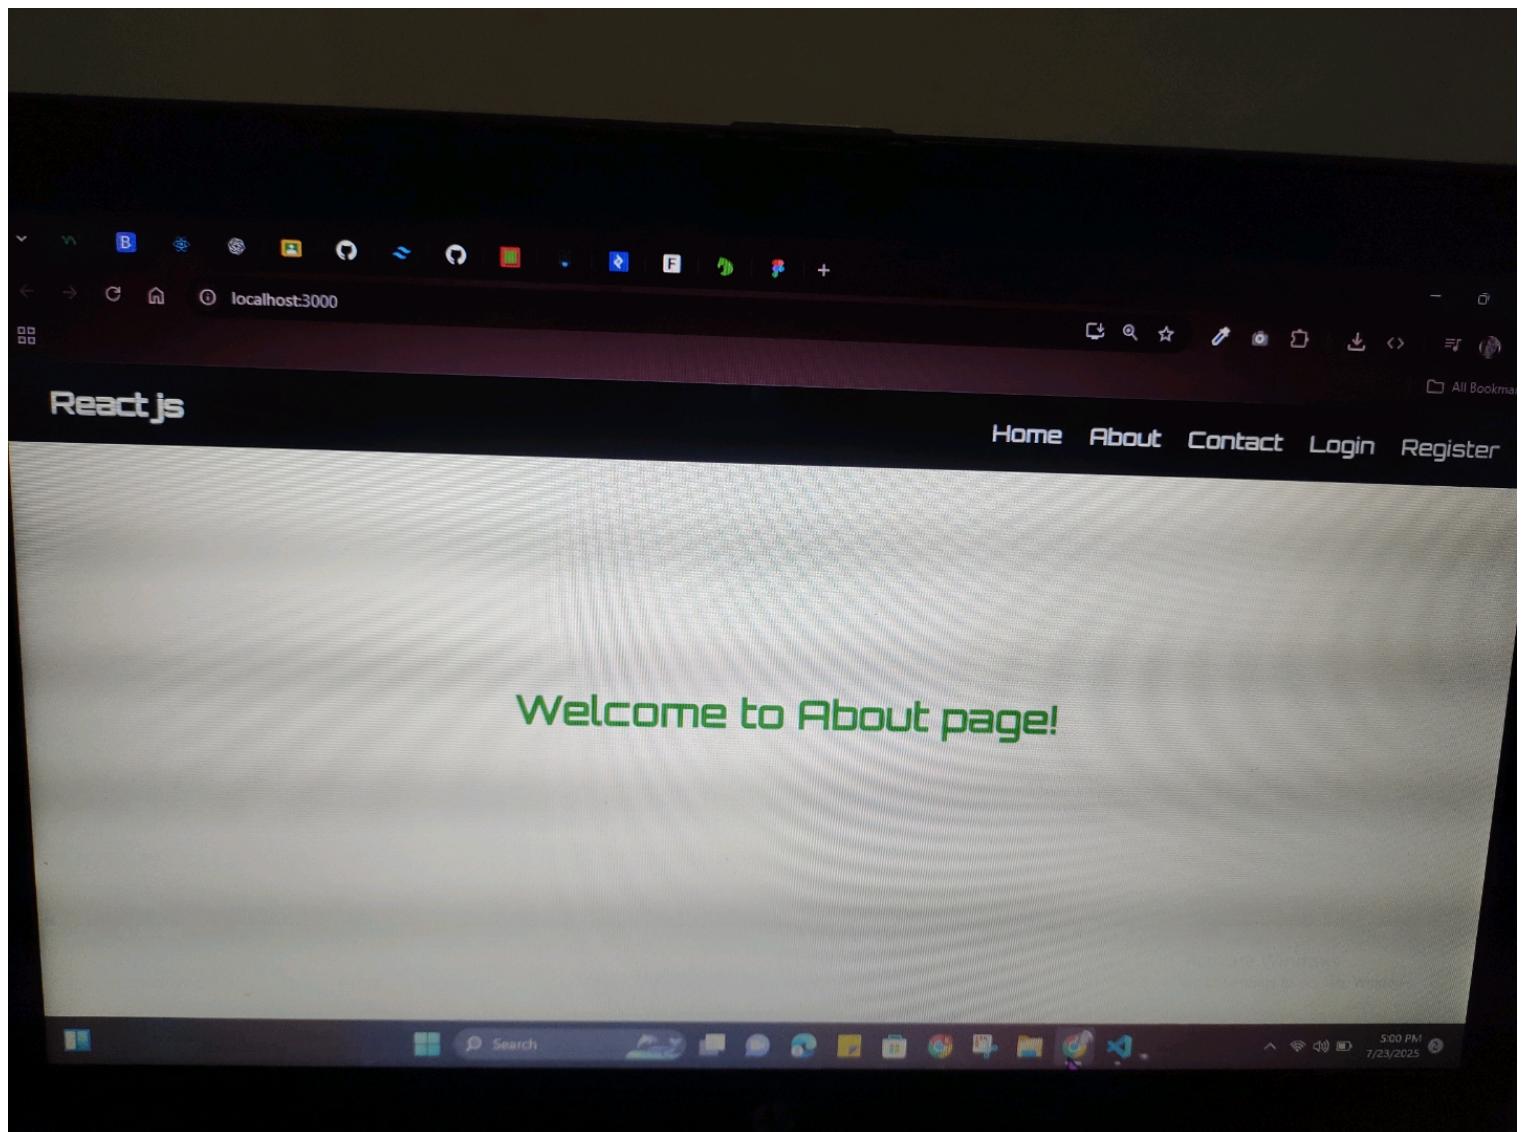


## Get in Touch

Name:

Email:

Message:

Send Message

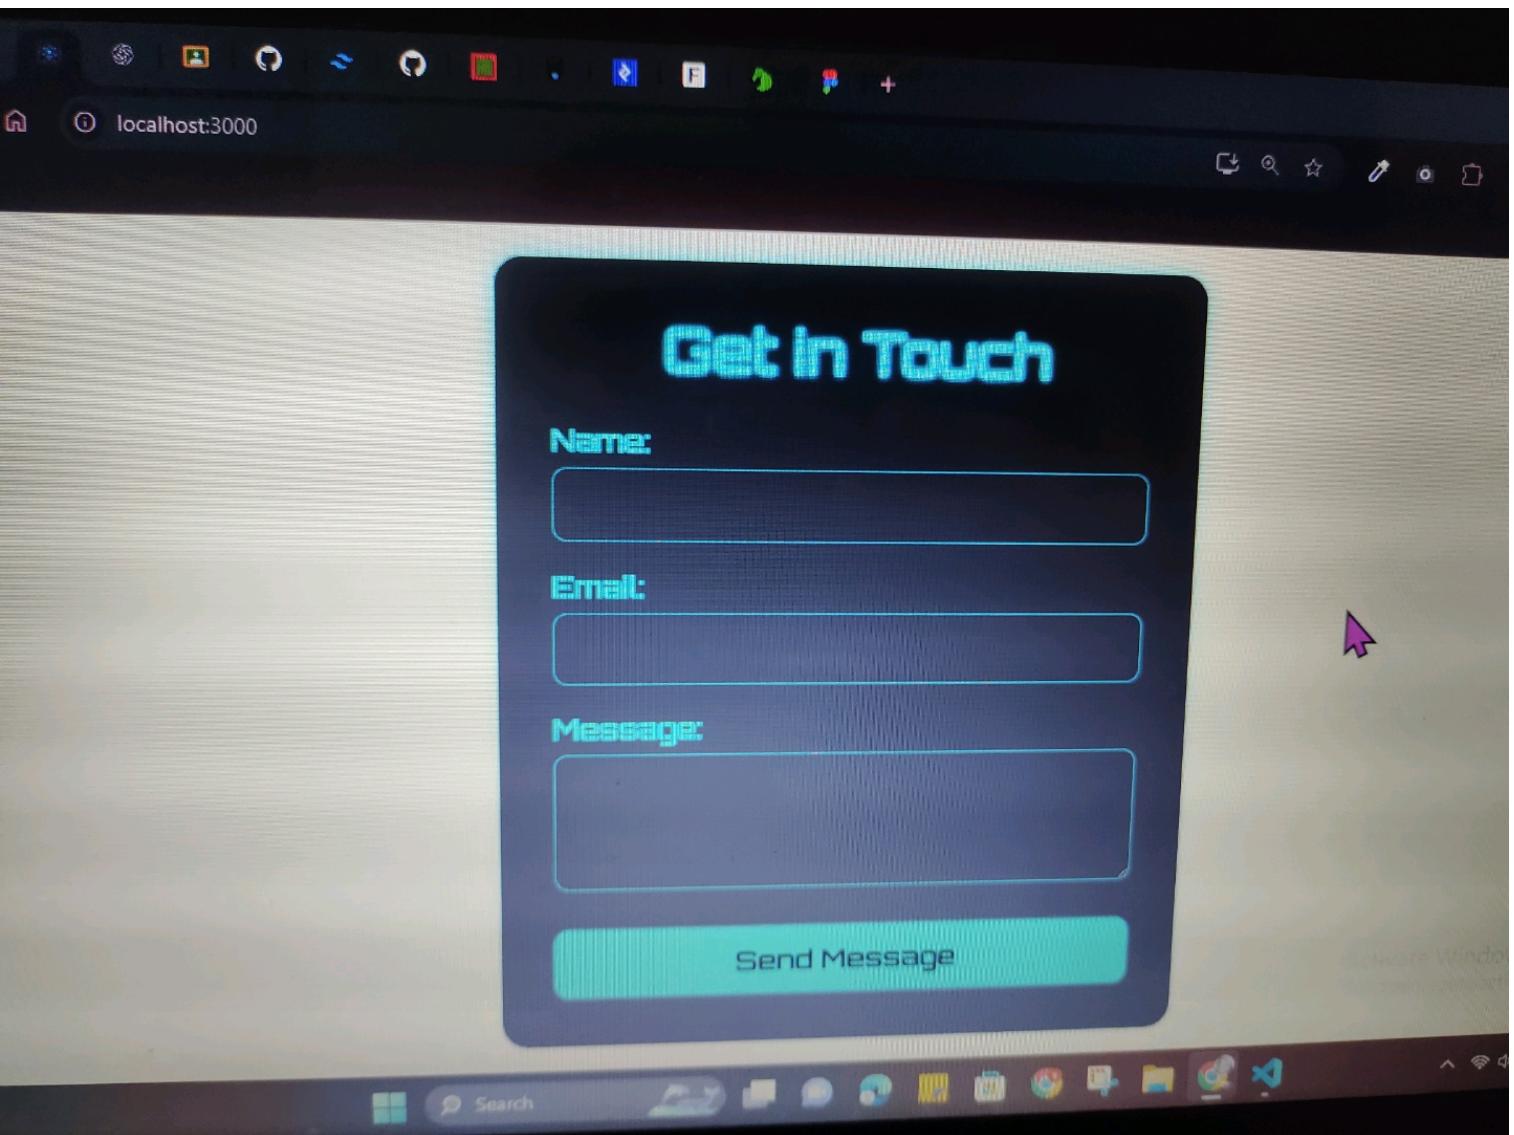

## Login

Username:

Email:

Password:

login

