




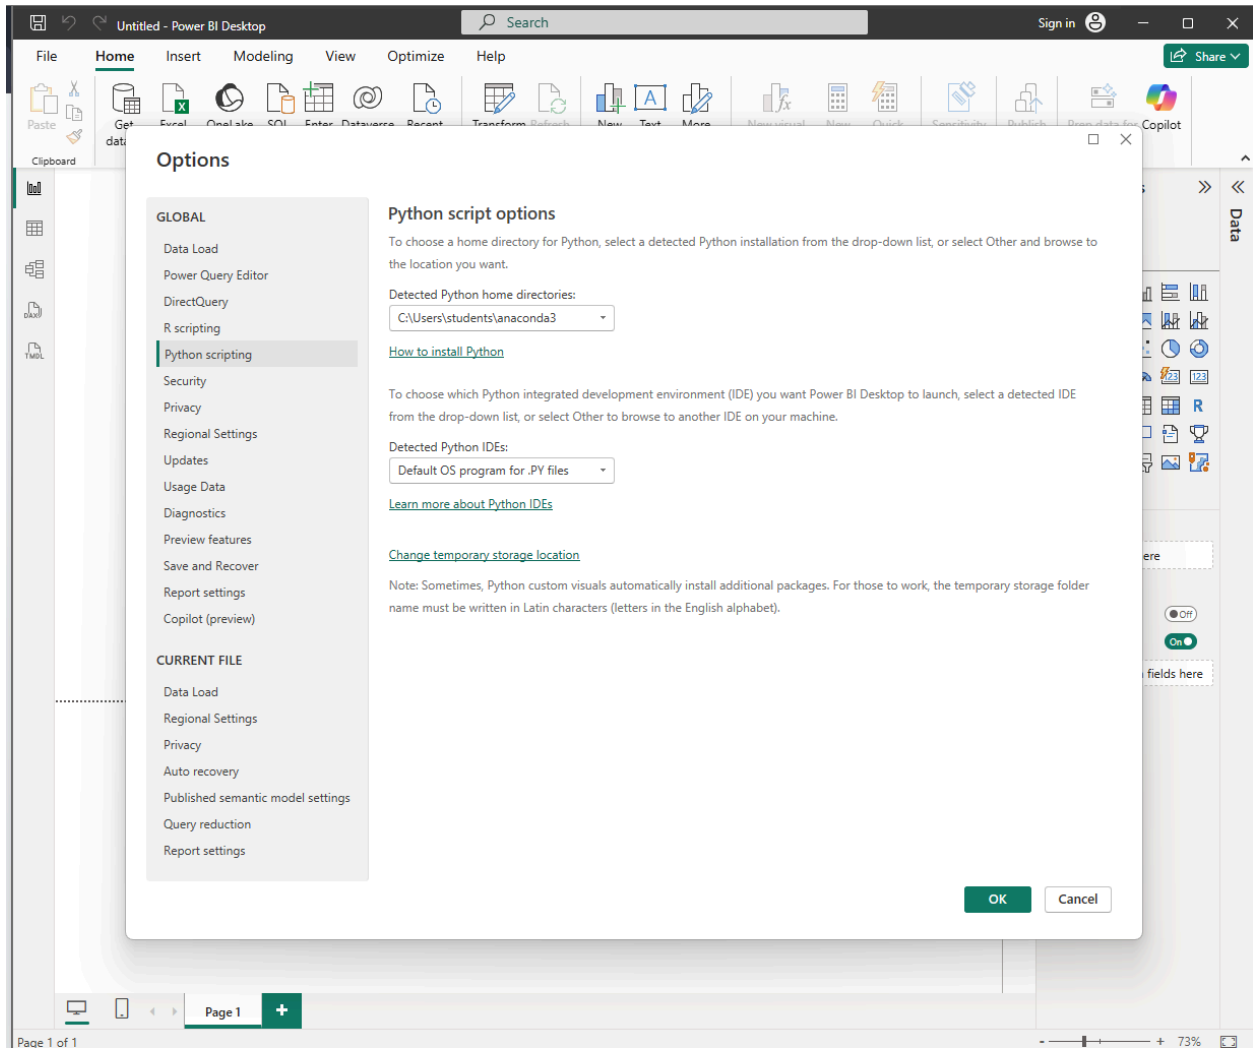

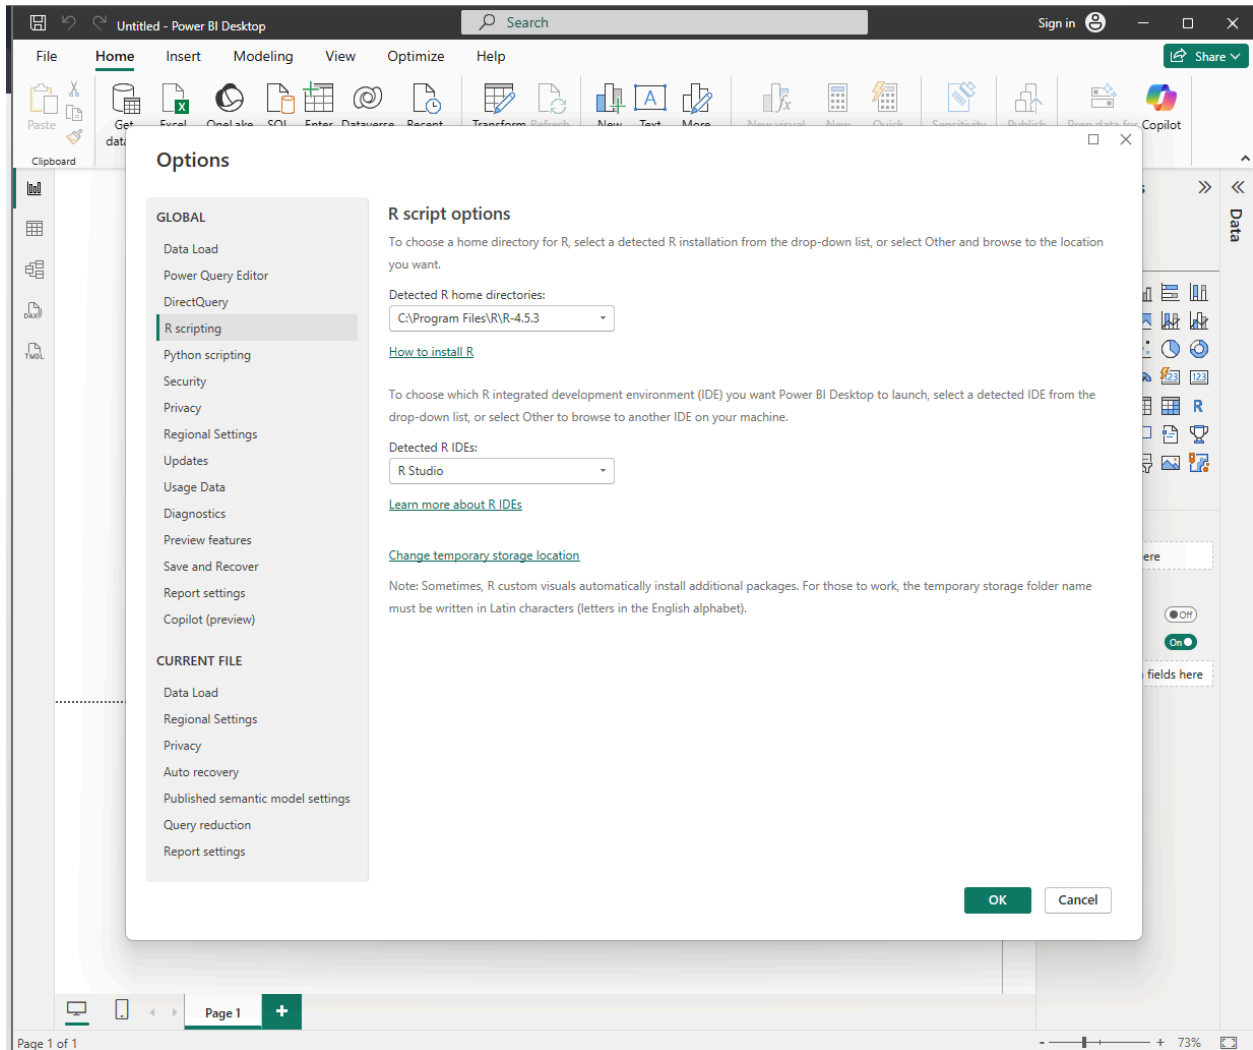

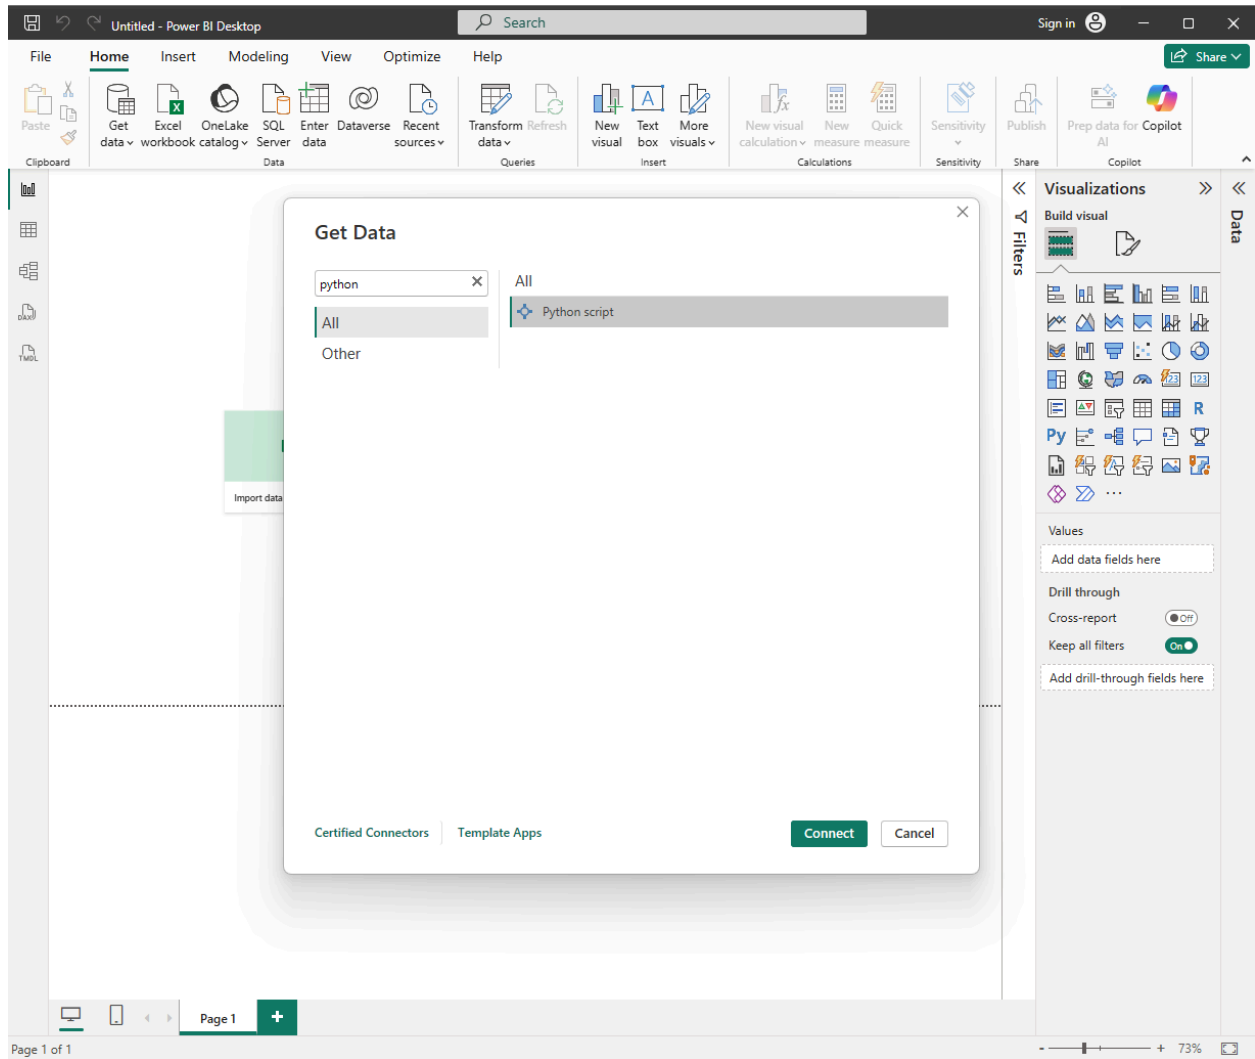

Untitled - Power BI Desktop

Search

Sign in

Share

File

Home

Insert

Modeling

View

Optimize

Help

Paste

Get data

Excel

OneLake

SQL Server

Enter data

Dataverse

Recent sources

Transform data

Refresh

New visual

Text box

More visuals

New visual calculation

New measure

Quick measure

Sensitivity

Publish

Prep data for Copilot AI

Clipboard

Data

Queries

Insert

Calculations

Sensitivity

Share

Copilot

Visualizations

Build visual

Filters

Values

Drill through

Cross-report

Keep all filters

Add drill-through fields here

Python script

Script

```
import pandas as pd

data = pd.DataFrame({
    'Hours_Studied': [1, 2, 3, 4, 5],
    'Marks': [35, 50, 65, 70, 90]
})

data
```

The script will run with the following Python installation C:\USERS\STUDENTS\ANACONDA3.  
To configure your settings and change which Python installation you want to run, go to Options and settings.


OK


Cancel

Page 1

73%



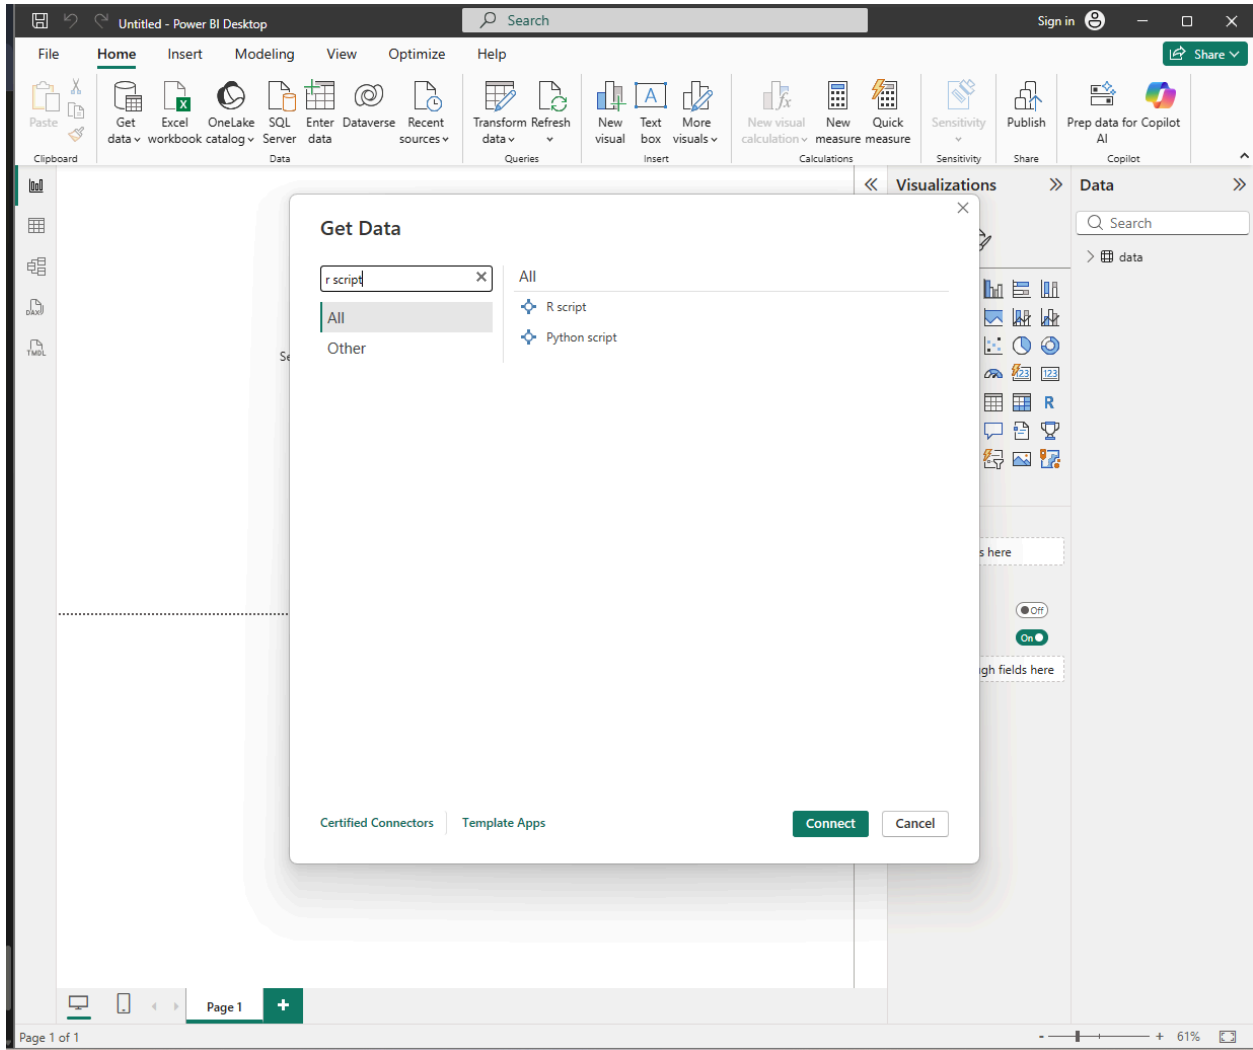

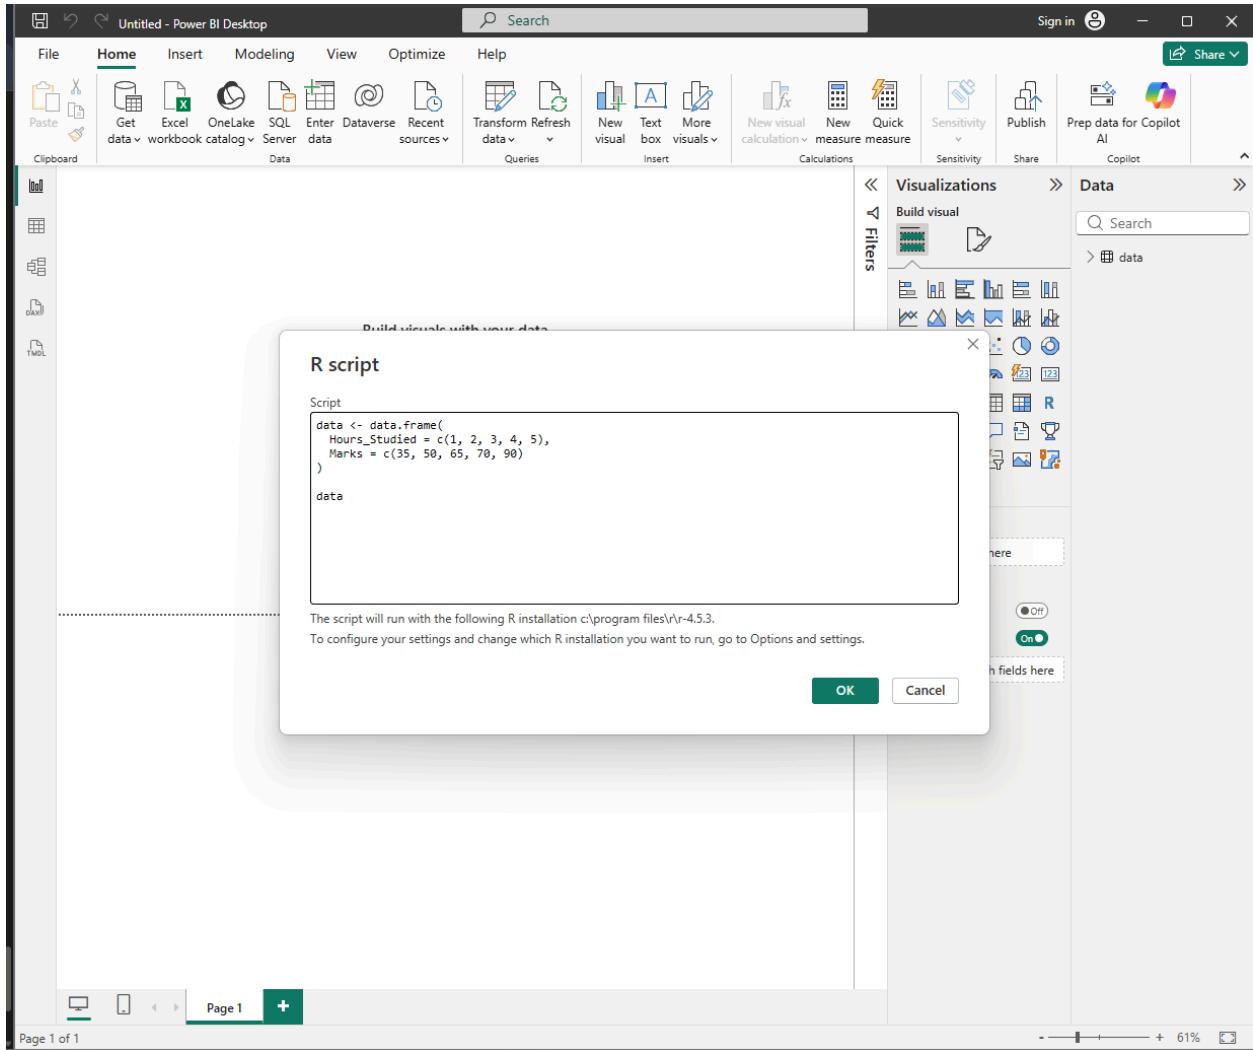

Untitled - Power BI Desktop

Search

Sign in

Share

FileHomeInsertModelingViewOptimizeHelp

Paste

Clipboard

Get data

Excel workbook

OneLake catalog

SQL Server

Enter data

Dataverse

Recent sources

Transform data

Refresh data

New visual

Text box

More visuals

New visual calculation

New measure

Quick measure

Sensitivity

Publish

Prep data for Copilot AI

Copilot

Navigator

Display Options

R [1]

☒ data

data

| Hours_Studied | Marks |
|---------------|-------|
| 1             | 35    |
| 2             | 50    |
| 3             | 65    |
| 4             | 70    |
| 5             | 90    |

Load

Transform Data

Cancel

Data

Search

data

Page 1

Page 1 of 1

61%



Untitled - Power BI Desktop

File Home Insert Modeling View Optimize Help Format Data / Drill Table tools

Name data

Structure

Hours\_Studied and Marks

Filters

Search

Filters on this visual

Hours\_Studied is (All)

Marks is (All)

Add data fields here

Filters on this page

Add data fields here

Visualizations

Build visual

Values

Hours\_Studied

Marks

Drill through

Cross-report

Keep all filters

Add drill-through fields here

Data

Search

data

Hours\_Studied

Marks

data (2)

Python script editor


Duplicate rows will be removed from the data.

```
1 # The following code to create a dataframe and remove duplicated rows is always executed and acts
  as a preamble for your script:
2
3 # dataset = pandas.DataFrame(Hours_Studied, Marks)
4 # dataset = dataset.drop_duplicates()
5
6 # Paste or type your script code here:
7 import matplotlib.pyplot as plt
8
9 plt.scatter(dataset['Hours_Studied'], dataset['Marks'])
10 plt.xlabel('Hours Studied')
11 plt.ylabel('Marks')
12 plt.title('Hours Studied vs Marks')
13 plt.show()
```


Page 1

Page 1 of 1

48%

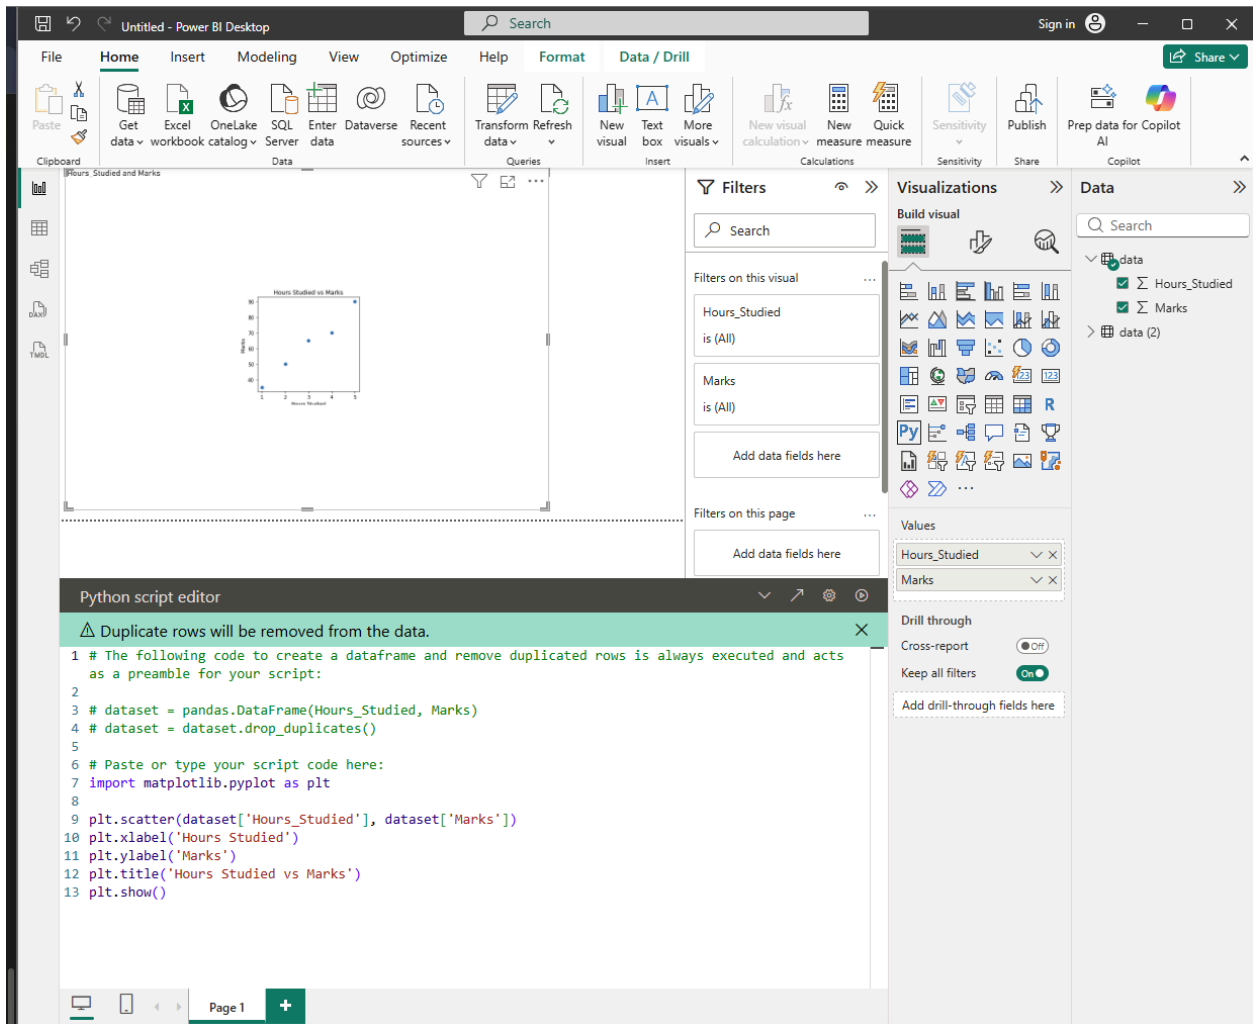

Hours Studied and Marks



Untitled - Power BI Desktop

File Home Insert Modeling View Optimize Help Format Data / Drill

Clipboard Get data Excel OneLake SQL Server Enter data Dataverse Recent sources Transform data Refresh Queries New visual Text box More visuals New visual calculation New measure Quick measure Sensitivity Publish Prep data for Copilot AI Copilot

Hours Studied vs Marks

Filters

Search

Filters on this visual

Hours\_Studied is (All)

Marks is (All)

Add data fields here

Filters on this page

Add data fields here

Visualizations

Build visual

Values

Hours\_Studied

Marks

Drill through

Cross-report

Keep all filters

Add drill-through fields here

Data

Search

data

Hours\_Studied

Marks

data (2)

R script editor


⚠ Duplicate rows will be removed from the data.


```
1 # The following code to create a dataframe and remove duplicated rows is always executed and acts
  # as a preamble for your script:
2
3 # dataset <- data.frame(Hours_Studied, Marks)
4 # dataset <- unique(dataset)
5
6 # Paste or type your script code here:
7 library(ggplot2)
8
9 ggplot(dataset, aes(x=Hours_Studied, y=Marks)) +
10   geom_point(color="blue", size=3) +
11   labs(title="Hours Studied vs Marks",
12        x="Hours Studied",
13        y="Marks")
```

Page 1 Page 2

Page 2 of 2

48%

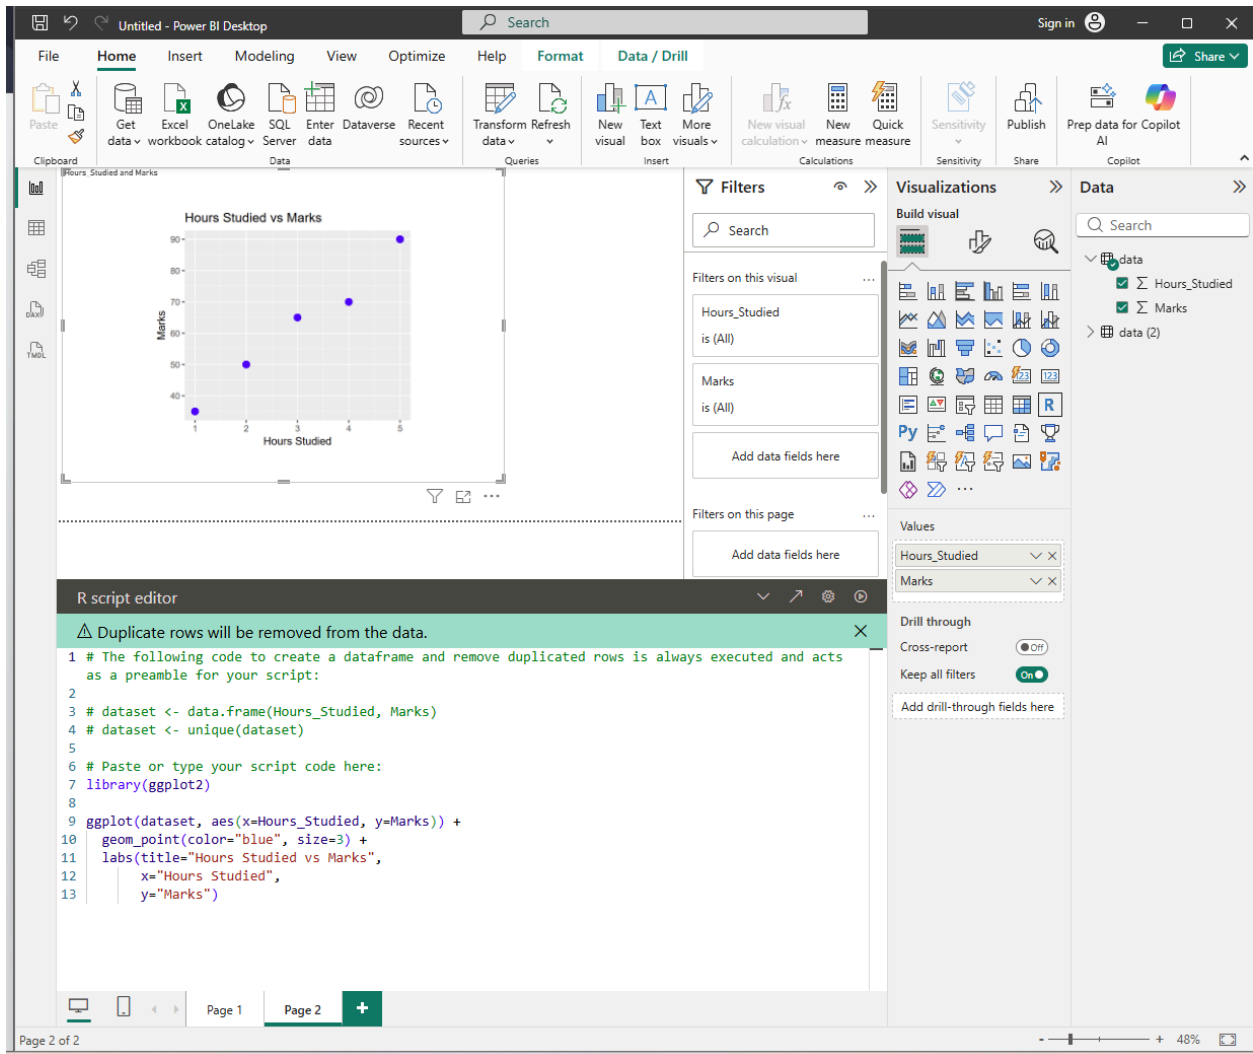

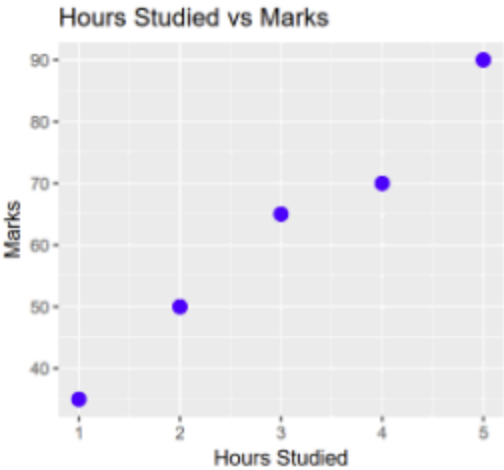

FileHomeTransformAdd ColumnViewToolsHelp

Group ByUse First Row as HeadersCount Rows

TransposeReverse Rows

Table

Any Column

Split ColumnFormatText Column

Merge ColumnsExtractParse

StatisticsStandard Scientific

Number Column

TrigonometryRoundingInformation

DateTimeDuration

Run R scriptRun Python script

Queries [2]

data

data (2)

fx

= Table.TransformColumnTypes(data1,{{"Hours\_Studied", Int64.Type}, {"Marks", Int64.Type}})

Hours\_Studied

Marks

135

250

365

470

590

Query Settings

PROPERTIES

Name

data

All Properties

APPLIED STEPS

Source

Navigation

Changed Type

Run Python script

Enter Python scripts into the editor to transform and shape your data.

Script

```
# 'dataset' holds the input data for this script
from sklearn.linear_model import LinearRegression

df = dataset.copy()

X = df[['Hours_Studied']]
y = df['Marks']

model = LinearRegression()
model.fit(X, y)

df['Predicted'] = model.predict(X)
```

The script will run with the following Python installation C:\USERS\STUDENTS\ANACONDA3.  
To configure your settings and change which Python installation you want to run, go to Options and settings.

OKCancel

2 COLUMNS, 5 ROWS Column profiling based on top 1000 rows

PREVIEW DOWNLOADED AT 04:34

Untitled - Power Query Editor

FileHomeTransformAdd ColumnViewToolsHelp

Group By

Use First Row as Headers

Count Rows

Transpose

Reverse Rows

Detect Data Type

Rename

Split Column

Format

ABC 123 Extract

Parse

Merge Columns

Statistics

Standard

Scientific

Information

10<sup>2</sup>

Trigonometry

Rounding

Date

Time

Duration

Date & Time Column

Run R script

Run Python script

Scripts

Queries [2]

data

data (2)

Python.Execute("# 'dataset' holds the input data for this script#(1f)from

AB Name

Value

1datasetTable

2dfTable

3XTable

Hours\_Studied

Marks

135

250

365

470

590

Query Settings

PROPERTIES

Name

data

All Properties

APPLIED STEPS

Source

Navigation

Changed Type

Run Python script

2 COLUMNS, 3 ROWS

Column profiling based on top 1000 rows

PREVIEW DOWNLOADED AT 04:34



FileHomeTransformAdd ColumnViewToolsHelp

Close & ApplyClose

New SourceNew Query

Recent Sources

Enter Data

Data source settingsData Sources

Manage ParametersParameters

Export query resultsOutput Data

Refresh PreviewQuery

PropertiesAdvanced EditorManage

Choose ColumnsManage Columns

Remove Columns

Keep RowsReduce Rows

Remove Rows

Sort

Split ColumnGroup By

12Replace ValuesTransform

Combine

Queries [2]

data

data (2)

fx

= Table.TransformColumnTypes(df,{"Hours\_Studied", Int64.Type}, {"Marks", Int64.Type},

12Hours\_Studied12Marks1.2Predicted

|   |   |    |    |
|---|---|----|----|
| 1 | 1 | 35 | 36 |
| 2 | 2 | 50 | 49 |
| 3 | 3 | 65 | 62 |
| 4 | 4 | 70 | 75 |
| 5 | 5 | 90 | 88 |

Query Settings

PROPERTIES

Name

data

All Properties

APPLIED STEPS

Source

Navigation

Changed Type

Run Python script


df

Changed Type1

3 COLUMNS, 5 ROWSColumn profiling based on top 1000 rowsPREVIEW DOWNLOADED AT 04:34

3 COLUMNS, 5 ROWS Column profiling based on top 1000 rows

PREVIEW DOWNLOADED AT 04:34

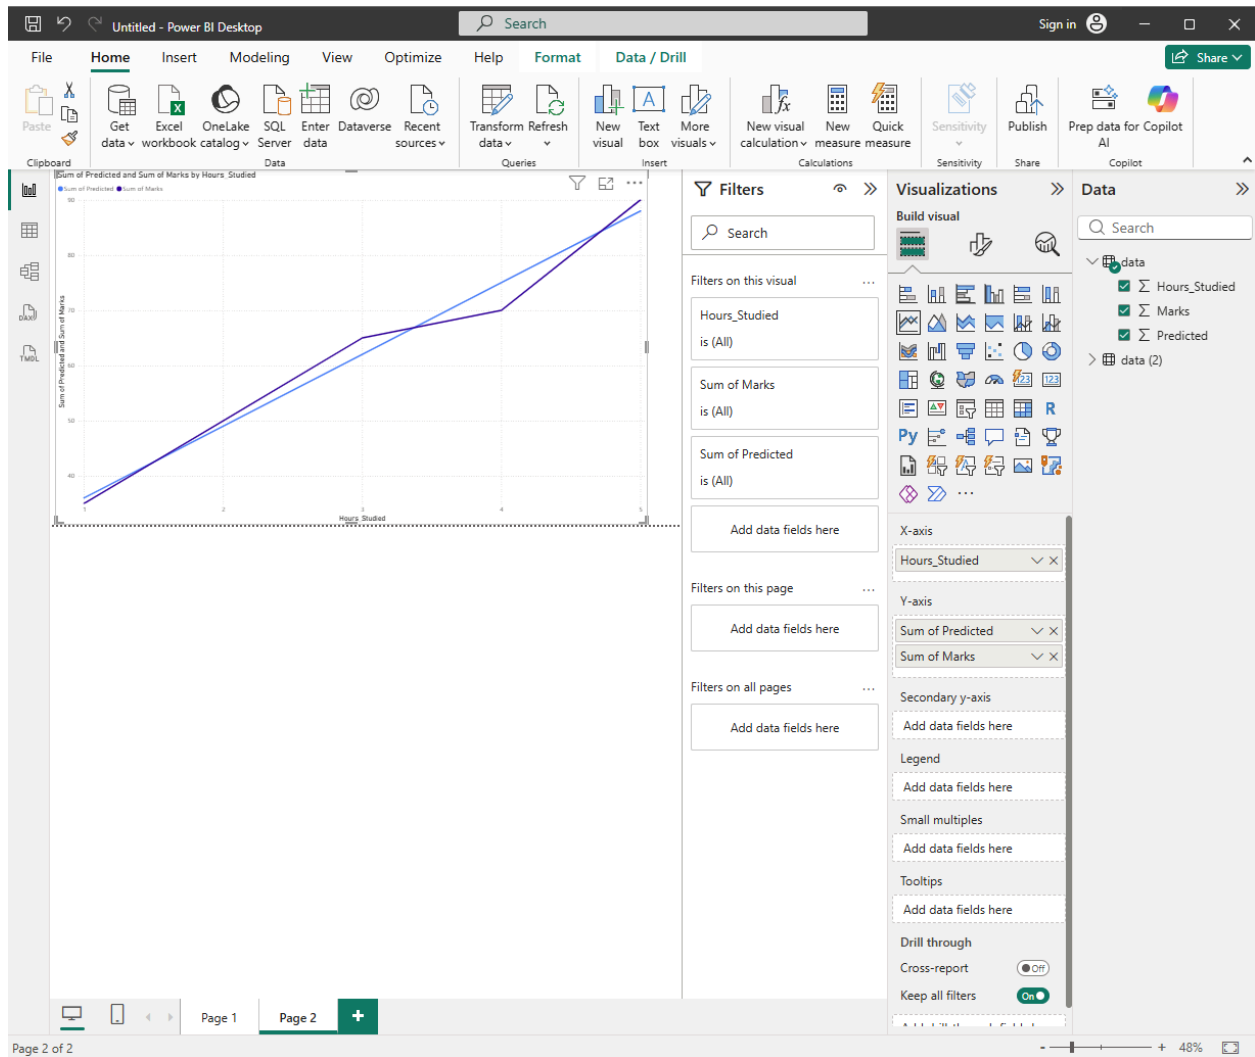

Untitled - Power Query Editor

File Home Transform Add Column View Tools Help

Close & Apply New Source Recent Sources Enter Data Data source settings Manage Parameters Export query results Refresh Preview Properties Advanced Editor Choose Columns Remove Columns Keep Rows Remove Rows Sort Split Column Group By Data Type: Whole Number Use First Row as Headers Replace Values Combine

Queries [2]

data

data (2)

Table.TransformColumnTypes(df,{{"Hours\_Studied", Int64.Type}, {"Marks", Int64.Type},

|   | Hours_Studied | Marks | 1.2 | Predicted |
|---|---------------|-------|-----|-----------|
| 1 | 1             | 35    |     | 36        |
| 2 | 2             | 50    |     | 49        |
| 3 | 3             | 65    |     | 62        |
| 4 | 4             | 70    |     | 75        |
| 5 | 5             | 90    |     | 88        |

Query Settings

PROPERTIES

Name

data

All Properties

APPLIED STEPS

Source

Navigation

Type

Python script

Type1

### Python script

Script

```
import pandas as pd
from sklearn.cluster import KMeans

df = pd.DataFrame({
    'Hours_Studied': [1,2,3,4,5],
    'Marks': [35,50,65,70,90]
})

kmeans = KMeans(n_clusters=2, random_state=0, n_init=10)
df['cluster'] = kmeans.fit_predict(df[['Hours_Studied', 'Marks']])
df
```

The script will run with the following Python installation C:\USERS\STUDENTS\ANACONDA3.  
To configure your settings and change which Python installation you want to run, go to Options and settings.

OK Cancel

3 COLUMNS, 5 ROWS Column profiling based on top 1000 rows

PREVIEW DOWNLOADED AT 04:34

Untitled - Power Query Editor

File Home Transform Add Column View Tools Help

Close & Apply Close New Source Recent Sources Enter Data Data source settings Manage Parameters Export query results Refresh Preview Properties Advanced Editor Choose Columns Remove Columns Keep Rows Remove Rows Sort Split Column Group By Data Type: Whole Number Use First Row as Headers Replace Values Combine

Queries [2] data data (2)

Table.TransformColumnTypes(df,{{"Hours\_Studied", Int64.Type}, {"Marks", Int64.Type},

Query Settings

PROPERTIES


df


| Hours_Studied | Marks | Cluster |
|---------------|-------|---------|
| 1             | 35    | 1       |
| 2             | 50    | 1       |
| 3             | 65    | 0       |
| 4             | 70    | 0       |
| 5             | 90    | 0       |


OK Cancel

3 COLUMNS, 5 ROWS Column profiling based on top 1000 rows

PREVIEW DOWNLOADED AT 04:34

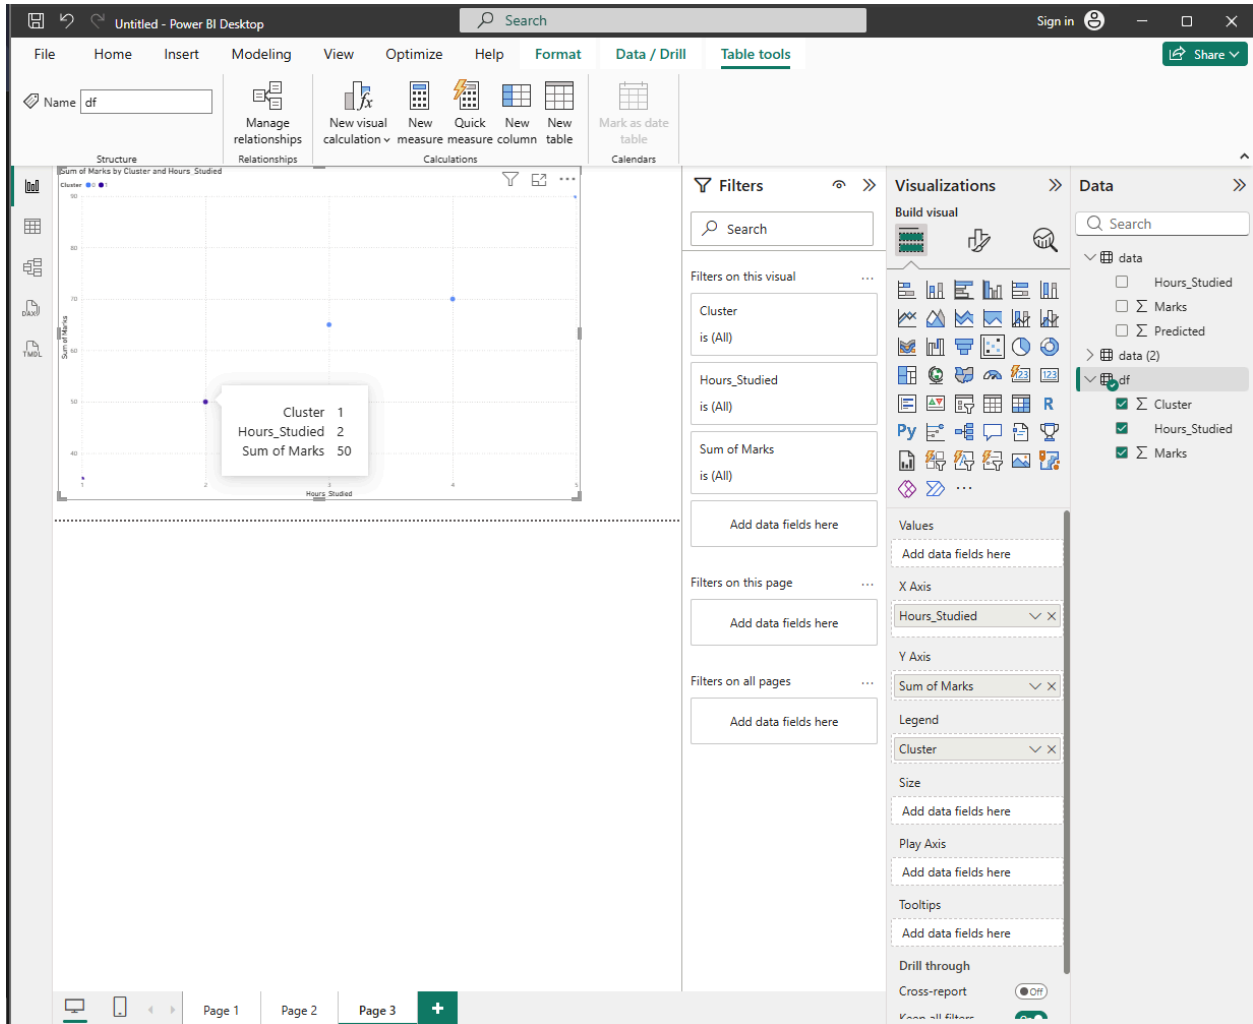

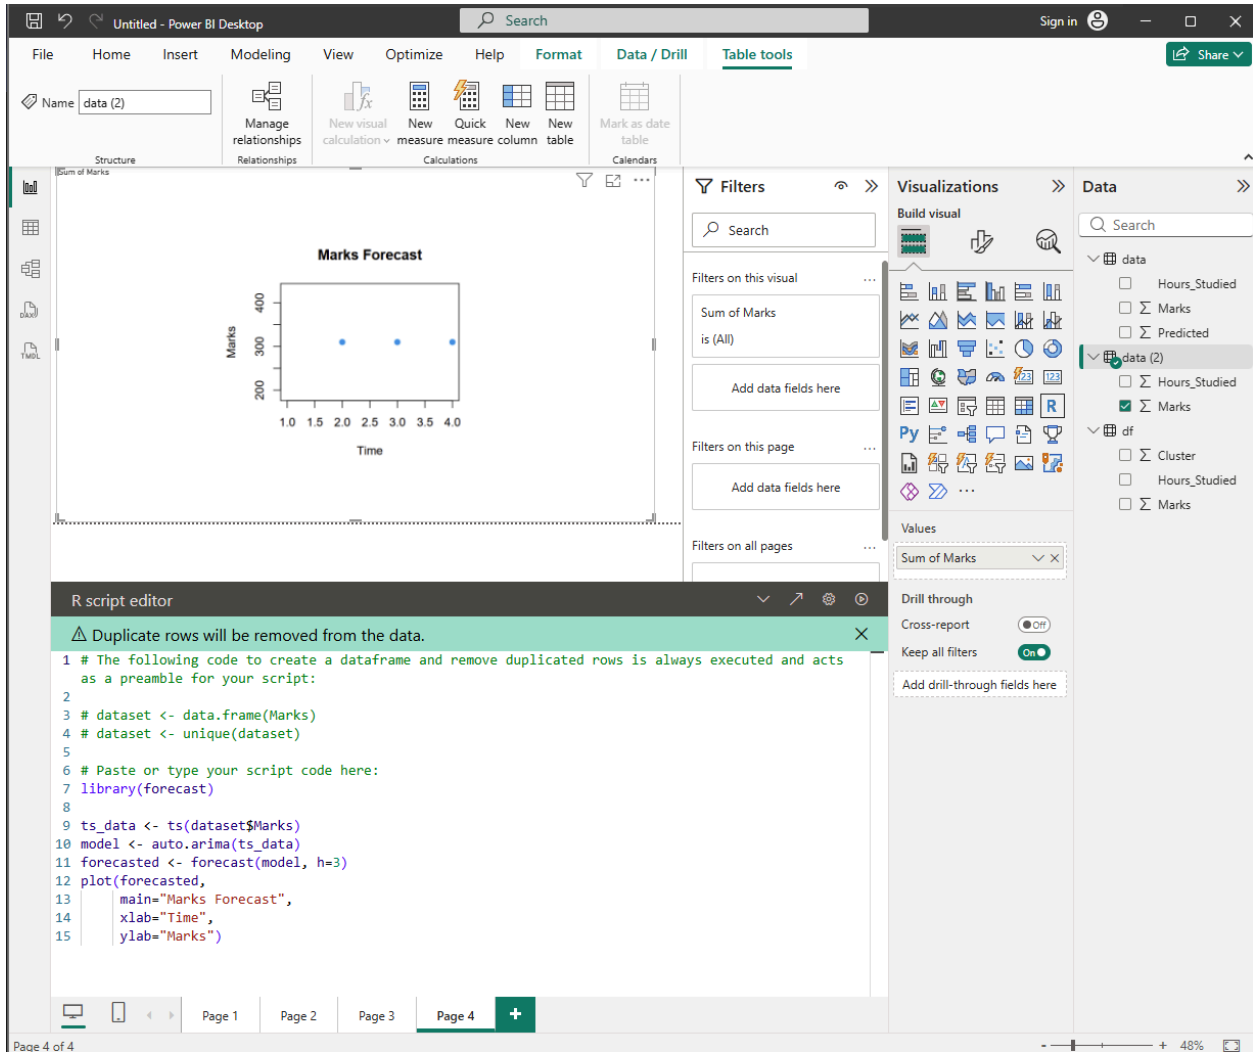

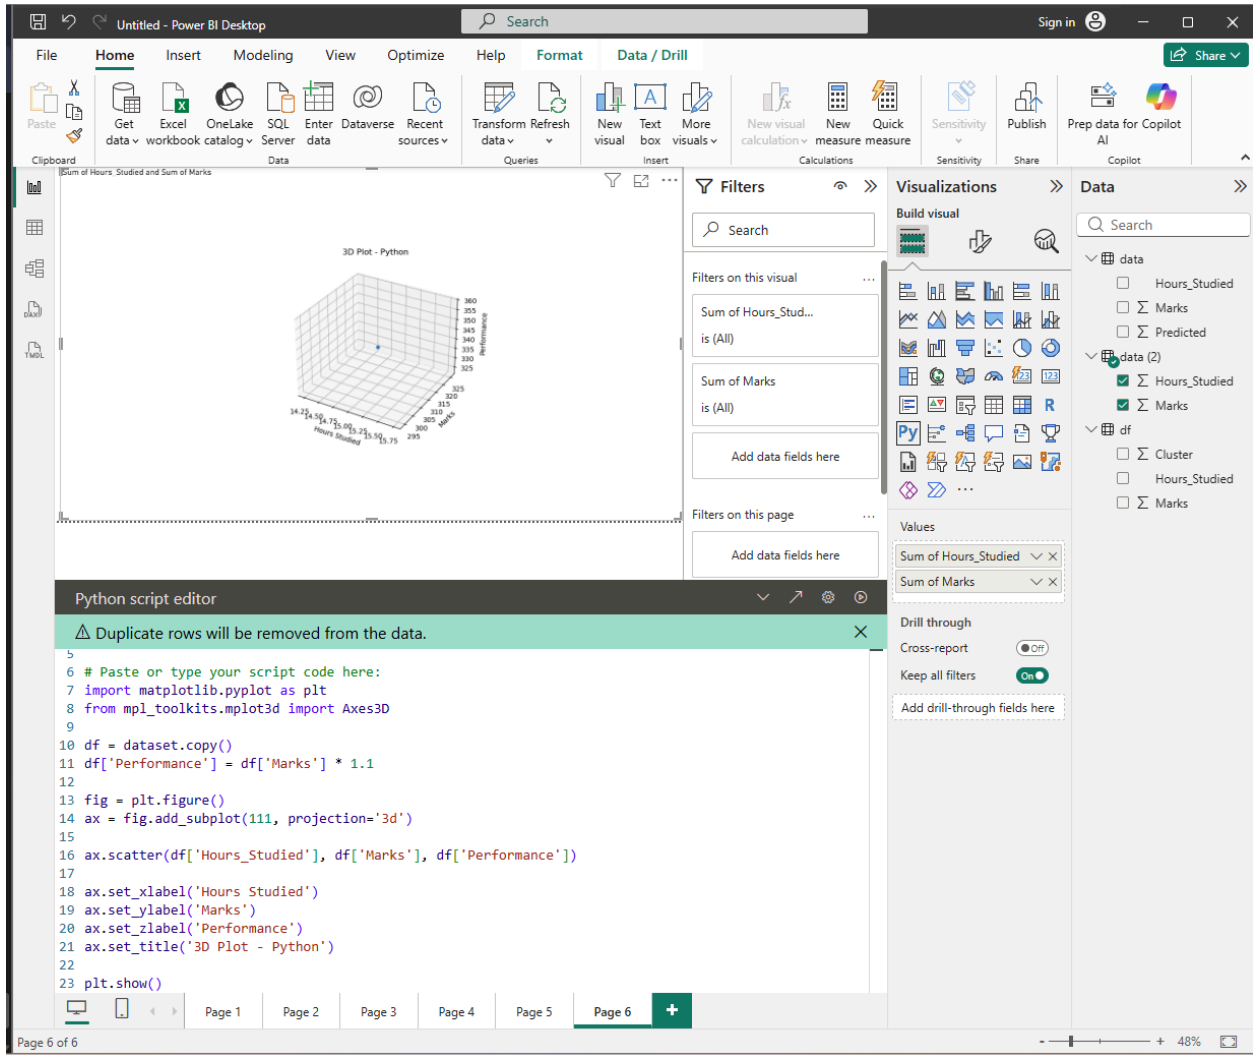

3D Plot - Python

