

## **PROGRAM - 1**

### **AIM**

Print your name to the screen with every letter being a different heading size

### **SOURCE CODE**

```
<html>
<head>Program 1</head>
<body>
  <h1>S</h1><h2>A</h2><h3>N</h3><h4>I</h4><h5>T</h5><h6>A</h6>
</body>
</html>
```

### **OUTPUT**

Program 1

**S**

**A**

**N**

**I**

**T**

**A**

### **RESULT**

The program has been executed successfully and output is obtained.

## PROGRAM – 2

### AIM

Display the following text:

H<sub>2</sub>O

12<sup>th</sup> April 2016


HTML stands for High Text Markup Language

He said <I am fine>

### SOURCE CODE

```
<html>
<body>
H<sub>2</sub>O
<br>
12<sup>th</sup>April 2016
<br>
HTML stands for <strike>Hyper Text Markup Language</strike>
<br>
<pre><big>He said</big> <<font size=7><b>I am fine</b></font>></pre>
</body>
</html>
```

### OUTPUT

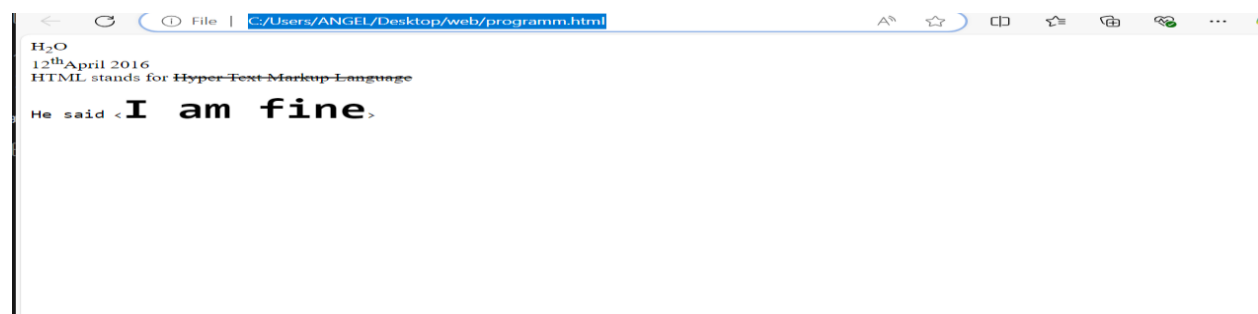

### RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 3

### AIM

Print a paragraph with 4 - 5 sentences. Each sentence should be a different font.

### SOURCE CODE

```
<html>
<body>
<p><font size="6" face="Arial" color="red">Web programming refers to the writing,markup
and coding involved in Web development, which includes Web content, Web client and
server scripting and network security.</font><font size="5" color="blue" face="Times New
Roman"> The most common languages used for Web programming are XML, HTML,
JavaScript, Perl 5 and PHP.</font><font size="3" color="green" face="Aachen Bold"> Web
programming is different from just programming, which requires interdisciplinary knowledge
on the application area, client and server scripting, and database technology.</font></p>
</body>
</html>
```

### OUTPUT



---

### RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 4

### AIM

Print a paragraph that is a description of a book, include the title of the book as well as its author. Names and titles should be underlined, adjectives should be italicized and bolded.

### SOURCE CODE

```
<html>

<body>

<center><u>

<h2>The wings of fire</h2>

<font size="3">Author : Dr. A.P.J Abdul Kalam, Arun Tiwari</font></u>

</center>

<p><i><b>Wings of Fire (1999), is the autobiography of the Missile Man of India and
President of India, Dr. A. P. J. Abdul Kalam. It was written by him and Arun Tiwari.In the
autobiography, Kalam examines his early life, effort, hardship, fortitude, luck and chance that
eventually led him to lead Indian space research, nuclear and missile programs. Kalam started
his career, after graduating from Aerospace engineering at Madras Institute of Technology, at
Hindustan Aeronautics Limited and was assigned to build a hovercraft prototype. Later he
moved to ISRO and helped establish the Vikram Sarabhai Space Centre and pioneered the first
space launch-vehicle program. During the 1990s and early 2000, Kalam moved to the DRDO
to lead the Indian nuclear weapons program, with particular successes in thermonuclear
weapons development culminating in the operation Smiling Buddha and an ICBM
Agni.</i></b></p>

</body>

</html>
```

### OUTPUT

### **The wings of fire**

Author : Dr. A.P.J Abdul Kalam, Arun Tiwari

*Wings of Fire (1999), is the autobiography of the Missile Man of India and President of India, Dr. A. P. J. Abdul Kalam. It was written by him and Arun Tiwari. In the autobiography, Kalam examines his early life, effort, hardship, fortitude, luck and chance that eventually led him to lead Indian space research, nuclear and missile programs. Kalam started his career, after graduating from Aerospace engineering at Madras Institute of Technology, at Hindustan Aeronautics Limited and was assigned to build a hovercraft prototype. Later he moved to ISRO and helped establish the Vikram Sarabhai Space Centre and pioneered the first space launch-vehicle program. During the 1990s and early 2000, Kalam moved to the DRDO to lead the Indian nuclear weapons program, with particular successes in thermonuclear weapons development culminating in the operation Smiling Buddha and an ICBM Agni.*

---

## **RESULT**

The program has been executed successfully and output is obtained.

## **PROGRAM – 5**


### **AIM**

Print two lists with any information you want. One list should be an ordered list, the other list should be an unordered list.

### **SOURCE CODE**

```
<html>
<body>
<p>Programming Languages</p>
<ol type="i">
<li>C
<li>C++
<li>java
<li>Python
</ol>
<p>Courses</p>
<ul type="square">
<li>BTech
<li>MTech
<li>MBA
<li>MCA
<li>PhD
</ul>
</body>
</html>
```

### **OUTPUT**

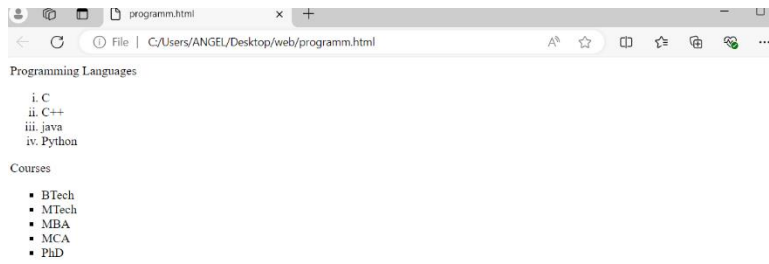

---

## **RESULT**

The program has been executed successfully and output is obtained.

## PROGRAM – 6

### AIM

Prints 10 names with a line break between each name. The list should be alphabetized, and to do this place a subscripted number next to each name based on where it will go in the alphabetized list. (Example: Alan<sub>1</sub>). Print first, the unalphabetized list with a subscript number next to each name, then the alphabetized list. Both lists should have an <h1> level heading.


### SOURCE CODE

```
<html>
<body>
<h1>Unalphabetized list</h1>
Alan<sub>3</sub><br>
Angela<sub>5</sub><br>
Anjala<sub>6</sub><br>
Sandra<sub>7</sub><br>
Vicky<sub>9</sub><br>
Tom<sub>8</sub><br>
Wilfred<sub>10</sub><br>
James<sub>4</sub><br>
Adam<sub>1</sub><br>
Anna<sub>2</sub>
<h1>Alphabetized list</h1>
Adam<br>
Anna<br>
Alan<br>
James<br>
Angela<br>
Anjala<br>
Sandra<br>
Tom<br>
```



```
Vicky<br>
Wilfred<br>
</body>
</html>
```

## OUTPUT

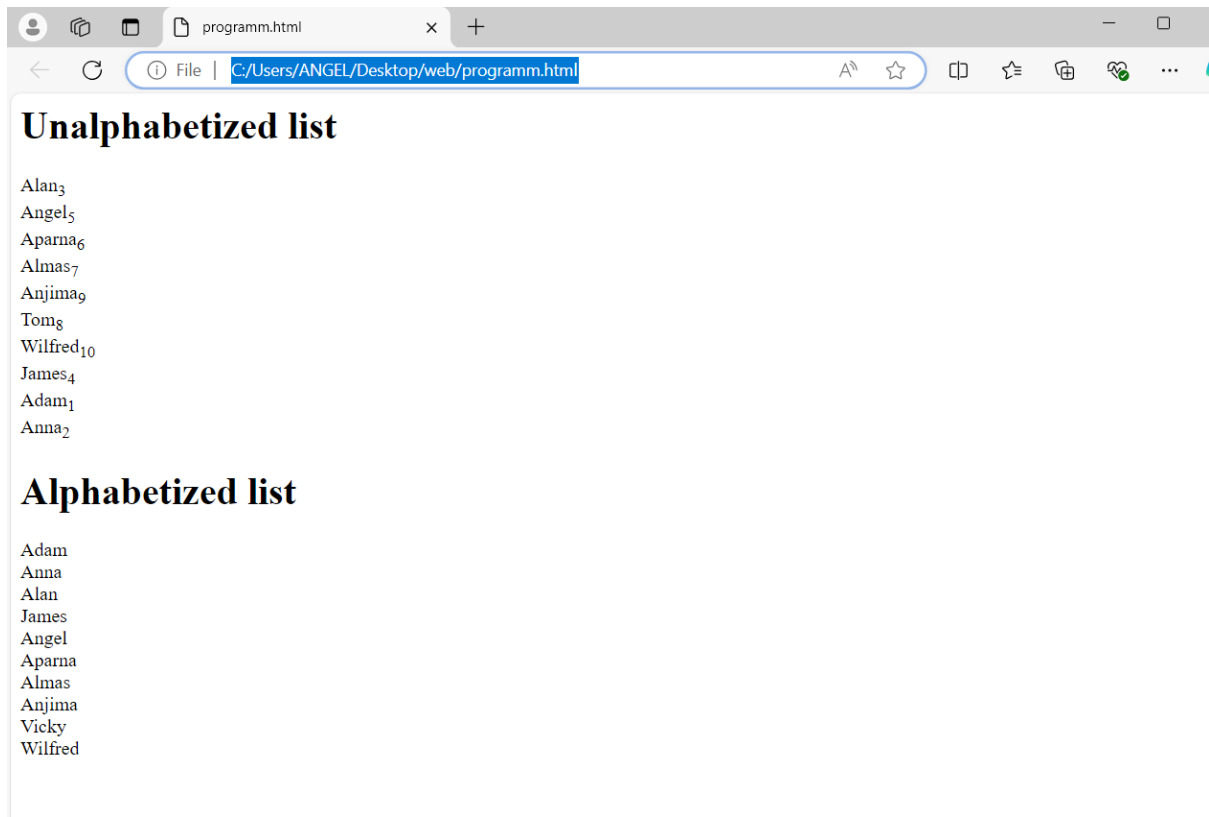

## RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 7


### AIM

Print the squares of the numbers 1 - 20. Each number should be on a separate line, next to it the number 2 superscripted, an equal sign and the result.

### SOURCE CODE

```
<html>
<body>
1<sup>2</sup> = 1<br>
2<sup>2</sup> = 4<br>
3<sup>2</sup> = 9<br>
4<sup>2</sup> = 16<br>
5<sup>2</sup> = 25<br>
6<sup>2</sup> = 36<br>
7<sup>2</sup> = 49<br>
8<sup>2</sup> = 64<br>
9<sup>2</sup> = 81<br>
10<sup>2</sup> = 100<br>
11<sup>2</sup> = 121<br>
12<sup>2</sup> = 144<br>
13<sup>2</sup> = 169<br>
14<sup>2</sup> = 196<br>
15<sup>2</sup> = 225<br>
16<sup>2</sup> = 256<br>
17<sup>2</sup> = 289<br>
18<sup>2</sup> = 324<br>
19<sup>2</sup> = 361<br>
20<sup>2</sup> = 400
</body>
</html>
```

### OUTPUT

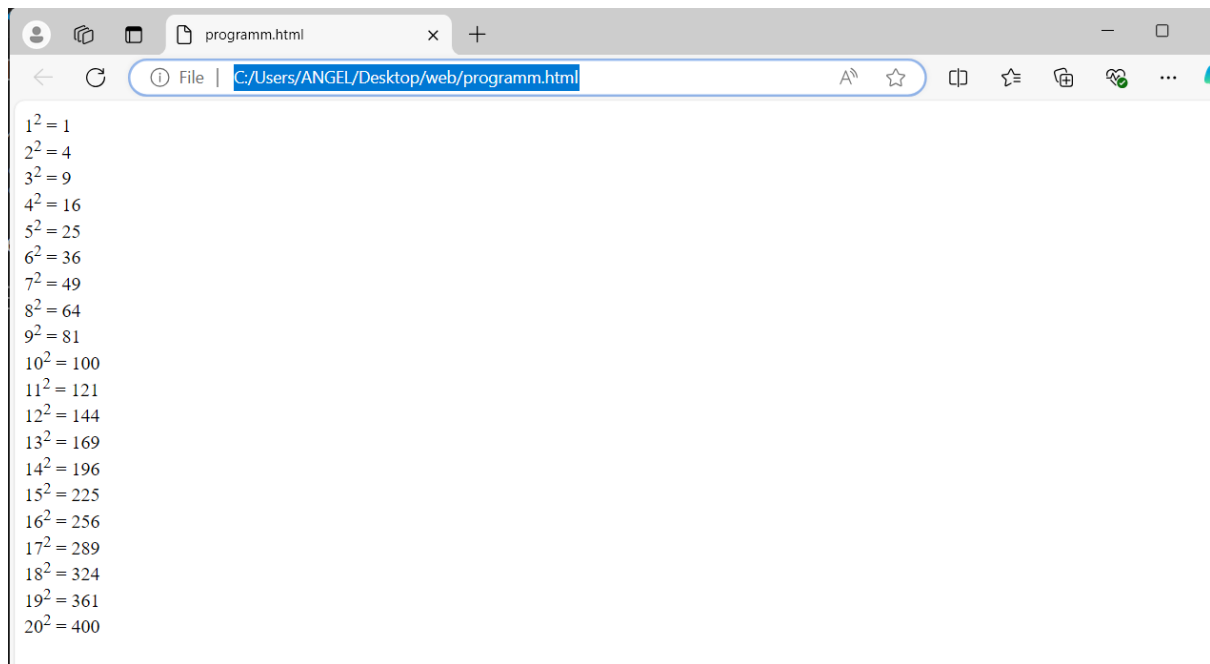

## RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 8


### AIM

Print a definition list with 5 items.

### SOURCE CODE

```
<html>
<body>
<dl>
  <dt>HTML</dt>
  <dd>A markup language</dd>
  <dt>Pen</dt>
  <dd>A writing tool</dd>
  <dt>Lettuce</dt>
  <dd>A vegetable</dd>
  <dt>Technology</dt>
  <dd>The development of tools which serve as a means to certain objectives</dd>
  <dt>Megabyte</dt>
  <dd>A unit of data consisting of 1024 kilobytes</dd></dl>
</body>
</html>
```

### OUTPUT

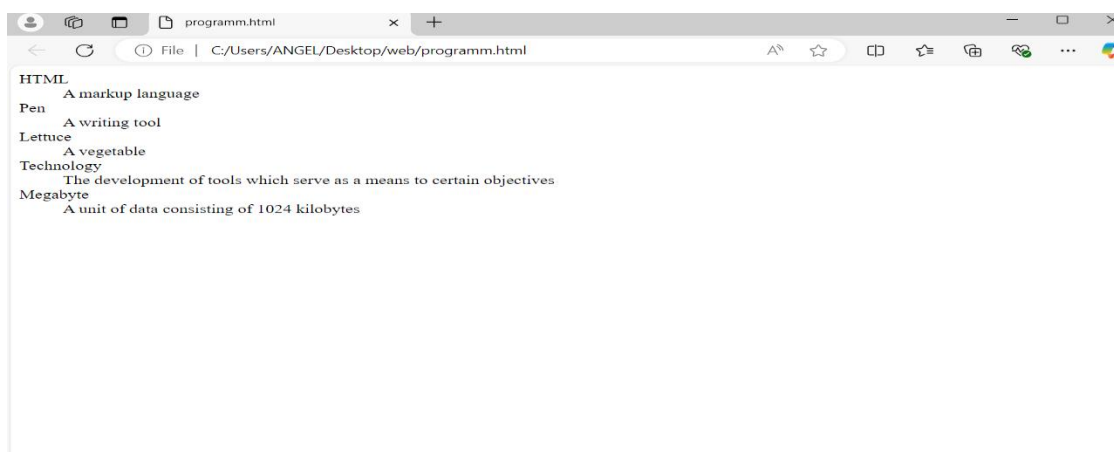

### RESULT

The program has been executed successfully and output is obtained.

## **PROGRAM – 9**

### **AIM**

Display an image that has a border of size 2, a width of 200, and a height of 200.

### **SOURCE CODE**

```
<html>  
<body>  
  
</body>  
</html>
```

### **OUTPUT**



### **RESULT**

The program has been executed successfully and output is obtained.

## PROGRAM – 10


### AIM

Print ten acronyms and abbreviations of your choosing, each separated by two lines. Specify the data that the abbreviations and acronyms represent.

### SOURCE CODE

```
<html>
<body>
<abbr title="Abstract">Abstr.</abbr><br /><br />
<abbr title="Biochemistry">Biochem.</abbr><br /><br />
<abbr title="Example">Ex.</abbr><br /><br />
<abbr title="Literature">Lit.</abbr><br /><br />
<abbr title="Mathematics">Math.</abbr><br /><br />
<acronym title="World Wide Web ">www</acronym><br /><br />
<acronym title="Central Processing Unit">CPU</acronym><br /><br />
<acronym title="International Standards Organization">ISO</acronym><br /><br />
<acronym title="Hyper Text Markup Language">HTML</acronym><br /><br />
<p>Move your mouse over an abbreviation or acronym to get more data.</p>
</body>
</html>
```

### OUTPUT

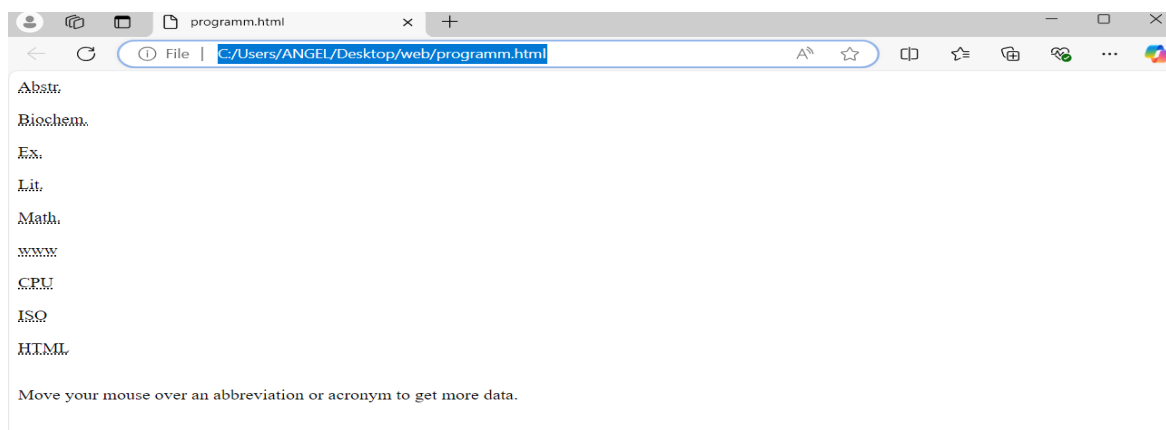

### RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 11

### AIM

Print two addresses in the same format used on the front of envelopes (sender's address in top left corner, receiver's address in the center)

### SOURCE CODE

```
<html>
<body>
<address>
Angel Biju<br>
Puryidath(H)<br>
Poonjar <br>
Njerippalam <br>
Pin code: 685519
</address>
<br><br>
<center>
<address>
Anna Jose<br>
Joann Jude (H)<br>
Poonjar,Kottayam<br>
Pin code: 686582
</address>
</center>
</body>
</html>
```

## OUTPUT



## RESULT

The program has been executed successfully and output is obtained.



## PROGRAM – 12

### AIM

Create an HTML page with the following contents:

---

I love HTML!!!

### **HTML Practice Exercise**

[JOHN UNIVERSITY](#)

---

I love HTML because:

1. I learned it quickly.
2. I can make web pages using code.
3. It is fun

---

My professor's e-mail address is [clarketb@jmu.edu](mailto:clarketb@jmu.edu) **Have a great day!**

### SOURCE CODE

```
<html>

<head>I love HTML!!!</head>

<body>

<center><h1>HTML Practice Exercise</h1><br>

<u><font size ="5" color="blue">JOHNS University</font></u></center>

<hr>

I love HTML because:<br>

<ol type="1">

<li>I learned it quickly.

<li>I can make web pages using code.

<li>It is fun

</ol>

<hr>

My professor's e-mail address is <a href="">clarketb@jmu.edu</a>

<b>Have a great day!</b>
```

</body>

</html>

## **OUTPUT**

---

I love HTML!!!

## **HTML Practice Exercise**

[JOHN UNIVERSITY](#)

---

I love HTML because:

1. I learned it quickly.
  2. I can make web pages using code.
  3. It is fun
- 

My professor's e-mail address is [clarketb@jmu.edu](mailto:clarketb@jmu.edu) **Have a great day!**

## **RESULT**

The program has been executed successfully and output is obtained.

## PROGRAM – 13

### AIM

Create the following table.

Time Table					
Hours	Mon	Tue	Wed	Thu	Fri
	Science	Maths	Science	Maths	Arts
	Social	History	English	Social	Sports
	Lunch				
	Science	Maths	Science	Maths	Project

### SOURCE

```

<html>
<body>
<table align="center" border="1">
<tr><th colspan="6">Time Table</th></tr>
<tr><th rowspan="7">Hours</th></tr>
<tr>
<td align="center">Mon</td>
<td align="center">Tue</td>
<td align="center">Wed</td>
<td align="center">Thu</td>
<td align="center">Fri</td>
</tr>
<tr>
<td>Science</td>
<td>Maths</td>
<td>Science</td>
<td>Maths</td>
<td>Arts</td>
</tr>
<tr>
<td>Social</td>
<td>History</td>

```

```

<td>English</td>
<td>Social</td>
<td>Sports</td>
</tr>
<tr><th colspan="5">Lunch</th></tr>
<tr>
<td>Science</td>
<td>Maths</td>
<td>Science</td>
<td>Maths</td>
<td rowspan="2">Project</td>
</tr><tr>
<td>Social</td>
<td>History</td>
<td>English</td>
<td>Social</td>
</tr>
</table>
</body>
</html>

```

## OUTPUT

Time Table					
Hours	Mon	Tue	Wed	Thu	Fri
	Science	Maths	Science	Maths	Arts
	Social	History	English	Social	Sports
	Lunch				
	Science	Maths	Science	Maths	Project

## RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 14

### AIM

Create a HTML Page which looks like the one given below.

## Pochi the Cat

### Introduction

Pochi was adopted from an animal shelter and now resides in Seattle, WA, where she runs a small but successful web page design business exclusively for cat clients.

### Profile

- *favorite food* - smoked salmon
- *hobbies* - watching fishing on ESPN, snacking on garden flowers, monitoring the apartment parking lot
- *hidden talent* - karaoke



### Links

- [Seattle Animal Control Shelter](#)
- [Humane Society of the United States](#)

### SOURCE CODE

```
<html>
<body>

<h1>Pochi the cat</h1><br>
<font size="5"><b>Introduction</b></font><br>
Pochi was adopted from animal shelter and now resides in Seattle, WA , where she runs a small
but sucessful web page design business exclusively for cat clients.<br>
<font size="5"><b>Profile</b></font>
<ul type="circle">
<li><i>favorite food - </i>smoked salmon.
<li><i>hobbies - </i>watching fishing on ESPN, snacking on garden flowers, monitoring the
apartment parking lot
<li><i>hidden talent -</i>karaoke
</ul>
<font size="5"><b>Links</b></font>
```

```
<ul type="circle">
<li><a href="">Seattle Animal Control Shelter</a>
<li><a href="">Humane Society of the nited States</a>
</body>
</html>
```

## OUTPUT

### Pochi the Cat

#### Introduction

Pochi was adopted from an animal shelter and now resides in Seattle, WA, where she runs a small but successful web page design business exclusively for cat clients.

#### Profile

- *favorite food* - smoked salmon
- *hobbies* - watching fishing on ESPN, snacking on garden flowers, monitoring the apartment parking lot
- *hidden talent* - karaoke

#### Links

- [Seattle Animal Control Shelter](#)
- [Humane Society of the United States](#)



## RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 15

### AIM

Create links to three different pages on three different websites that should all open in a new window.

### SOURCE CODE

```
<html>
<body><style type="text/css">
body{
font-family: times new roman;
font-size: 20px;
text-align: center;
}</style>
<h3><u>Click the following links to visit the websites</u></h3>
<a href="https://www.w3schools.com" target="_blank">W3 Schools</a><br>
<a href="https://www.tutorialspoint.com/" target="_blank">Tutorials Point</a><br>
<a href="https://www.youtube.com/" target="_blank">Youtube</a><br>
</body>
</html>
```

### OUTPUT

---

**Click the following links to visit the websites**

[W3 Schools](https://www.w3schools.com)  
[Tutorials Point](https://www.tutorialspoint.com/)  
[Youtube](https://www.youtube.com/)

---

### RESULT

The program has been executed successfully and output is obtained.

## **PROGRAM – 16**

### **AIM**

Create a HTML page with different types of frames such as floating frame, navigation frame & mixed frame.

### **SOURCE CODE**

c2.html

```
<html>
<head>
<title>Floating Frame</title>
</head>
<body bgcolor="yellow">
<center>
<h1>Floating Frame !!!!!</h1>
<iframe src="13.html" height="50%" width="50%"></iframe>
</center>
</body>
</html>
```

C2.2.html

```
<html>
<frameset rows="100%" cols="50%,50%">
<frame src="13.html" />
<frame src="c2.html" />
</frameset>
</html>
```

### **OUTPUT**



Time Table					
Hours	Mon	Tue	Wed	Thu	Fri
	Science	Maths	Science	Maths	Arts
	Social	History	English	Social	Sports
	Lunch				
	Science	Maths	Science	Maths	Project
	Social	History	English	Social	

Floating Frame !!!!!					
Hours	Mon	Tue	Wed	Thu	Fri
	Science	Maths	Science	Maths	Arts
	Social	History	English	Social	Sports
	Lunch				
	Science	Maths	Science	Maths	Project
	Social	History	English	Social	

## **RESULT**

The program has been executed successfully and output is obtained.

## PROGRAM – 17

### AIM

Create a HTML file by applying the different styles using inline, external & internal style sheets. Internal & Inline CSS

### SOURCE CODE

```
<html>
<head>
<style>
body{ background-color:DarkViolet;}
h1 {color:red;}
p{color:blue}
</style>
</head>
<body>
<h1>internal CSS</h1>
<p>This is a paragraph that contains cascading style sheet</p>
<h2 style="color:red">This is a heading using inline CSS</h2>
</body>
</html>
```

### OUTPUT

**internal CSS**

This is a paragraph that contains cascading style sheet

**This is a heading using inline CSS**

### External CSS

excess.html

```
<html>
```

```
<head>
```

```
<link rel="stylesheet" href="style.css"></head>
```

```
<body>
```

```
<h1>Tree Data Structure</h1><p>Root: The root node is the topmost node in the tree hierarchy. In other words, the root node is the one that doesn't have any parent. In the above structure, node numbered 1 is the root node of the tree. If a node is directly linked to some other node, it would be called a parent-child relationship.
```

Child node: If the node is a descendant of any node, then the node is known as a child node.

Parent: If the node contains any sub-node, then that node is said to be the parent of that sub-node.

Sibling: The nodes that have the same parent are known as siblings.</p>

```
</body>
```

```
</html>
```

style.css

```
body{
```

```
background-color:DarkBlue;
```

```
}
```

```
h1{
```

```
color:Crimson;
```

```
text-align:center;
```

```
}
```

```
p{
```

```
text-align:left;
```

```
color:Azure;
```

```
}
```

### **OUTPUT**



## **RESULT**

The program has been executed successfully and output is obtained.

## PROGRAM – 18

### AIM


Create a registration form using HTML.

### SOURCE CODE


```
<html>
<head>
<title>Registration Form</title>
</head>
<body>
<h1><center>Student Registration</center></h1>
<table align="center">
<form action="" method="">
<tr><td>Name:</td>
<td><input type="text"></td>
</tr>
<tr><td>Roll No:</td>
<td><input type="text"></td>
</tr>
<tr><td>Admission Number:</td>
<td><input type="text"></td>
</tr>
<tr><td>Date of Birth:</td>
<td><input type="date"></td>
</tr>
<tr><td>Sex:</td>
<td><input type="radio">
<label>Male</label><input type="radio">
<label>Female</label>
</td>
</tr>
</tr>
```

```
<tr><td>Phone No:</td>
<td><input type="text"></td>
</tr>
<tr><td>Email id:</td>
<td><input type="text"></td>
</tr>
</table>
<center><input type="submit" value="submit">
</form>
</body>
</html>
```

## **OUTPUT**

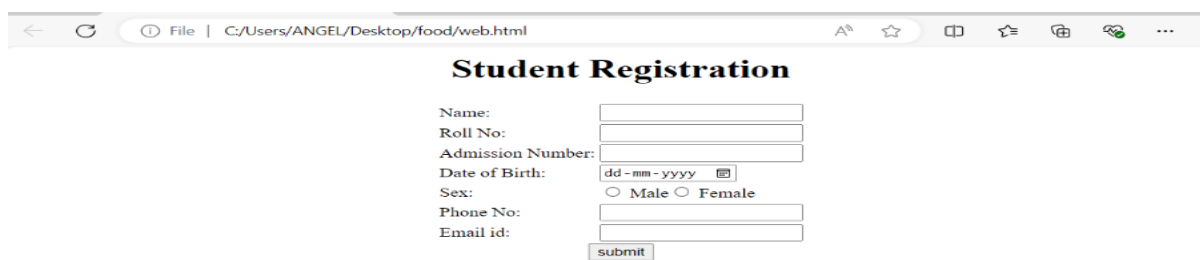

The screenshot shows a web browser window with the address bar displaying "File | C:/Users/ANGEL/Desktop/food/web.html". The page title is "Student Registration". The form contains the following fields and controls:

- Name:
- Roll No:
- Admission Number:
- Date of Birth:  
- Sex: ☐ Male ☐ Female
- Phone No:
- Email id:
- 

## **RESULT**

The program has been executed successfully and output is obtained.

## PROGRAM – 19

### AIM

Create an HTML page using frames which are similar to the following one. In the left frame provide hyperlinks to 3 important monuments in the world. On clicking that hyperlink an image of the monument should be displayed in right frame with suitable description

### SOURCE CODE

2.5.html

```
<html>
<frameset cols="25%,*">
<frame src="link.html"/>
<frame src="home.html" name="z" />
</frameset>
</html>
```

home.html

```
<html>
<style>
h1{
text-align: center;
color: Azure;
}
body{
background-color: DarkMagenta;
}
p{
font-size:30px;
color: AliceBlue;
}
</style>
<body>
<br>
```

```
<h1 >Famous Monuments</h1>
```

```
<p><br><br>Taj Mahal
```

```
<br><br>India Gate
```

```
<br><br>Charminar</p>
```

```
</body>
```

```
</html>
```

```
link.html
```

```
<html>
```

```
<style>
```

```
a{
```

```
font-size: 30px;
```

```
color: red;
```

```
}
```

```
body{
```

```
background-color: Gold;
```

```
}
```

```
</style>
```

```
<body style="text-align: center">
```

```
<br><br><br><br>
```

```
<h1 align="center"><font face="cooper" color="DarkBlue" size="6">The Famous  
Monuments</font></h1>
```

```
<a href="home.html" target="z">Home</a><br>
```

```
<a href="tajmahal.html" target="z">Taj Mahal</a><br>
```

```
<a href="pyramid.html" target="z">Pyramids of Giza </a><br>
```

```
<a href="coloessium.html" target="z">The Colosseum,Rome</a>
```

```
</body>
```

```
</html>
```

```
tagmahal.html
```

```
<html>
```

```
<style>
```

```
body{
```

```
font-family: times new roman;
```

```
font-size: 20px;
```

```
background-color: DarkBlue;
```



```

}
h1{
color: Azure;
text-align: center;
}
p{
color:Linen;
}
</style>
<body>
<h1>Taj Mahal</h1>
<center></center>
<p>The Taj Mahal 'Crown of the Palace', is an ivory-white marble mausoleum on the southern
bank of the river Yamuna in the Indian city of Agra. It was commissioned in 1632 by the
Mughal emperor Shah Jahan (reigned from 1628 to 1658) to house the tomb of his favorite
wife, Mumtaz Mahal; it also houses the tomb of Shah Jahan himself. The tomb is the
centerpiece of a 17-hectare(42-acre) complex, which includes a mosque and a guest house, and
is set in formal gardens bounded on three sides by a crenelated wall. </p>
</body>
</html>
pyramid.html
<html>
<style>
body{
font-family: times new roman;
font-size: 20px;
background-color: DarkBlue;
}
h1{
color: Azure;
text-align: center;
}
p{
color:Linen;

```

```

}
</style>
<body>
<h1>Great Pyramid of Giza</h1>
<center></center>
<p>The Great Pyramid of Giza is the biggest Egyptian pyramid and the tomb of Fourth Dynasty
pharaoh Khufu. Built in the early 26th century BC during a period of around 27 years,the
pyramid is the oldest of the Seven Wonders of the Ancient World, and the only one to remain
largely intact. As part of the Giza pyramid complex, it borders present-day Giza in Greater
Cairo, Egypt.</p>
</body>
</html>

```

coloesium.html

```

<html>
<style>
body{
font-family: times new roman;
font-size: 20px;
background-color: DarkBlue;
}
h1{
color: Azure;
text-align: center;
}
p{color:Linen;
}
</style>
<body>
<h1>The Colosseum,Rome</h1>
<center></center>
<p>The Colosseum is an oval amphitheatre in the centre of the city of Rome, Italy, just east of
the Roman Forum. It is the largest ancient amphitheatre ever built, and is still the largest
standing amphitheatre in the world today, despite its age. Construction began under the
emperor Vespasian (r. 69–79 AD) in 72 and was completed in 80 AD under his successor and


```



heir, Titus (r. 79–81).Further modifications were made during the reign of Domitian (r. 81–96).The three emperors that were patrons of the work are known as the Flavian dynasty, and the amphitheatre was named the Flavian Amphitheatre (Latin: Amphitheatrum Flavium; Italian: Anfiteatro Flavio by later classicists and archaeologists for its association with their family name (Flavius).The Colosseum is built of travertine limestone, tuff (volcanic rock), and brick-faced concrete. </p>

&lt;/body&gt;

&lt;/html&gt;

## OUTPUT

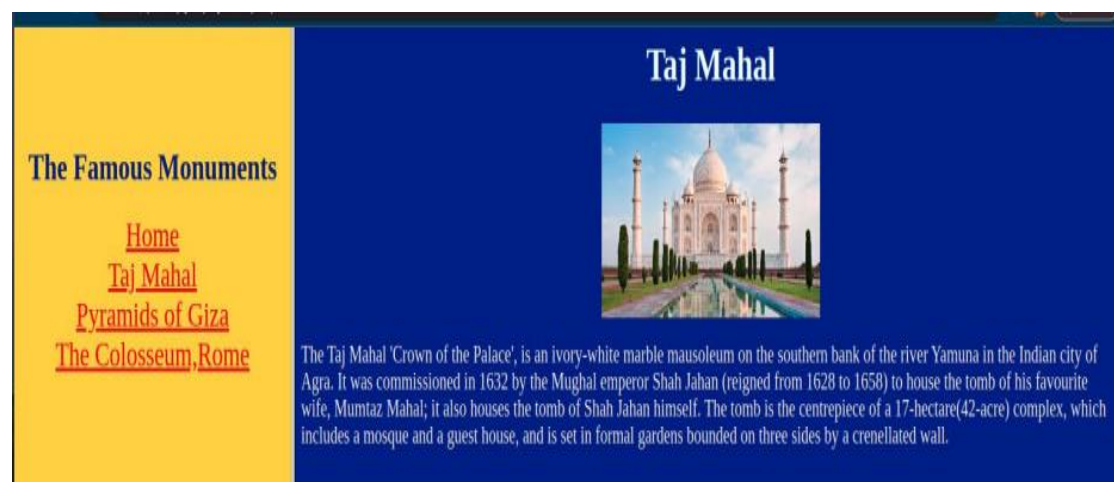

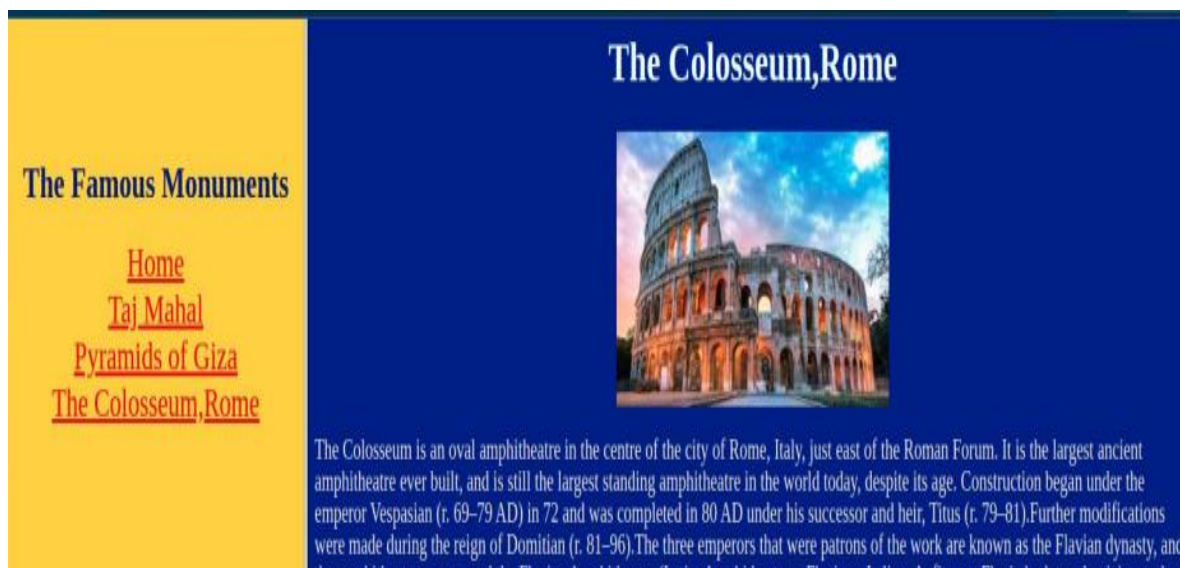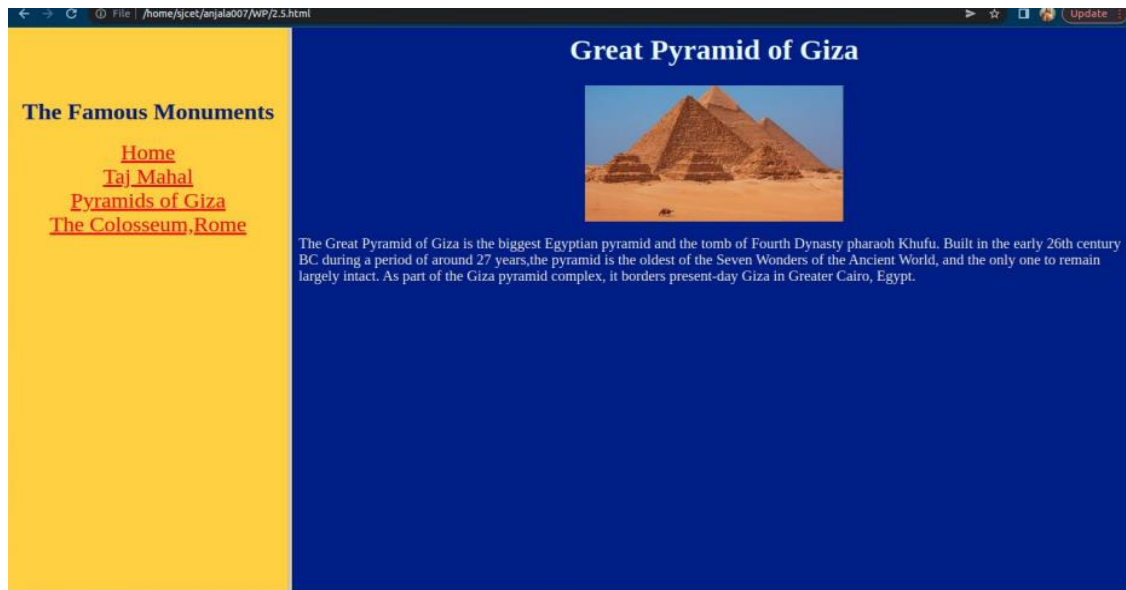

## RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 20

### AIM

Make up three image links for 3 web browsers and put them in a borderless table.  
Construct the table so that there is just a little space between the images.

### SOURCE CODE

```
<html>
<body><style>
th,td{padding: 20px;}
body{text-align: center;}
</style>
<table align="center" style="padding-top: 200px"><tr>
<td><a href="https://www.mozilla.org/en-US/"></a></td>
<td><a href="https://www.yahoo.com/"></a></td>
<td><a href="https://sjcetpalai.ac.in/"></a></td></tr></table>
</body>
</html>
```

### OUTPUT



---

### RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 21

### AIM

Create all <p> elements will be center-aligned, with a red text color.

### SOURCE CODE

```
<html>
<head>
<style>
p{color:red;
text-align:center}
</style>
</head>
<body>
<h1>internal css example</h1>
<p>This is a paragraph that containing internal CSS. This paragraph is red in color and this is
center aligned paragraph.</p>
</body>
</html>
```

### OUTPUT

#### internal css example

This is a paragraph that containing internal CSS. This paragraph is red in color and this is center aligned paragraph.

---

### RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 22


### AIM

Set the background color for the page to "linen" and the background color for <h1> to "lightblue".

### SOURCE CODE

```
<html>
<head>
<style>
body{ background-color:linen;}
h1 { background-color:lightblue;}
</style>
</head>
<body>
<h1>H1 heading with CSS background color property</h1>
</body>
</html>
```

### OUTPU

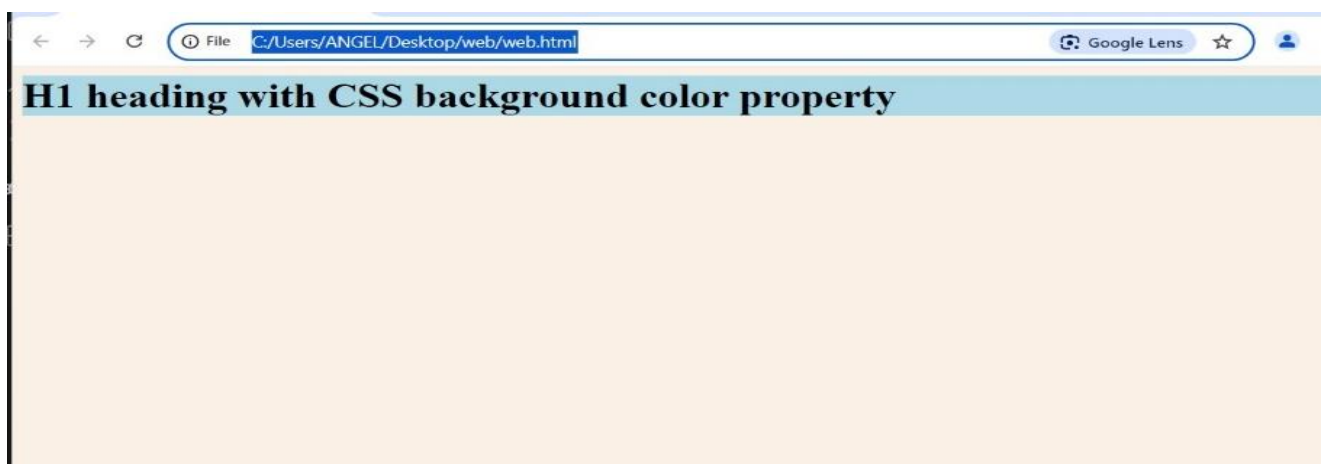

### RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 23

### AIM

Add an external style sheet with the URL: "mystyle.css"

### SOURCE CODE

HTML code

```
<html>

<head>

<link rel="stylesheet" href="mystyle.css">

</head>

<body>

<h1>HTML</h1>

<p>The HyperText Markup Language or HTML is the standard markup language for
documents
designed to be displayed in a web browser. It can be assisted by technologies such as
Cascading Style Sheets
(CSS) and scripting languages such as JavaScript.

</p>

</body>

</html>
```

mystyle.css

```
body{

background-color:DarkBlue;}

h1 {

color:Crimson;

text-align:center;}

p{


text-align:left;

color:Azure;

}
```



## **OUTPUT**

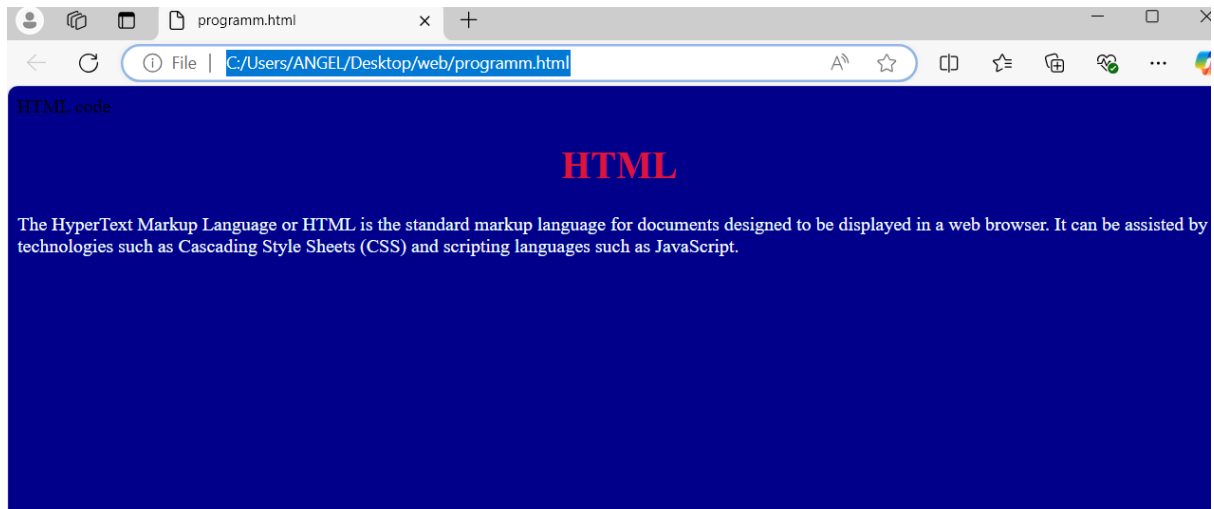

## **RESULT**

The program has been executed successfully and output is obtained.

## PROGRAM – 24

### AIM

Set "background-color: linen" for the page, using an inline style.

### SOURCE CODE

```
<html>

<body style="color:linen">


<h1><font color="red">HTML</h1>

<p>The HyperText Markup Language or HTML is the standard markup language for documents designed to be displayed in a web browser. It can be assisted by technologies such as Cascading Style Sheets (CSS) and scripting languages such as JavaScript.</p>

</body>

</html>
```

### OUTPUT

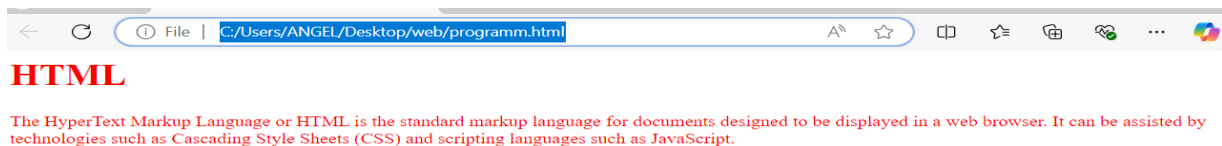

---

### RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 25

### AIM

Set "background-color: blue" for the page, using an internal style sheet.

### SOURCE CODE

```
<html>
<head>
<style>
body{ background-color:blue }
</style>
</head>
<body>
<h1><font color="red">This page have the background color linen set through internal style
sheet</font></h1>
</body>
</html>
```

### OUTPUT



### RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 26


### AIM

Set "background-color: blue" for the page, using an internal style sheet.

### SOURCE CODE

```
<html>
<head>
<style>
body{ background-color:blue }
</style>
</head>
<body>
<h1><font color="red">This page have the background color linen set through internal style
sheet</font></h1>
</body>
</html>
```

### OUTPUT

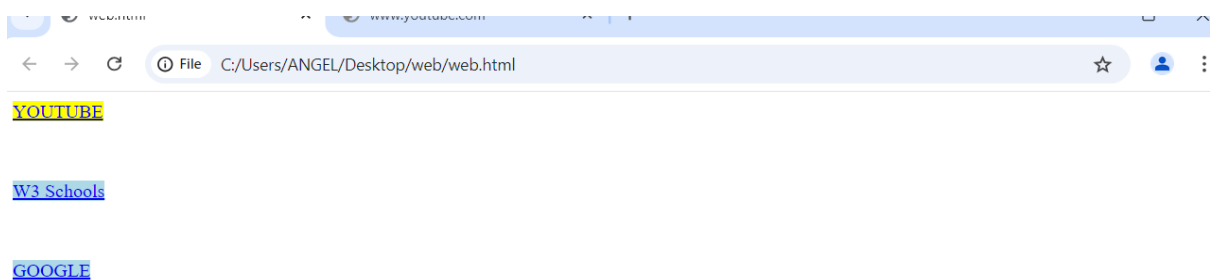

---

### RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 27

### AIM

Create an HTML page to explain the use of various predefined functions in a string and math object in java script.

### SOURCE CODE


```
<html>
<body>
<label>Enter a string:</label><br>
<input type="text" name="str" id="str1"><br><br>
<label>enter number</label>
<input type="text" name="text1" id="id1"><br><br>
<label>enter power</label>
<input type="text" name="text2" id="id2">
<script language="javascript" type="text/javascript">
function add()
{
var a,b,c,n,m,i,s,sl,sli;
s=(document.getElementById("str1").value);
sl=s.length;
sli=s.slice(5,11);
a=(document.getElementById("id1").value);
b=(document.getElementById("id2").value);
c=Math.pow(a,b);
n=Math.sqrt(a);
m=Math.ceil(a);
i=Math.floor(a);
(document.getElementById("strlen").value)=sl;
(document.getElementById("strsli").value)=sli;
(document.getElementById("ans").value)=c;
(document.getElementById("sqr").value)=n;
```

```

(document.getElementById("ceil").value)=m;
(document.getElementById("floor").value)=i;
}
</script>
<br><br>
<button onclick="add()">Get Result</button><br><br>
<label>Length of the String :</label>
<input type="text" id="strlen"><br><br>
<label>Slice String :</label><br>
<input type="text" id="strsli"><br><br>
<label><b><u>Power of a number</u></b></label><br>
<input type="text" id="ans"><br><br>
<label><u><b>Squareroot of the number</b></u></label><br>
<input type="text" id="sqr"><br><br>
<label><u><b>Ceil of the number</b></u></label><br>
<input type="text" id="ceil"><br><br>
<label><u><b>floor of the number</b></u></label><br><input type="text" id="floor">
</body>
</html>

```

## OUTPUT

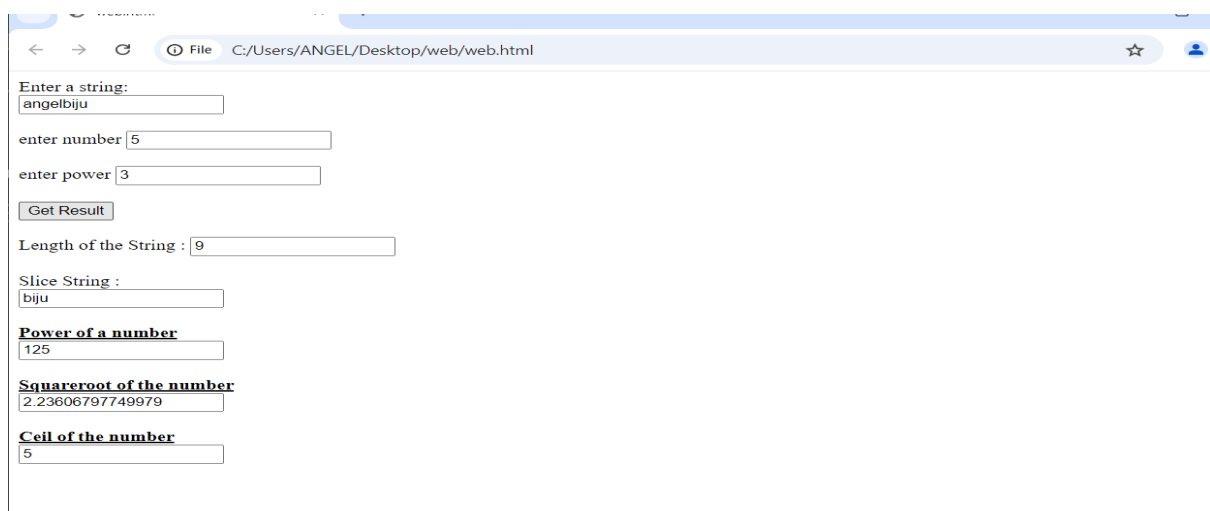

## RESULT

The program has been executed successfully and output is obtained.

## PROGRAM – 28

### AIM

Generate the calendar using JavaScript code by getting the year from the user.

### SOURCE CODE

```
<html>
<body>
YEAR : <input type="text" id="year_get"><br><br>
MONTH (1 - 12): <input type="text" id="month_get"><br>
<input type="button" id="subtn" value="Display Calender" onclick="generate()"
><br><br><br>
<div id="content"> </div>
</body>
<script>
function generate()
{
var init_content = "<table BORDER=1
id='calender'><tr><th>Sun</th><th>Mon</th><th>Tue</th><th>Wed</th><th>Thu</th><t
h>Fri</th><th>Sat</th></tr>
><tr>"
var year_get = document.getElementById("year_get").value;
var month_get = document.getElementById("month_get").value;
month_get -=1;
var date = new Date(year_get,month_get);
var day = date.getDay();
for (var i = 0; i < day; i++){
init_content += "<td></td>";
}
while (date.getMonth() == month_get)
{
init_content += "<td>" + date.getDate() + "</td>";
if (date.getDay() == 6)
```

```
{  
init_content += "</tr><tr>";  
}  
date.setDate(date.getDate() + 1);  
}  
init_content += "</table>"  
document.getElementById("content").innerHTML = init_content;  
}  
</script>  
</html>
```

## **OUTPUT**

YEAR :

MONTH (1 - 12):

Sun	Mon	Tue	Wed	Thu	Fri	Sat
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30						

## **RESULT**

The program has been executed successfully and output is obtained.



## PROGRAM – 29

### AIM

Create a HTML registration form and to validate the form using JavaScript code.


### SOURCE CODE


```
<html>
<head>
<script type="text/javascript">
function check()
{
if(document.getElementById('name').value == "")
alert("Please enter your name");
if(document.getElementById('user').value == "")
alert("Please enter a username");
var email = document.getElementById('mail');
var filter = /^[a-zA-Z0-9_\.\\-]+\@((([a-zA-Z0-9\\-]+\.)+([a-zA-Z0-9]{2,4})+)$/;
if (!filter.test(email.value))
{
alert('Please enter a valid email address');
}
if((document.getElementById('pswd').value == "")
&&(document.getElementById('cpswd').value == ""))
alert("Please enter your password");
if((document.getElementById('pswd').value) !=
(document.getElementById('cpswd').value))
alert("Password does not match");
}
</script>
</head>
<body>
<center>
```

```
<form>

<u>
<h1>REGISTRATION</h1>
</u>
Name : <input type="text" id="name">
<br><br>
Username : <input type="text" id="user">
<br><br>
Email : <input type="text" id="mail">
<br><br>
Password : <input type="password" id="pswd">
<br><br>
Confirm password : <input type="password" id="cpswd">
<br><br>
<input type="submit" id="submit" onclick="check()">&emsp;<input type="reset">
</form>
</center>
</body>
</html>
```

## OUTPUT

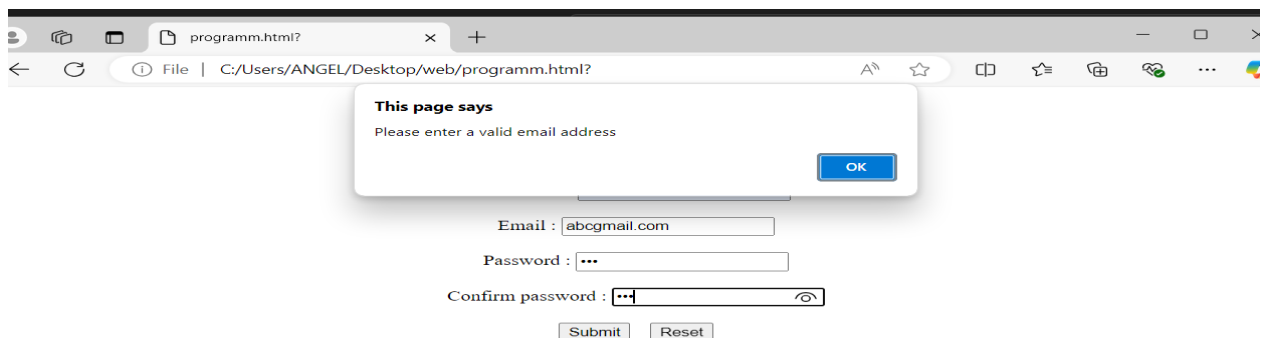

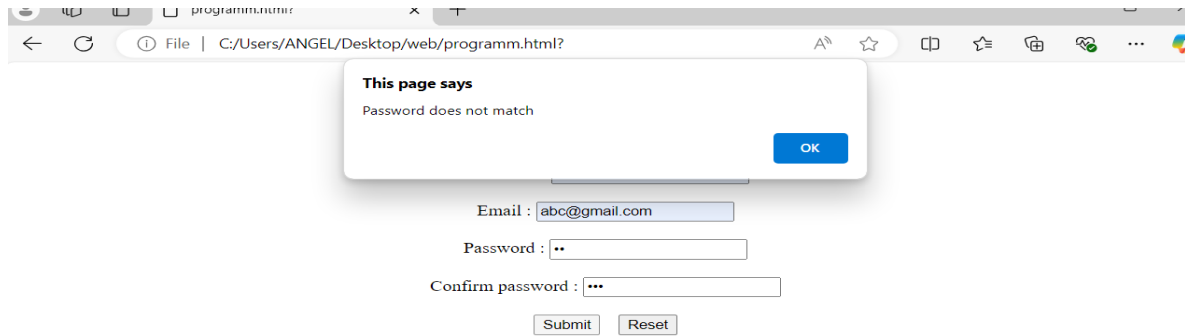

---

## **RESULT**

The program has been executed and output is obtained.

## PROGRAM – 30

### AIM

Evaluating JavaScript Event Handling for every click of a button to change the background color of a HTML page.

### SOURCE CODE

```
<html>
<body>
<script>
function change()
{
var color = "#" + Math.random().toString(16).slice(2,8);
document.body.style.backgroundColor = color;
}</script>
<button type="submit" onclick="change()">Change background color</button>
</body>
</html>
```

### OUTPUT



### RESULT

The program has been executed and output is obtained.

## PROGRAM – 31

### AIM

Create a HTML page to display a new image and text when the mouse comes over the existing content in the page using JavaScript Event Handling.

### SOURCE CODE

```
<html >
<body>
<div class="a" id="a">
<br><br>
<h1 id="text1">Taj Mahal,Agra</h1>
<h1 id="text2">The colosseum,Rome</h1>
</div>
<script>
document.getElementById("a").addEventListener("mouseover",ab);
document.getElementById("a").addEventListener("mouseout",bc);
function ab() {
document.getElementById('image').src = "colosseum.jpeg";
document.getElementById('text1').style.display="none";
document.getElementById('text2').style.display="block"
}
function bc() {
document.getElementById('image').src = "taj.jpeg";
document.getElementById('text1').style.display="block";
document.getElementById('text2').style.display="none";
}
</script>
</body>
</html>
```

## **OUTPUT**



Taj Mahal,Agra

---

## **RESULT**

The program has been executed and output is obtained.

## PROGRAM – 32

### AIM


Create a HTML page to show online exams using JavaScript.

### SOURCE CODE

```
<html>
<head>
<script type="text/javascript">
var i=0;
function exam()
{
if(document.f1.n1[0].checked)
i=i+1;
if(document.f1.n2[0].checked)
i=i+1;
alert("your score is "+i+"/2");
}
</script>
</head>
<body>
<h2>Online Exam</h2>
<form name="f1">
<h3>spelling of 2</h3>
<input type="radio" id="2" name="n1" value="two">two
<input type="radio" id="2" name="n1" value="tow">tow
<h3>which is odd number</h3>
<input type="radio" id="1" name="n2" value="1">1
<input type="radio" id="1" name="n2" value="2">2
<br>
<br>
```

```
<input type="submit" value="Submit" onclick="exam()">
</form>
</body>
</html>
```

## OUTPUT

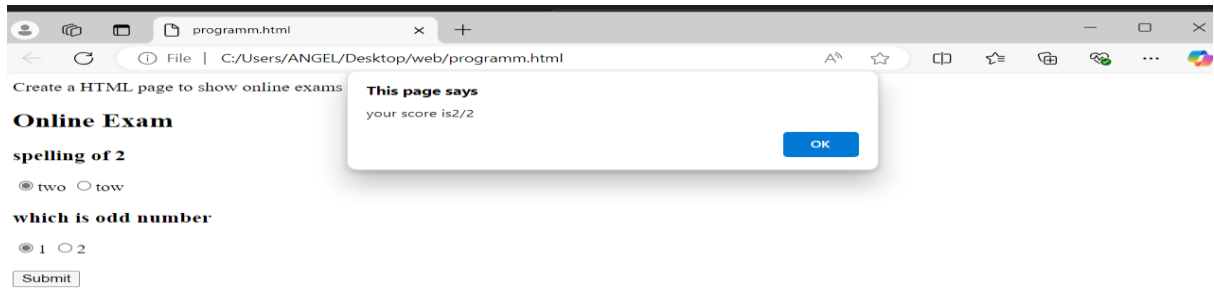

## RESULT

The program has been executed and output is obtained.



## PROGRAM – 33

### AIM

Outline a registration form using PHP and do necessary validations.

### SOURCE CODE

```
<html>
<body>
<h1>Registration form</h1>
<form action = "" method = "POST">
Username : <input type="text" name="username"><br> <br>
Email : <input type="text" name="email"><br> <br>
Password : <input type="text" name="pass"><br> <br>
Confirm password : <input type="text" name="cpass"><br> <br>
<input type="submit" value="Register">
<?php
if (empty($_POST['username']) ||
empty($_POST['pass']) ||
empty($_POST['email']) ||
empty($_POST['cpass']))
{
die("Please fill all required fields!");
}
if ($_POST['pass'] != $_POST['cpass'])
{
die ('Password and confirm password should match');
}
else
{
die("successfull");
}
?>
```

</form>

</body>

</html>

## OUTPUT

<b>Registration form</b>	<b>Registration form</b>
Username : <input type="text" value="22mca007"/>	Username : <input type="text"/>
Email : <input type="text" value="anjalamichaelk@gmail.com"/>	Email : <input type="text"/>
Password : <input type="text" value="123"/>	Password : <input type="text"/>
Confirm password : <input type="text" value="123"/>	Confirm password : <input type="text"/>
<input type="button" value="Register"/> Please fill all required fields!	<input type="button" value="Register"/> successfull

## RESULT

The program has been executed and output is obtained.

## PROGRAM – 34

### AIM

Compose Electricity bill from user input based on a given tariff using PHP.

### SOURCE CODE

```
<html>
<head>
<title>Electricity Bill</title>
</head>
<?php
$result_str = $result = "";
if (isset($_POST['unit-submit'])) {
    $units = $_POST['units'];
    if (!empty($units)) {
        $result = calculate_bill($units);
        $result_str = 'Total amount of ' . $units . ' - ' . $result;}}
function calculate_bill($units) {
    $unit_cost_first = 3.50;
    $unit_cost_second = 4.00;
    $unit_cost_third = 5.20;
    $unit_cost_fourth = 6.50;
    if($units <= 50) {
        $bill = $units * $unit_cost_first;}
    else if($units > 50 && $units <= 100) {
        $temp = 50 * $unit_cost_first;
        $remaining_units = $units - 50;
        $bill = $temp + ($remaining_units * $unit_cost_second);}
    else if($units > 100 && $units <= 200) {
        $temp = (50 * 3.5) + (100 * $unit_cost_second);
        $remaining_units = $units - 150;
        $bill = $temp + ($remaining_units * $unit_cost_third);
    }
}
```

```

else {
$temp = (50 * 3.5) + (100 * $unit_cost_second) + (100 * $unit_cost_third);
$remaining_units = $units - 250;
$bill = $temp + ($remaining_units * $unit_cost_fourth);
}
return number_format((float)$bill, 2, '.', '');
}
?>
<body>
<div id="page-wrap">
<h1>Electricity Bill</h1>
<form action="" method="post" id="quiz-form">
<input type="number" name="units" id="units" placeholder="Please enter no.of Units" />
<input type="submit" name="unit-submit" id="unit-submit" value="Submit"/>
</form>
<div>
<?php echo '<br />' . $result_str; ?>
</div>
</div>
</body>
</html>

```

## **OUTPUT**

### **Electricity Bill**

25

Total amount of 25 - 87.50

## **RESULT**

The program has been executed and output is obtained.

## **PROGRAM – 35**

### **AIM**

Build a PHP code to store name of students in an array and display it using print\_r function. Sort and Display the same using asort & arsort functions.

### **SOURCE CODE**

```
<?php
$a = array("Anjala", "Christeena", "Blessey","Angela");
print_r($a);
echo("<br>Ascending order : ");
asort($a);
print_r($a);
echo("<br>Descending order : ");
arsort($a);
print_r($a);
?>
```

### **OUTPUT**

```
Array ( [0] => Anjala [1] => Christeena [2] => Blessey [3] => Angela )
Ascending order : Array ( [3] => Angela [0] => Anjala [2] => Blessey [1] => Christeena )
Descending order : Array ( [1] => Christeena [2] => Blessey [0] => Anjala [3] => Angela )
```

---

### **RESULT**

The program has been executed and output is obtained.

## PROGRAM – 36

### AIM

Build a PHP code to store name of Indian Cricket players in an array and display the same in HTML table.

### SOURCE CODE

```
<?php
$cricket=array(array('M S Dhoni',40),array('Virat Kohli',33),array('Sachin Tendulkar',48),
array('Rohit Sharma',36),
array('Sanju Samson',28));
?>
<html>
<table border="1"><tr><th>Name</th><th>Age</th></tr>
<tr><td><?php echo $cricket[0][0] ?></td><td><?php echo $cricket[0][1]?></td></tr>
<tr><td><?php echo $cricket[1][0] ?></td><td><?php echo $cricket[1][1]?></td></tr>
<tr><td><?php echo $cricket[2][0] ?></td><td><?php echo $cricket[2][1]?></td></tr>
<tr><td><?php echo $cricket[3][0] ?></td><td><?php echo $cricket[3][1]?></td></tr>
<tr><td><?php echo $cricket[4][0] ?></td><td><?php echo $cricket[4][1]?></td></tr>
</table>
</html>
```

### OUTPUT

Name	Age
M S Dhoni	40
Virat Kohli	33
Sachin Tendulkar	48
Rohit Sharma	36
Sanju Samson	28

---

### RESULT

The program has been executed and output is obtained.

## PROGRAM – 37

### AIM

Develop a PHP program to connect to a database and retrieve data from a table and show the details in a neat format.

### SOURCE CODE

#### Config.php

```
<?php
$mysql_host="localhost";
$mysql_user="22mca007";
$mysql_password="2547";
$conn=mysqli_connect($mysql_host,$mysql_user,$mysql_password);
if(mysqli_select_db($conn,'22mca007'))
{
echo 'connected';
}
else{
echo 'falied';
}
?>
```

#### Reg.php

```
<?php
include "config.php";
if(isset($_POST['submit']))
{
$name=$_POST['name'];
$email=$_POST['email'];
$password=$_POST['password'];
$sql = "INSERT INTO `local` ( `name`, `email`, `password`) VALUES ( '$name', '$email', '$password')";
```

```

$result=$conn->query($sql);
if($result==TRUE)
{
echo "new record created successfully";
}
else
{
echo "Error".$sql."<br>".$conn->error;
}
$conn->close();
}
?>

<html>
<body>
<h2> Signup Form </h2>
<form action="" method="POST"><fieldset><legend> Personal Information </legend>
First Name:<br><input type="text" name="name"><br>
Email:<br><input type="email" name="email"><br>
Password:<br><input type="password" name="password"><br>
<br><input type="submit" name="submit" value="submit"><br>
<a href="view.php" >VIEW DATA</a></fieldset>
</body>
</html>

```

### view.php

```

<?php
include "config.php";
$sql = " SELECT * FROM `local` " ;
$result=$conn->query($sql);
?>

<html>
<head>
<title>view page</title>
</head>

```



```
<body>
<div class="container">
<h2>VIEW</h2>
<table border="1">
<tr>
<th>sino</th>
<th>Name</th>
<th>Email</th>
<th>Password</th>
</tr>
<?php
if($result->num_rows>0)
{
while($row=$result->fetch_assoc())
{
?>
<tr>
<td><?php echo $row['sino'];?></td>
<td><?php echo $row['Name'];?></td>
<td><?php echo $row['Email'];?></td>
<td><?php echo $row['password'];?></td>
<?php
}
}
?>
</table>
</html>
```

## OUTPUT

connectednew record created successfully

### Signup Form

Personal Information

First Name:

Email:

Password:

[VIEW DATA](#)

connected

### Signup Form

Personal Information

First Name:

Email:

Password:

[VIEW DATA](#)

connected

### VIEW

sino	Name	Email	Password
1	anjala michael	anjalamichaelk@gmail.com	123
2	anjala michael	anjalamichael2024@mca.sjcetpalai.ac.in	456

## RESULT

The program has been executed and output is obtained

## PROGRAM – 38

### AIM

Using PHP and MySQL, develop a program to accept book information viz. Accession number, title, authors, edition and publisher from a web page and store the information in a database and to search for a book with the title specified by the user and to display the search results with proper headings.

### SOURCE CODE

#### bookconnect.php

```
<?php
$mysql_host='localhost';
$mysql_user='22mca007';
$mysql_password='2547';
$conn=mysqli_connect($mysql_host,$mysql_user,$mysql_password);
if(mysqli_select_db($conn,'22mca007'))
{echo 'connection successful';
}
else{
echo 'connection failed';
}
?>
```

#### insert.php

```
<?php
include "bookconnect.php";
if(isset($_POST['submit']))
{
$ano=$_POST['ano'];
$title=$_POST['title'];
$author=$_POST['author'];
$edition=$_POST['edition'];
$publisher=$_POST['publisher'];
```

```
$sql = "INSERT INTO `books` ( `ano`,`title`,`author`,`edition`,`publisher`)
VALUES ( '$ano','$title', '$author', '$edition', '$publisher')";
$result=$conn->query($sql);
if($result==TRUE)
{
echo "new record created successfully";
}
else
{
echo "Error".$sql."<br>".$conn->error;
}
$conn->close();
}
?>

<html>
<head>
<title>newcustomer</title>
</head>
<body>
<form method="POST" action="">
<h1>Register</h1><br>
Ano<br>
<input type="text" name="ano" required><br>
<br>
Title<br>
<input type="text" name="title" required><br>
Author<br>
<input type="text" name="author" required><br>
Edition<br>
<input type="text" name="edition" required><br>
Publisher<br>
<input type="text" name="publisher" required>
<br>
<input type="submit" name="submit"
```

```

value="register"><br><br><br><br><br>
<a href="booksearch.php" >VIEW DATA</a>
</form>
</body>
</html>
booksearch.php
<?php
require "bookconnect.php";
if(isset($_POST['sub']))
{ $bookhead=$_POST['btitle'];
$store = "SELECT * FROM `books` WHERE `title` = '$bookhead'";
$result=$conn->query($store);
if($result=mysqli_query($conn,$store))
{
while($query_execute=mysqli_fetch_assoc($result))
{
?><table
border="1"><tr><th>sino</th><th>title</th><th>author</th><th>edition</th><th>publisher
</th></tr>
<tr><td><?php echo $query_execute["ano"];?></td>
<td><?php echo $query_execute["title"];?></td>
<td><?php echo $query_execute["author"];?></td>
<td><?php echo $query_execute["edition"];?></td>
<td><?php echo $query_execute["publisher"];?></td></tr></table>
<?php }
}$con->close();
}
?>
<html>
<head>
<title>book search</title>
</head>
<body><form method="POST" action="">
<label>enter the title</label>

```

```

<input type="text" name="btitle">
<input type="submit" name="sub" value="submit">
<a href="insert.php" >ADD DATA</a>
</form>
</body>
</html>

```

## OUTPUT

connection successfulnew record created successfully

### Register

Ano  
2

Title  
Wings of fire

Author  
Dr.A.P.J Abdul Kalam

Edition  
1

Publisher  
DC Books

[VIEW DATA](#)

---

connection successful

sino	title	author	edition	publisher
1	Programming in C	E. Balaguruswammy	3	Mc Growhill

## RESULT

The program has been executed and output is obtained.