Exercise 8

Ex. No.: 8

Perform Web Spidering

Aim:

The Website Crawler (sometimes referred to as "spider") performs a technical Search Engine Optimization (SEO) audit by crawling your site for issues like broken links, redirects, HTTP status codes, meta tags, and more. To perform web spidering on rajalakshmi.org

Procedure:

1. Navigate to the dashboard.
2. Click “Create Project”, and enter your website’s domain (with or without “https”)
3. Provides an overall website score, total pages scanned, and host information

Issues are categorized by impact:

- Criticals (high-impact issues affecting SEO)
- Warnings (moderate impact)
- Notices (recommendations)
- Opportunities (enhancements beyond baseline corrections)

WEB SPIDERING USING OWASP ZAP

After Downloading the Windows(64) Installer of ZAP , run the setup

After which , access the zap application

In the manual Explore option , type the url to crawl.

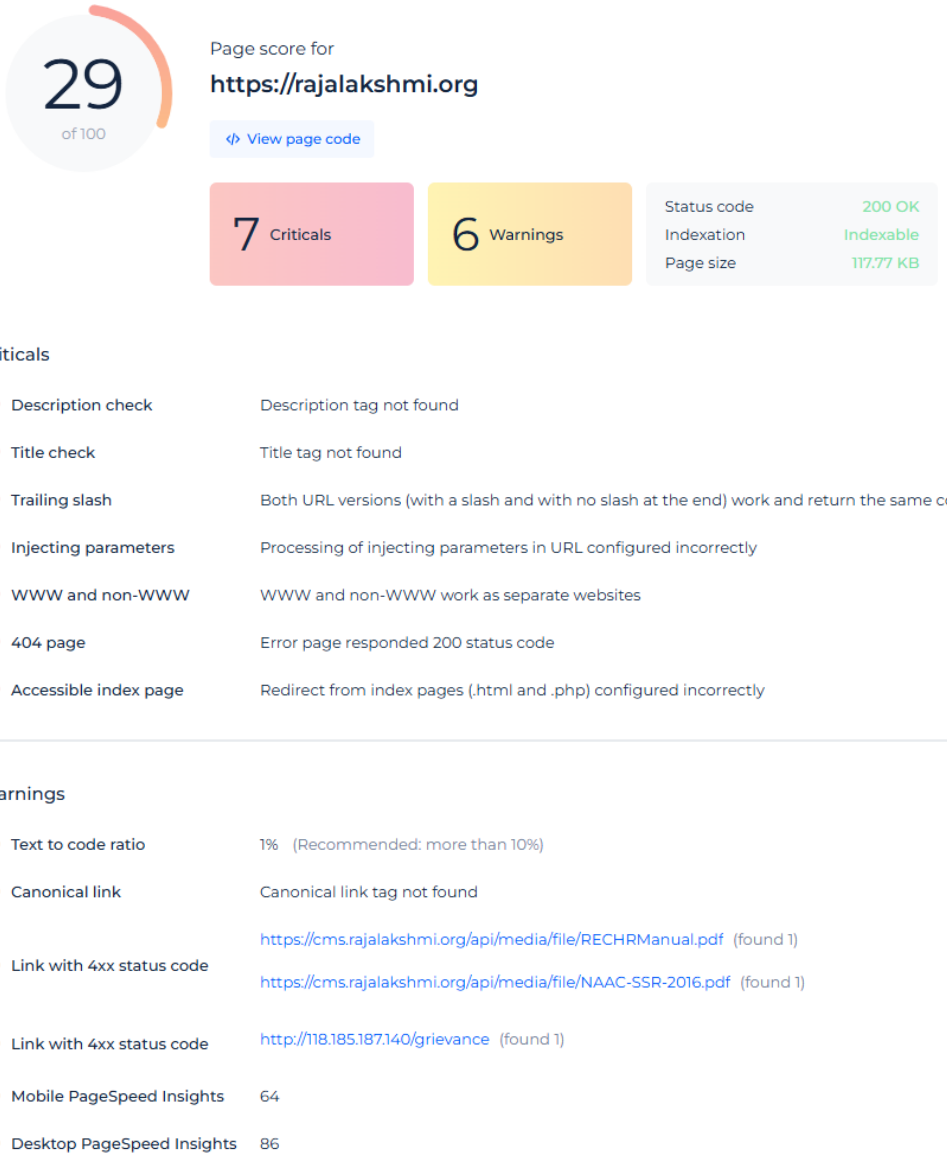
We can also use an option called client spider , just right click the specified url in the sites tab and in the attack options , click client spider

Result:

The crawl findings has to be fixed using meaningful actions by Prioritizing with

Critical issues, then Warnings.

Screenshots

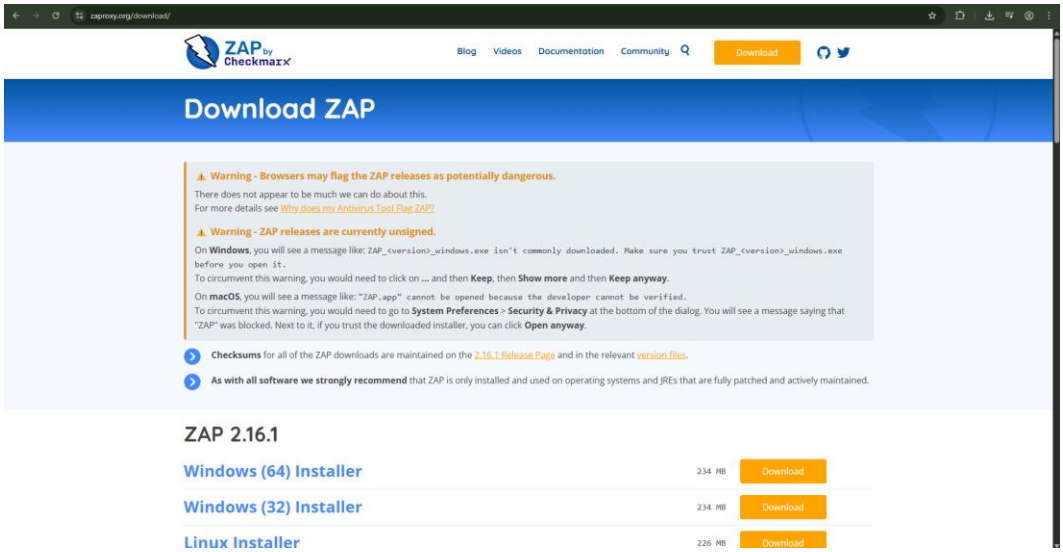


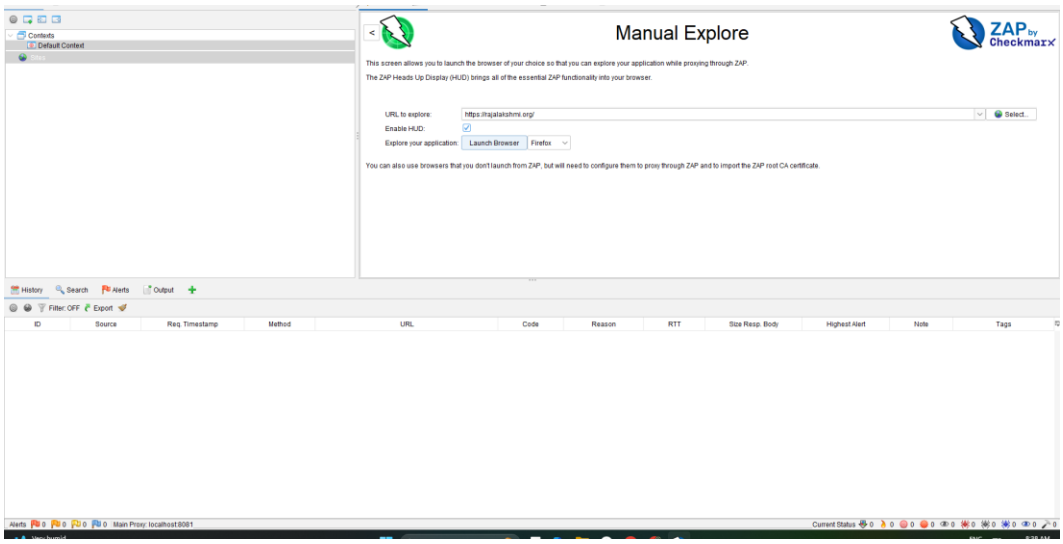
Indexation

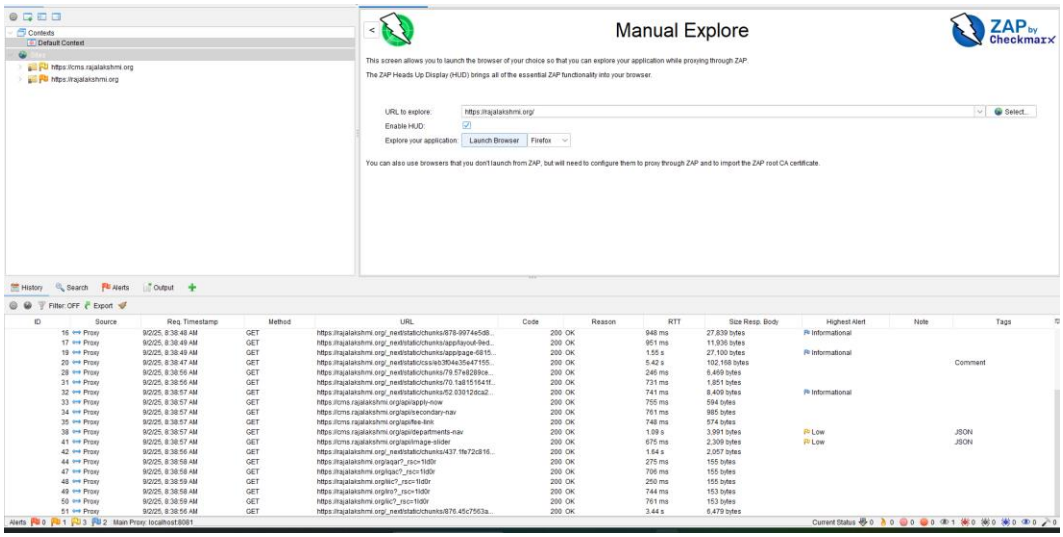
Robots meta tag	Page is open for indexing in robots meta tag
X-Robots-Tag	Page is open for indexing in X-Robots-Tag
Robots.txt file	Page crawling is allowed in robots.txt file
Noindex tag	There is no content in noindex tags

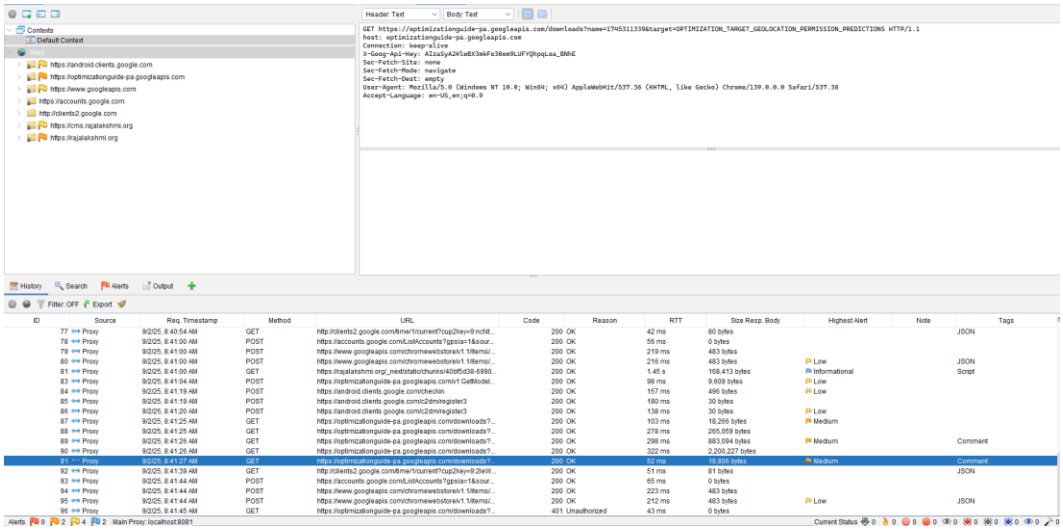
URL vulnerability

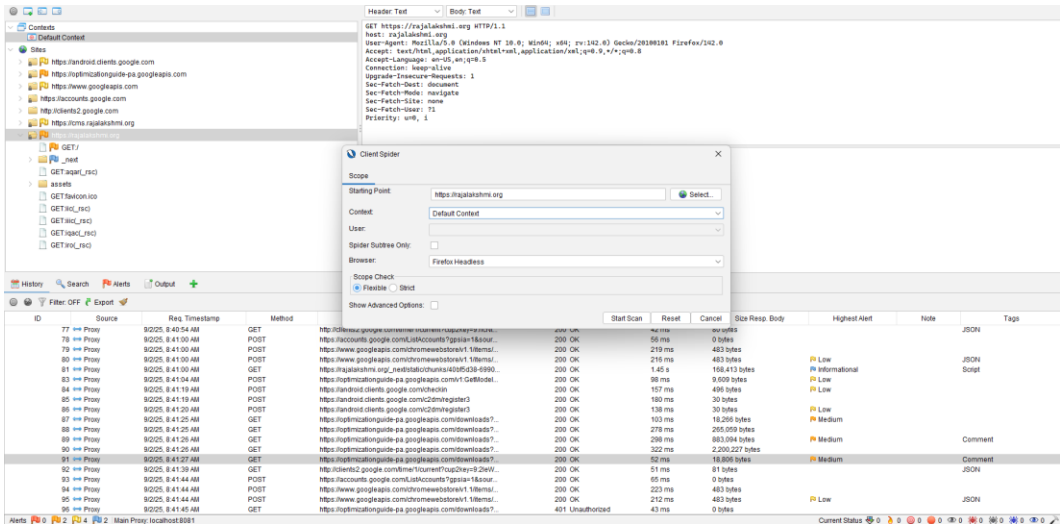
Case sensitive	Page URL is case sensitive
Trailing slash	Both URL versions (with a slash and with no slash at the end) work and return the same content
Injecting parameters	Processing of injecting parameters in URL configured incorrectly
Duplicate slashes	Processing of duplicate slashes in URL configured correctly
HTTP and HTTPS	Working protocol redirect: HTTP to HTTPS
Hidden links	Hidden links not found
WWW and non-WWW	WWW and non-WWW work as separate websites
404 page	Error page responded 200 status code
Accessible index page	Redirect from index pages (.html and .php) configured incorrectly

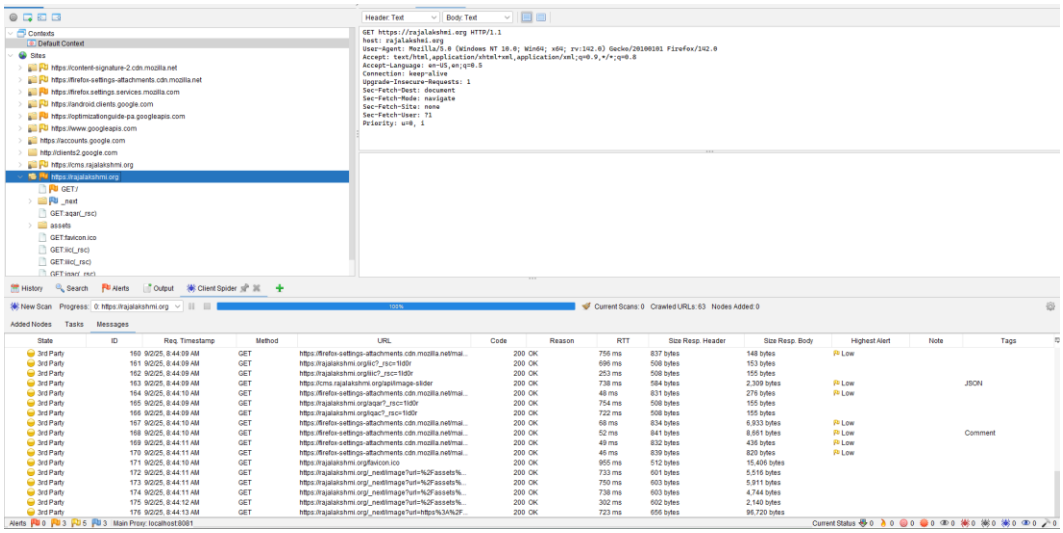



Manual Explore
ZAP by Checkmarx
This screen allows you to launch the browser of your choice so that you can explore your application while proxying through ZAP.
The ZAP Heads Up Display (HUD) brings all of the essential ZAP functionality into your browser.
URL to explore:
https://rajalakshmi.org/
Select...
Enable HUD:
Explore your application:
Launch Browser
Firefox
You can also use browsers that you don't launch from ZAP, but will need to configure them to proxy through ZAP and to import the ZAP root CA certificate.


Manual Explore
ZAP by Checkmarx
This screen allows you to launch the browser of your choice so that you can explore your application while proxying through ZAP.
The ZAP Heads Up Display (HUD) brings all of the essential ZAP functionality into your browser.
URL to explore:
https://rajalakshmi.org/
Select...
Enable HUD:
Explore your application:
Launch Browser
Firefox
You can also use browsers that you don't launch from ZAP, but will need to configure them to proxy through ZAP and to import the ZAP root CA certificate.


GET https://optimizationguide-pa.googleapis.com/downloads?name=1745311339&target=OPTIMIZATION_TARGET_GEOLOCATION_PERMISSION_PREDICTIONS HTTP/1.1
host: optimizationguide-pa.googleapis.com
Connection: keep-alive
X-Goog-Api-Key: AIzaSyA2KlwBX3mkFo30om9LUFYQhpqLoa_BNhE
Sec-Fetch-Site: none
Sec-Fetch-Mode: navigate
Sec-Fetch-Dest: empty
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/139.0.0.0 Safari/537.36
Accept-Language: en-US,en;q=0.9


Client Spider
Scope
Starting Point:
https://rajalakshmi.org
Select...
Context:
Default Context
User:
Spider Subtree Only:
Browser:
Firefox Headless
Scope Check
Flexible
Strict
Show Advanced Options:
Start Scan
Reset
Cancel


Client Spider
New Scan
Progress:
https://rajalakshmi.org
Current Scans: 0
Crawled URLs: 63
Nodes Added: 0
Added Nodes
Tasks
Messages