

20. TM SUBTRACTION OF aaa-aa

=====

```
#include <stdio.h>
```

```
int main() {
```

```
    int a,b,i;
```

```
    printf("Enter first unary number (number of a's): ");
```

```
    scanf("%d",&a);
```

```
    printf("Enter second unary number (number of a's): ");
```

```
    scanf("%d",&b);
```

```
    if(b>a) {
```

```
        printf("Negative result not represented in unary.\n");
```

```
    } else {
```

```
        printf("Result = ");
```

```
        for(i=0;i<a-b;i++) printf("a");
```


```
        if(a==b) printf("epsilon");
```

```
        printf("\n");
```

```
    }
```

```
    return 0;
```

```
}
```

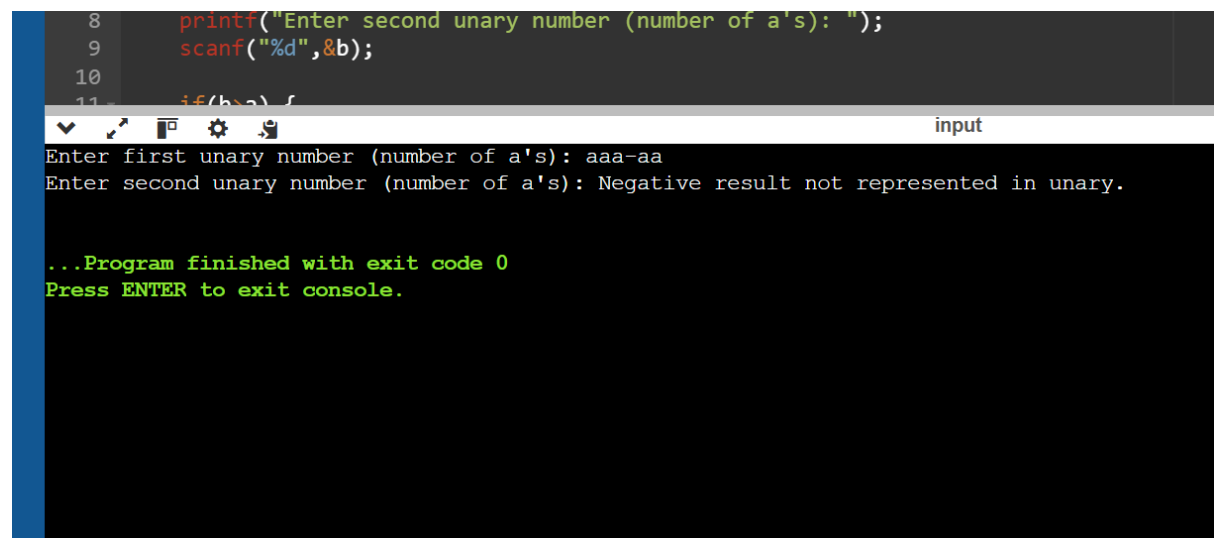

```
8     printf("Enter second unary number (number of a's): ");
9     scanf("%d",&b);
10
11     if(b>a) {
12         printf("Negative result not represented in unary.\n");
13     } else {
14         printf("Result = ");
15         for(i=0;i<a-b;i++) printf("a");
16         if(a==b) printf("epsilon");
17         printf("\n");
18     }
19     return 0;
20 }
```

input

Enter first unary number (number of a's): aaa-aa

Enter second unary number (number of a's): Negative result not represented in unary.

...Program finished with exit code 0

Press ENTER to exit console.