

25. DFA START WITH a OR b

```
=====
```

```
#include <stdio.h>
```

```
int main() {
```

```
    char s[100];
```

```
    printf("Enter string over {a,b}: ");
```

```
    scanf("%s",s);
```


```
    if(s[0]=='a' || s[0]=='b')
```

```
        printf("Accepted\n");
```

```
    else
```

```
        printf("Rejected\n");
```

```
    return 0;
```

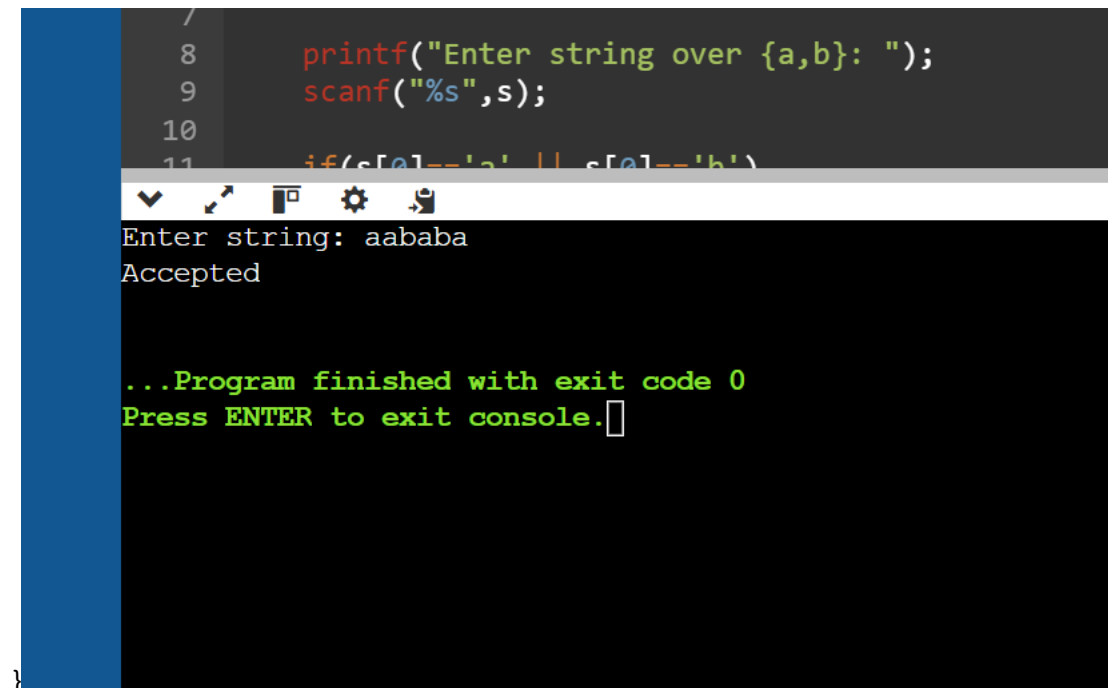

The screenshot shows a code editor with the following C code:

```
7  
8     printf("Enter string over {a,b}: ");  
9     scanf("%s",s);  
10  
11     if(s[0]=='a' || s[0]=='b')
```

Below the code editor, the program's output is displayed in a console window:

```
Enter string: aababa  
Accepted  
  
...Program finished with exit code 0  
Press ENTER to exit console.
```