

33. DFA CONTAINS abc AS SUBSTRING

=====

```
#include <stdio.h>
```

```
#include <string.h>
```

```
int main() {
```

```
    char s[200];
```

```
    int i,found=0;
```

```
    printf("Enter string over {a,b,c}: ");
```

```
    scanf("%s",s);
```

```
    for(i=0;s[i+2]!='\0';i++)
```

```
        if(s[i]=='a' && s[i+1]=='b' && s[i+2]=='c') {
```

```
            found=1;
```

```
            break;
```


```
        }
```

```
    if(found) printf("Accepted\n");
```

```
    else printf("Rejected\n");
```

```
    return 0;
```

```
}
```

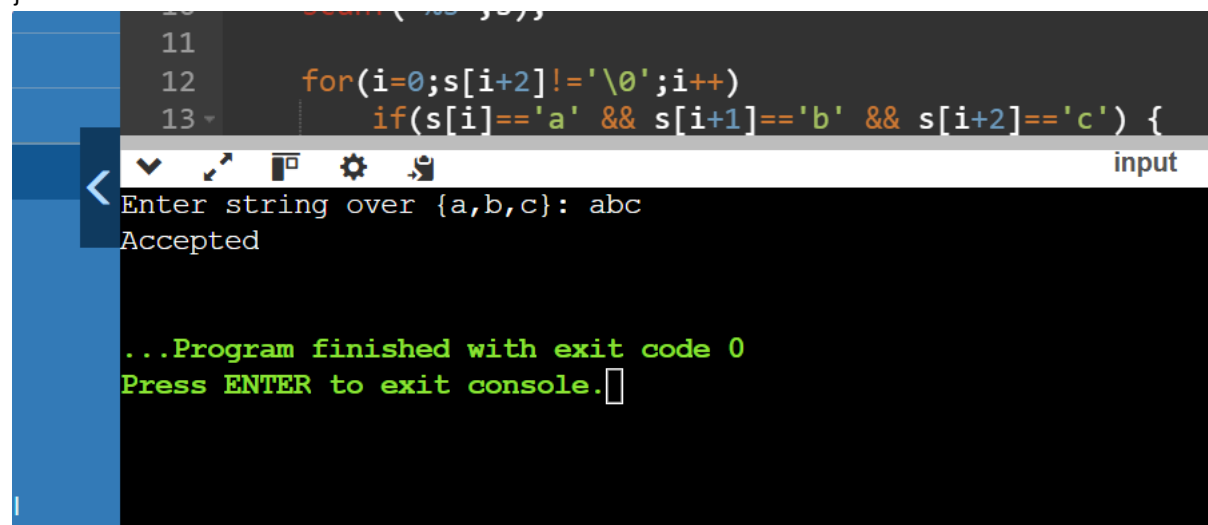

The screenshot shows a code editor with the following C code:

```
11
12     for(i=0;s[i+2]!='\0';i++)
13         if(s[i]=='a' && s[i+1]=='b' && s[i+2]=='c') {
```

Below the code, a terminal window displays the program's execution:

```
< Enter string over {a,b,c}: abc
Accepted

...Program finished with exit code 0
Press ENTER to exit console.
```