

40. NFA ACCEPT ANY NUMBER OF b's, INPUT {a,b}

```
=====
```

```
#include <stdio.h>
```

```
int main() {
```

```
    char s[100];
```

```
    int i,ok=1;
```

```
    printf("Enter string: ");
```

```
    scanf("%s",s);
```

```
    for(i=0;s[i]!='\0';i++)
```

```
        if(s[i]!='b') {
```

```
            ok=0;
```

```
            break;
```


```
        }
```

```
    if(ok) printf("Accepted\n");
```

```
    else printf("Rejected\n");
```

```
    return 0;
```

```
}
```

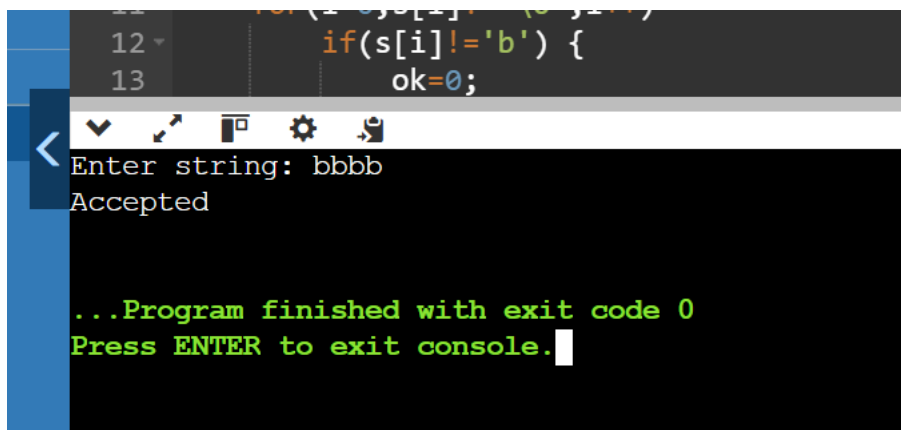

The screenshot shows a code editor with the following C code:

```
12     if(s[i]!='b') {
13         ok=0;
```

Below the code editor, a terminal window displays the program's execution:

```
< Enter string: bbbb
Accepted

...Program finished with exit code 0
Press ENTER to exit console.
```