


Database schema & relationships

Each storage engine has a distinct responsibility. Relationships across engines are enforced by PHP, not foreign keys.

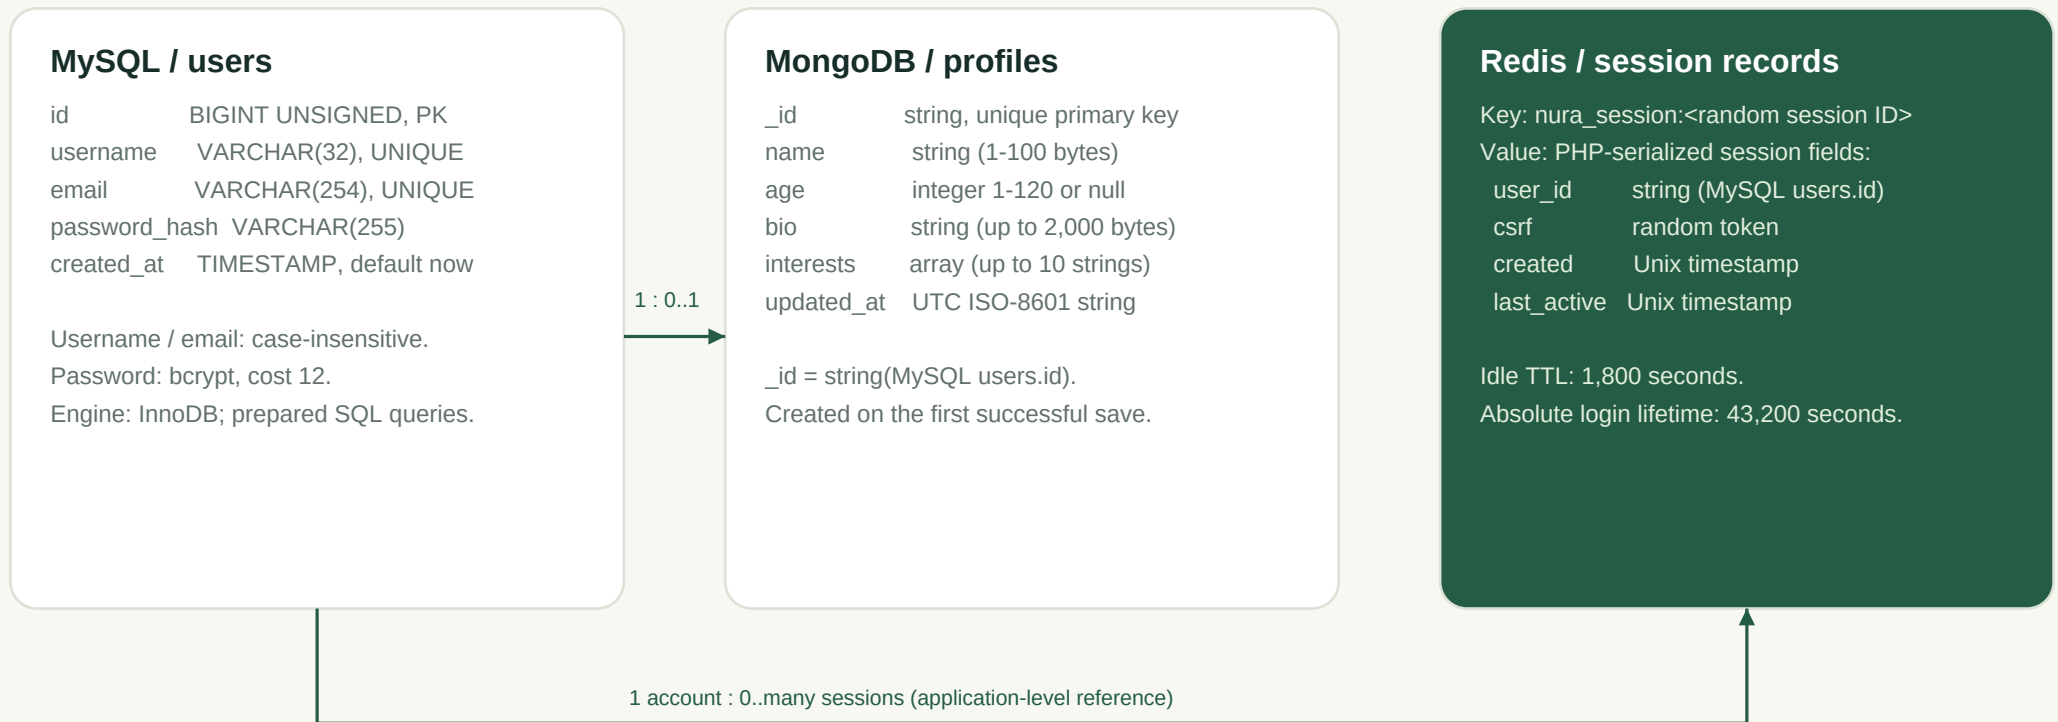

Why profiles are created on first save

Registration writes only to MySQL. MongoDB downtime cannot leave a half-created registration across two databases.

Profile writes always use the signed-in user ID; client-supplied IDs are ignored. MongoDB automatically enforces unique `_id` values.

Redis also holds `rate:<scope>:<SHA-256(client IP)>` counters, atomically incremented with a 900-second expiry.

No passwords are stored in MongoDB or Redis. Only the opaque session ID is sent to the browser in its HttpOnly cookie.