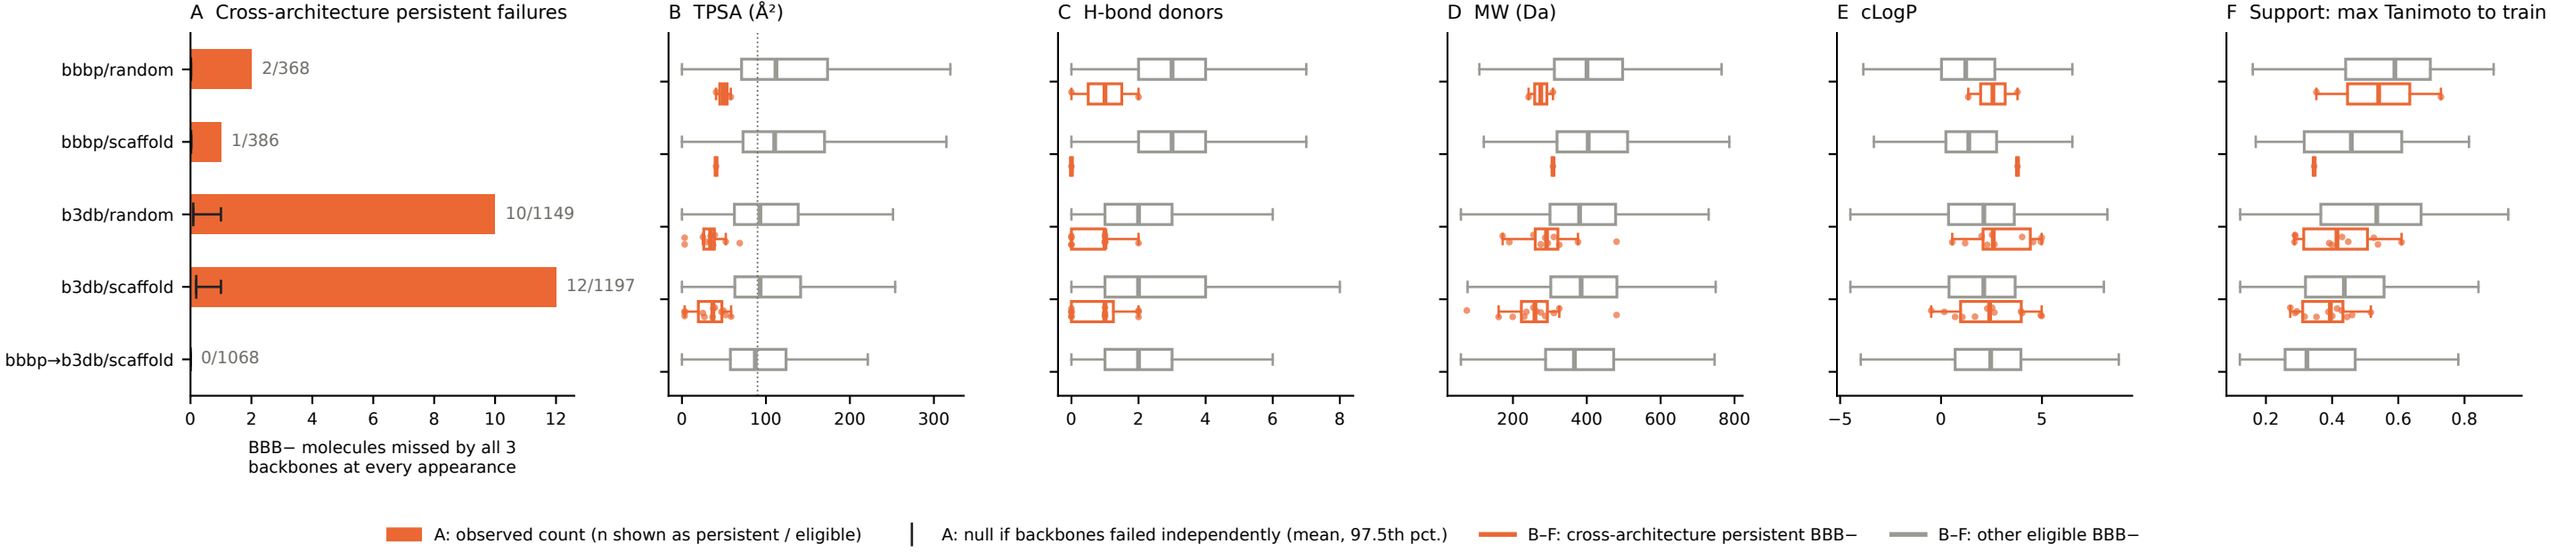
A Cross-architecture persistent failures
bbbp/random
bbbp/scaffold
b3db/random
b3db/scaffold
bbbp→b3db/scaffold
2/368
1/386
10/1149
12/1197
0/1068
0
2
4
6
8
10
12
BBB− molecules missed by all 3 backbones at every appearance
B TPSA (Å²)
0
100
200
300
C H-bond donors
0
2
4
6
8
D MW (Da)
200
400
600
800
E cLogP
−5
0
5
F Support: max Tanimoto to train
0.2
0.4
0.6
0.8
A: observed count (n shown as persistent / eligible)
A: null if backbones failed independently (mean, 97.5th pct.)
B–F: cross-architecture persistent BBB−
B–F: other eligible BBB−