

The Ugly Document

Everything that usually breaks a Markdown renderer

inkless

2026-01-01

Hostile input, on purpose

This file exists to be difficult. It is not a showcase, it is a stress test. Every construct here has broken some renderer somewhere. If the output looks sane, the edge handling works. Some warnings are raised deliberately; run `inkless examples/ugly.md --check` to see them with their source positions.

Punctuation that fights the PDF format

Literal parentheses (and) and) (unbalanced on purpose, and a backslash \ and two backslashes \\ and a trailing one at the end of this line. \ Mixed together: (a\b) \ (c\) ((d)))e(\\(f)\\.

A paragraph made almost entirely of delimiters: () () \\ (\) () (\\ () \ ()) \ () (\) () \\) (\ (

Escaped markup that must stay literal: `\not bold\`, `\not italic\`, `\not code\\`, `\#not a heading`, `\not a link\`, `\!not an image`.

Long unbreakable strings

A word with no spaces at all, which cannot be broken on whitespace and must be broken by width instead:

Supercalifragilisticexpialidociousantidisestablishmentarianism
pneumonoultramicroscopicsilicov
lcanoconiosisflocinaucinihilipilificationhonorificabilitudinitatibus

A path-like string of similar hostility:

/usr/local/share/some/deeply/nested/directory/structure/that/keeps/going/and/going/without/any/
break/opportunity/at/all/final.tar.gz

A URL as an autolink:

<https://example.org/a/very/long/path/that/goes/on/for/a/while/and/then/some/more?query=parameter&another=value&third=yes>

Inside a code span:

this_is_a_single_token_inside_a_code_span_that_is_far_too_wide_for_the_column_
and_must_be_broken

Deep nesting

- Level one
 - Level two
 - Level three
 - Level four
 - Level five
 - Level six, which also has a long line that will wrap and must keep its indentation while doing so
 - Level six, second item
 - Back to five
 - Back to four
 - Back to three
 - 1. An ordered list at depth four
 - 2. Second
 - And unordered again at depth five
 - And once more at six
 - Back to two
- Back to one

Quotes nested inside quotes inside quotes:

One deep.

Two deep, with enough text that it wraps onto a second line and shows whether the rules stack correctly.

Three deep.

Four deep, which is further than anyone should go.

Back to two.

Back to one.

A list inside a quote inside a list:

- Outer item
 - A quote inside the item
 - A list inside the quote
 - Nested again

and a code block inside the quote inside the list
with indentation

- Second outer item

Tabs

```
This line is indented with a single tab and is an indented code block.
This one too.
    And this one has two tabs.
```

```
def tabbed():
    return "this fenced block uses tabs for indentation"

def spaced():
    return "and this one uses spaces, at the same visual depth"
```

Mixed tabs inside a paragraph should collapse to single spaces.

Wide tables

Column one	Column two	Column three	Column four	Column five	Column six
short	short	short	short	short	short
a much longer cell that has to wrap inside its own column	centred and also fairly long	right aligned and long as well	more text here	and here	and finally here
code_in_a_cell()	bold	<i>italic</i>	a link	(parentheses)	backslash
1	22	333	4444	55555	666666

A table whose header is much shorter than its body:


a	b
This cell contains a great deal of text, far more than the header suggests, and it will need several lines to fit into the column it has been given	short

A table with a deliberately mismatched row, which warns:

x	y	z
short row		
kept	kept	kept

Images

A truecolour PNG, embedded:

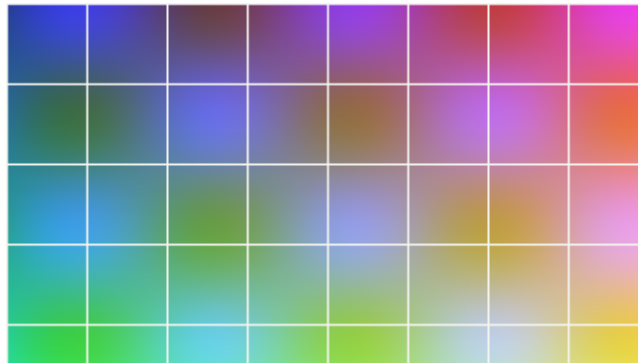

An RGBA PNG with a soft mask, so transparency works:



A file that does not exist, which warns and shows the alt text:

[image: this file is missing]

A file that is not a PNG, which warns and shows the alt text:

[image: a text file pretending to be an image]

An image inline in a sentence, *[image: like this]*, which is shown as alt text because it would have to sit on a text baseline.

Emphasis that fights back

Intraword underscores: snake_case_name, **init**, a_b_c_d_e, and some_module.some_function.

Asterisks used as multiplication: $5 * 3 * 2 = 30$, and $2 * 2 * 2 * 2 = 16$.

Adjacent runs: *a b c*, **a b c**, **a b**.

Nesting: **bold with *italic* inside**, *italic with **bold** inside*, **a link inside bold**, code with `*asterisks*` in it.

Unclosed, which warns: ****this bold never closes and the parser has to cope**

Characters outside WinAnsiEncoding

Accented Latin works: naïve, résumé, Zürich, Ångström, Çedilla, æther, £5, €uro is not in WinAnsi at this position but ¥ and ¢ are, ½ and ¾ and ±.

These cannot be drawn without an embedded font and are replaced with a placeholder, each warned about once: ??, ????????, ????????, ??????, ?.

Degenerate blocks

A heading with nothing after it:

An empty list item:

-

A list item with only a code block:

-

```
x = 1
```

An empty code fence:

A fence that never closes, at the very end of the document, which warns:

```
def unterminated():  
    return "there is no closing fence after this"
```