


LAB EXERSICE #7

Objectives: To implement DDL operation in PL/SQL

Code: //following code is written and compiled in PL/SQL developer.

1. CREATE TABLE:

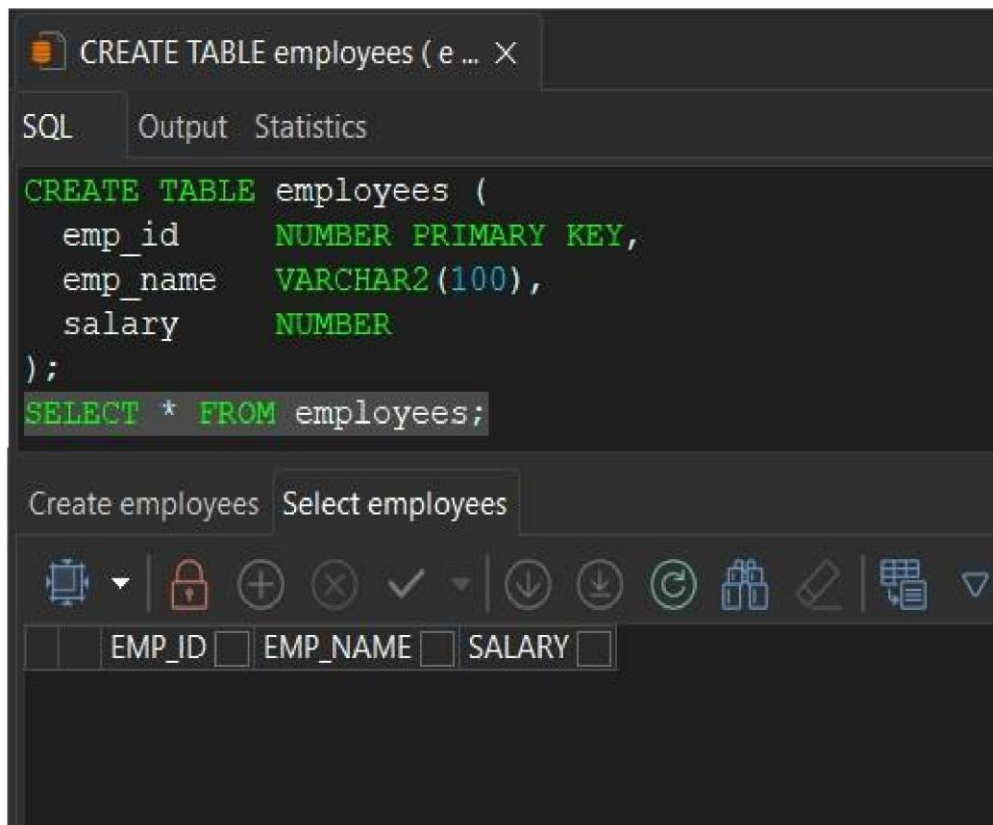


The screenshot displays the PL/SQL Developer interface. At the top, a tab is labeled 'CREATE TABLE employees (e ... X'. Below this, there are three tabs: 'SQL', 'Output', and 'Statistics', with 'SQL' being the active tab. The main text area contains the following SQL code:

```
CREATE TABLE employees (  
    emp_id      NUMBER PRIMARY KEY,  
    emp_name    VARCHAR2(100),  
    salary      NUMBER  
);  
SELECT * FROM employees;
```

Below the code editor, there are two buttons: 'Create employees' and 'Select employees'. Underneath these buttons is a toolbar with various icons for database operations. At the bottom, there is a table structure preview showing three columns: 'EMP_ID', 'EMP_NAME', and 'SALARY', each with a small input box next to it.

2. ALTER TABLE:

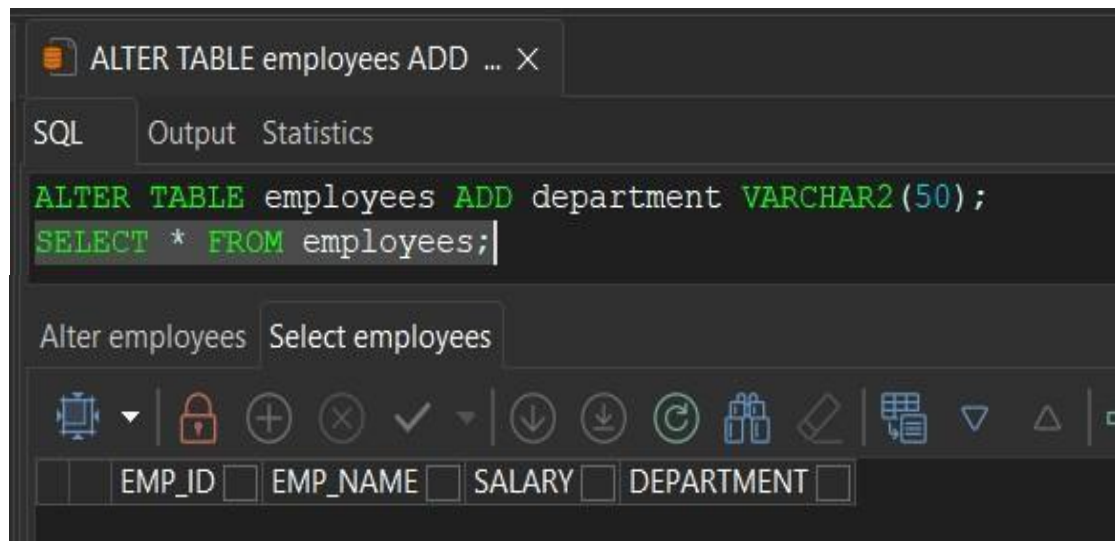

3. DROP TABLE:

