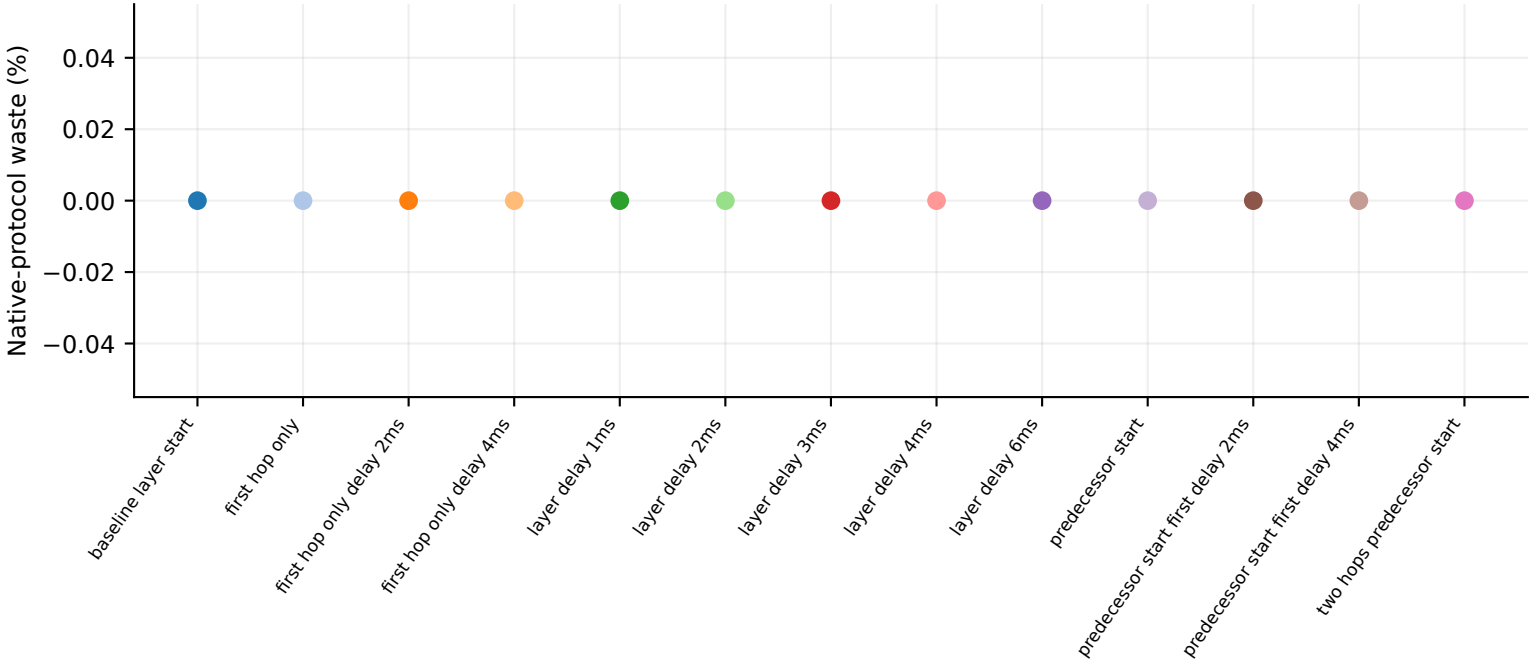
Native-protocol waste (%)
0.04
0.02
0.00
−0.02
−0.04
baseline layer start
first hop only
first hop only delay 2ms
first hop only delay 4ms
layer delay 1ms
layer delay 2ms
layer delay 3ms
layer delay 4ms
layer delay 6ms
predecessor start
predecessor start first delay 2ms
predecessor start first delay 4ms
two hops predecessor start