Compiler-Driven ACE

QFT-96

Complete mesh and torus experiment report

Mapping, routing, congestion, shared-memory allocation
and EPR generation policies

Final measured results for T-HQA QFT-96, five base EPR policies, four mesh routes, torus Dijkstra, seven total-memory capacities, every legal cache allocation and thirteen Dynamic launch variants. The report includes all 210 verified congestion heatmaps, grouped at a readable scale, and graphs with numerical tables and committed CSV links.
Prepared 26 October 2026 (IST). This document presents the completed campaign as one experiment; it is not a chronological account of previous result revisions.

Contents

1 Study design, pipeline and methodology **1**

1.1 Research question and completed experiments . . . 1

1.2 Pipeline . . . 1

1.3 Memory, policies and fixed parameters . . . 2

1.4 Outcome definitions, aggregation and validation . . . 3

2 Congestion definitions, verification and grouped heatmaps **4**

2.1 Mesh / xy . . . 10

2.2 Mesh / yx . . . 24

2.3 Mesh / shortest_reliable . . . 38

2.4 Mesh / max_reliability . . . 52

2.5 Torus / dijkstra . . . 66

3 Mesh: routing-specific memory and policy results **81**

3.1 XY . . . 81

3.2 YX . . . 105

3.3 Shortest Reliable . . . 129

3.4 Max Reliability . . . 153

4 Torus: Dijkstra memory and policy results **178**

4.1 Dijkstra . . . 178

5 Every cache allocation at fixed total memory **203**

5.1 Mesh / xy . . . 203

5.2 Mesh / yx . . . 210

5.3 Mesh / shortest_reliable . . . 217

5.4 Mesh / max_reliability . . . 224

5.5 Torus / dijkstra . . . 231

6 Dynamic structural policies and launch sensitivities **239**

6.1 Mesh / xy . . . 239

6.2 Mesh / yx . . . 255

6.3 Mesh / shortest_reliable . . . 271

6.4 Mesh / max_reliability . . . 287

6.5 Torus / dijkstra . . . 303

7 Final measured comparison and interpretation **320**

A Metric coverage and instrumentation notes **322**

B Evidence, files and reproducibility **323**

Chapter 1

Study design, pipeline and methodology

1.1 Research question and completed experiments

This study measures how routing, communication-memory capacity and EPR pre-generation policies affect a 96-qubit QFT workload in a multicore quantum-network simulator. The principal outcomes are request latency, communication makespan and delivered EPR fidelity. Readiness, memory admission waiting, pair utilisation, waste and retries explain the trade-offs.

The completed base campaign contains 1,639 validated jobs and 6,402 policy/physics-seed evaluations. The separate Dynamic launch phase contains 143 validated jobs and 286 evaluations. All included runs complete every requested hop. The complete factor coverage is:

Factor	Evaluated levels
Circuit and mapping	QFT-96; 766 declared layers; T-HQA and OEE initial placement; seed labels 42, 43, 44
Physical architecture	4×4 mesh; 4×4 torus
Mesh routing	XY, YX, shortest-reliable, maximum-reliability
Torus routing	Dijkstra only
Total communication memory	$M \in \{2, 3, 4, 6, 8, 16, 32\}$ per core
Cache allowance	Every integer $C = 0, \ldots, M - 1$; ODG only needs $C = 0$
Base EPR policies	ODG, CGP, ACGP, Dynamic full-chain, Dynamic first-hop
Physics seeds	0 and 1 for each byte-distinct trace/policy cell
Dynamic launch phase	Thirteen registered variants, all routes, $M = 4$, $C = 3$
Congestion	Fifteen conceptual route artefacts, both counting rules, seven capacities, all sixteen cores

Table 1.1: The completed QFT-96 design. No other benchmark is pooled into these results.

1.2 Pipeline

The pipeline is: QFT circuit → layer decomposition → T-HQA placement → logical (ℓ, q, src, dst) migrations → explicit physical routes → adjacent-hop request trace → ACE EPR policies on SeQUeNCe → validated per-seed records → tables and figures. The audited placement signature is identical across all fifteen artefacts, including torus: this campaign reuses the mesh-derived T-HQA partition. Logical endpoints therefore stay fixed across both topology and routing choices. Mesh–torus comparisons change the physical graph, route and network configuration together under this common placement.

A qubit's successive hops remain ordered; independent qubits can request pairs concurrently in an active layer. The measured event is EPR delivery for a hop. Computation gates, data-qubit relay-slot occupancy and the final QFT state are not fully simulated by these traces. Consequently, communication makespan is not a full hardware QFT runtime and delivered EPR fidelity is not QFT output-state fidelity.

Fifteen conceptual topology/route/seed artefacts reduce to eleven byte-distinct request traces. Identical XY aliases, for example, are simulated once per physics seed and never counted three times. The record retains conceptual aliases for tracing provenance. Seeds that generate the same placement or route are not independent placement samples.

1.3 Memory, policies and fixed parameters

M is the *shared total* number of communication memories per core. It is not a per-neighbour allocation and is distinct from mapper data-qubit slots. C limits cached/prepared EPR occupancy within this total. The autonomous-cache cap follows C in CGP and ACGP; Dynamic uses it for compiler preparation. The generation-capacity setting is $G = \max(1, C)$.

The main memory curves use ODG at $C = 0$ and all cached methods at $C = M-1$. Thus both cache allowance and G change with M: these curves compare the declared policy configurations, not a pure memory-only intervention. The all-allocation chapter includes every C at fixed M and the complete metric CSVs, so a result cannot be mistaken for a globally optimal allocation.

Policy	Evaluated behaviour
ODG	Generate after an eligible request needs an EPR pair; no compiler/autonomous preparation allowance.
CGP	Continuous autonomous neighbour-pair generation with the configured fixed neighbour-selection behaviour.
ACGP	Continuous generation with request-informed adaptive neighbour selection.
Dynamic full-chain	Compiler-directed preparations for the eligible planned chain hops, using the layer-based preparation schedule.
Dynamic first-hop	Keep preparations only for the first hop of each same-qubit, same-layer chain; later hops use physical demand fallback.

Table 1.2: The five base policies share the same workload and physical model within each comparison.

Parameter	Fixed value or rule
Mapper data slots; initially reserved slots	8 per core; 2 initially reserved per core
Mapper link-reliability range	0.1–1.0, derived seeded maps
Preparation trigger; delay	Layer-start; 0 ms in the base phase
Planner lead; Dynamic lookahead	1 layer; 8 layers
Planner coherence window	10 layers
Delta setting	6 layers; fixed-strategy control, not a swept Dynamic objective
Scheduler and admission	Per-qubit; event-driven; starvation guard enabled
Artificial reservation lead	0 ms; required control guard retained
Compiler reservation; demand window	1000 ms; 50 ms
Requested fidelity threshold	0.01
Configured memory fidelity; coherence	0.95; 1 second
Simulation stop	Stop at workload completion; 200-second safety horizon

Table 1.3: Parameters from the frozen execution contract and topology configuration. Planner layers and physical seconds are different quantities.

Internal event time is in picoseconds. Tables convert elapsed durations into milliseconds or seconds. The simulated delay magnitude follows the configured physical/control model; it does not imply that the on-chip hardware or decoherence constants have been independently calibrated. Configured reservation-window lengths are upper booking windows, not automatically the duration for which each resource remains occupied.

1.4 Outcome definitions, aggregation and validation

For hop i, request latency is $L_i = c_i - a_i$, where eligibility a_i is layer activation for its first hop, or predecessor completion for a later hop, and c_i is EPR delivery. It includes admission waiting, control exchange, retries and generation after eligibility. It excludes storage that happened before eligibility. Parallel request latencies must not be summed to obtain makespan.

Metric	Definition used in this report
Mean/median/p95/max	Request distribution within each run; tables then summarise those run-level values. Mean run-p95 is not a pooled percentile across all seeds.
Makespan; throughput	Simulated workload interval through final delivery; completed hop requests divided by this interval. Different routes can have different hop counts.
Admission wait	The event scheduler's explicit pre-admission waiting interval. Generation/service and retry-wait counters are separately recorded and need not form an exact additive decomposition.
Compiler readiness	Fraction of all requests served by a pair physically created before first application submission. Submission and eligibility are different boundaries.
Intended hit; fallback	Intended planned-pair use divided by all requests; fraction not served by a compiler pair. Late compiler use can be an intended hit without being ready.
Compiler waste; expiry	$100(N_{expired} + N_{remaining})/N_{generated}$; expiry is $100N_{expired}/N_{generated}$. Remaining pairs are counted at workload stop.
Protocol waste	The native protocol's separate unused/generated counter. Its accounting population differs from compiler records; the two percentages cannot be added.
Storage; fidelity	Storage among used compiler pairs only; delivered fidelity across delivered EPR pairs; fidelity-at-use among utilised compiler pairs.
Completion	Completed hop requests divided by requested hop requests. All included evaluations have completion fraction one.

Table 1.4: Important metric denominators. Counter diagnostics are retained even when constant; n/a denotes absent or inapplicable instrumentation.

Tables report an equally weighted mean and sample SD across distinct trace/physics runs, recomputed directly from per-seed rows. XY and YX have two observations per primary cell; routes with three distinct traces have six. The SD describes this observed mixture, not an independent-circuit population or a 95% confidence interval. Two physics seeds provide limited statistical precision. Repeated values rounded to zero SD are available unrounded in the linked CSV.

The audit checks the official manifest hash, expected seed rows, full completion, runtime parameters, configuration and trace hashes, each recorded SeQUeNCe identity, metadata source hashes and frozen simulator files at the execution commits. It independently recomputes the saved aggregates. A separate parser verifies trace adjacency, placement replay and each heatmap percentage. The committed per-seed export contains every observation, including results whose original raw job directories are retained only locally.

Chapter 2

Congestion definitions, verification and grouped heatmaps

Congestion here is a *structural trace-demand proxy*, separate from measured temporal occupancy. For each communication-active layer and core, route counting assigns one demand per traversing qubit route; hop counting assigns one per adjacent-hop incidence, so an internal relay is counted twice. Endpoints count once under either definition. Neither proxy is a measured simultaneous-residency trace or a proof of a physical occupancy bound.

For total demand D, endpoint demand E and capacity M, total overload is $D > M$, own/source–destination overload is $E > M$, and relay-only overload is $E \leq M < D$. Own and relay-only are disjoint and exactly partition total overload. Percentages divide by the number of *communication-active layers*, not all 766 declared circuit layers. Zero overload means the selected structural proxy fits the capacity; it does not guarantee zero ACE queueing from cached pairs.

All 210 original heatmap cells were checked against independently parsed request traces: 15 conceptual route artefacts × 7 capacities × 2 definitions. Every one of the 3,360 core rows, containing three overload percentages, matches the stored data. Each trace has 226 communication-active layers, which supply the percentage denominator. The following atlas regenerates these verified values as readable groups of three seeds, rather than shrinking 21 original images into a single page. Every group has its exact 16-core table and CSV link. A common 0–100% colour scale makes pages comparable.

The six overview graphs report overloaded active-layer percentage, overloaded core-layer count and summed excess demand, for both definitions. Their seed SDs refer to three *conceptual reliability seed labels*; repeated XY/YX aliases do not become independent mappings. The atlas retains all aliases for completeness.

Topology / route	Seed labels	Migrations	Adjacent hops
Mesh / XY	42, 43, 44	1965	3876
Mesh / YX	42, 43, 44	1965	3876
Mesh / shortest-reliable	42, 43, 44	1965	3876
Mesh / maximum-reliability	42	1965	4242
Mesh / maximum-reliability	43	1965	5396
Mesh / maximum-reliability	44	1965	4774
Torus / Dijkstra	42, 43, 44	1965	3186

Table 2.1: Validated trace structure. Every conceptual artefact has 766 declared and 226 communication-active layers, with the same T-HQA placement signature. Exact source CSV.

Route counting: Overloaded active layers (%)

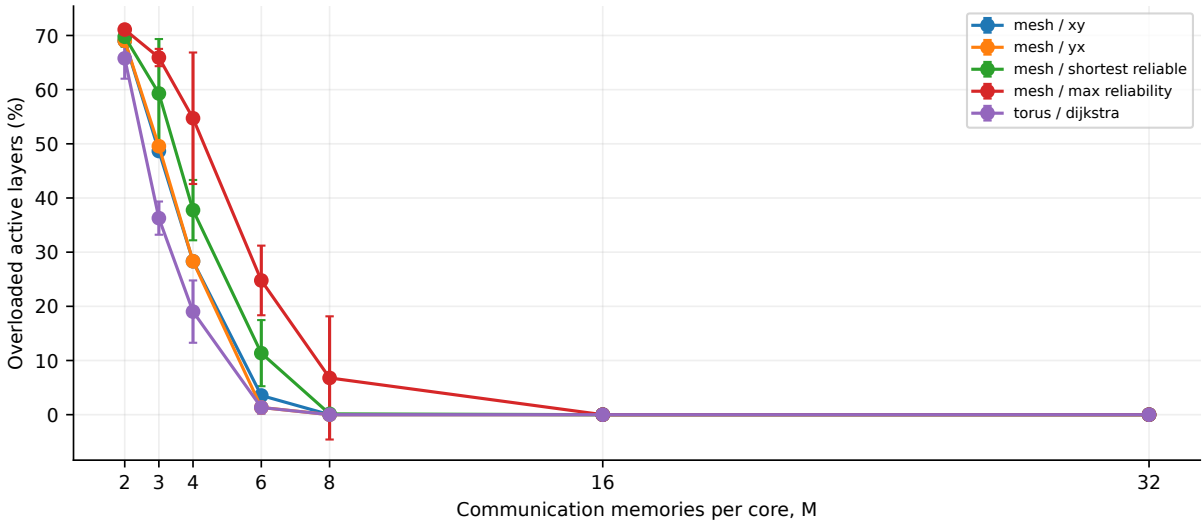


Figure 2.1: Mean and sample SD across three conceptual reliability-seed labels. Identical route aliases are not independent mappings.

M	XY	YX	Short-rel	Max-rel	Torus Dijk.
2	69.027 ± 0.000	69.027 ± 0.000	69.764 ± 1.842	71.091 ± 0.255	65.782 ± 3.763
3	48.673 ± 0.000	49.558 ± 0.000	59.292 ± 10.051	65.929 ± 1.595	36.283 ± 3.066
4	28.319 ± 0.000	28.319 ± 0.000	37.758 ± 5.568	54.720 ± 12.137	19.027 ± 5.752
6	3.540 ± 0.000	1.327 ± 0.000	11.357 ± 6.104	24.779 ± 6.427	1.327 ± 1.171
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.1475 ± 0.2555	6.785 ± 11.370	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 2.2: Overloaded active layers (%) for route counting.

Exact CSV values and sample counts

Route counting: Overloaded core-layers

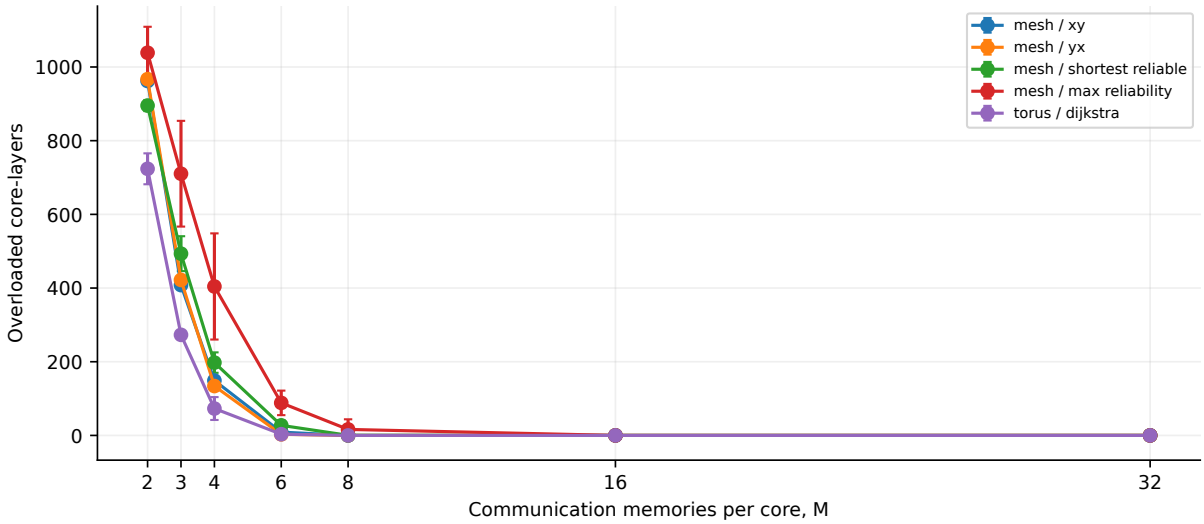


Figure 2.2: Mean and sample SD across three conceptual reliability-seed labels. Identical route aliases are not independent mappings.

M	XY	YX	Short-rel	Max-rel	Torus Dijk.
2	962.00 ± 0.00	967.00 ± 0.00	895.33 ± 15.04	1038.67 ± 70.49	723.67 ± 41.96
3	408.00 ± 0.00	422.00 ± 0.00	493.33 ± 47.35	710.33 ± 143.49	273.00 ± 4.36
4	149.00 ± 0.00	134.00 ± 0.00	197.67 ± 27.75	404.33 ± 144.07	73.000 ± 31.048
6	9.000 ± 0.000	3.000 ± 0.000	27.333 ± 13.429	88.333 ± 33.292	3.333 ± 2.887
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.3333 ± 0.5774	16.333 ± 27.429	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 2.3: Overloaded core-layers for route counting.

Exact CSV values and sample counts

Route counting: Excess demand

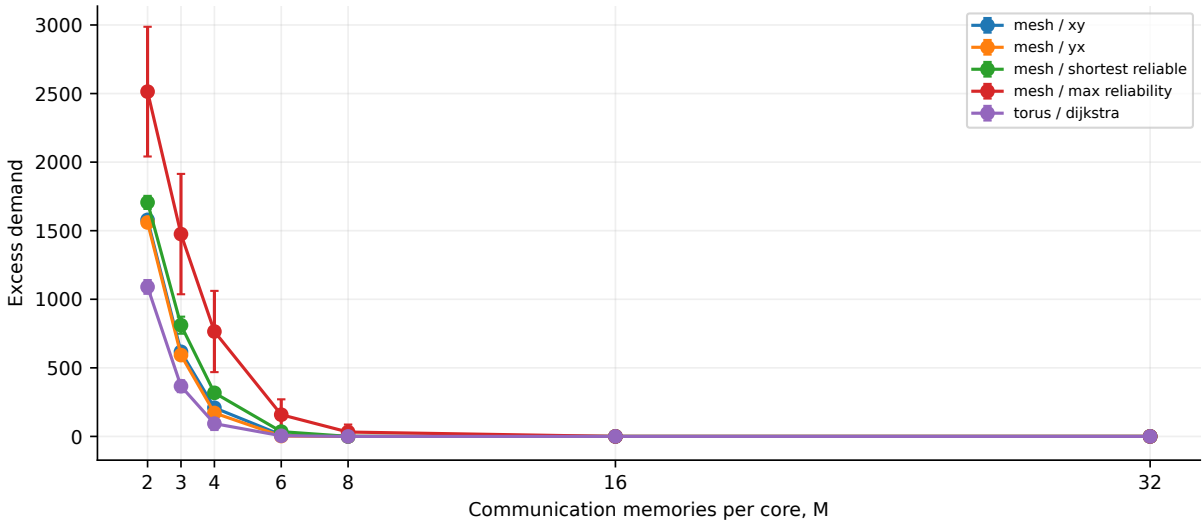


Figure 2.3: Mean and sample SD across three conceptual reliability-seed labels. Identical route aliases are not independent mappings.

M	XY	YX	Short-rel	Max-rel	Torus Dijk.
2	1579.00 ± 0.00	1560.00 ± 0.00	1706.33 ± 47.65	2514.00 ± 472.90	1090.00 ± 50.21
3	617.00 ± 0.00	593.00 ± 0.00	811.00 ± 62.22	1475.33 ± 438.79	366.33 ± 43.39
4	209.00 ± 0.00	171.00 ± 0.00	317.67 ± 17.62	765.00 ± 296.14	93.333 ± 46.608
6	11.000 ± 0.000	3.000 ± 0.000	35.000 ± 17.349	158.33 ± 112.17	4.667 ± 4.163
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.3333 ± 0.5774	32.000 ± 54.562	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 2.4: Excess demand for route counting.

Exact CSV values and sample counts

Hop counting: Overloaded active layers (%)

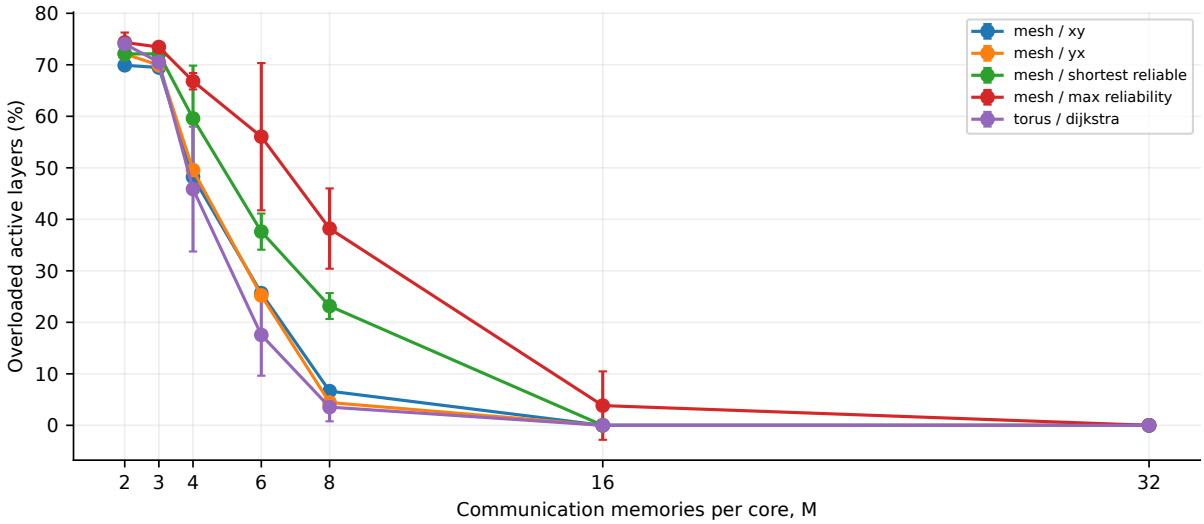


Figure 2.4: Mean and sample SD across three conceptual reliability-seed labels. Identical route aliases are not independent mappings.

M	XY	YX	Short-rel	Max-rel	Torus Dijk.
2	69.912 ± 0.000	72.124 ± 0.000	72.124 ± 1.533	74.336 ± 1.929	74.041 ± 0.921
3	69.469 ± 0.000	69.912 ± 0.000	72.124 ± 1.533	73.451 ± 0.442	70.501 ± 1.114
4	48.230 ± 0.000	49.558 ± 0.000	59.587 ± 10.257	66.814 ± 1.595	45.870 ± 12.120
6	25.664 ± 0.000	25.221 ± 0.000	37.611 ± 3.512	56.047 ± 14.299	17.552 ± 7.919
8	6.637 ± 0.000	4.425 ± 0.000	23.156 ± 2.516	38.201 ± 7.795	3.540 ± 2.763
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	3.835 ± 6.642	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 2.5: Overloaded active layers (%) for hop counting.

Exact CSV values and sample counts

Hop counting: Overloaded core-layers

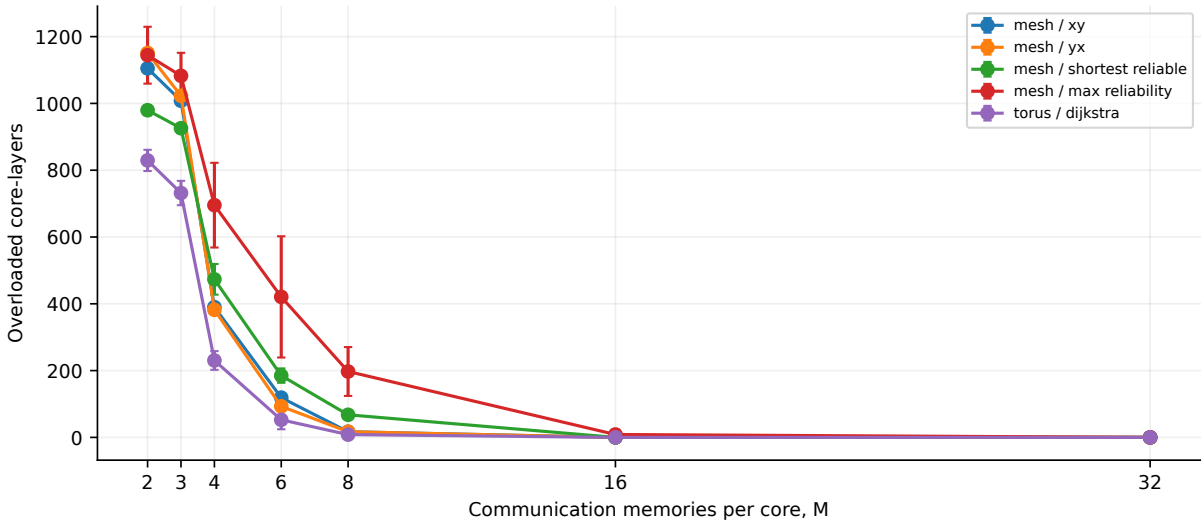


Figure 2.5: Mean and sample SD across three conceptual reliability-seed labels. Identical route aliases are not independent mappings.

M	XY	YX	Short-rel	Max-rel	Torus Dijk.
2	1105.00 ± 0.00	1151.00 ± 0.00	979.67 ± 15.01	1144.33 ± 85.15	829.33 ± 31.77
3	1008.00 ± 0.00	1023.00 ± 0.00	925.67 ± 10.02	1082.67 ± 68.81	731.67 ± 36.47
4	390.00 ± 0.00	382.00 ± 0.00	473.33 ± 45.94	695.33 ± 126.77	230.33 ± 28.01
6	119.00 ± 0.00	93.000 ± 0.000	185.00 ± 21.52	420.67 ± 181.48	52.667 ± 28.361
8	17.000 ± 0.000	17.000 ± 0.000	67.667 ± 9.238	197.33 ± 73.11	8.333 ± 6.429
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	8.667 ± 15.011	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 2.6: Overloaded core-layers for hop counting.

Exact CSV values and sample counts

Hop counting: Excess demand

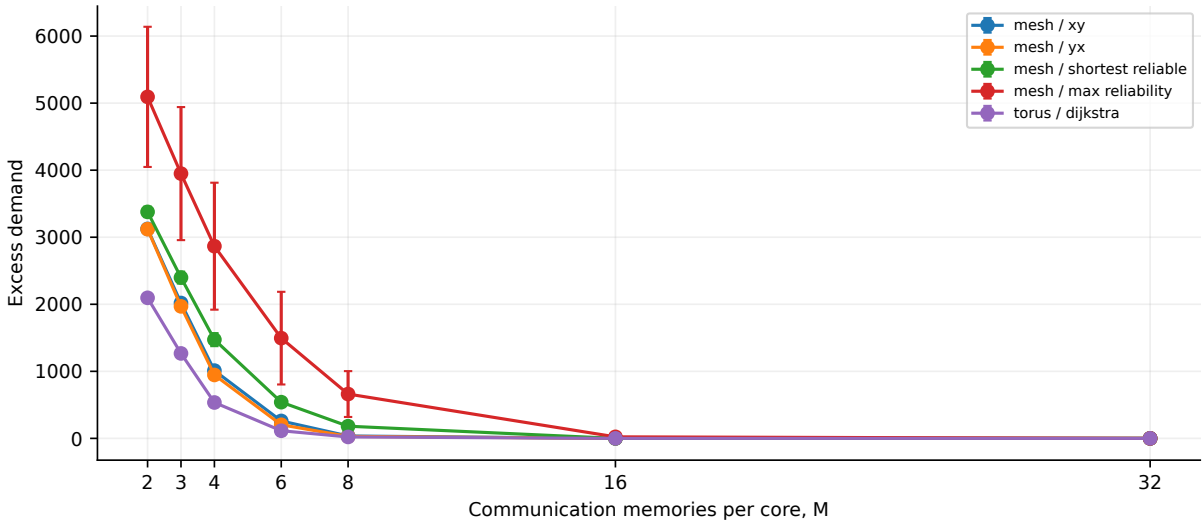


Figure 2.6: Mean and sample SD across three conceptual reliability-seed labels. Identical route aliases are not independent mappings.

M	XY	YX	Short-rel	Max-rel	Torus Dijk.
2	3124.00 ± 0.00	3120.00 ± 0.00	3378.00 ± 77.95	5093.33 ± 1045.34	2096.33 ± 48.79
3	2019.00 ± 0.00	1969.00 ± 0.00	2398.33 ± 89.20	3949.00 ± 992.16	1267.00 ± 42.23
4	1011.00 ± 0.00	946.00 ± 0.00	1472.67 ± 97.39	2866.33 ± 946.75	535.33 ± 52.79
6	260.00 ± 0.00	203.00 ± 0.00	540.33 ± 24.21	1495.00 ± 691.03	114.00 ± 72.19
8	36.000 ± 0.000	30.000 ± 0.000	181.67 ± 49.07	661.33 ± 341.95	21.667 ± 18.230
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	23.000 ± 39.837	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 2.7: Excess demand for hop counting.

Exact CSV values and sample counts

2.1 Mesh / xy

Mesh xy; M=2; route counting

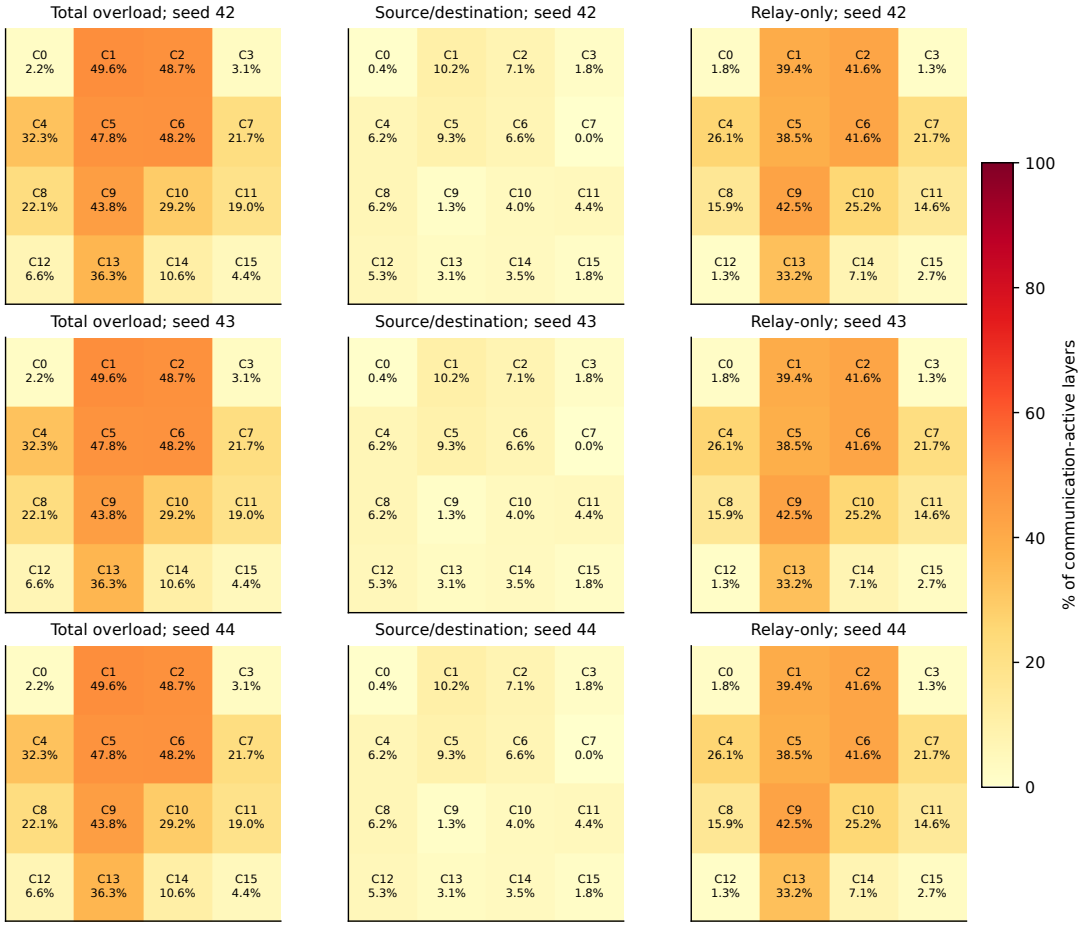


Figure 2.7: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	2.212	0.442	1.770	2.212	0.442	1.770	2.212	0.442	1.770
1	49.558	10.177	39.381	49.558	10.177	39.381	49.558	10.177	39.381
2	48.673	7.080	41.593	48.673	7.080	41.593	48.673	7.080	41.593
3	3.097	1.770	1.327	3.097	1.770	1.327	3.097	1.770	1.327
4	32.301	6.195	26.106	32.301	6.195	26.106	32.301	6.195	26.106
5	47.788	9.292	38.496	47.788	9.292	38.496	47.788	9.292	38.496
6	48.230	6.637	41.593	48.230	6.637	41.593	48.230	6.637	41.593
7	21.681	0.000	21.681	21.681	0.000	21.681	21.681	0.000	21.681
8	22.124	6.195	15.929	22.124	6.195	15.929	22.124	6.195	15.929
9	43.805	1.327	42.478	43.805	1.327	42.478	43.805	1.327	42.478
10	29.204	3.982	25.221	29.204	3.982	25.221	29.204	3.982	25.221
11	19.027	4.425	14.602	19.027	4.425	14.602	19.027	4.425	14.602
12	6.637	5.310	1.327	6.637	5.310	1.327	6.637	5.310	1.327
13	36.283	3.097	33.186	36.283	3.097	33.186	36.283	3.097	33.186
14	10.619	3.540	7.080	10.619	3.540	7.080	10.619	3.540	7.080
15	4.425	1.770	2.655	4.425	1.770	2.655	4.425	1.770	2.655

Table 2.8: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=3; route counting

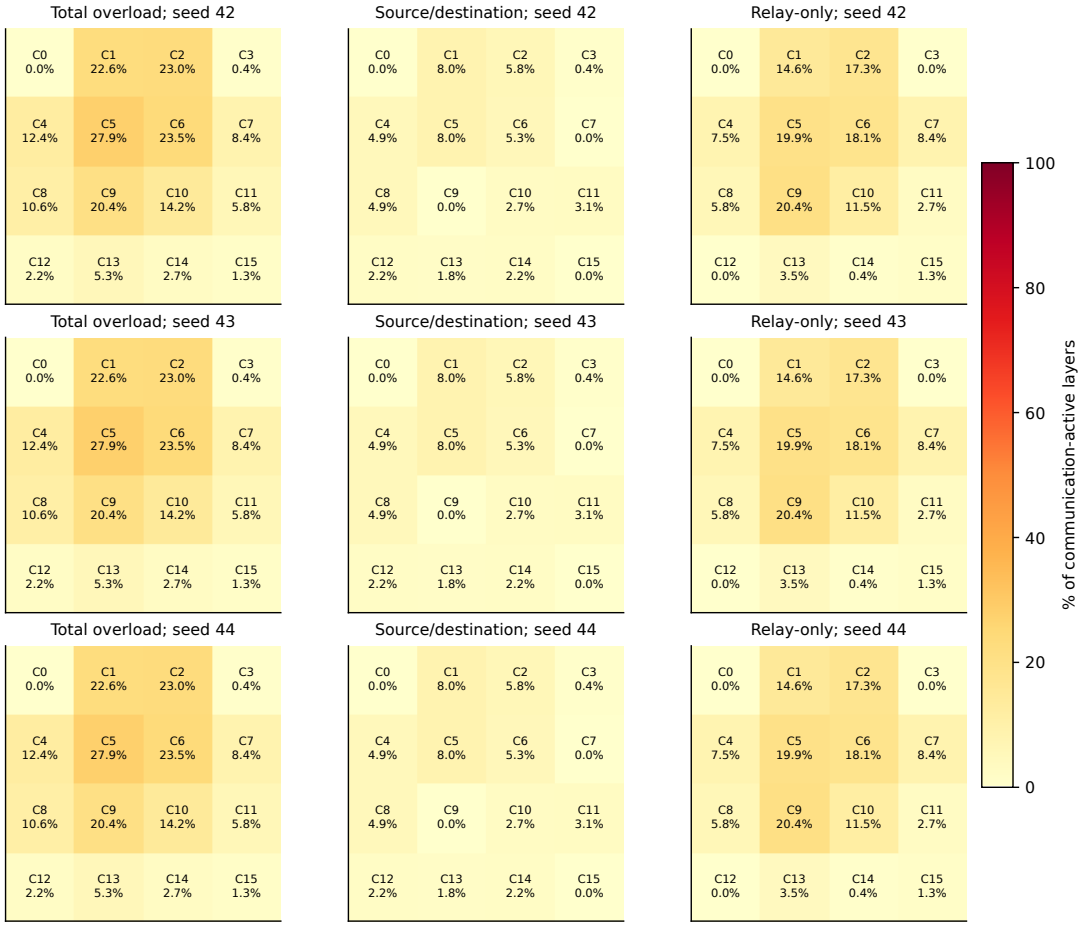


Figure 2.8: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	22.566	7.965	14.602	22.566	7.965	14.602	22.566	7.965	14.602
2	23.009	5.752	17.257	23.009	5.752	17.257	23.009	5.752	17.257
3	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
4	12.389	4.867	7.522	12.389	4.867	7.522	12.389	4.867	7.522
5	27.876	7.965	19.912	27.876	7.965	19.912	27.876	7.965	19.912
6	23.451	5.310	18.142	23.451	5.310	18.142	23.451	5.310	18.142
7	8.407	0.000	8.407	8.407	0.000	8.407	8.407	0.000	8.407
8	10.619	4.867	5.752	10.619	4.867	5.752	10.619	4.867	5.752
9	20.354	0.000	20.354	20.354	0.000	20.354	20.354	0.000	20.354
10	14.159	2.655	11.504	14.159	2.655	11.504	14.159	2.655	11.504
11	5.752	3.097	2.655	5.752	3.097	2.655	5.752	3.097	2.655
12	2.212	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000
13	5.310	1.770	3.540	5.310	1.770	3.540	5.310	1.770	3.540
14	2.655	2.212	0.442	2.655	2.212	0.442	2.655	2.212	0.442
15	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327

Table 2.9: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=4; route counting

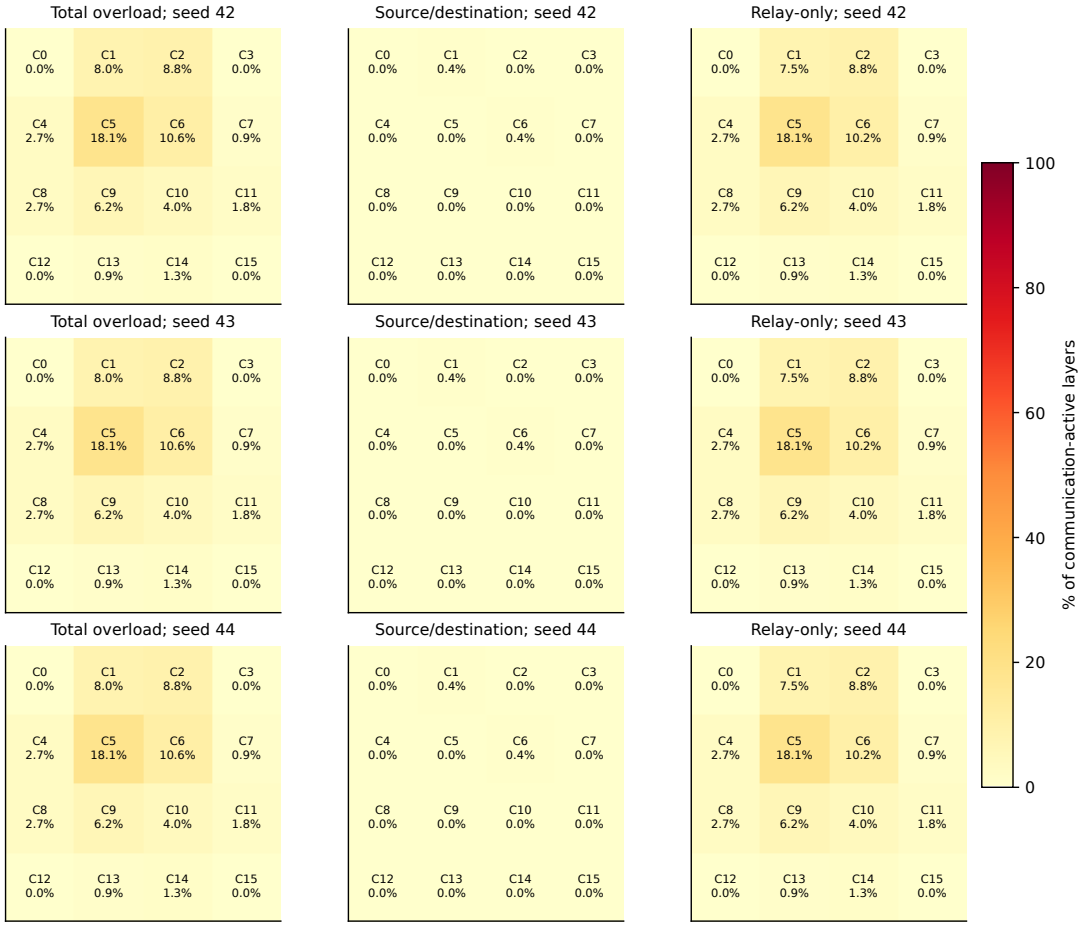


Figure 2.9: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	7.965	0.442	7.522	7.965	0.442	7.522	7.965	0.442	7.522
2	8.850	0.000	8.850	8.850	0.000	8.850	8.850	0.000	8.850
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	2.655	0.000	2.655	2.655	0.000	2.655	2.655	0.000	2.655
5	18.142	0.000	18.142	18.142	0.000	18.142	18.142	0.000	18.142
6	10.619	0.442	10.177	10.619	0.442	10.177	10.619	0.442	10.177
7	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
8	2.655	0.000	2.655	2.655	0.000	2.655	2.655	0.000	2.655
9	6.195	0.000	6.195	6.195	0.000	6.195	6.195	0.000	6.195
10	3.982	0.000	3.982	3.982	0.000	3.982	3.982	0.000	3.982
11	1.770	0.000	1.770	1.770	0.000	1.770	1.770	0.000	1.770
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
14	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.10: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=6; route counting

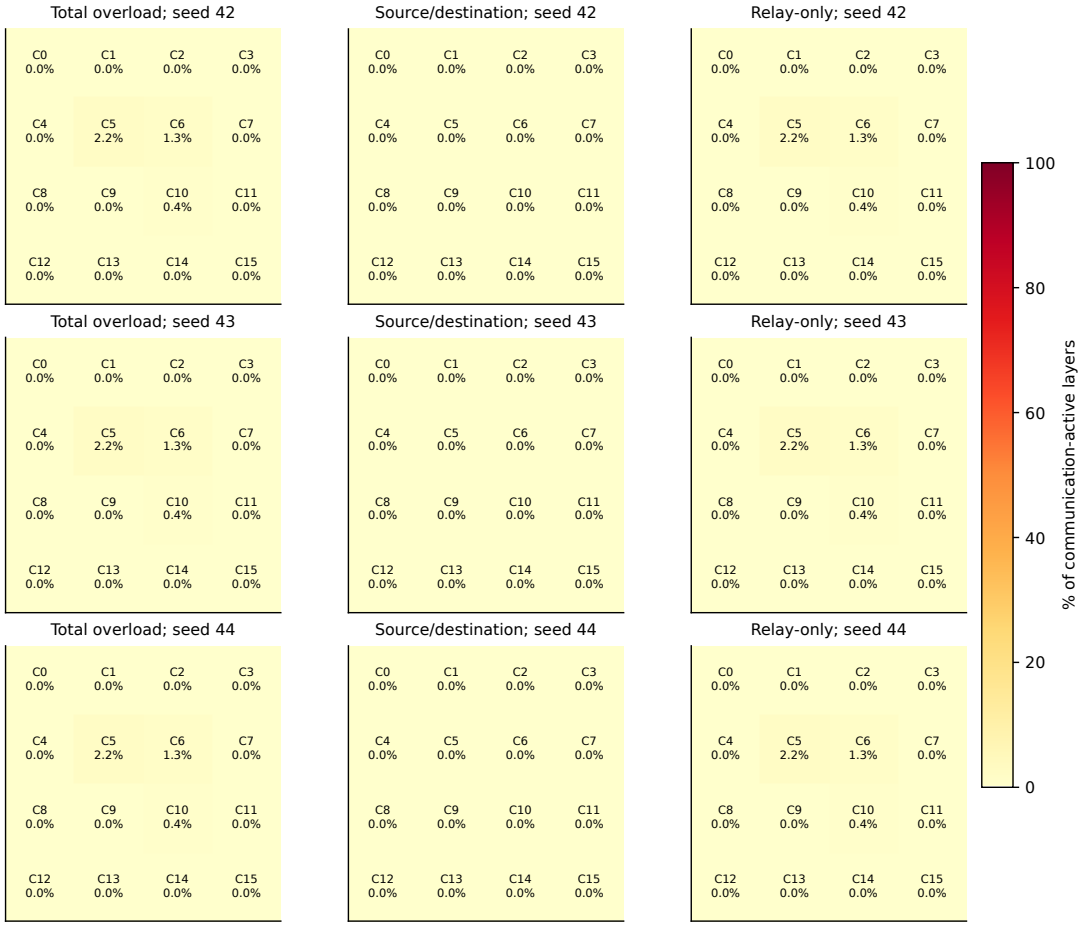


Figure 2.10: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000	2.212
6	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.11: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=8; route counting

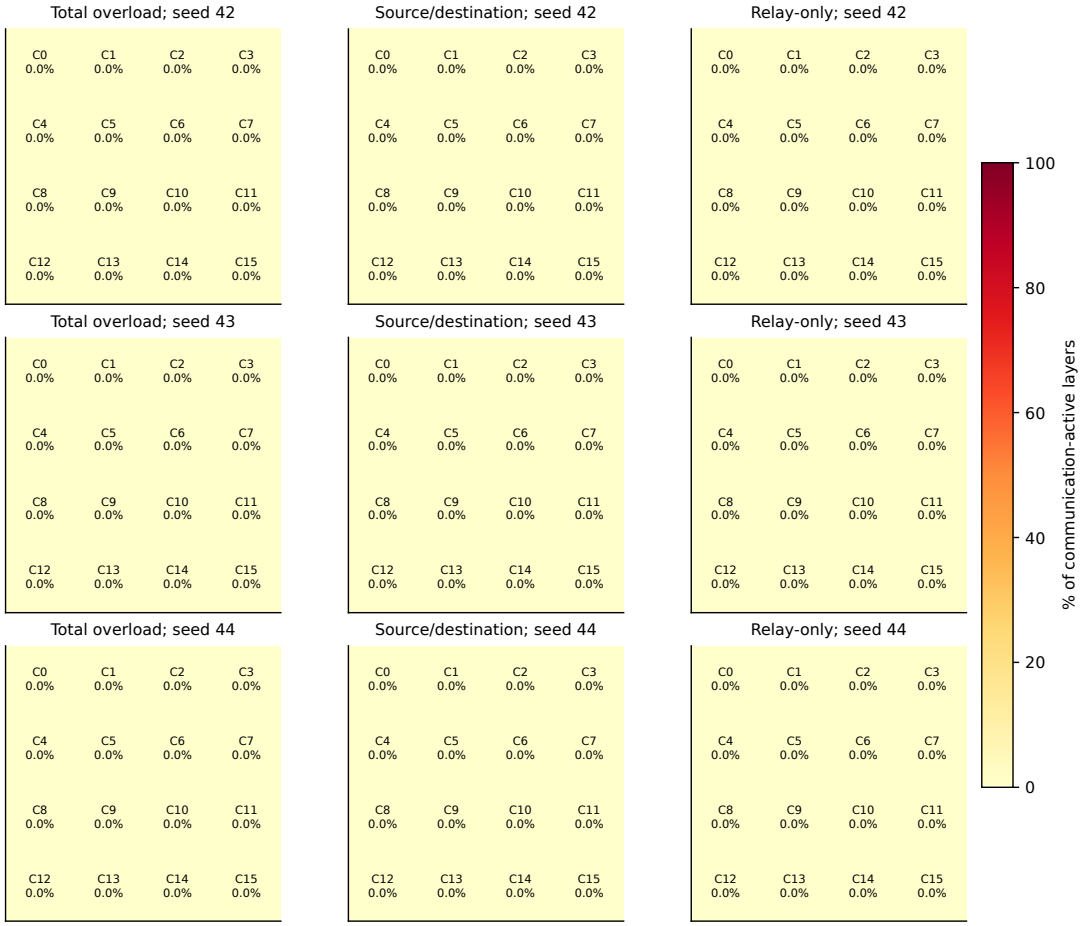


Figure 2.11: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.12: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=16; route counting

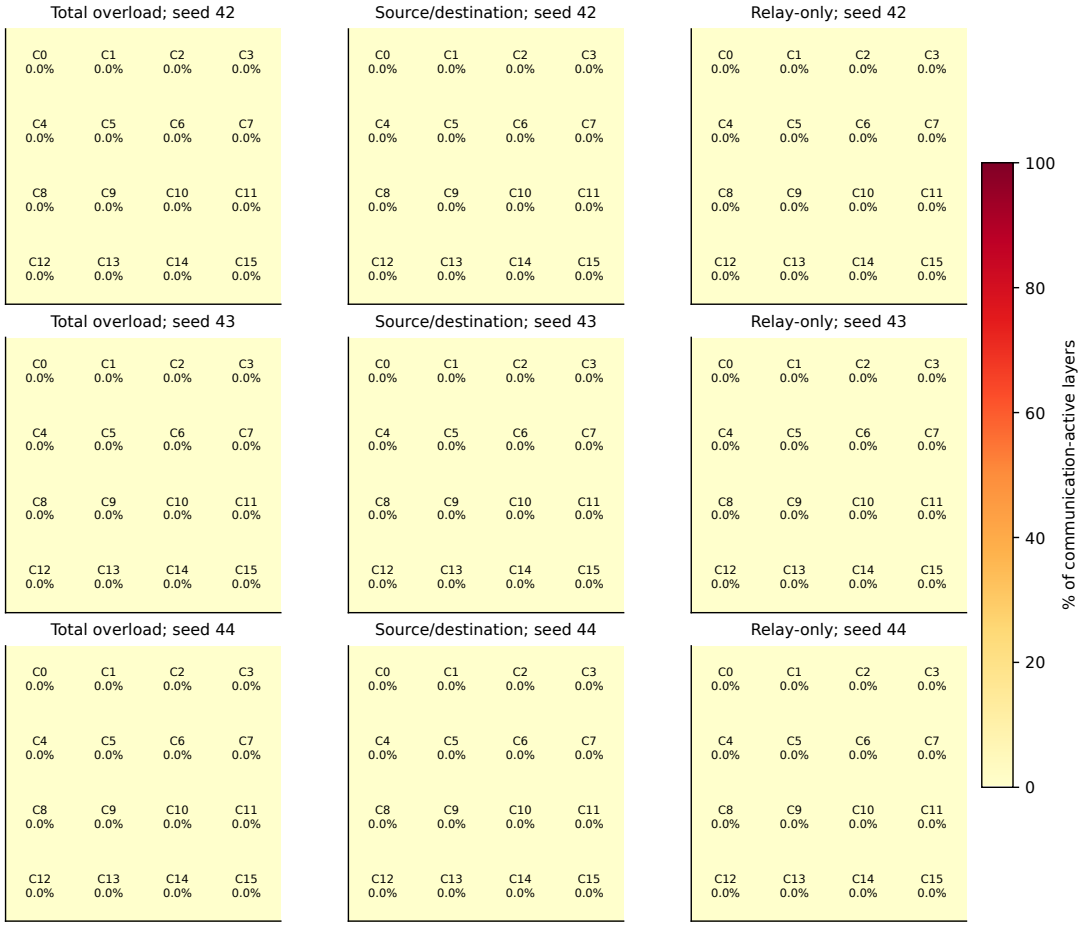


Figure 2.12: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.13: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=32; route counting

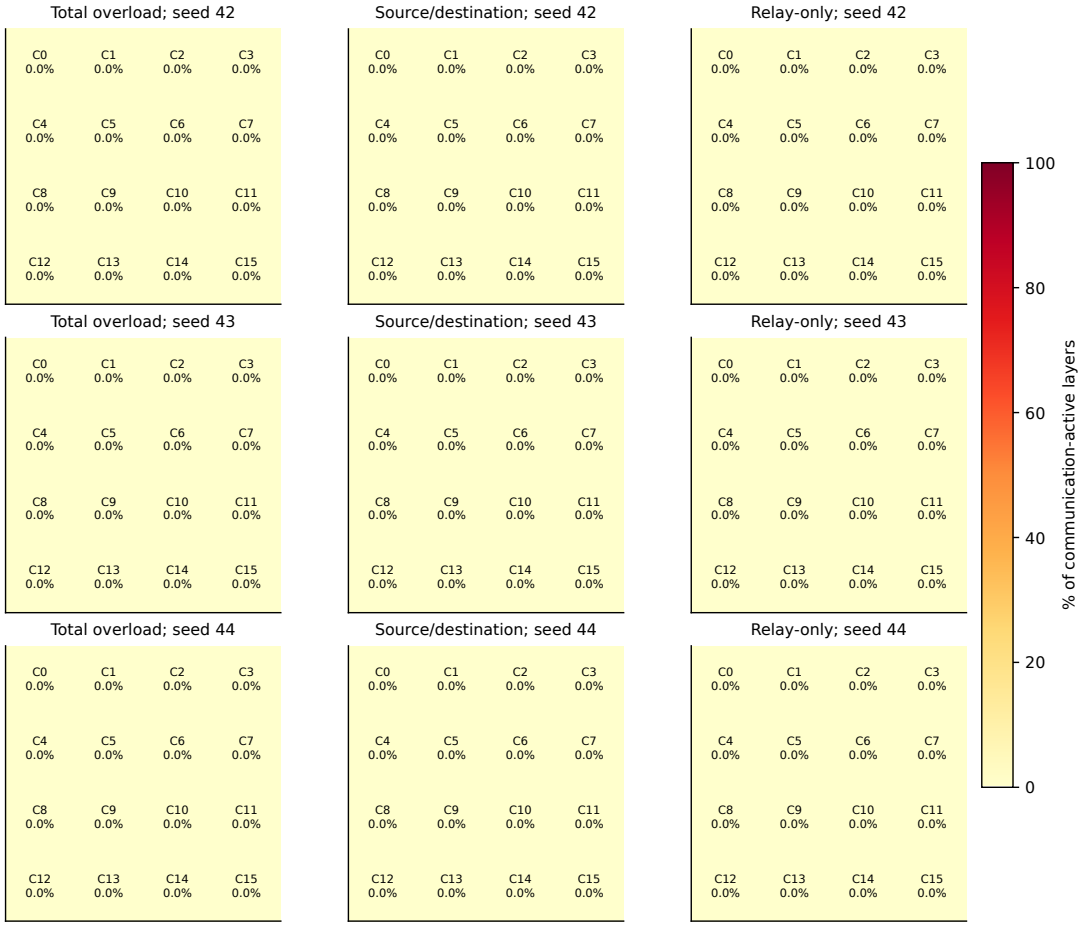


Figure 2.13: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.14: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=2; hop counting

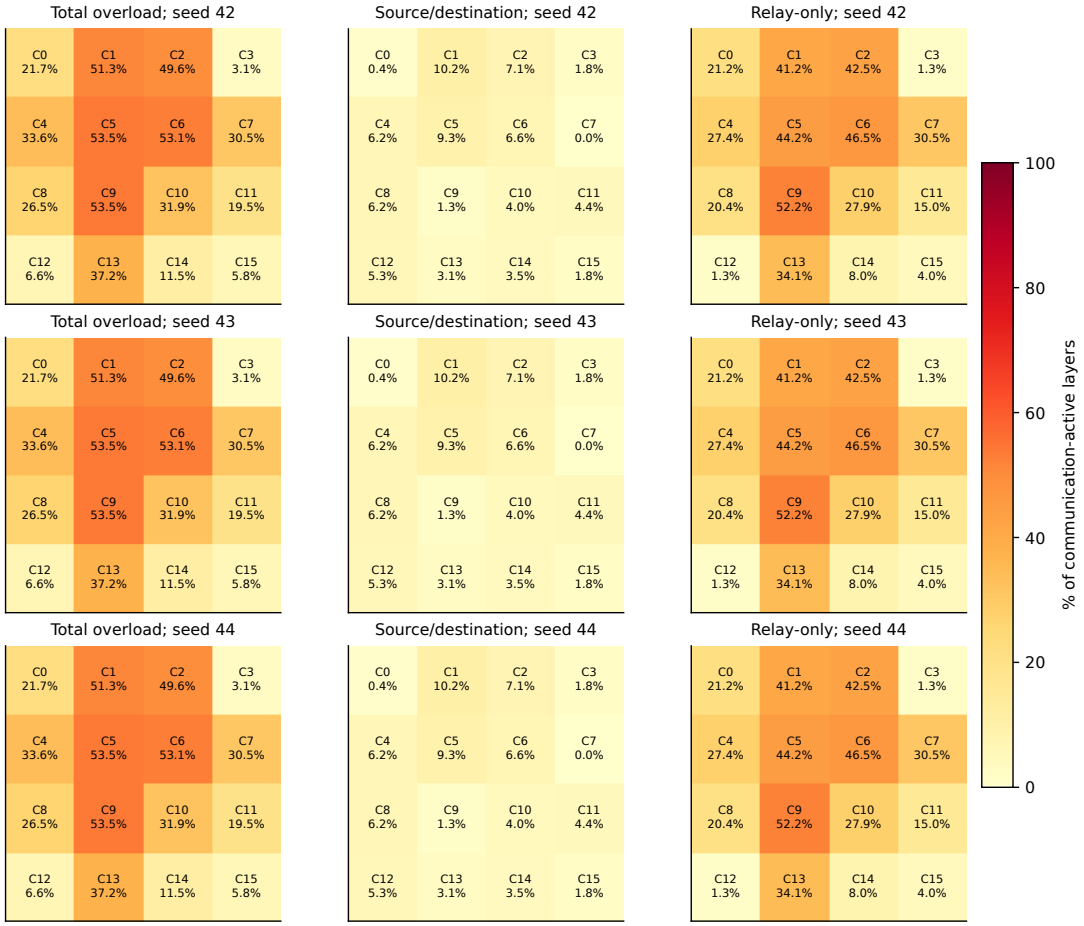


Figure 2.14: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	21.681	0.442	21.239	21.681	0.442	21.239	21.681	0.442	21.239
1	51.327	10.177	41.150	51.327	10.177	41.150	51.327	10.177	41.150
2	49.558	7.080	42.478	49.558	7.080	42.478	49.558	7.080	42.478
3	3.097	1.770	1.327	3.097	1.770	1.327	3.097	1.770	1.327
4	33.628	6.195	27.434	33.628	6.195	27.434	33.628	6.195	27.434
5	53.540	9.292	44.248	53.540	9.292	44.248	53.540	9.292	44.248
6	53.097	6.637	46.460	53.097	6.637	46.460	53.097	6.637	46.460
7	30.531	0.000	30.531	30.531	0.000	30.531	30.531	0.000	30.531
8	26.549	6.195	20.354	26.549	6.195	20.354	26.549	6.195	20.354
9	53.540	1.327	52.212	53.540	1.327	52.212	53.540	1.327	52.212
10	31.858	3.982	27.876	31.858	3.982	27.876	31.858	3.982	27.876
11	19.469	4.425	15.044	19.469	4.425	15.044	19.469	4.425	15.044
12	6.637	5.310	1.327	6.637	5.310	1.327	6.637	5.310	1.327
13	37.168	3.097	34.071	37.168	3.097	34.071	37.168	3.097	34.071
14	11.504	3.540	7.965	11.504	3.540	7.965	11.504	3.540	7.965
15	5.752	1.770	3.982	5.752	1.770	3.982	5.752	1.770	3.982

Table 2.15: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=3; hop counting



Figure 2.15: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	1.770	0.000	1.770	1.770	0.000	1.770	1.770	0.000	1.770
1	50.442	7.965	42.478	50.442	7.965	42.478	50.442	7.965	42.478
2	48.673	5.752	42.920	48.673	5.752	42.920	48.673	5.752	42.920
3	1.770	0.442	1.327	1.770	0.442	1.327	1.770	0.442	1.327
4	32.301	4.867	27.434	32.301	4.867	27.434	32.301	4.867	27.434
5	52.655	7.965	44.690	52.655	7.965	44.690	52.655	7.965	44.690
6	52.655	5.310	47.345	52.655	5.310	47.345	52.655	5.310	47.345
7	27.876	0.000	27.876	27.876	0.000	27.876	27.876	0.000	27.876
8	26.106	4.867	21.239	26.106	4.867	21.239	26.106	4.867	21.239
9	49.558	0.000	49.558	49.558	0.000	49.558	49.558	0.000	49.558
10	30.531	2.655	27.876	30.531	2.655	27.876	30.531	2.655	27.876
11	19.027	3.097	15.929	19.027	3.097	15.929	19.027	3.097	15.929
12	3.540	2.212	1.327	3.540	2.212	1.327	3.540	2.212	1.327
13	34.956	1.770	33.186	34.956	1.770	33.186	34.956	1.770	33.186
14	10.177	2.212	7.965	10.177	2.212	7.965	10.177	2.212	7.965
15	3.982	0.000	3.982	3.982	0.000	3.982	3.982	0.000	3.982

Table 2.16: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=4; hop counting

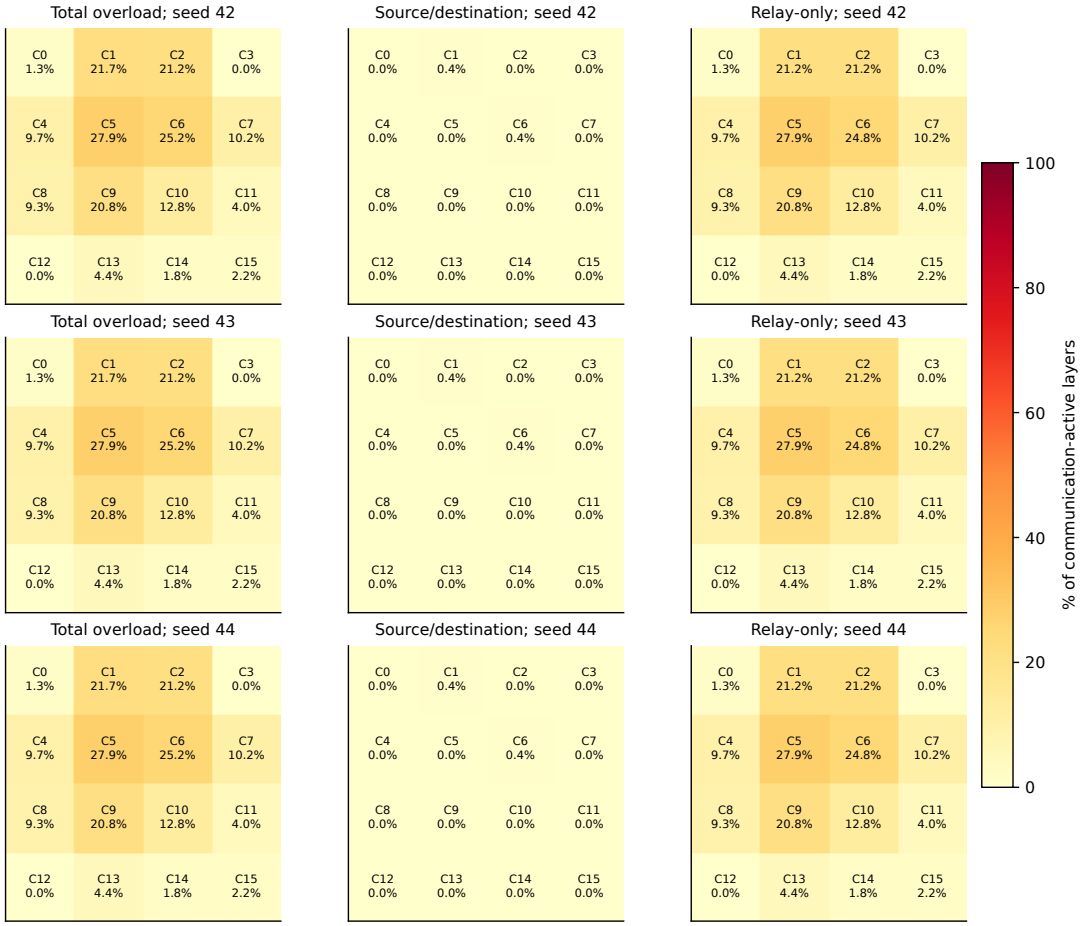


Figure 2.16: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327
1	21.681	0.442	21.239	21.681	0.442	21.239	21.681	0.442	21.239
2	21.239	0.000	21.239	21.239	0.000	21.239	21.239	0.000	21.239
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	9.735	0.000	9.735	9.735	0.000	9.735	9.735	0.000	9.735
5	27.876	0.000	27.876	27.876	0.000	27.876	27.876	0.000	27.876
6	25.221	0.442	24.779	25.221	0.442	24.779	25.221	0.442	24.779
7	10.177	0.000	10.177	10.177	0.000	10.177	10.177	0.000	10.177
8	9.292	0.000	9.292	9.292	0.000	9.292	9.292	0.000	9.292
9	20.796	0.000	20.796	20.796	0.000	20.796	20.796	0.000	20.796
10	12.832	0.000	12.832	12.832	0.000	12.832	12.832	0.000	12.832
11	3.982	0.000	3.982	3.982	0.000	3.982	3.982	0.000	3.982
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	4.425	0.000	4.425	4.425	0.000	4.425	4.425	0.000	4.425
14	1.770	0.000	1.770	1.770	0.000	1.770	1.770	0.000	1.770
15	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000	2.212

Table 2.17: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=6; hop counting

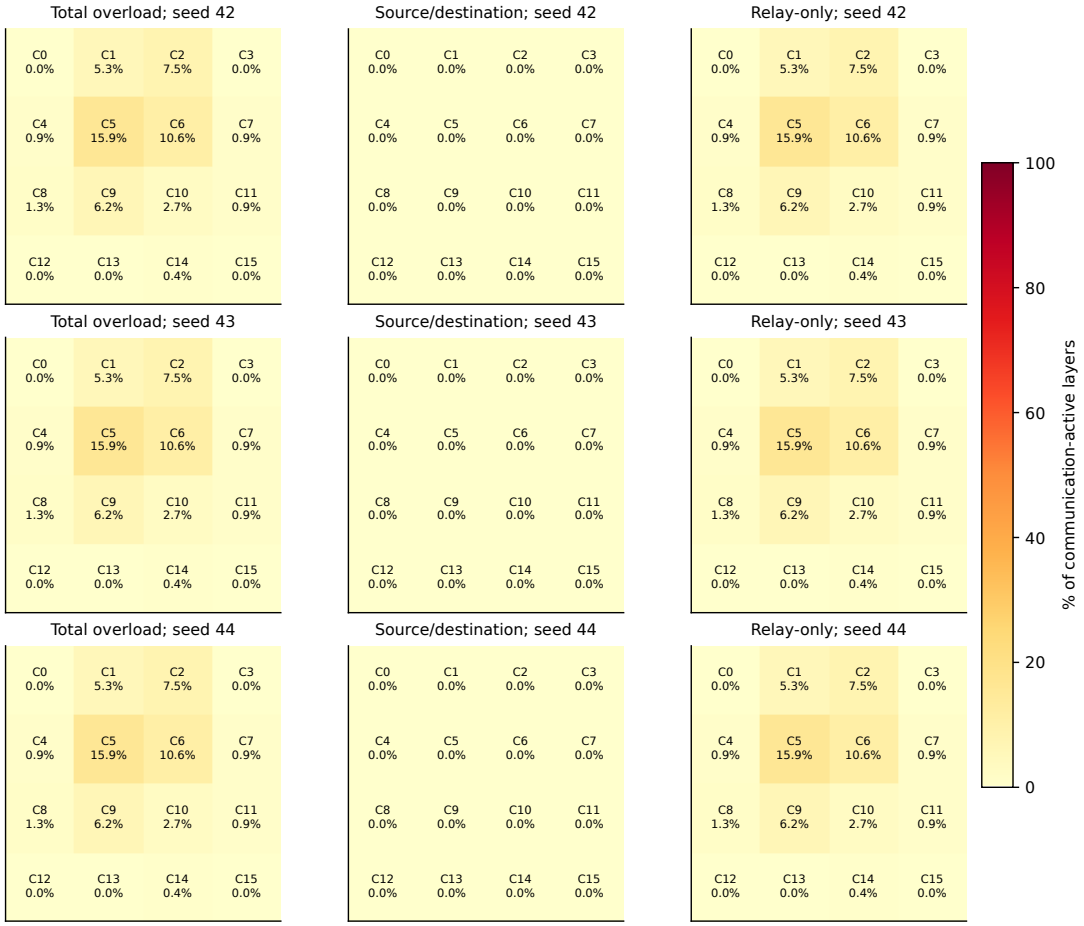


Figure 2.17: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	5.310	0.000	5.310	5.310	0.000	5.310	5.310	0.000	5.310
2	7.522	0.000	7.522	7.522	0.000	7.522	7.522	0.000	7.522
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
5	15.929	0.000	15.929	15.929	0.000	15.929	15.929	0.000	15.929
6	10.619	0.000	10.619	10.619	0.000	10.619	10.619	0.000	10.619
7	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
8	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327
9	6.195	0.000	6.195	6.195	0.000	6.195	6.195	0.000	6.195
10	2.655	0.000	2.655	2.655	0.000	2.655	2.655	0.000	2.655
11	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.18: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=8; hop counting

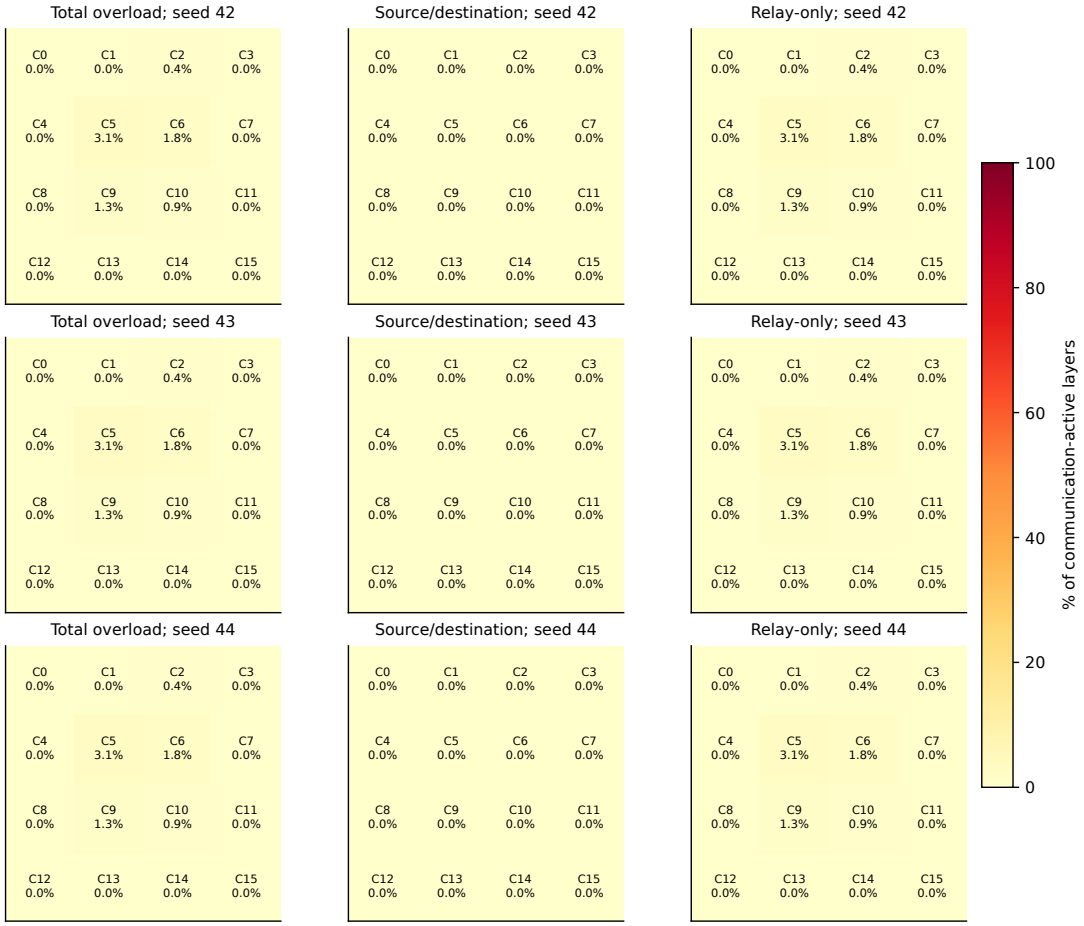


Figure 2.18: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	3.097	0.000	3.097	3.097	0.000	3.097	3.097	0.000	3.097
6	1.770	0.000	1.770	1.770	0.000	1.770	1.770	0.000	1.770
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327
10	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.19: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=16; hop counting

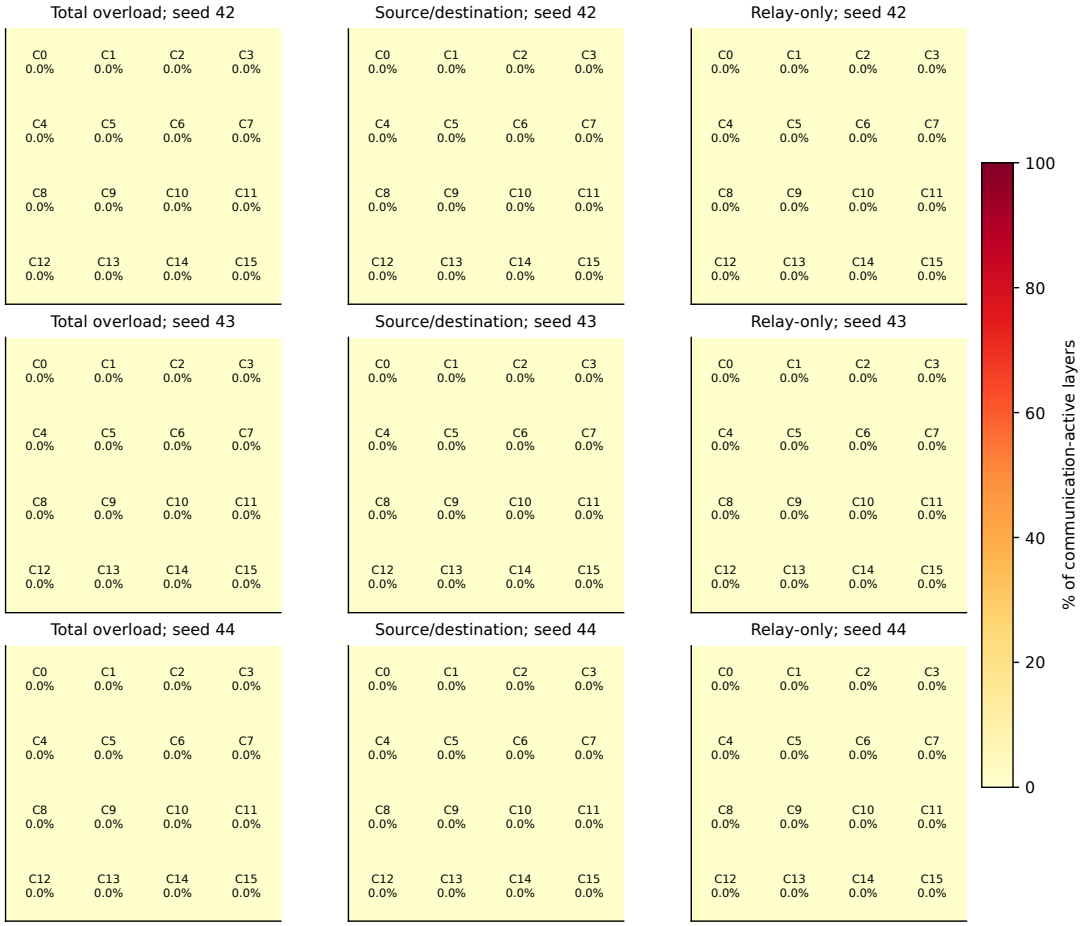


Figure 2.19: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.20: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh xy; M=32; hop counting

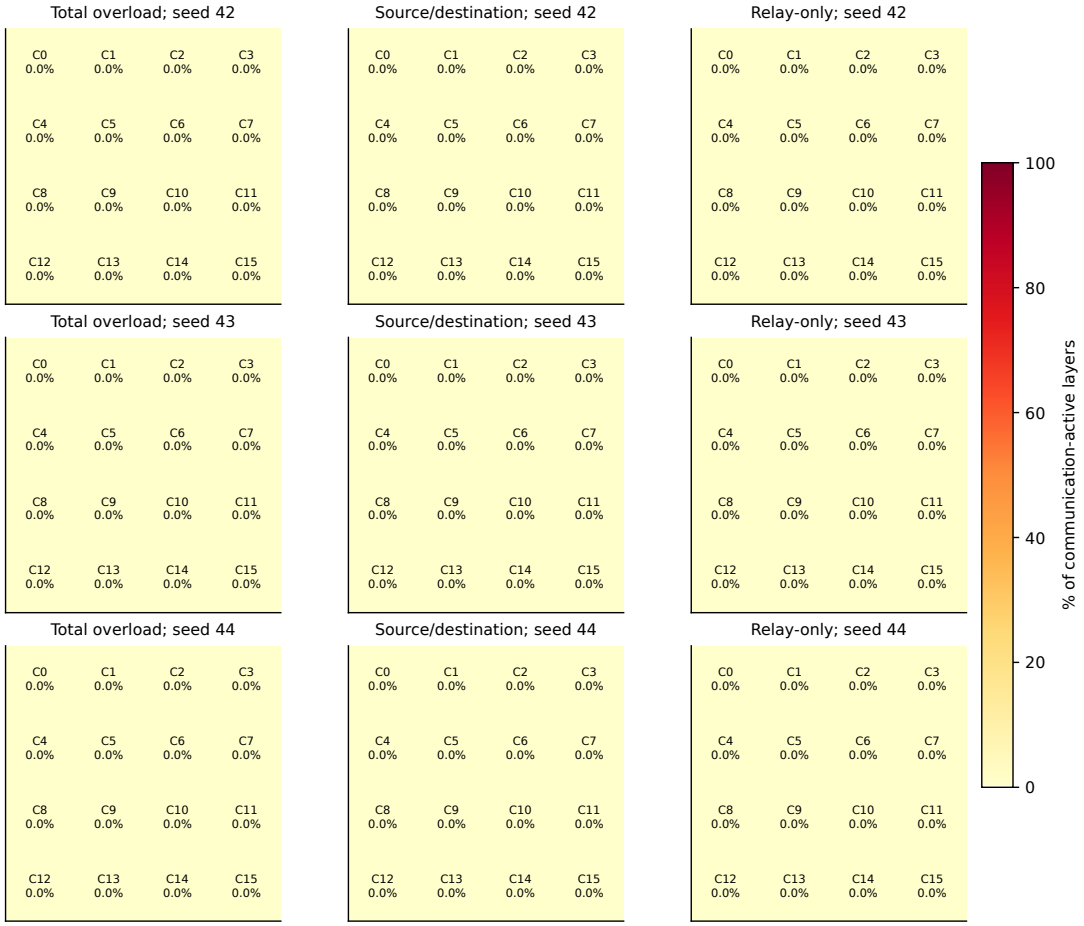


Figure 2.20: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.21: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

2.2 Mesh / yx

Mesh yx; M=2; route counting



Figure 2.21: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	1.770	0.442	1.327	1.770	0.442	1.327	1.770	0.442	1.327
1	46.903	10.177	36.726	46.903	10.177	36.726	46.903	10.177	36.726
2	43.363	7.080	36.283	43.363	7.080	36.283	43.363	7.080	36.283
3	3.982	1.770	2.212	3.982	1.770	2.212	3.982	1.770	2.212
4	28.761	6.195	22.566	28.761	6.195	22.566	28.761	6.195	22.566
5	43.363	9.292	34.071	43.363	9.292	34.071	43.363	9.292	34.071
6	42.920	6.637	36.283	42.920	6.637	36.283	42.920	6.637	36.283
7	25.221	0.000	25.221	25.221	0.000	25.221	25.221	0.000	25.221
8	25.221	6.195	19.027	25.221	6.195	19.027	25.221	6.195	19.027
9	45.133	1.327	43.805	45.133	1.327	43.805	45.133	1.327	43.805
10	34.513	3.982	30.531	34.513	3.982	30.531	34.513	3.982	30.531
11	30.088	4.425	25.664	30.088	4.425	25.664	30.088	4.425	25.664
12	5.310	5.310	0.000	5.310	5.310	0.000	5.310	5.310	0.000
13	37.168	3.097	34.071	37.168	3.097	34.071	37.168	3.097	34.071
14	9.735	3.540	6.195	9.735	3.540	6.195	9.735	3.540	6.195
15	4.425	1.770	2.655	4.425	1.770	2.655	4.425	1.770	2.655

Table 2.22: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=3; route counting

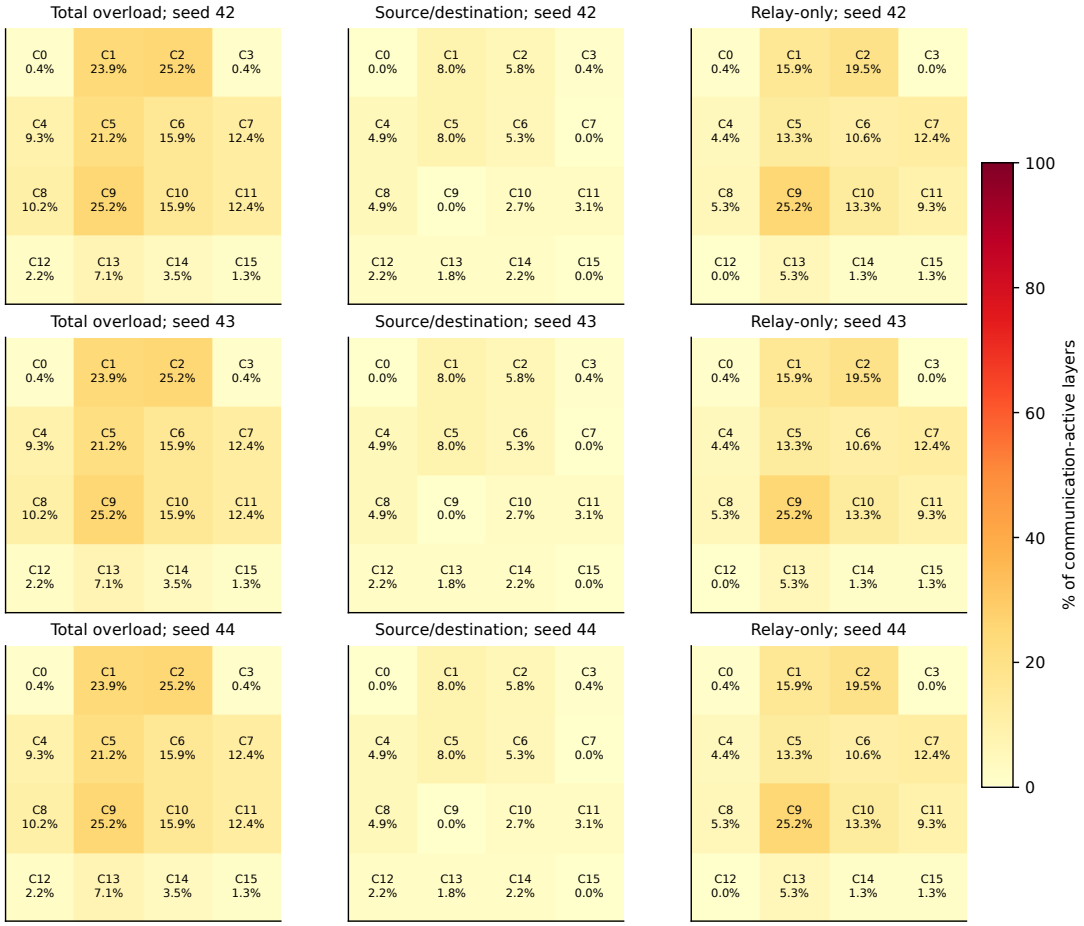


Figure 2.22: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
1	23.894	7.965	15.929	23.894	7.965	15.929	23.894	7.965	15.929
2	25.221	5.752	19.469	25.221	5.752	19.469	25.221	5.752	19.469
3	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
4	9.292	4.867	4.425	9.292	4.867	4.425	9.292	4.867	4.425
5	21.239	7.965	13.274	21.239	7.965	13.274	21.239	7.965	13.274
6	15.929	5.310	10.619	15.929	5.310	10.619	15.929	5.310	10.619
7	12.389	0.000	12.389	12.389	0.000	12.389	12.389	0.000	12.389
8	10.177	4.867	5.310	10.177	4.867	5.310	10.177	4.867	5.310
9	25.221	0.000	25.221	25.221	0.000	25.221	25.221	0.000	25.221
10	15.929	2.655	13.274	15.929	2.655	13.274	15.929	2.655	13.274
11	12.389	3.097	9.292	12.389	3.097	9.292	12.389	3.097	9.292
12	2.212	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000
13	7.080	1.770	5.310	7.080	1.770	5.310	7.080	1.770	5.310
14	3.540	2.212	1.327	3.540	2.212	1.327	3.540	2.212	1.327
15	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327

Table 2.23: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=4; route counting

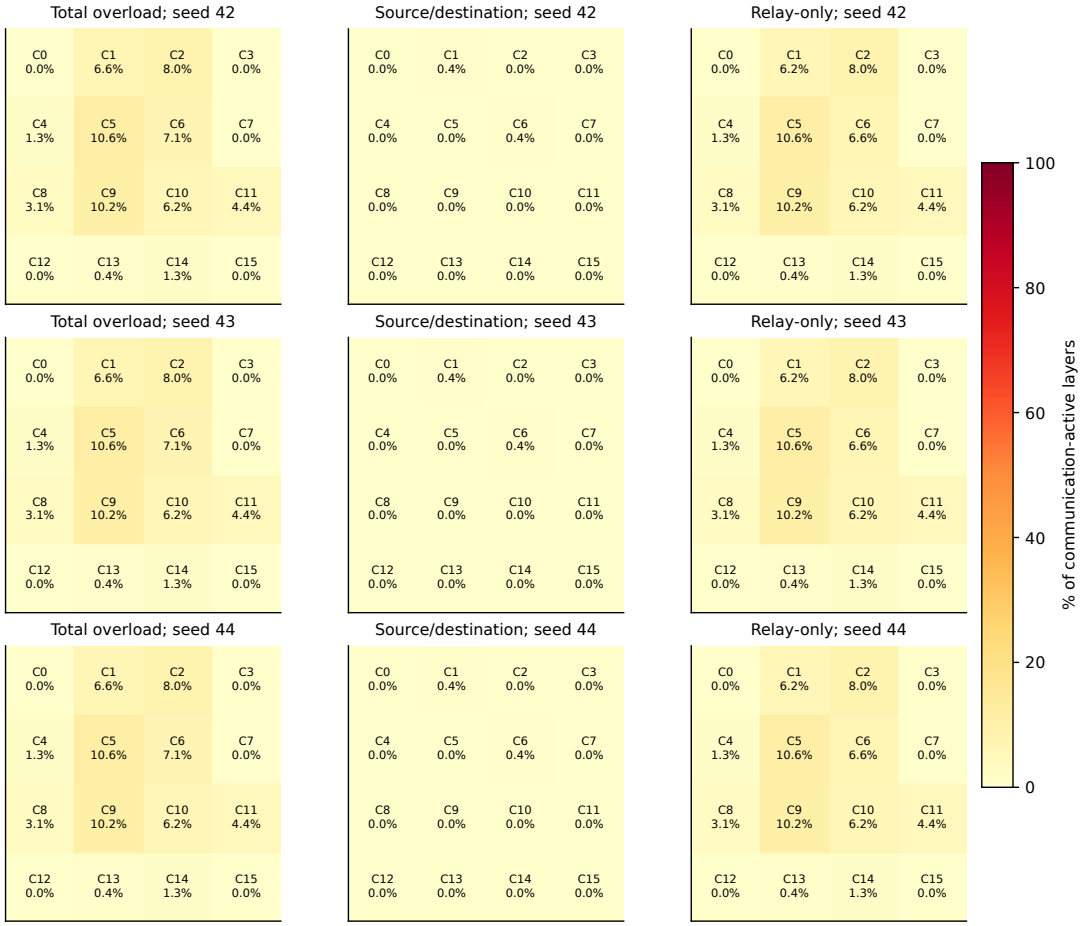


Figure 2.23: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	6.637	0.442	6.195	6.637	0.442	6.195	6.637	0.442	6.195
2	7.965	0.000	7.965	7.965	0.000	7.965	7.965	0.000	7.965
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327
5	10.619	0.000	10.619	10.619	0.000	10.619	10.619	0.000	10.619
6	7.080	0.442	6.637	7.080	0.442	6.637	7.080	0.442	6.637
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	3.097	0.000	3.097	3.097	0.000	3.097	3.097	0.000	3.097
9	10.177	0.000	10.177	10.177	0.000	10.177	10.177	0.000	10.177
10	6.195	0.000	6.195	6.195	0.000	6.195	6.195	0.000	6.195
11	4.425	0.000	4.425	4.425	0.000	4.425	4.425	0.000	4.425
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
14	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.24: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=6; route counting

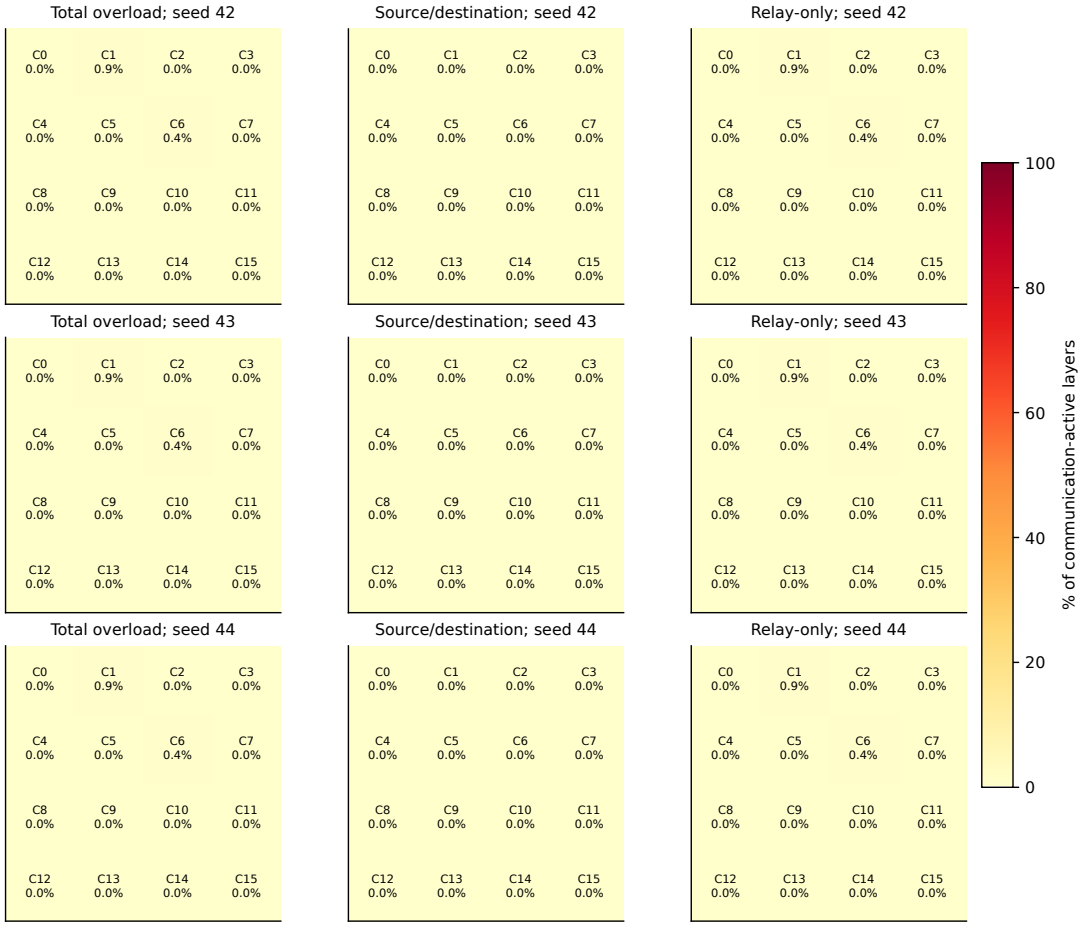


Figure 2.24: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.25: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=8; route counting

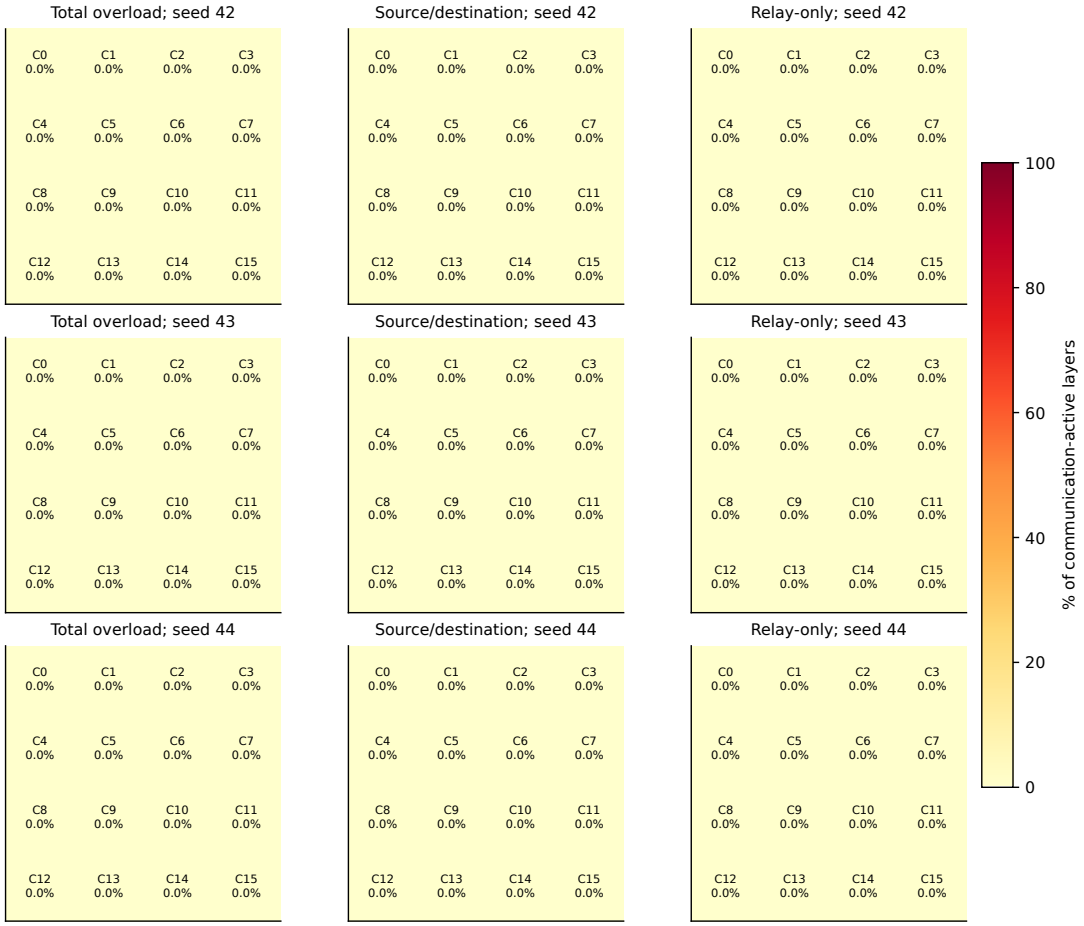


Figure 2.25: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.26: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=16; route counting

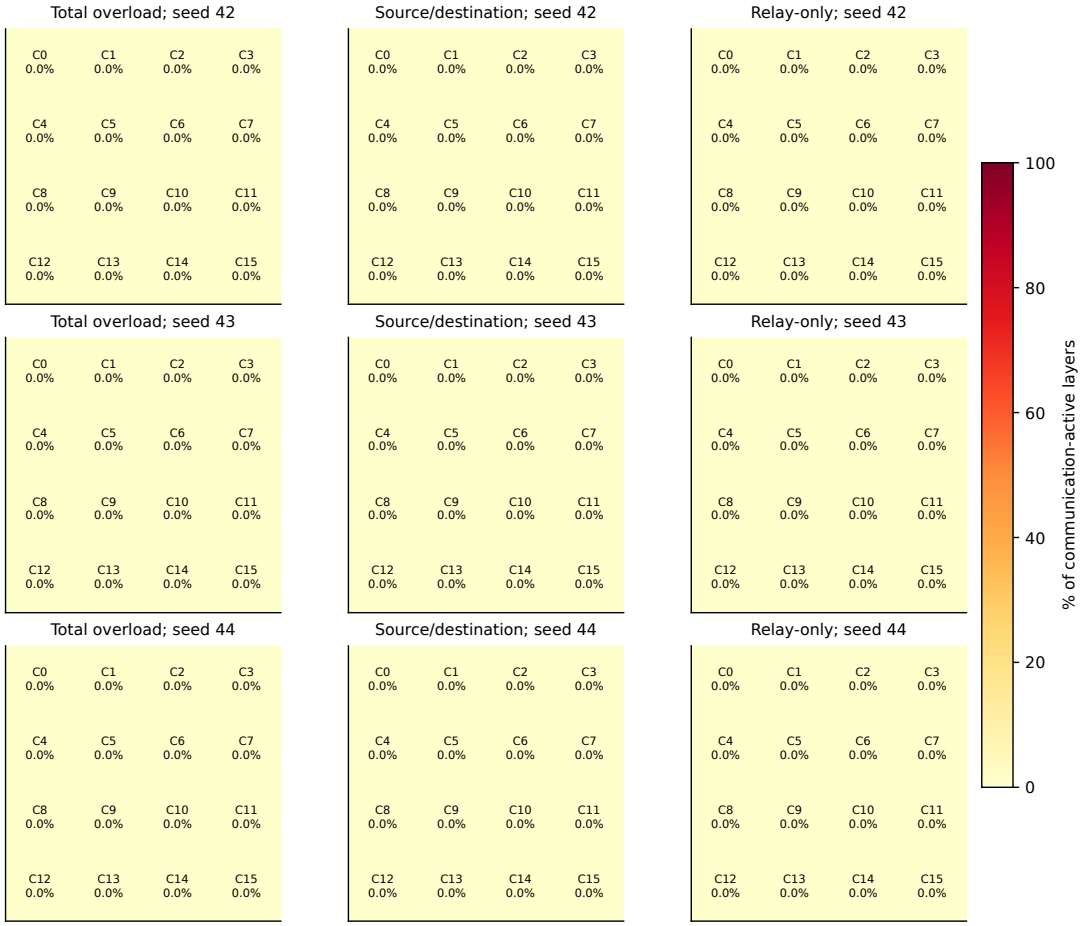


Figure 2.26: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.27: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=32; route counting

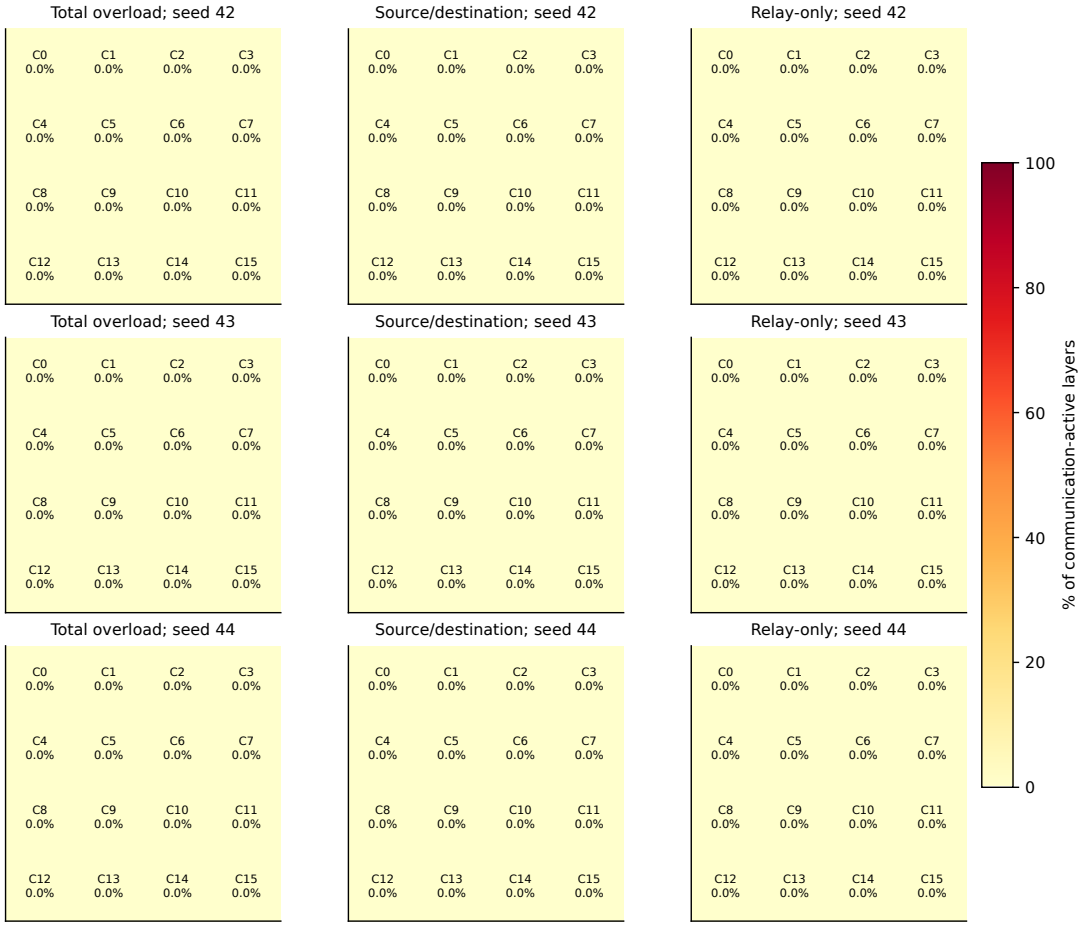


Figure 2.27: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.28: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=2; hop counting

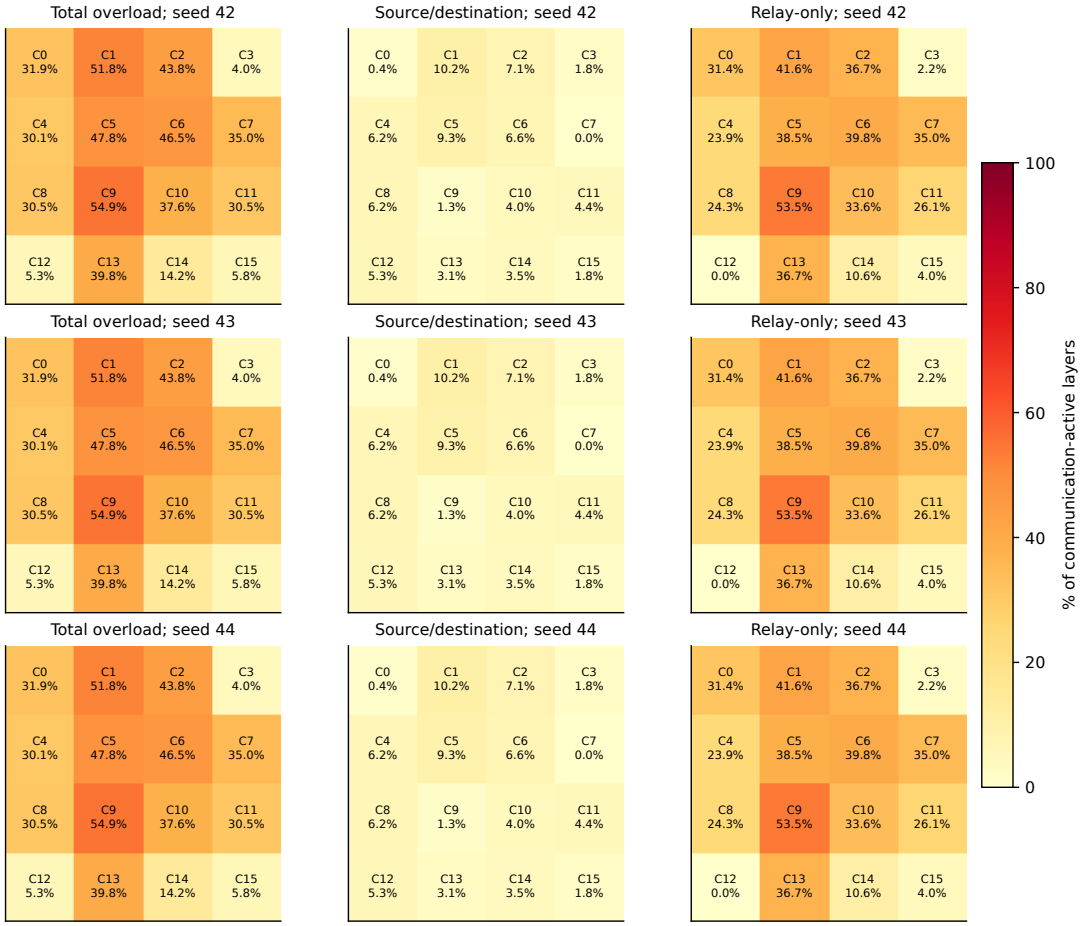


Figure 2.28: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	31.858	0.442	31.416	31.858	0.442	31.416	31.858	0.442	31.416
1	51.770	10.177	41.593	51.770	10.177	41.593	51.770	10.177	41.593
2	43.805	7.080	36.726	43.805	7.080	36.726	43.805	7.080	36.726
3	3.982	1.770	2.212	3.982	1.770	2.212	3.982	1.770	2.212
4	30.088	6.195	23.894	30.088	6.195	23.894	30.088	6.195	23.894
5	47.788	9.292	38.496	47.788	9.292	38.496	47.788	9.292	38.496
6	46.460	6.637	39.823	46.460	6.637	39.823	46.460	6.637	39.823
7	34.956	0.000	34.956	34.956	0.000	34.956	34.956	0.000	34.956
8	30.531	6.195	24.336	30.531	6.195	24.336	30.531	6.195	24.336
9	54.867	1.327	53.540	54.867	1.327	53.540	54.867	1.327	53.540
10	37.611	3.982	33.628	37.611	3.982	33.628	37.611	3.982	33.628
11	30.531	4.425	26.106	30.531	4.425	26.106	30.531	4.425	26.106
12	5.310	5.310	0.000	5.310	5.310	0.000	5.310	5.310	0.000
13	39.823	3.097	36.726	39.823	3.097	36.726	39.823	3.097	36.726
14	14.159	3.540	10.619	14.159	3.540	10.619	14.159	3.540	10.619
15	5.752	1.770	3.982	5.752	1.770	3.982	5.752	1.770	3.982

Table 2.29: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=3; hop counting



Figure 2.29: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	1.770	0.000	1.770	1.770	0.000	1.770	1.770	0.000	1.770
1	50.000	7.965	42.035	50.000	7.965	42.035	50.000	7.965	42.035
2	42.920	5.752	37.168	42.920	5.752	37.168	42.920	5.752	37.168
3	2.655	0.442	2.212	2.655	0.442	2.212	2.655	0.442	2.212
4	28.761	4.867	23.894	28.761	4.867	23.894	28.761	4.867	23.894
5	46.460	7.965	38.496	46.460	7.965	38.496	46.460	7.965	38.496
6	45.575	5.310	40.265	45.575	5.310	40.265	45.575	5.310	40.265
7	31.858	0.000	31.858	31.858	0.000	31.858	31.858	0.000	31.858
8	29.204	4.867	24.336	29.204	4.867	24.336	29.204	4.867	24.336
9	50.885	0.000	50.885	50.885	0.000	50.885	50.885	0.000	50.885
10	36.283	2.655	33.628	36.283	2.655	33.628	36.283	2.655	33.628
11	30.088	3.097	26.991	30.088	3.097	26.991	30.088	3.097	26.991
12	2.212	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000
13	37.168	1.770	35.398	37.168	1.770	35.398	37.168	1.770	35.398
14	12.832	2.212	10.619	12.832	2.212	10.619	12.832	2.212	10.619
15	3.982	0.000	3.982	3.982	0.000	3.982	3.982	0.000	3.982

Table 2.30: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=4; hop counting

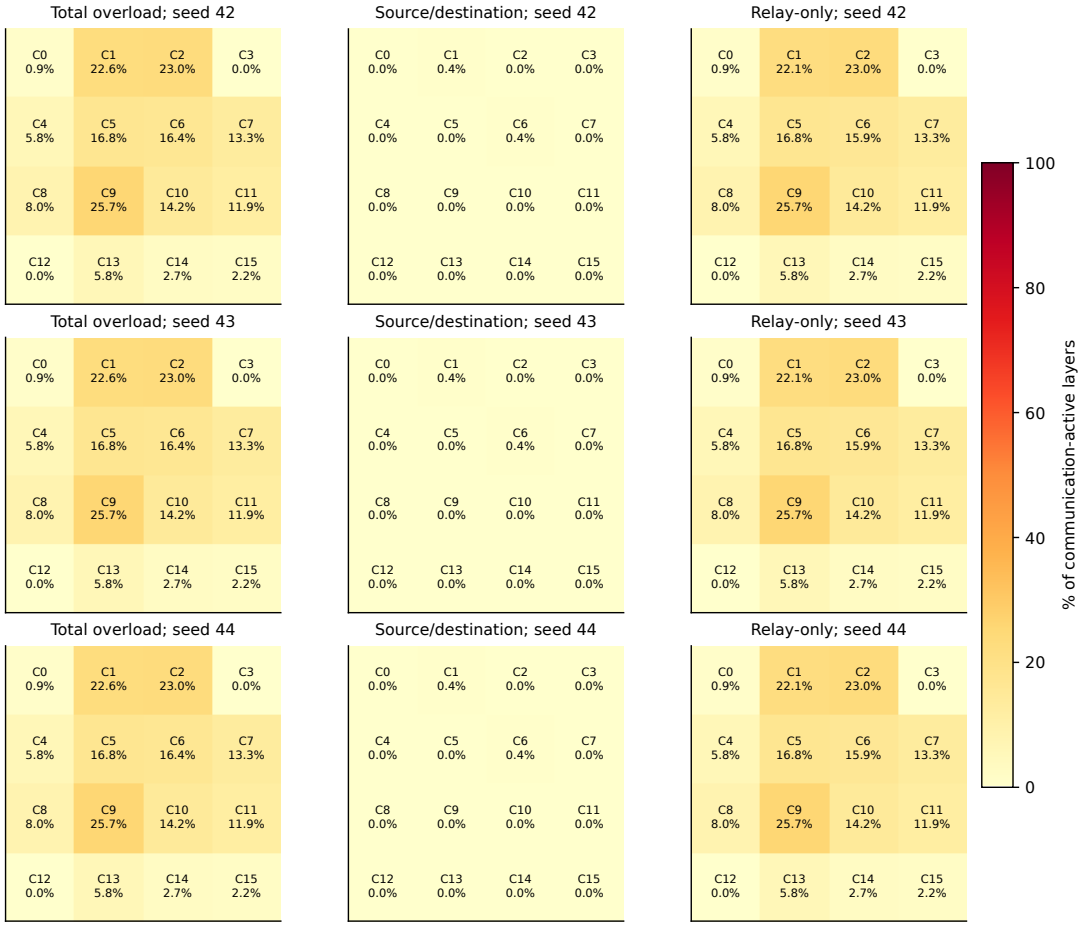


Figure 2.30: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
1	22.566	0.442	22.124	22.566	0.442	22.124	22.566	0.442	22.124
2	23.009	0.000	23.009	23.009	0.000	23.009	23.009	0.000	23.009
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	5.752	0.000	5.752	5.752	0.000	5.752	5.752	0.000	5.752
5	16.814	0.000	16.814	16.814	0.000	16.814	16.814	0.000	16.814
6	16.372	0.442	15.929	16.372	0.442	15.929	16.372	0.442	15.929
7	13.274	0.000	13.274	13.274	0.000	13.274	13.274	0.000	13.274
8	7.965	0.000	7.965	7.965	0.000	7.965	7.965	0.000	7.965
9	25.664	0.000	25.664	25.664	0.000	25.664	25.664	0.000	25.664
10	14.159	0.000	14.159	14.159	0.000	14.159	14.159	0.000	14.159
11	11.947	0.000	11.947	11.947	0.000	11.947	11.947	0.000	11.947
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	5.752	0.000	5.752	5.752	0.000	5.752	5.752	0.000	5.752
14	2.655	0.000	2.655	2.655	0.000	2.655	2.655	0.000	2.655
15	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000	2.212

Table 2.31: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=6; hop counting

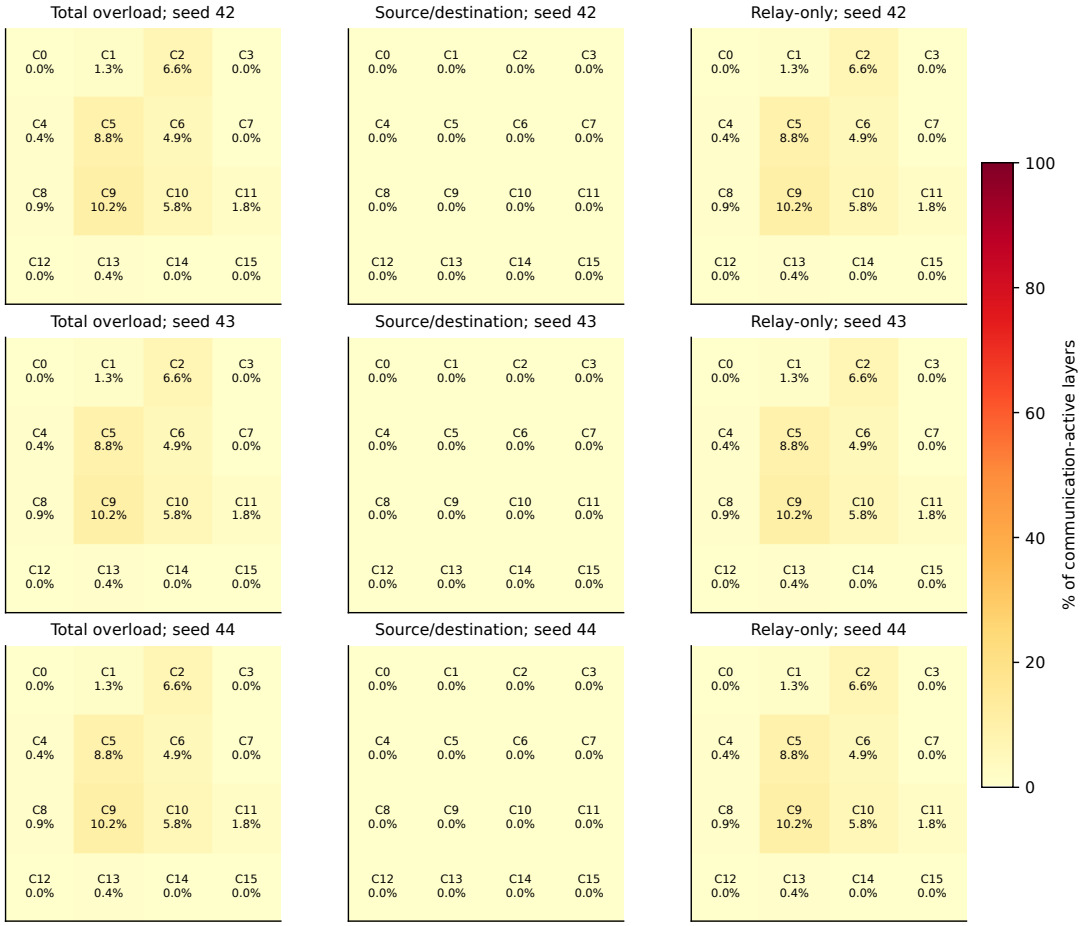


Figure 2.31: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327
2	6.637	0.000	6.637	6.637	0.000	6.637	6.637	0.000	6.637
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
5	8.850	0.000	8.850	8.850	0.000	8.850	8.850	0.000	8.850
6	4.867	0.000	4.867	4.867	0.000	4.867	4.867	0.000	4.867
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
9	10.177	0.000	10.177	10.177	0.000	10.177	10.177	0.000	10.177
10	5.752	0.000	5.752	5.752	0.000	5.752	5.752	0.000	5.752
11	1.770	0.000	1.770	1.770	0.000	1.770	1.770	0.000	1.770
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.32: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=8; hop counting

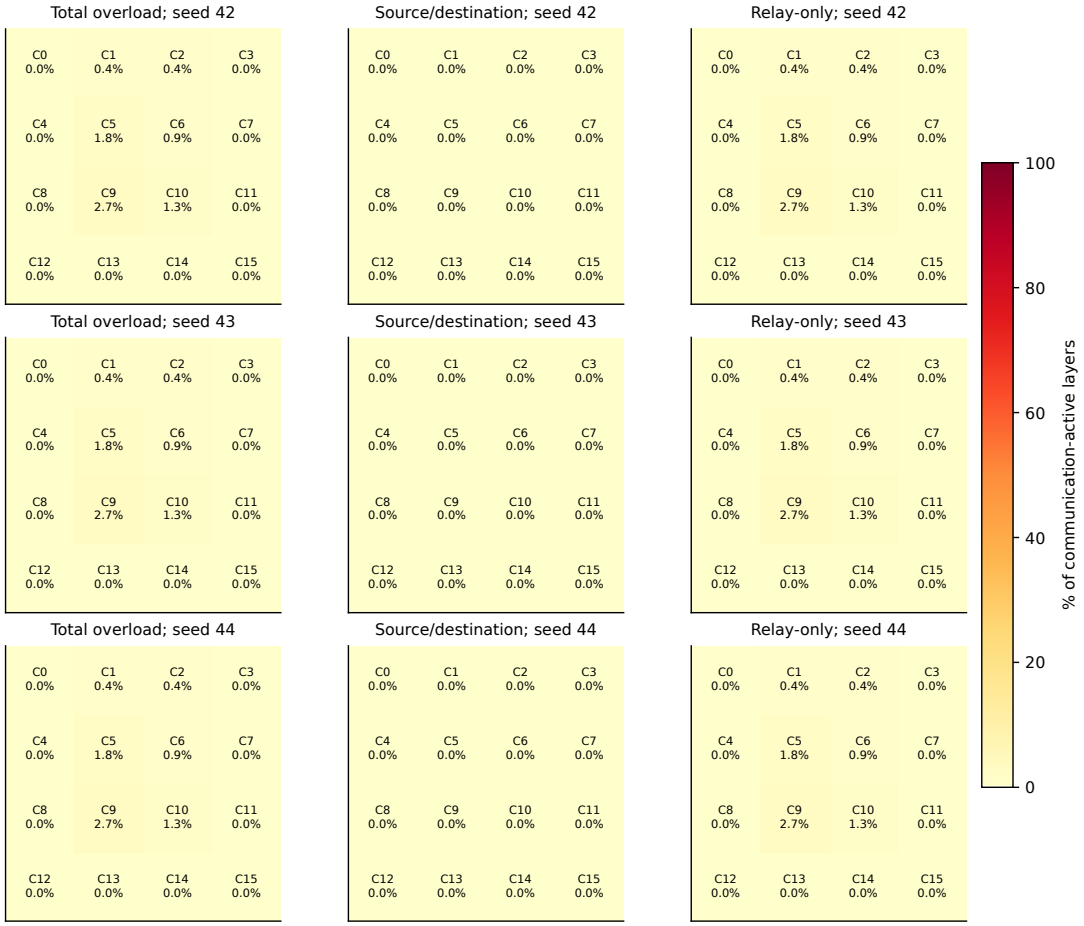


Figure 2.32: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
2	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000	0.442
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	1.770	0.000	1.770	1.770	0.000	1.770	1.770	0.000	1.770
6	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	2.655	0.000	2.655	2.655	0.000	2.655	2.655	0.000	2.655
10	1.327	0.000	1.327	1.327	0.000	1.327	1.327	0.000	1.327
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.33: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=16; hop counting

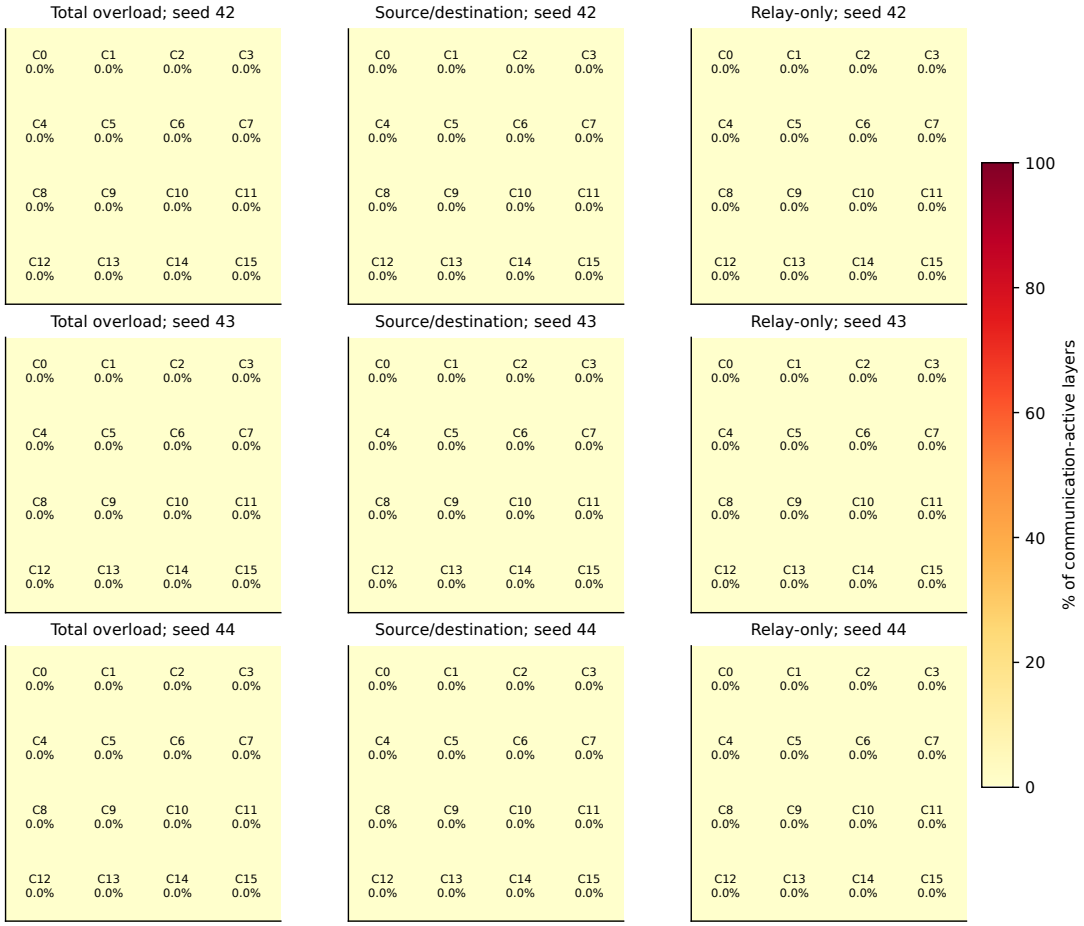


Figure 2.33: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.34: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh yx; M=32; hop counting

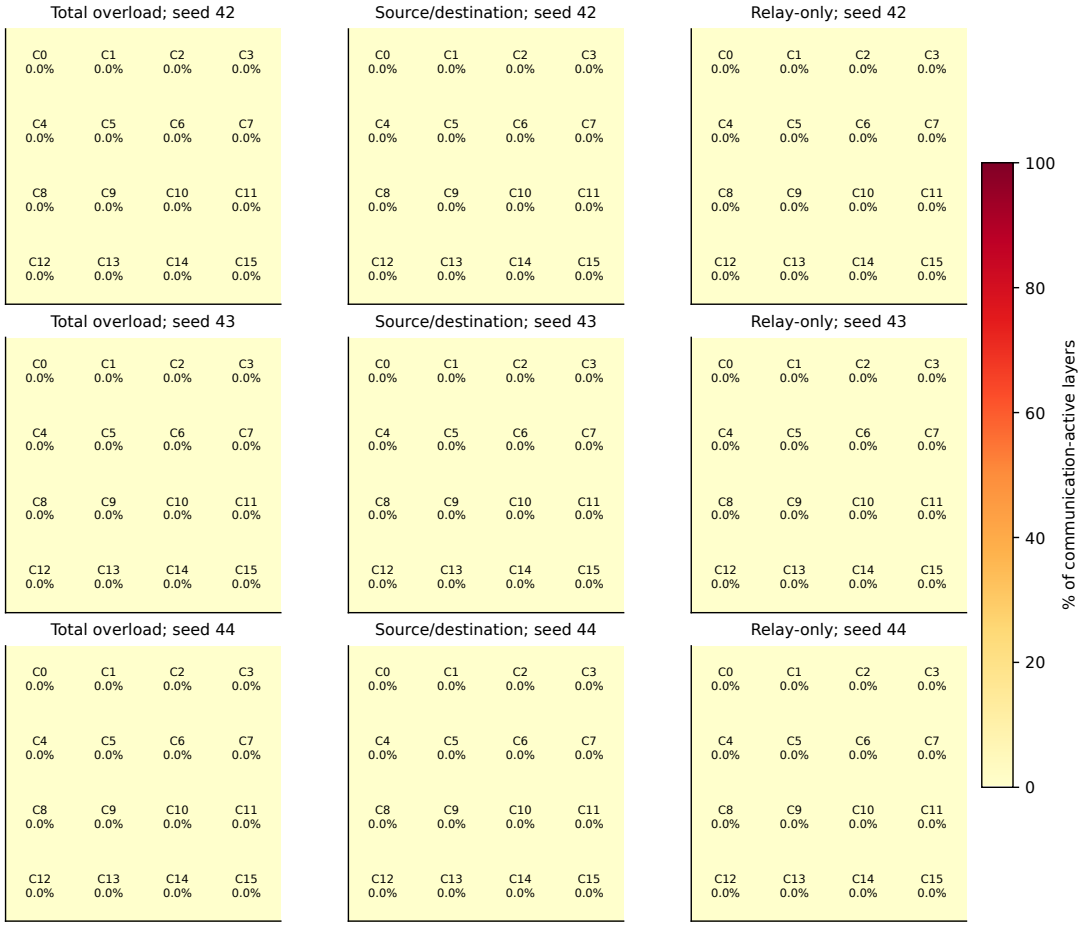


Figure 2.34: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.35: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

2.3 Mesh / shortest_reliable

Mesh shortest_reliable; M=2; route counting

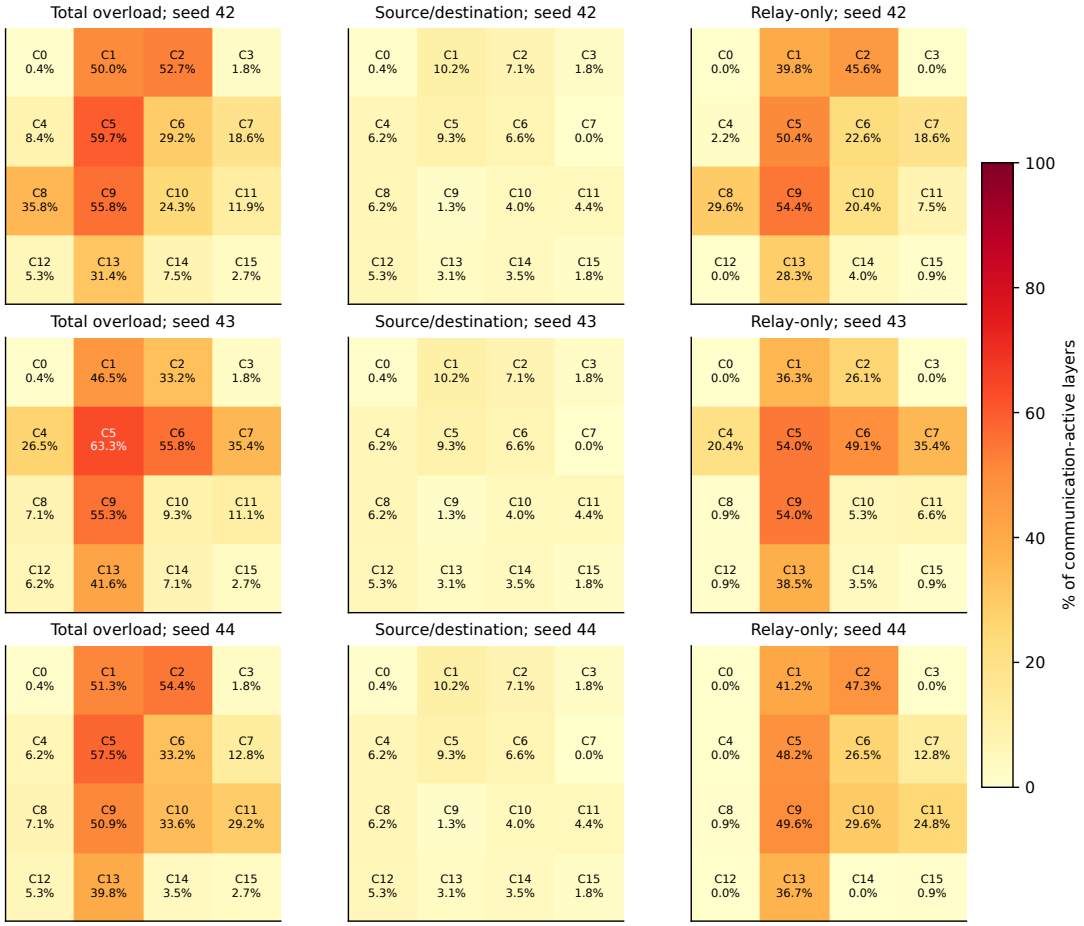


Figure 2.35: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
1	50.000	10.177	39.823	46.460	10.177	36.283	51.327	10.177	41.150
2	52.655	7.080	45.575	33.186	7.080	26.106	54.425	7.080	47.345
3	1.770	1.770	0.000	1.770	1.770	0.000	1.770	1.770	0.000
4	8.407	6.195	2.212	26.549	6.195	20.354	6.195	6.195	0.000
5	59.735	9.292	50.442	63.274	9.292	53.982	57.522	9.292	48.230
6	29.204	6.637	22.566	55.752	6.637	49.115	33.186	6.637	26.549
7	18.584	0.000	18.584	35.398	0.000	35.398	12.832	0.000	12.832
8	35.841	6.195	29.646	7.080	6.195	0.885	7.080	6.195	0.885
9	55.752	1.327	54.425	55.310	1.327	53.982	50.885	1.327	49.558
10	24.336	3.982	20.354	9.292	3.982	5.310	33.628	3.982	29.646
11	11.947	4.425	7.522	11.062	4.425	6.637	29.204	4.425	24.779
12	5.310	5.310	0.000	6.195	5.310	0.885	5.310	5.310	0.000
13	31.416	3.097	28.319	41.593	3.097	38.496	39.823	3.097	36.726
14	7.522	3.540	3.982	7.080	3.540	3.540	3.540	3.540	0.000
15	2.655	1.770	0.885	2.655	1.770	0.885	2.655	1.770	0.885

Table 2.36: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=3; route counting

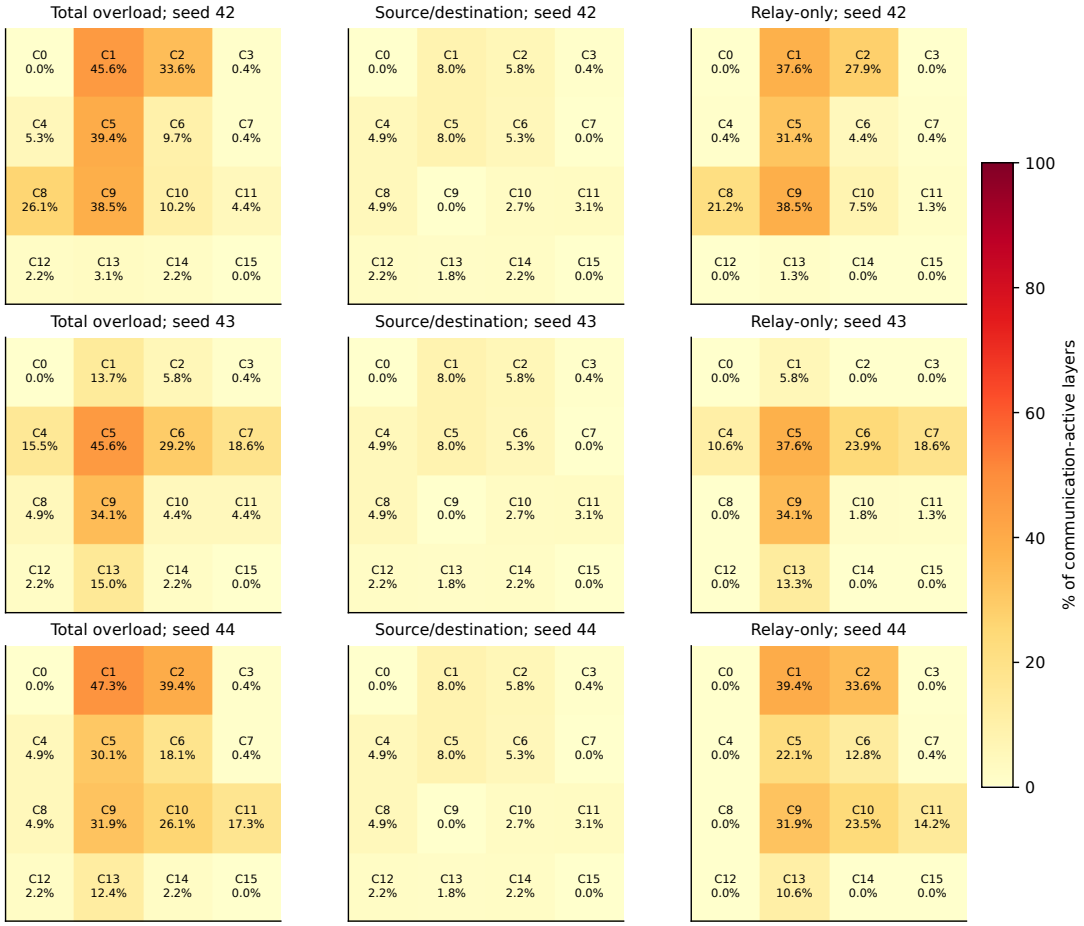


Figure 2.36: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	45.575	7.965	37.611	13.717	7.965	5.752	47.345	7.965	39.381
2	33.628	5.752	27.876	5.752	5.752	0.000	39.381	5.752	33.628
3	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
4	5.310	4.867	0.442	15.487	4.867	10.619	4.867	4.867	0.000
5	39.381	7.965	31.416	45.575	7.965	37.611	30.088	7.965	22.124
6	9.735	5.310	4.425	29.204	5.310	23.894	18.142	5.310	12.832
7	0.442	0.000	0.442	18.584	0.000	18.584	0.442	0.000	0.442
8	26.106	4.867	21.239	4.867	4.867	0.000	4.867	4.867	0.000
9	38.496	0.000	38.496	34.071	0.000	34.071	31.858	0.000	31.858
10	10.177	2.655	7.522	4.425	2.655	1.770	26.106	2.655	23.451
11	4.425	3.097	1.327	4.425	3.097	1.327	17.257	3.097	14.159
12	2.212	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000
13	3.097	1.770	1.327	15.044	1.770	13.274	12.389	1.770	10.619
14	2.212	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.37: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=4; route counting

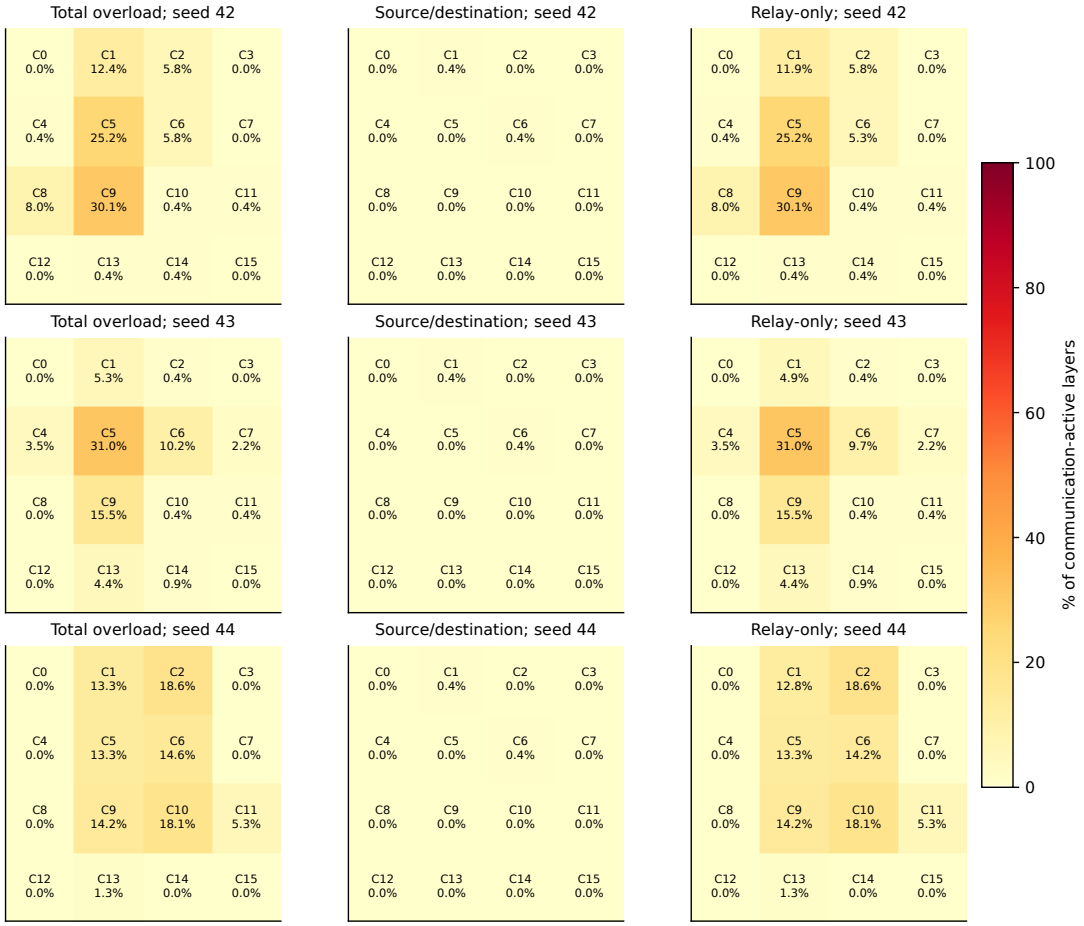


Figure 2.37: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	12.389	0.442	11.947	5.310	0.442	4.867	13.274	0.442	12.832
2	5.752	0.000	5.752	0.442	0.000	0.442	18.584	0.000	18.584
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.442	0.000	0.442	3.540	0.000	3.540	0.000	0.000	0.000
5	25.221	0.000	25.221	30.973	0.000	30.973	13.274	0.000	13.274
6	5.752	0.442	5.310	10.177	0.442	9.735	14.602	0.442	14.159
7	0.000	0.000	0.000	2.212	0.000	2.212	0.000	0.000	0.000
8	7.965	0.000	7.965	0.000	0.000	0.000	0.000	0.000	0.000
9	30.088	0.000	30.088	15.487	0.000	15.487	14.159	0.000	14.159
10	0.442	0.000	0.442	0.442	0.000	0.442	18.142	0.000	18.142
11	0.442	0.000	0.442	0.442	0.000	0.442	5.310	0.000	5.310
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.442	0.000	0.442	4.425	0.000	4.425	1.327	0.000	1.327
14	0.442	0.000	0.442	0.885	0.000	0.885	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.38: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=6; route counting

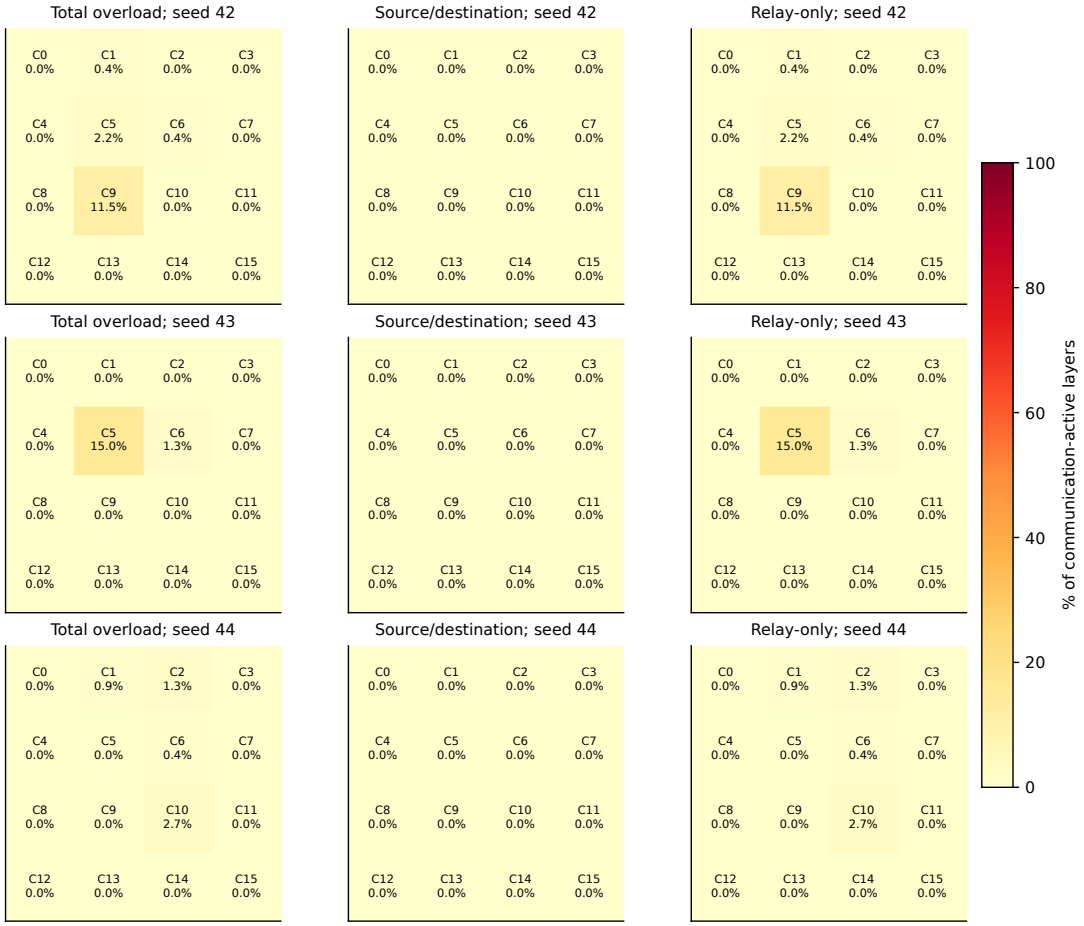


Figure 2.38: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.442	0.000	0.442	0.000	0.000	0.000	0.885	0.000	0.885
2	0.000	0.000	0.000	0.000	0.000	0.000	1.327	0.000	1.327
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	2.212	0.000	2.212	15.044	0.000	15.044	0.000	0.000	0.000
6	0.442	0.000	0.442	1.327	0.000	1.327	0.442	0.000	0.442
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	11.504	0.000	11.504	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	2.655	0.000	2.655
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.39: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=8; route counting

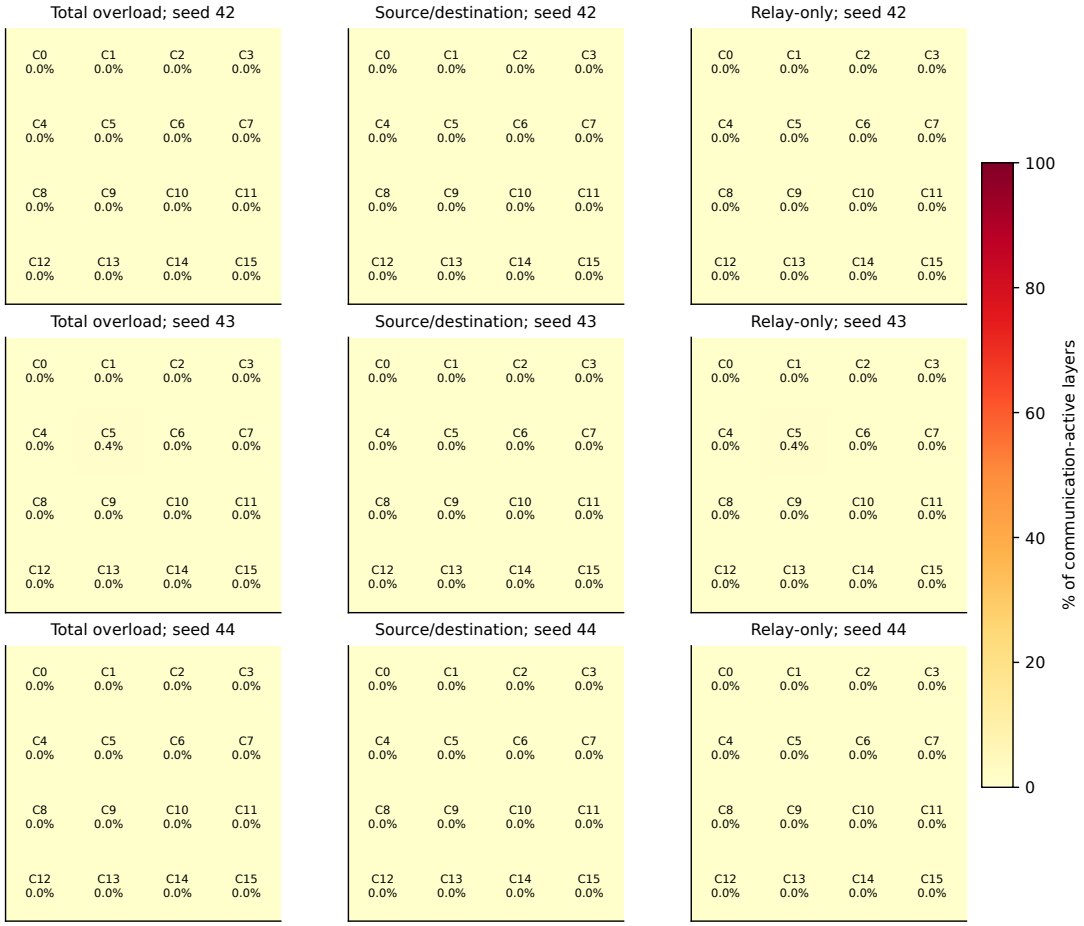


Figure 2.39: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.442	0.000	0.442	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.40: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=16; route counting

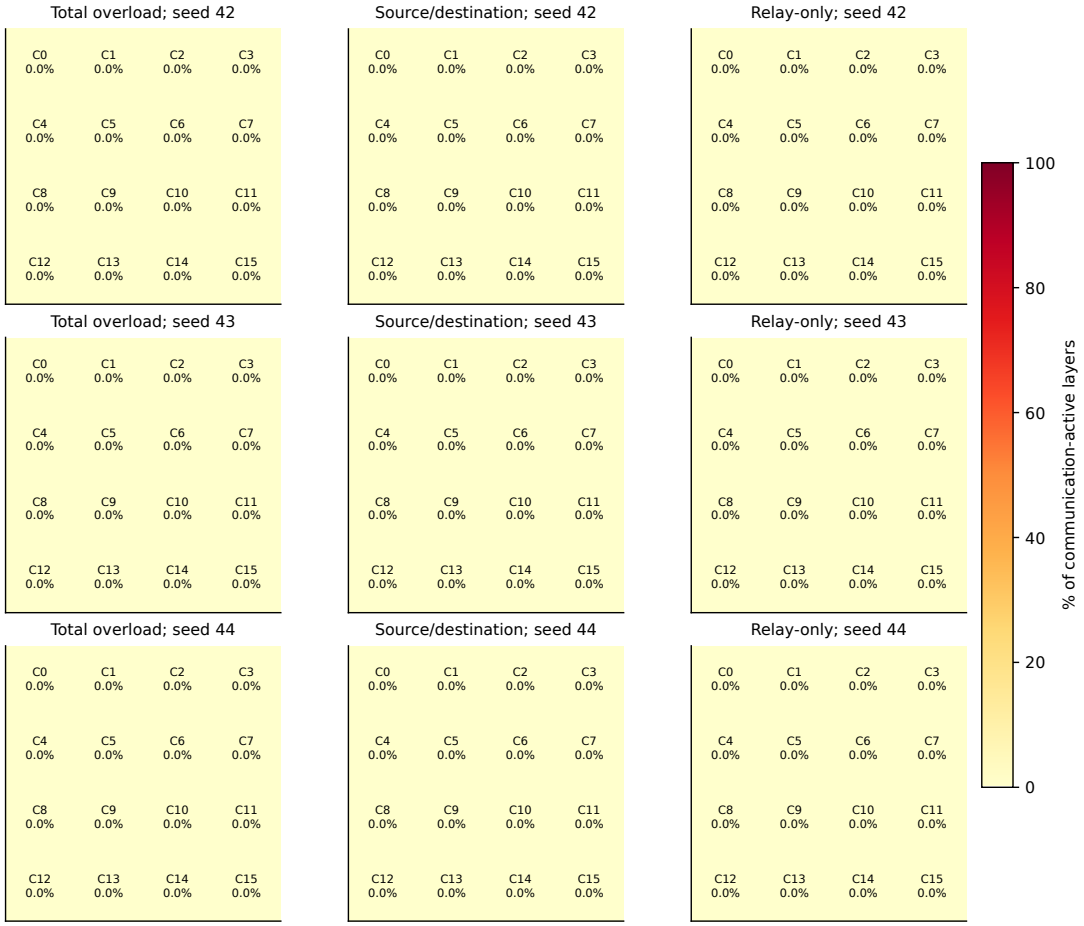


Figure 2.40: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.41: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=32; route counting

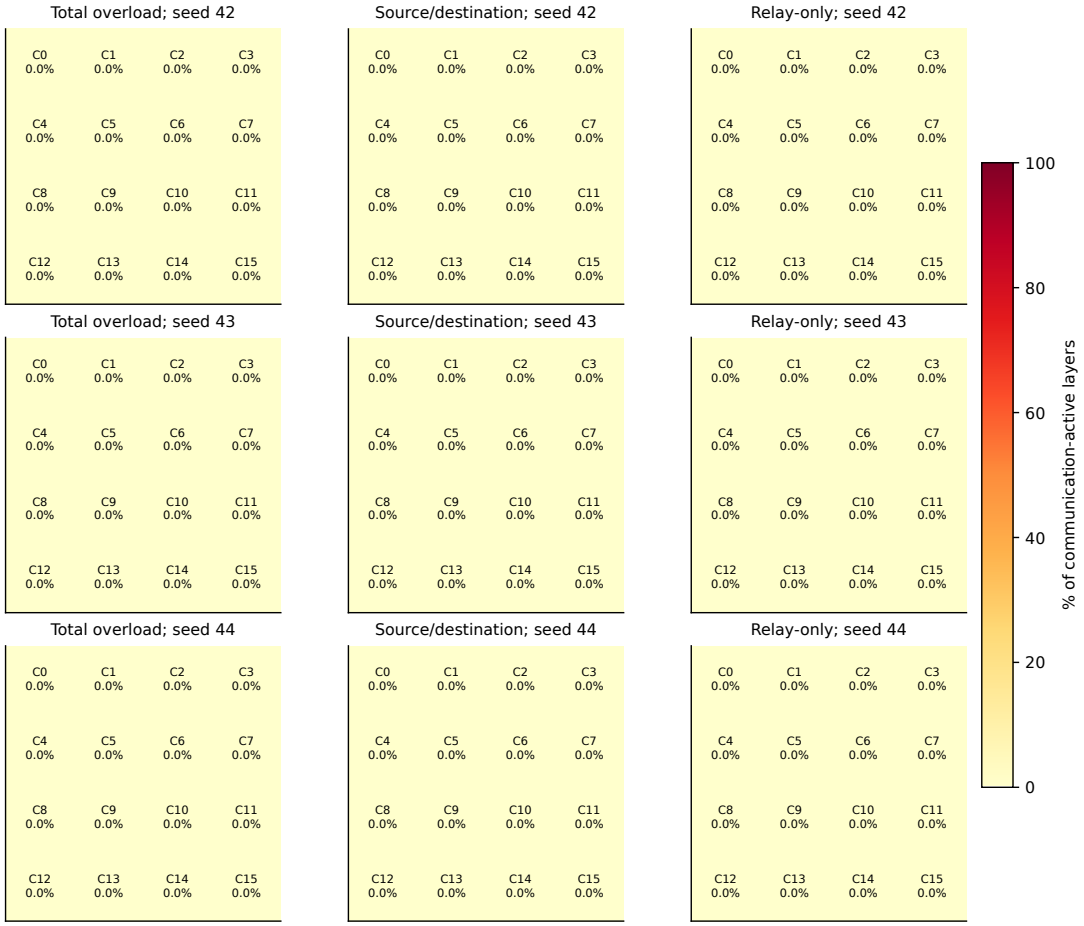


Figure 2.41: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.42: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=2; hop counting

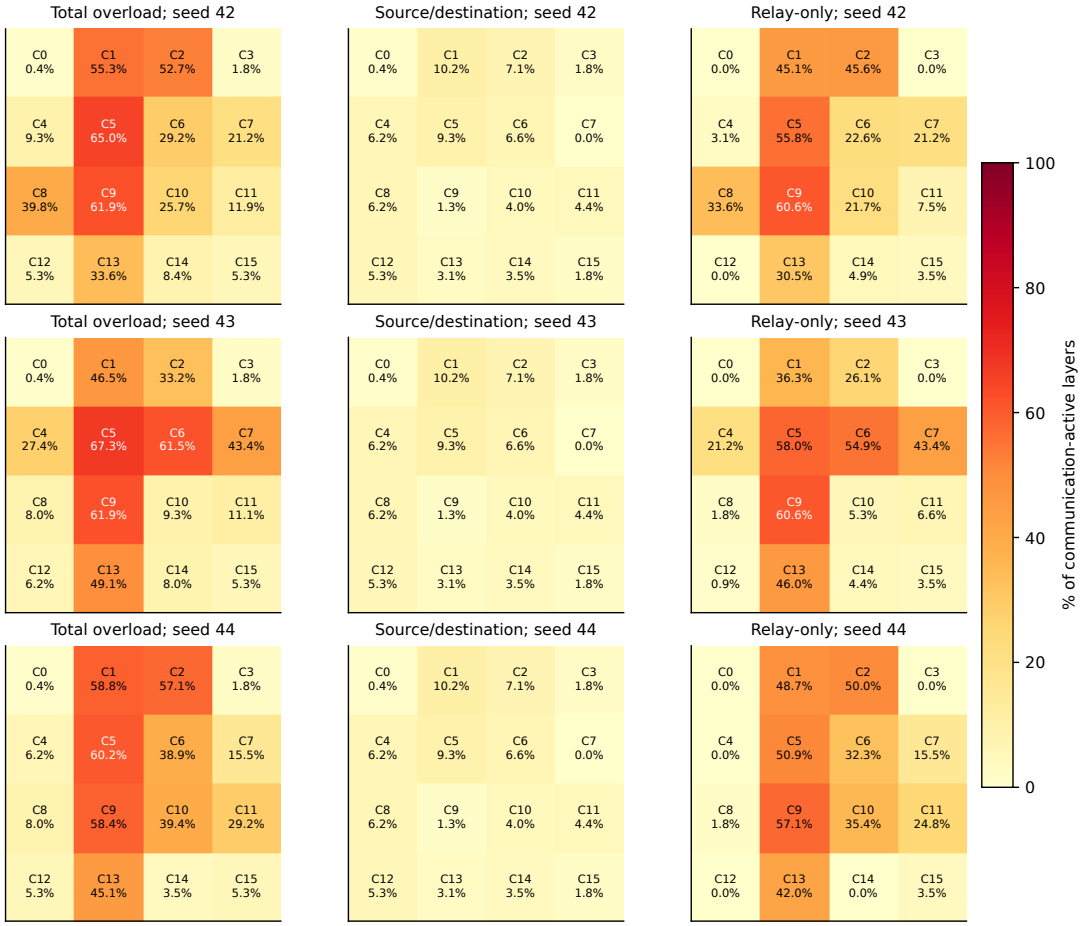


Figure 2.42: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
1	55.310	10.177	45.133	46.460	10.177	36.283	58.850	10.177	48.673
2	52.655	7.080	45.575	33.186	7.080	26.106	57.080	7.080	50.000
3	1.770	1.770	0.000	1.770	1.770	0.000	1.770	1.770	0.000
4	9.292	6.195	3.097	27.434	6.195	21.239	6.195	6.195	0.000
5	65.044	9.292	55.752	67.257	9.292	57.965	60.177	9.292	50.885
6	29.204	6.637	22.566	61.504	6.637	54.867	38.938	6.637	32.301
7	21.239	0.000	21.239	43.363	0.000	43.363	15.487	0.000	15.487
8	39.823	6.195	33.628	7.965	6.195	1.770	7.965	6.195	1.770
9	61.947	1.327	60.619	61.947	1.327	60.619	58.407	1.327	57.080
10	25.664	3.982	21.681	9.292	3.982	5.310	39.381	3.982	35.398
11	11.947	4.425	7.522	11.062	4.425	6.637	29.204	4.425	24.779
12	5.310	5.310	0.000	6.195	5.310	0.885	5.310	5.310	0.000
13	33.628	3.097	30.531	49.115	3.097	46.018	45.133	3.097	42.035
14	8.407	3.540	4.867	7.965	3.540	4.425	3.540	3.540	0.000
15	5.310	1.770	3.540	5.310	1.770	3.540	5.310	1.770	3.540

Table 2.43: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=3; hop counting



Figure 2.43: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	55.310	7.965	47.345	45.133	7.965	37.168	57.522	7.965	49.558
2	52.655	5.752	46.903	31.858	5.752	26.106	57.080	5.752	51.327
3	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
4	7.965	4.867	3.097	27.434	4.867	22.566	4.867	4.867	0.000
5	65.044	7.965	57.080	67.257	7.965	59.292	60.177	7.965	52.212
6	29.204	5.310	23.894	61.062	5.310	55.752	38.938	5.310	33.628
7	18.584	0.000	18.584	40.265	0.000	40.265	12.832	0.000	12.832
8	39.823	4.867	34.956	5.752	4.867	0.885	5.752	4.867	0.885
9	58.850	0.000	58.850	58.850	0.000	58.850	55.310	0.000	55.310
10	24.336	2.655	21.681	7.965	2.655	5.310	38.053	2.655	35.398
11	11.947	3.097	8.850	11.062	3.097	7.965	29.204	3.097	26.106
12	2.212	2.212	0.000	3.097	2.212	0.885	2.212	2.212	0.000
13	31.858	1.770	30.088	47.345	1.770	45.575	43.805	1.770	42.035
14	6.195	2.212	3.982	5.752	2.212	3.540	2.212	2.212	0.000
15	0.885	0.000	0.885	0.885	0.000	0.885	0.885	0.000	0.885

Table 2.44: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=4; hop counting

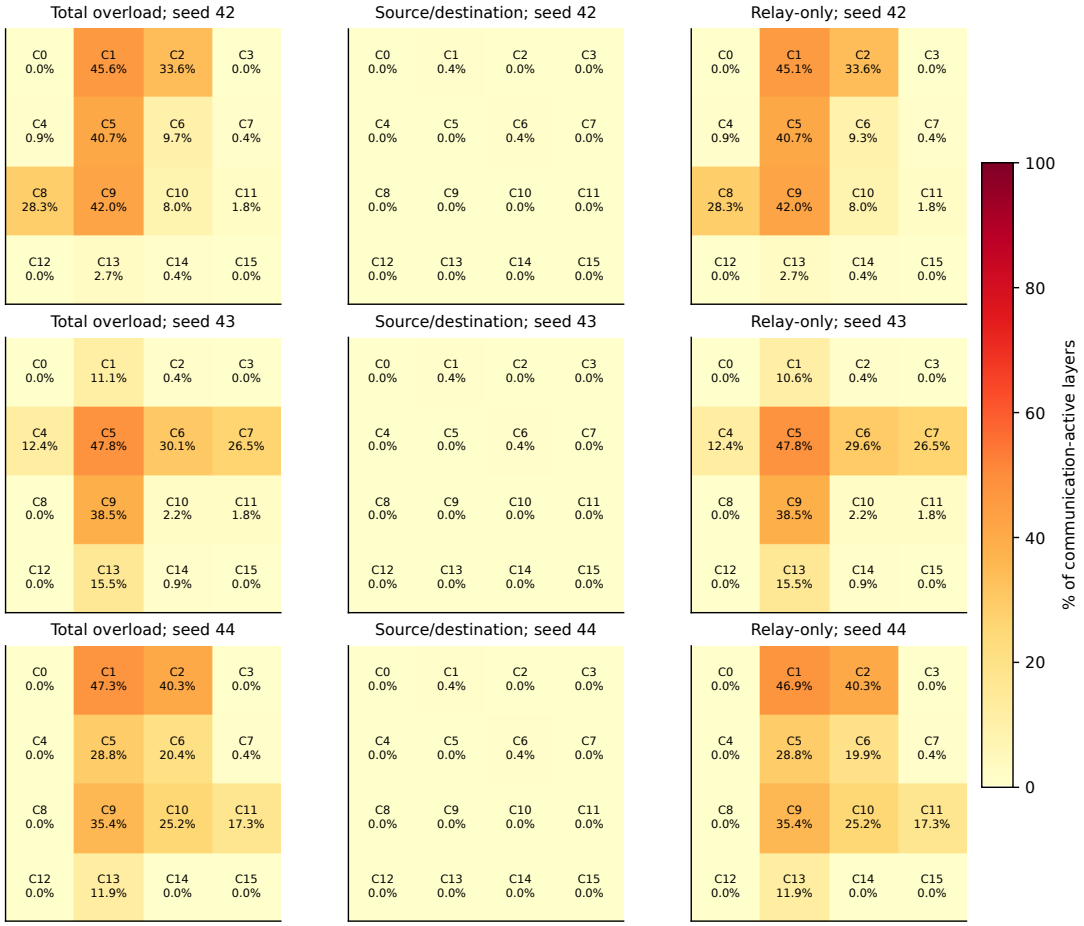


Figure 2.44: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	45.575	0.442	45.133	11.062	0.442	10.619	47.345	0.442	46.903
2	33.628	0.000	33.628	0.442	0.000	0.442	40.265	0.000	40.265
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.885	0.000	0.885	12.389	0.000	12.389	0.000	0.000	0.000
5	40.708	0.000	40.708	47.788	0.000	47.788	28.761	0.000	28.761
6	9.735	0.442	9.292	30.088	0.442	29.646	20.354	0.442	19.912
7	0.442	0.000	0.442	26.549	0.000	26.549	0.442	0.000	0.442
8	28.319	0.000	28.319	0.000	0.000	0.000	0.000	0.000	0.000
9	42.035	0.000	42.035	38.496	0.000	38.496	35.398	0.000	35.398
10	7.965	0.000	7.965	2.212	0.000	2.212	25.221	0.000	25.221
11	1.770	0.000	1.770	1.770	0.000	1.770	17.257	0.000	17.257
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	2.655	0.000	2.655	15.487	0.000	15.487	11.947	0.000	11.947
14	0.442	0.000	0.442	0.885	0.000	0.885	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.45: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=6; hop counting

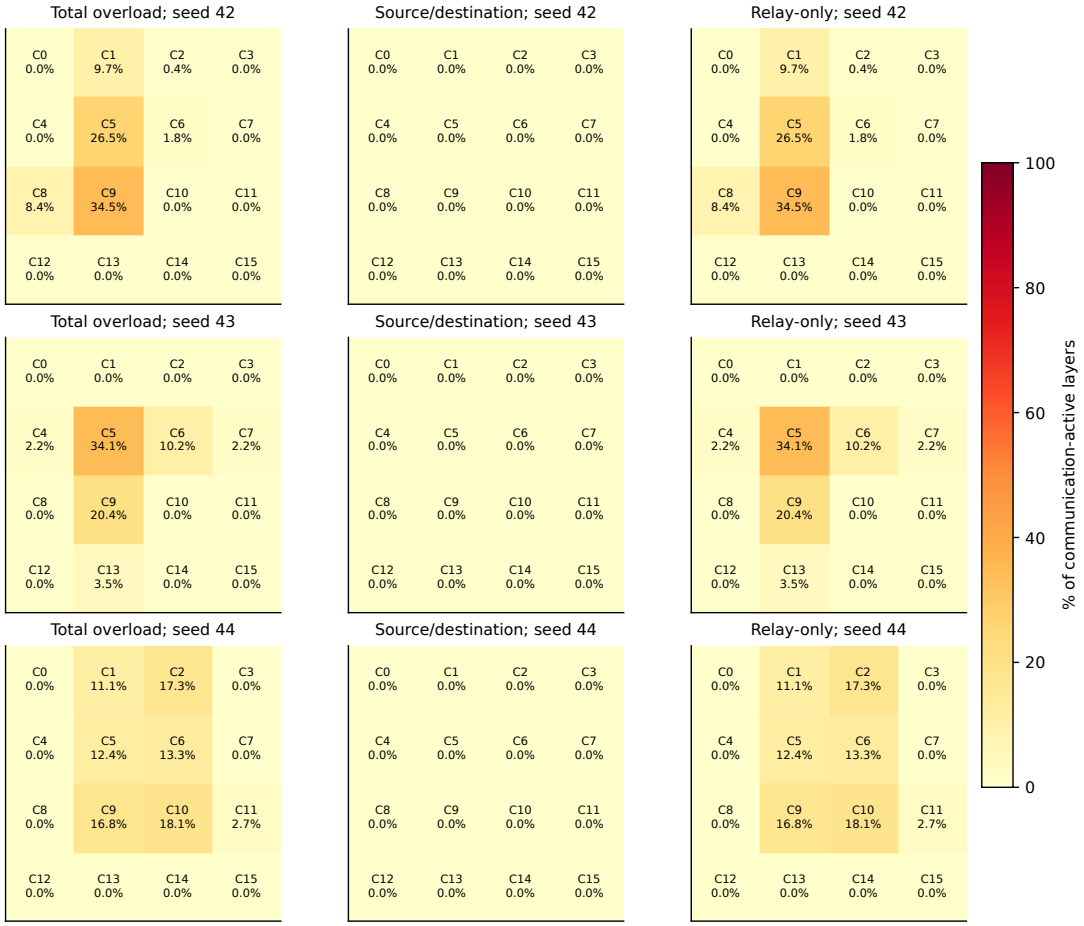


Figure 2.45: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	9.735	0.000	9.735	0.000	0.000	0.000	11.062	0.000	11.062
2	0.442	0.000	0.442	0.000	0.000	0.000	17.257	0.000	17.257
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	2.212	0.000	2.212	0.000	0.000	0.000
5	26.549	0.000	26.549	34.071	0.000	34.071	12.389	0.000	12.389
6	1.770	0.000	1.770	10.177	0.000	10.177	13.274	0.000	13.274
7	0.000	0.000	0.000	2.212	0.000	2.212	0.000	0.000	0.000
8	8.407	0.000	8.407	0.000	0.000	0.000	0.000	0.000	0.000
9	34.513	0.000	34.513	20.354	0.000	20.354	16.814	0.000	16.814
10	0.000	0.000	0.000	0.000	0.000	0.000	18.142	0.000	18.142
11	0.000	0.000	0.000	0.000	0.000	0.000	2.655	0.000	2.655
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	3.540	0.000	3.540	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.46: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=8; hop counting

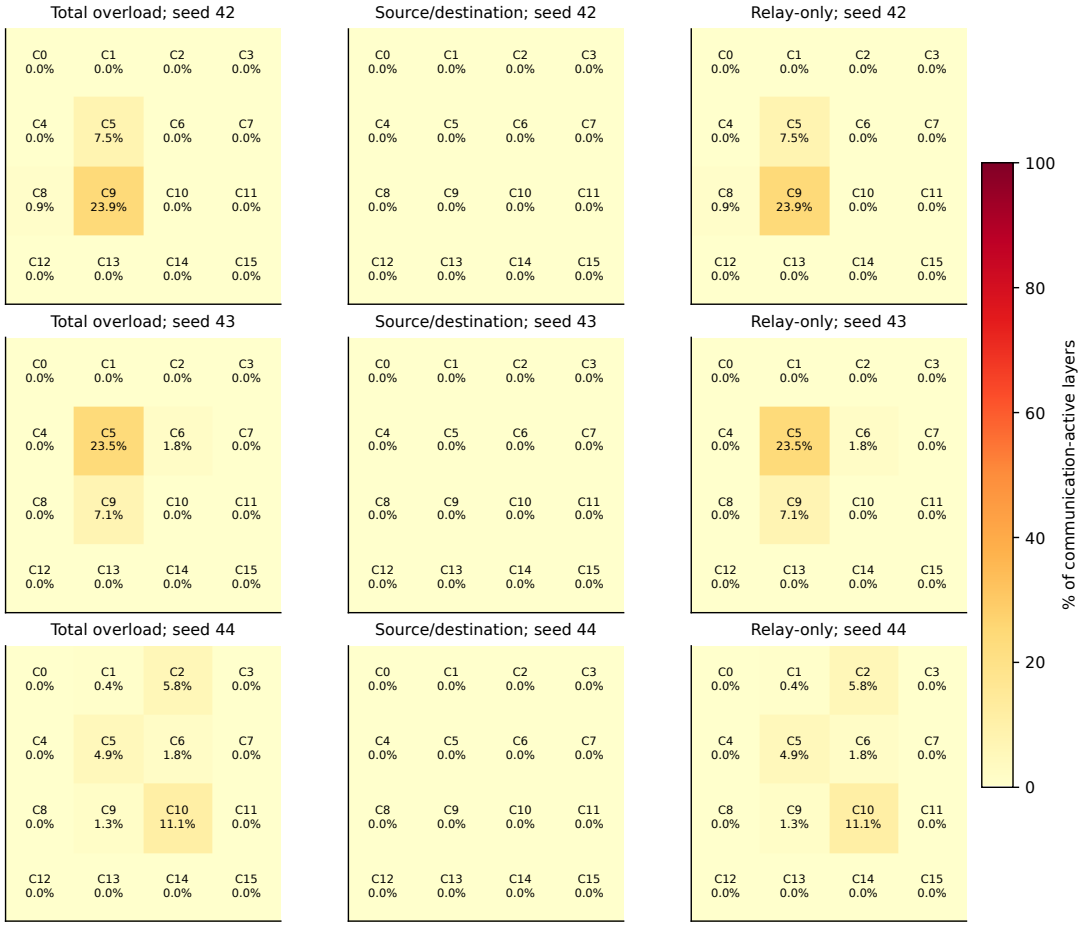


Figure 2.46: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.442	0.000	0.442
2	0.000	0.000	0.000	0.000	0.000	0.000	5.752	0.000	5.752
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	7.522	0.000	7.522	23.451	0.000	23.451	4.867	0.000	4.867
6	0.000	0.000	0.000	1.770	0.000	1.770	1.770	0.000	1.770
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.885	0.000	0.885	0.000	0.000	0.000	0.000	0.000	0.000
9	23.894	0.000	23.894	7.080	0.000	7.080	1.327	0.000	1.327
10	0.000	0.000	0.000	0.000	0.000	0.000	11.062	0.000	11.062
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.47: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=16; hop counting

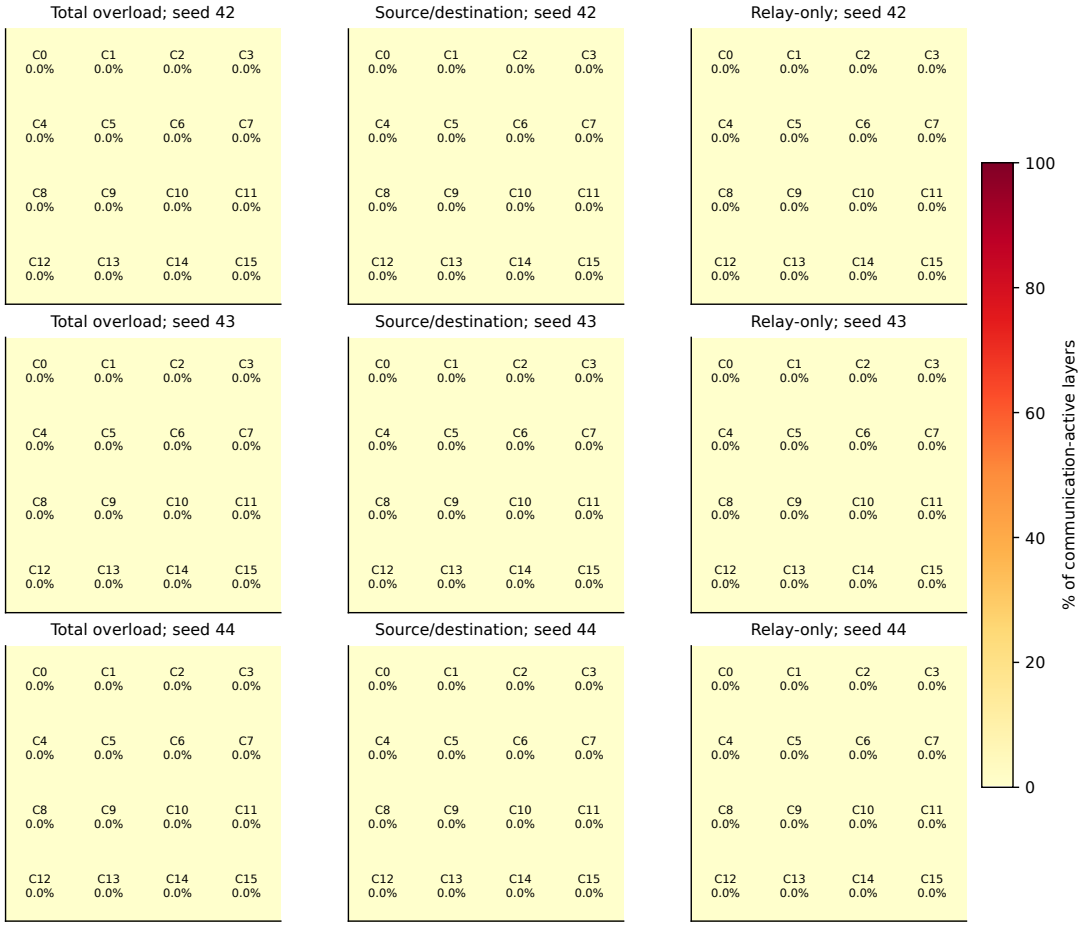


Figure 2.47: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.48: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh shortest_reliable; M=32; hop counting

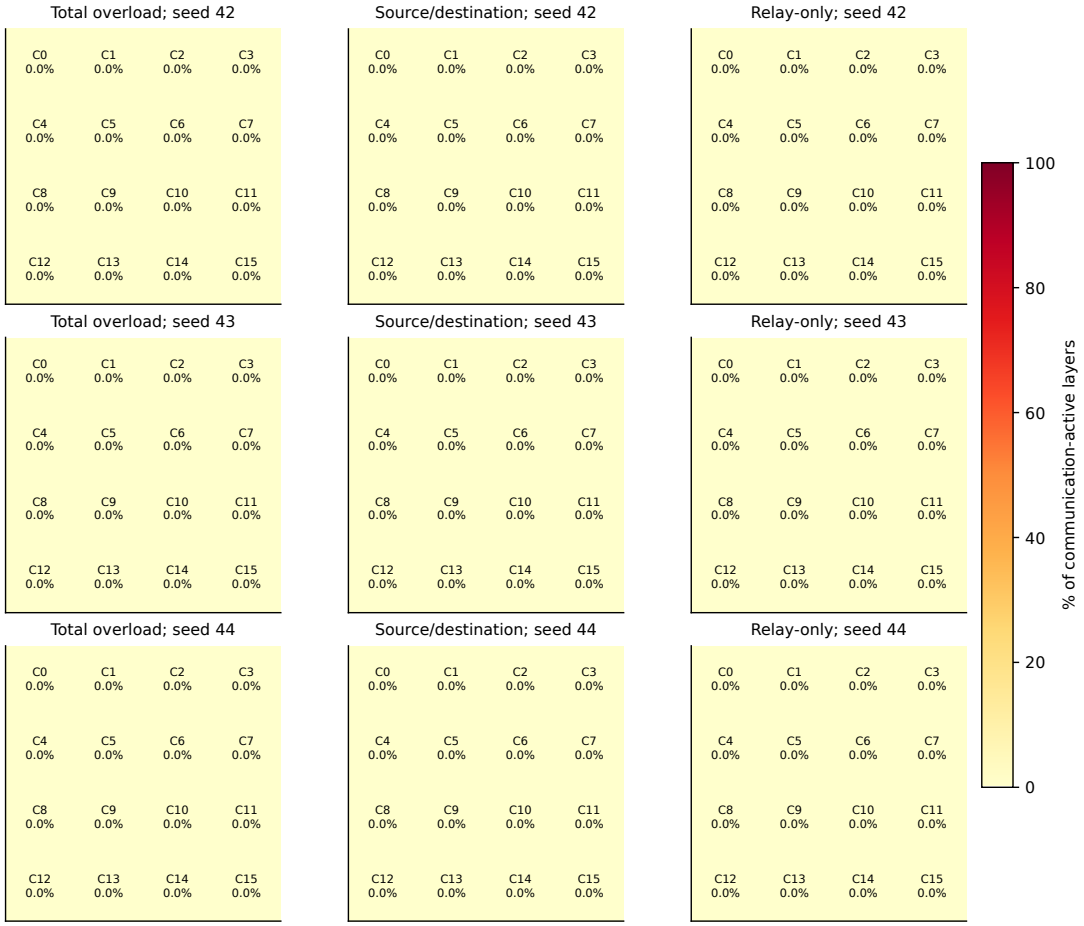


Figure 2.48: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.49: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

2.4 Mesh / max_reliability

Mesh max_reliability; M=2; route counting

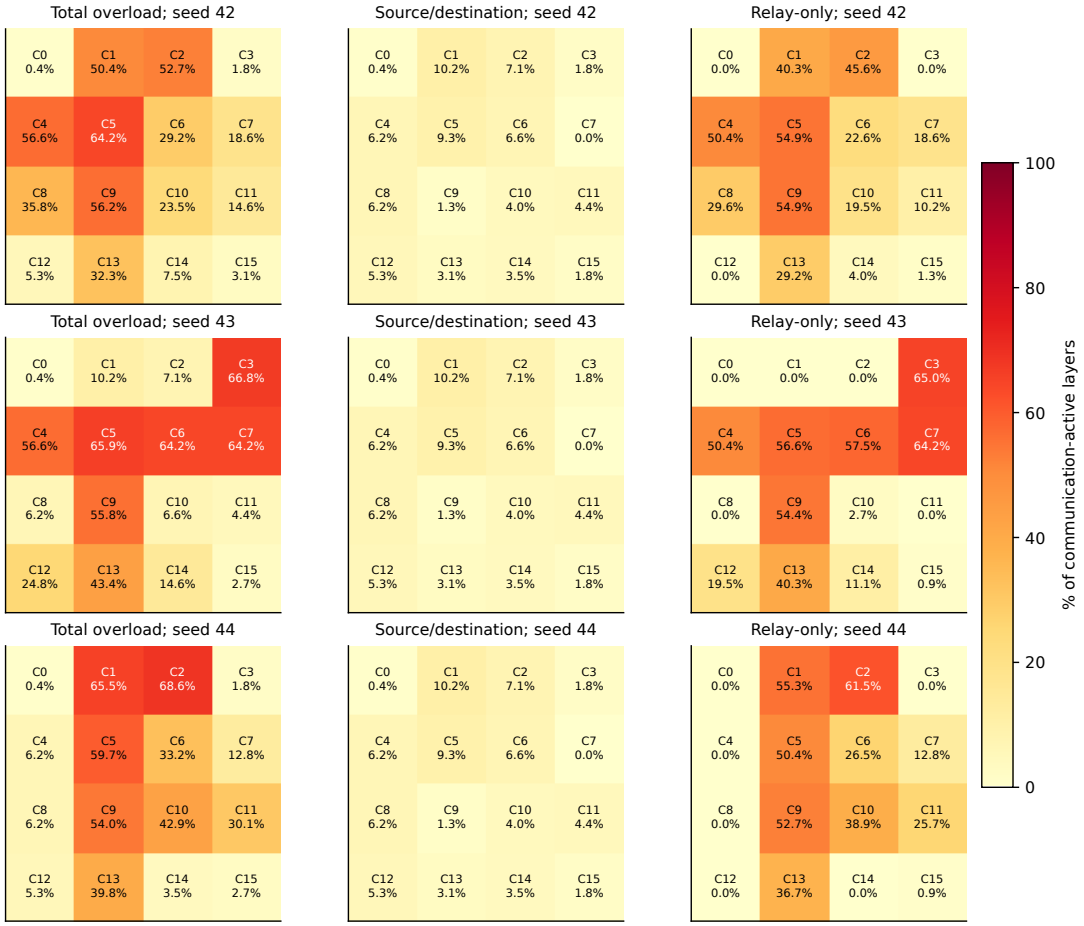


Figure 2.49: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
1	50.442	10.177	40.265	10.177	10.177	0.000	65.487	10.177	55.310
2	52.655	7.080	45.575	7.080	7.080	0.000	68.584	7.080	61.504
3	1.770	1.770	0.000	66.814	1.770	65.044	1.770	1.770	0.000
4	56.637	6.195	50.442	56.637	6.195	50.442	6.195	6.195	0.000
5	64.159	9.292	54.867	65.929	9.292	56.637	59.735	9.292	50.442
6	29.204	6.637	22.566	64.159	6.637	57.522	33.186	6.637	26.549
7	18.584	0.000	18.584	64.159	0.000	64.159	12.832	0.000	12.832
8	35.841	6.195	29.646	6.195	6.195	0.000	6.195	6.195	0.000
9	56.195	1.327	54.867	55.752	1.327	54.425	53.982	1.327	52.655
10	23.451	3.982	19.469	6.637	3.982	2.655	42.920	3.982	38.938
11	14.602	4.425	10.177	4.425	4.425	0.000	30.088	4.425	25.664
12	5.310	5.310	0.000	24.779	5.310	19.469	5.310	5.310	0.000
13	32.301	3.097	29.204	43.363	3.097	40.265	39.823	3.097	36.726
14	7.522	3.540	3.982	14.602	3.540	11.062	3.540	3.540	0.000
15	3.097	1.770	1.327	2.655	1.770	0.885	2.655	1.770	0.885

Table 2.50: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=3; route counting

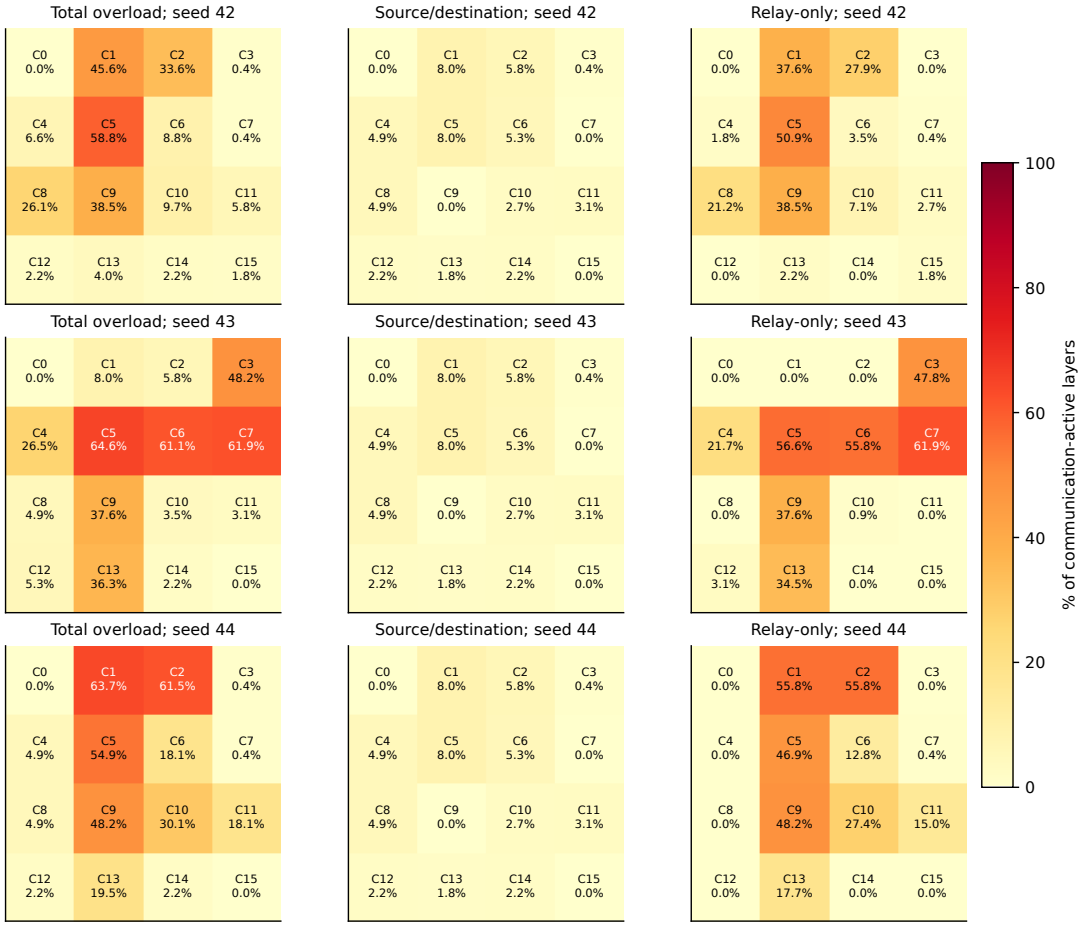


Figure 2.50: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	45.575	7.965	37.611	7.965	7.965	0.000	63.717	7.965	55.752
2	33.628	5.752	27.876	5.752	5.752	0.000	61.504	5.752	55.752
3	0.442	0.442	0.000	48.230	0.442	47.788	0.442	0.442	0.000
4	6.637	4.867	1.770	26.549	4.867	21.681	4.867	4.867	0.000
5	58.850	7.965	50.885	64.602	7.965	56.637	54.867	7.965	46.903
6	8.850	5.310	3.540	61.062	5.310	55.752	18.142	5.310	12.832
7	0.442	0.000	0.442	61.947	0.000	61.947	0.442	0.000	0.442
8	26.106	4.867	21.239	4.867	4.867	0.000	4.867	4.867	0.000
9	38.496	0.000	38.496	37.611	0.000	37.611	48.230	0.000	48.230
10	9.735	2.655	7.080	3.540	2.655	0.885	30.088	2.655	27.434
11	5.752	3.097	2.655	3.097	3.097	0.000	18.142	3.097	15.044
12	2.212	2.212	0.000	5.310	2.212	3.097	2.212	2.212	0.000
13	3.982	1.770	2.212	36.283	1.770	34.513	19.469	1.770	17.699
14	2.212	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000
15	1.770	0.000	1.770	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.51: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=4; route counting

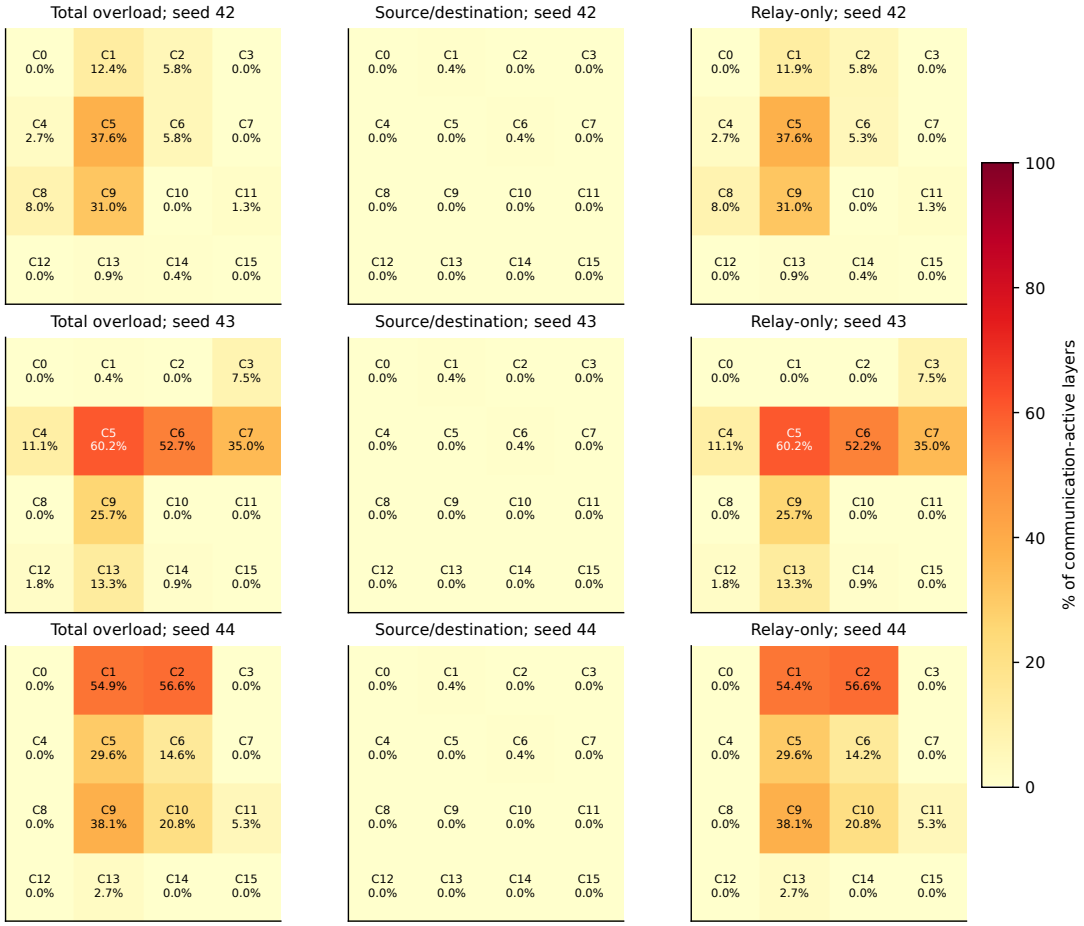


Figure 2.51: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	12.389	0.442	11.947	0.442	0.442	0.000	54.867	0.442	54.425
2	5.752	0.000	5.752	0.000	0.000	0.000	56.637	0.000	56.637
3	0.000	0.000	0.000	7.522	0.000	7.522	0.000	0.000	0.000
4	2.655	0.000	2.655	11.062	0.000	11.062	0.000	0.000	0.000
5	37.611	0.000	37.611	60.177	0.000	60.177	29.646	0.000	29.646
6	5.752	0.442	5.310	52.655	0.442	52.212	14.602	0.442	14.159
7	0.000	0.000	0.000	34.956	0.000	34.956	0.000	0.000	0.000
8	7.965	0.000	7.965	0.000	0.000	0.000	0.000	0.000	0.000
9	30.973	0.000	30.973	25.664	0.000	25.664	38.053	0.000	38.053
10	0.000	0.000	0.000	0.000	0.000	0.000	20.796	0.000	20.796
11	1.327	0.000	1.327	0.000	0.000	0.000	5.310	0.000	5.310
12	0.000	0.000	0.000	1.770	0.000	1.770	0.000	0.000	0.000
13	0.885	0.000	0.885	13.274	0.000	13.274	2.655	0.000	2.655
14	0.442	0.000	0.442	0.885	0.000	0.885	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.52: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=6; route counting

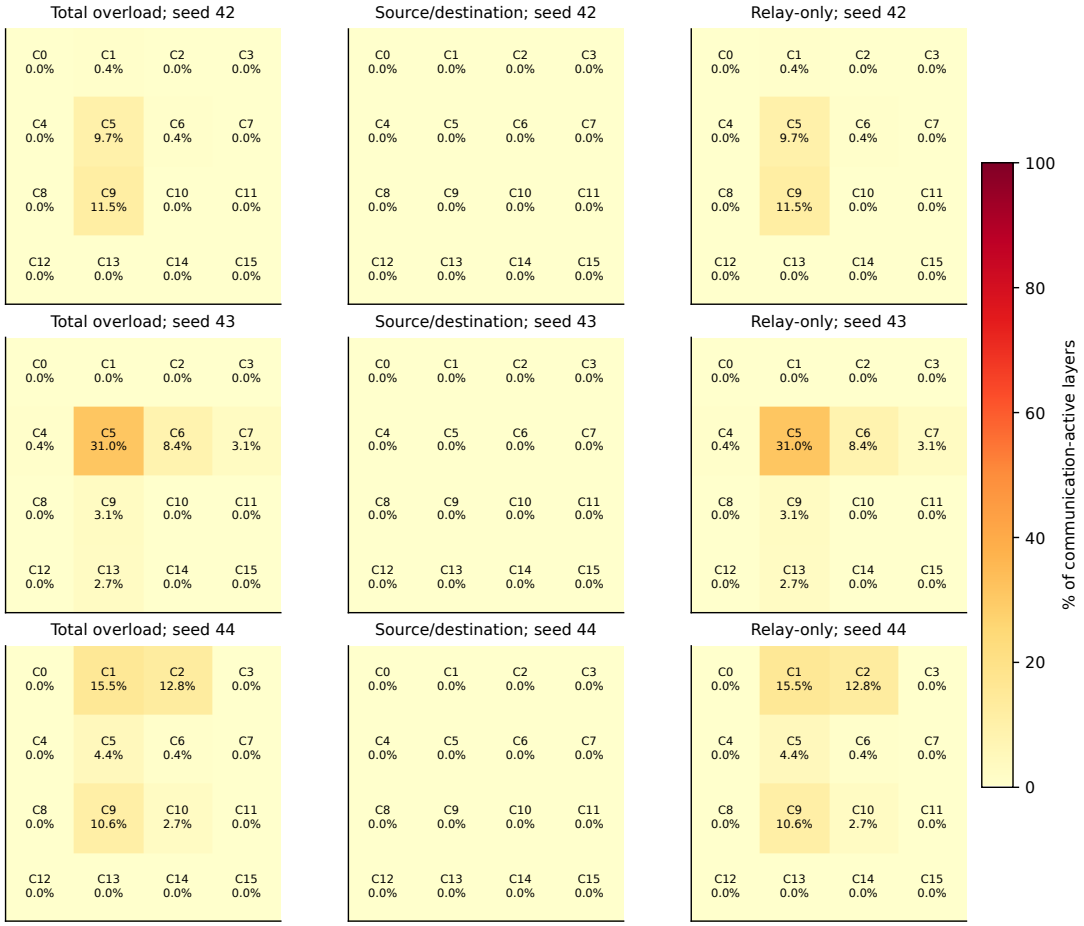


Figure 2.52: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.442	0.000	0.442	0.000	0.000	0.000	15.487	0.000	15.487
2	0.000	0.000	0.000	0.000	0.000	0.000	12.832	0.000	12.832
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.442	0.000	0.442	0.000	0.000	0.000
5	9.735	0.000	9.735	30.973	0.000	30.973	4.425	0.000	4.425
6	0.442	0.000	0.442	8.407	0.000	8.407	0.442	0.000	0.442
7	0.000	0.000	0.000	3.097	0.000	3.097	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	11.504	0.000	11.504	3.097	0.000	3.097	10.619	0.000	10.619
10	0.000	0.000	0.000	0.000	0.000	0.000	2.655	0.000	2.655
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	2.655	0.000	2.655	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.53: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=8; route counting

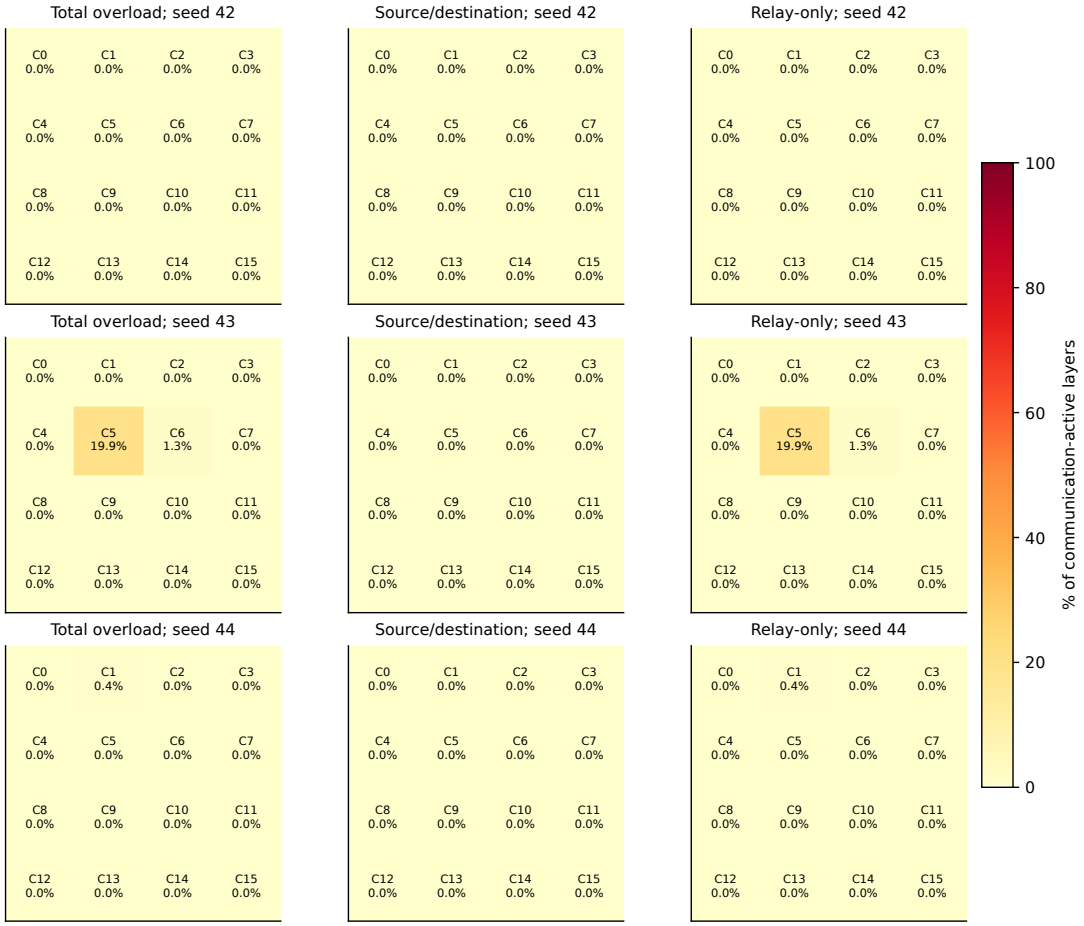


Figure 2.53: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.442	0.000	0.442
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	19.912	0.000	19.912	0.000	0.000	0.000
6	0.000	0.000	0.000	1.327	0.000	1.327	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.54: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=16; route counting

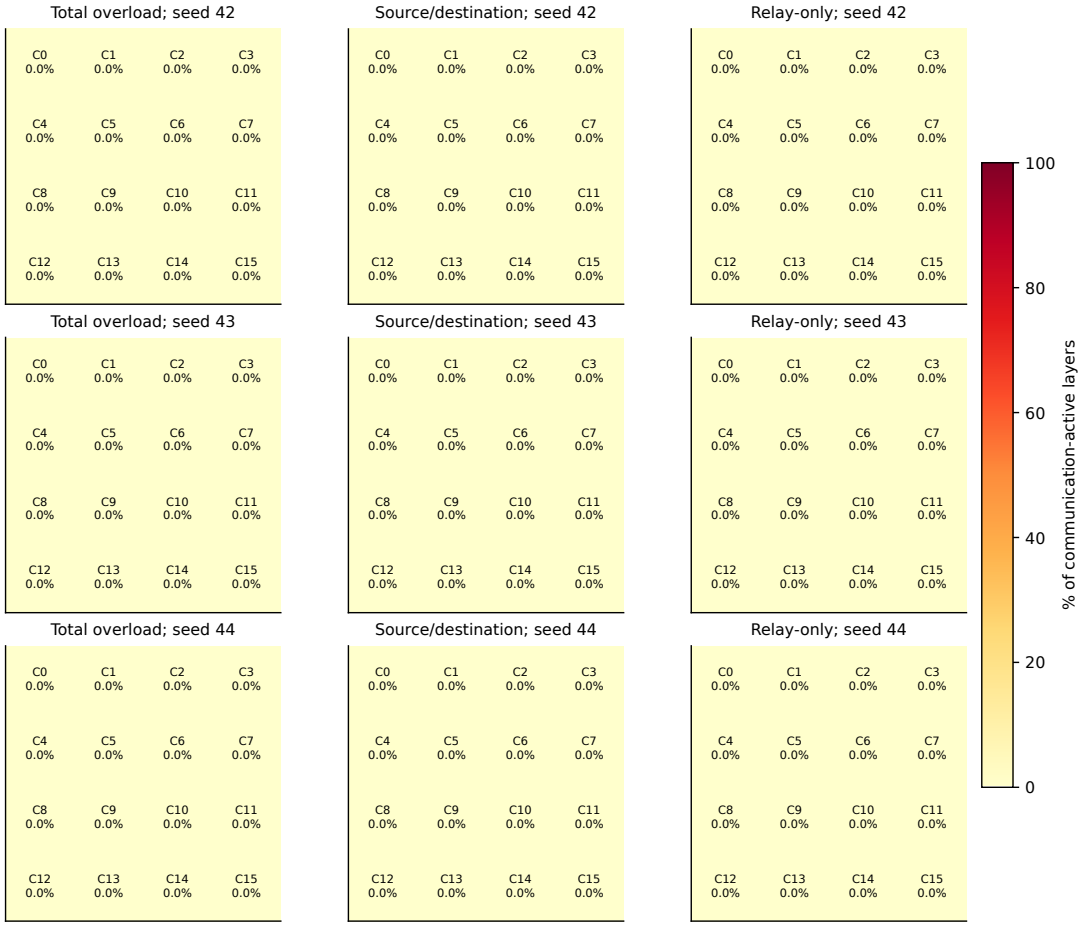


Figure 2.54: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.55: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=32; route counting

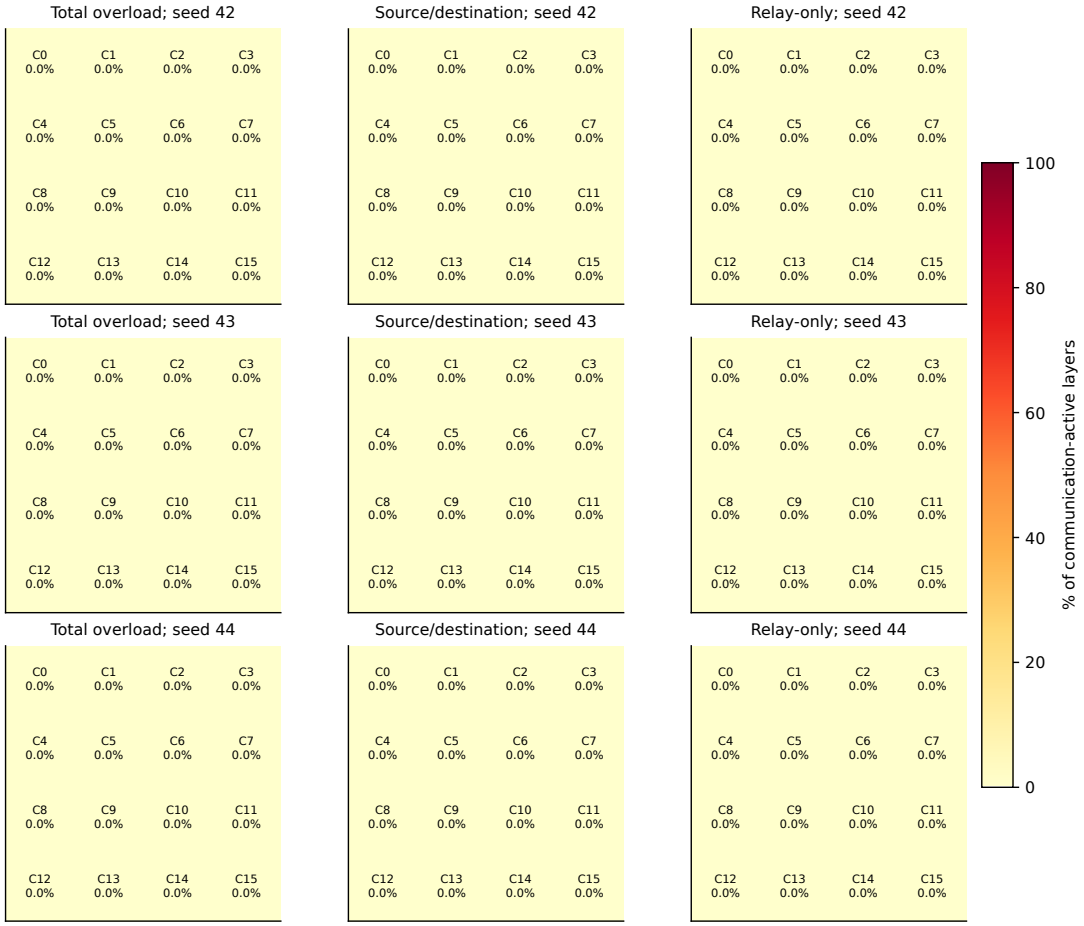


Figure 2.55: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.56: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=2; hop counting

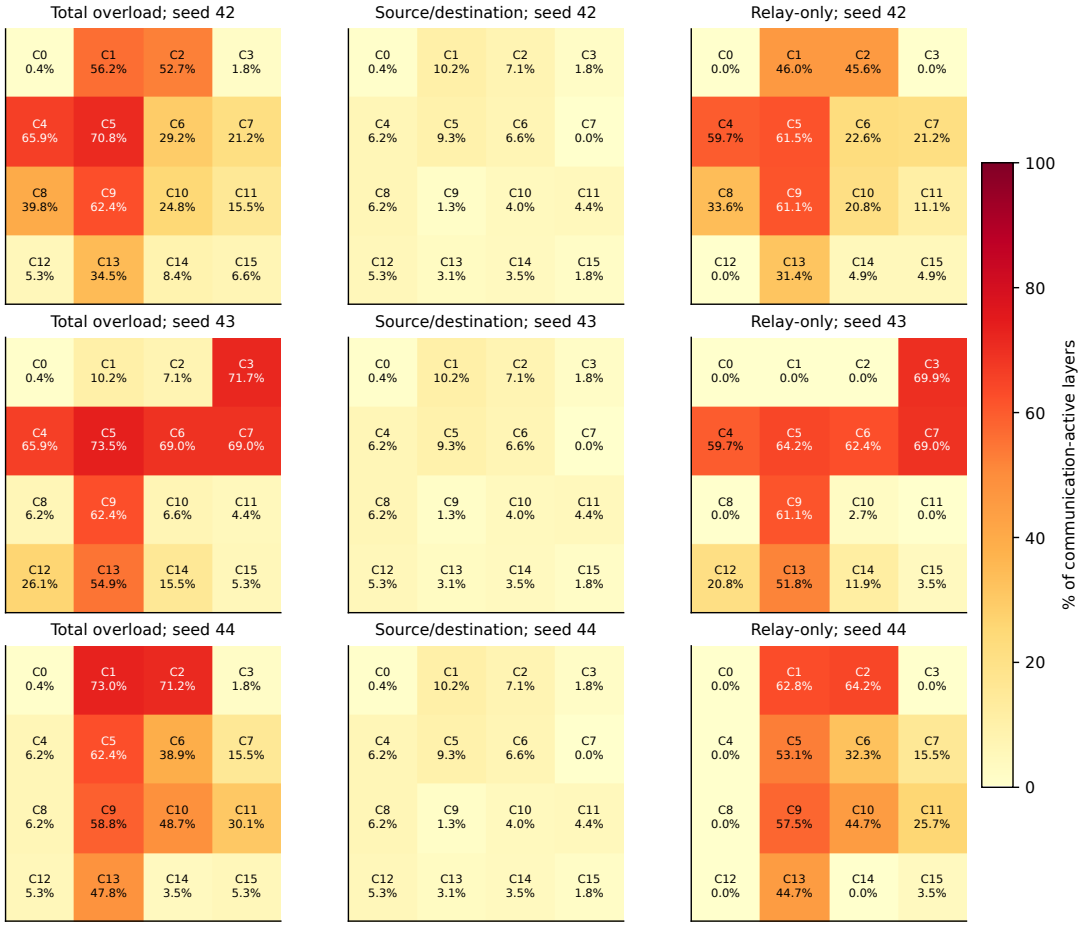


Figure 2.56: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
1	56.195	10.177	46.018	10.177	10.177	0.000	73.009	10.177	62.832
2	52.655	7.080	45.575	7.080	7.080	0.000	71.239	7.080	64.159
3	1.770	1.770	0.000	71.681	1.770	69.912	1.770	1.770	0.000
4	65.929	6.195	59.735	65.929	6.195	59.735	6.195	6.195	0.000
5	70.796	9.292	61.504	73.451	9.292	64.159	62.389	9.292	53.097
6	29.204	6.637	22.566	69.027	6.637	62.389	38.938	6.637	32.301
7	21.239	0.000	21.239	69.027	0.000	69.027	15.487	0.000	15.487
8	39.823	6.195	33.628	6.195	6.195	0.000	6.195	6.195	0.000
9	62.389	1.327	61.062	62.389	1.327	61.062	58.850	1.327	57.522
10	24.779	3.982	20.796	6.637	3.982	2.655	48.673	3.982	44.690
11	15.487	4.425	11.062	4.425	4.425	0.000	30.088	4.425	25.664
12	5.310	5.310	0.000	26.106	5.310	20.796	5.310	5.310	0.000
13	34.513	3.097	31.416	54.867	3.097	51.770	47.788	3.097	44.690
14	8.407	3.540	4.867	15.487	3.540	11.947	3.540	3.540	0.000
15	6.637	1.770	4.867	5.310	1.770	3.540	5.310	1.770	3.540

Table 2.57: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=3; hop counting



Figure 2.57: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	55.752	7.965	47.788	7.965	7.965	0.000	71.681	7.965	63.717
2	52.655	5.752	46.903	5.752	5.752	0.000	71.239	5.752	65.487
3	0.442	0.442	0.000	69.027	0.442	68.584	0.442	0.442	0.000
4	57.522	4.867	52.655	57.522	4.867	52.655	4.867	4.867	0.000
5	70.796	7.965	62.832	73.451	7.965	65.487	62.389	7.965	54.425
6	29.204	5.310	23.894	69.027	5.310	63.717	38.938	5.310	33.628
7	18.584	0.000	18.584	69.027	0.000	69.027	12.832	0.000	12.832
8	39.823	4.867	34.956	4.867	4.867	0.000	4.867	4.867	0.000
9	59.292	0.000	59.292	59.292	0.000	59.292	58.850	0.000	58.850
10	23.451	2.655	20.796	5.310	2.655	2.655	47.345	2.655	44.690
11	14.602	3.097	11.504	3.097	3.097	0.000	30.088	3.097	26.991
12	2.212	2.212	0.000	24.779	2.212	22.566	2.212	2.212	0.000
13	33.186	1.770	31.416	50.442	1.770	48.673	47.788	1.770	46.018
14	6.195	2.212	3.982	13.274	2.212	11.062	2.212	2.212	0.000
15	3.097	0.000	3.097	0.885	0.000	0.885	0.885	0.000	0.885

Table 2.58: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=4; hop counting

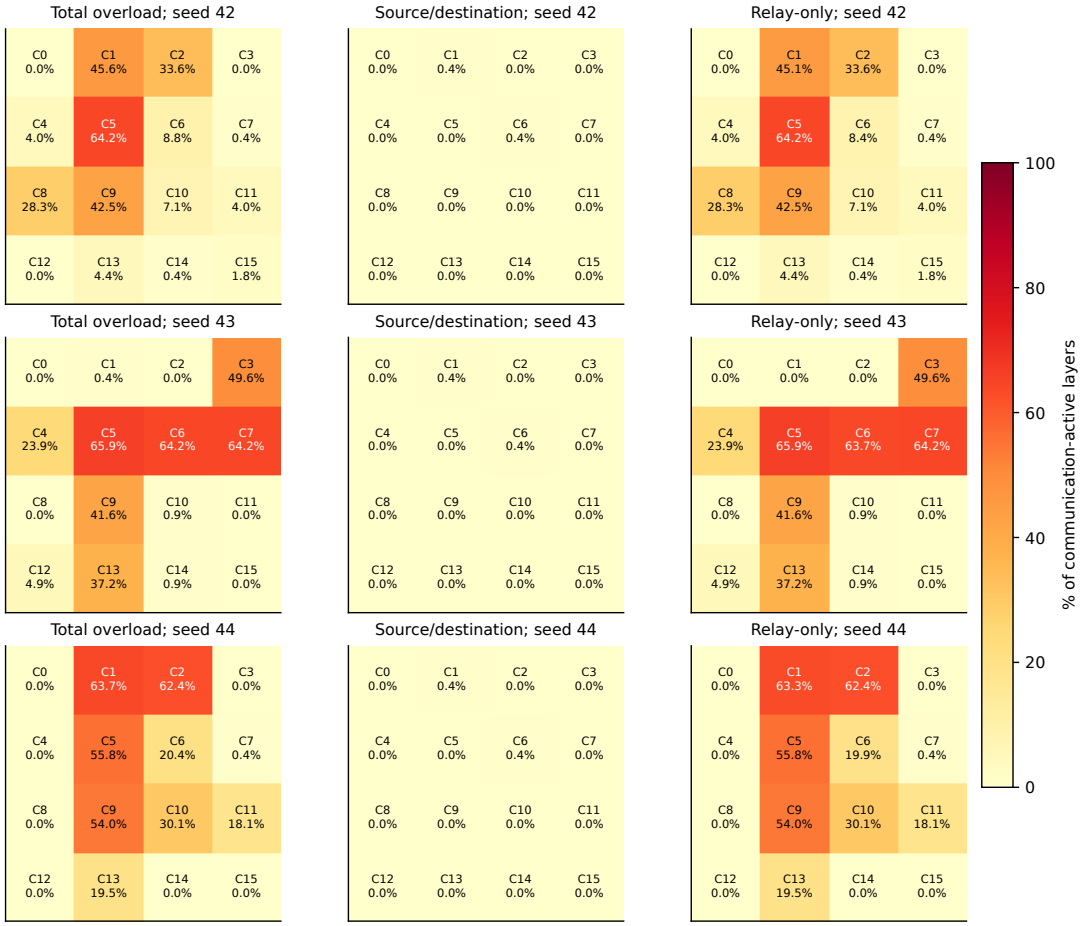


Figure 2.58: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	45.575	0.442	45.133	0.442	0.442	0.000	63.717	0.442	63.274
2	33.628	0.000	33.628	0.000	0.000	0.000	62.389	0.000	62.389
3	0.000	0.000	0.000	49.558	0.000	49.558	0.000	0.000	0.000
4	3.982	0.000	3.982	23.894	0.000	23.894	0.000	0.000	0.000
5	64.159	0.000	64.159	65.929	0.000	65.929	55.752	0.000	55.752
6	8.850	0.442	8.407	64.159	0.442	63.717	20.354	0.442	19.912
7	0.442	0.000	0.442	64.159	0.000	64.159	0.442	0.000	0.442
8	28.319	0.000	28.319	0.000	0.000	0.000	0.000	0.000	0.000
9	42.478	0.000	42.478	41.593	0.000	41.593	53.982	0.000	53.982
10	7.080	0.000	7.080	0.885	0.000	0.885	30.088	0.000	30.088
11	3.982	0.000	3.982	0.000	0.000	0.000	18.142	0.000	18.142
12	0.000	0.000	0.000	4.867	0.000	4.867	0.000	0.000	0.000
13	4.425	0.000	4.425	37.168	0.000	37.168	19.469	0.000	19.469
14	0.442	0.000	0.442	0.885	0.000	0.885	0.000	0.000	0.000
15	1.770	0.000	1.770	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.59: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=6; hop counting

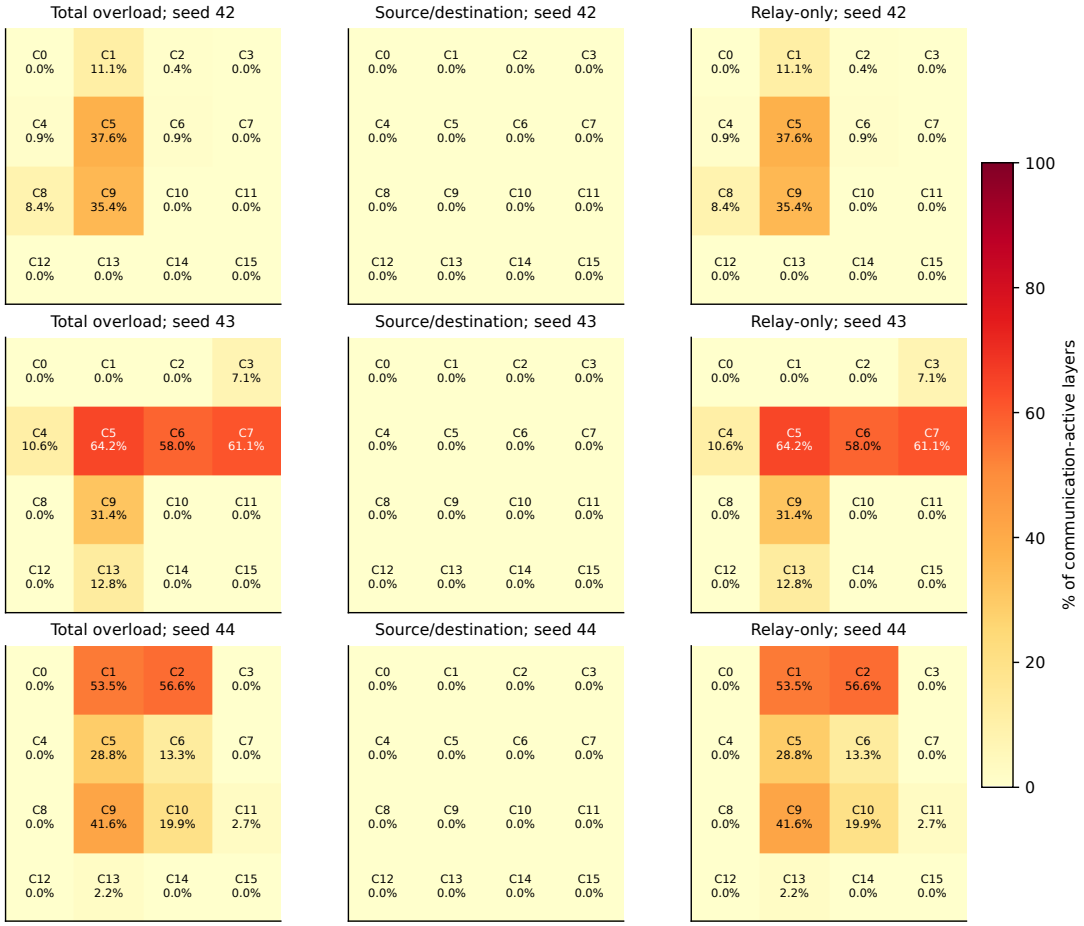


Figure 2.59: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	11.062	0.000	11.062	0.000	0.000	0.000	53.540	0.000	53.540
2	0.442	0.000	0.442	0.000	0.000	0.000	56.637	0.000	56.637
3	0.000	0.000	0.000	7.080	0.000	7.080	0.000	0.000	0.000
4	0.885	0.000	0.885	10.619	0.000	10.619	0.000	0.000	0.000
5	37.611	0.000	37.611	64.159	0.000	64.159	28.761	0.000	28.761
6	0.885	0.000	0.885	57.965	0.000	57.965	13.274	0.000	13.274
7	0.000	0.000	0.000	61.062	0.000	61.062	0.000	0.000	0.000
8	8.407	0.000	8.407	0.000	0.000	0.000	0.000	0.000	0.000
9	35.398	0.000	35.398	31.416	0.000	31.416	41.593	0.000	41.593
10	0.000	0.000	0.000	0.000	0.000	0.000	19.912	0.000	19.912
11	0.000	0.000	0.000	0.000	0.000	0.000	2.655	0.000	2.655
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	12.832	0.000	12.832	2.212	0.000	2.212
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.60: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=8; hop counting

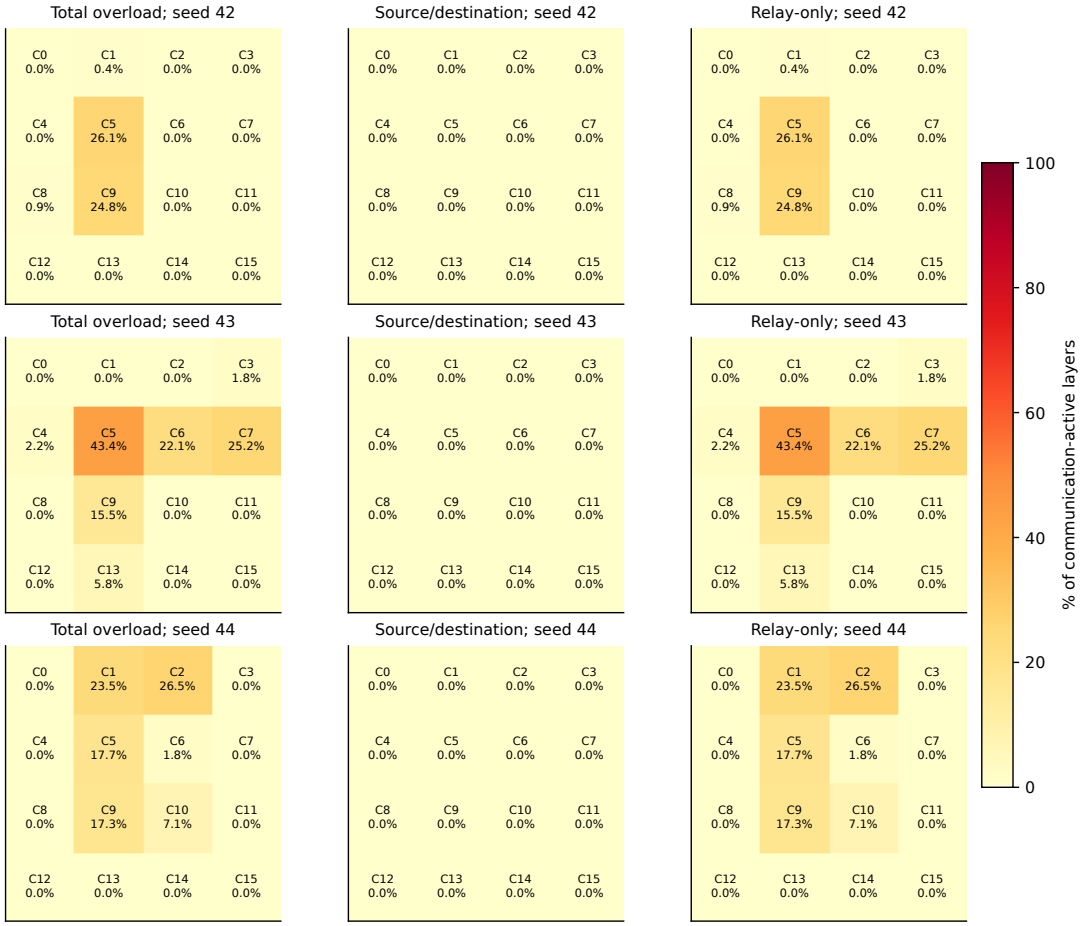


Figure 2.60: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.442	0.000	0.442	0.000	0.000	0.000	23.451	0.000	23.451
2	0.000	0.000	0.000	0.000	0.000	0.000	26.549	0.000	26.549
3	0.000	0.000	0.000	1.770	0.000	1.770	0.000	0.000	0.000
4	0.000	0.000	0.000	2.212	0.000	2.212	0.000	0.000	0.000
5	26.106	0.000	26.106	43.363	0.000	43.363	17.699	0.000	17.699
6	0.000	0.000	0.000	22.124	0.000	22.124	1.770	0.000	1.770
7	0.000	0.000	0.000	25.221	0.000	25.221	0.000	0.000	0.000
8	0.885	0.000	0.885	0.000	0.000	0.000	0.000	0.000	0.000
9	24.779	0.000	24.779	15.487	0.000	15.487	17.257	0.000	17.257
10	0.000	0.000	0.000	0.000	0.000	0.000	7.080	0.000	7.080
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	5.752	0.000	5.752	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.61: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=16; hop counting

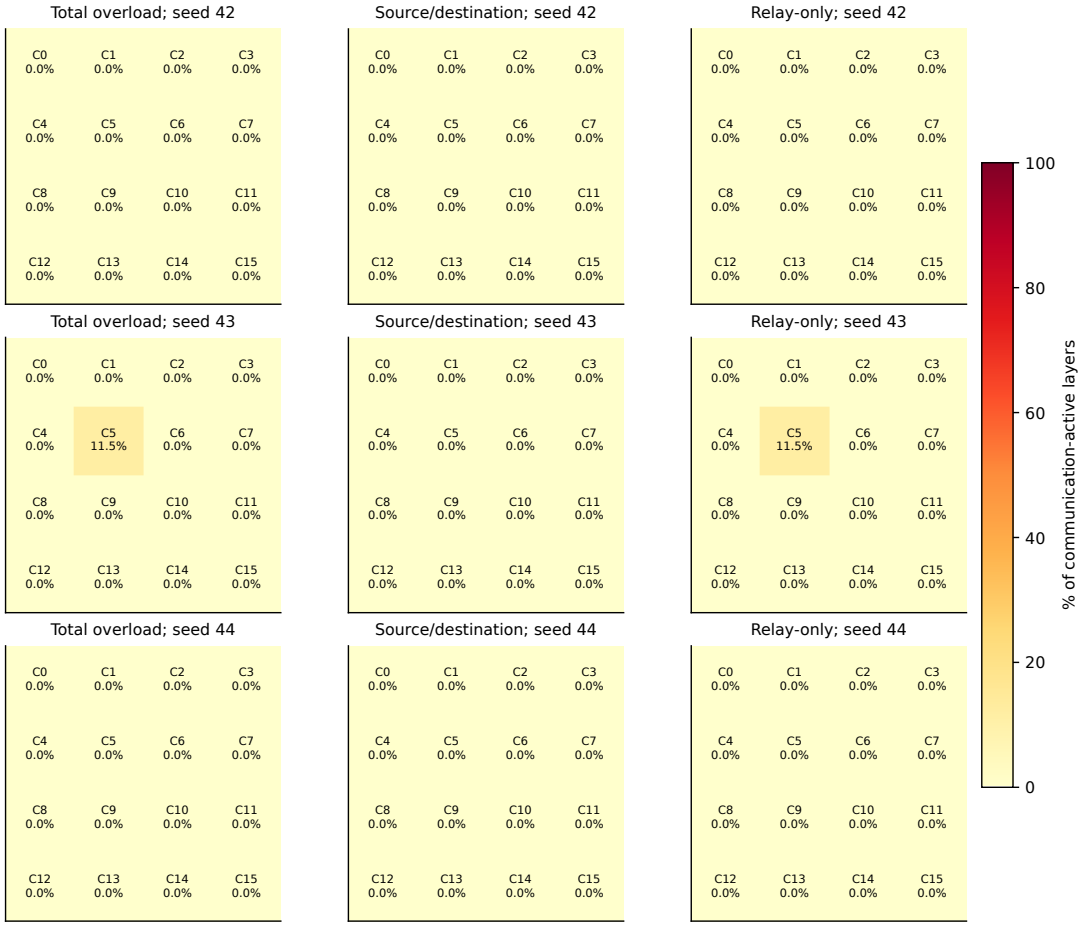


Figure 2.61: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	11.504	0.000	11.504	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.62: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Mesh max_reliability; M=32; hop counting

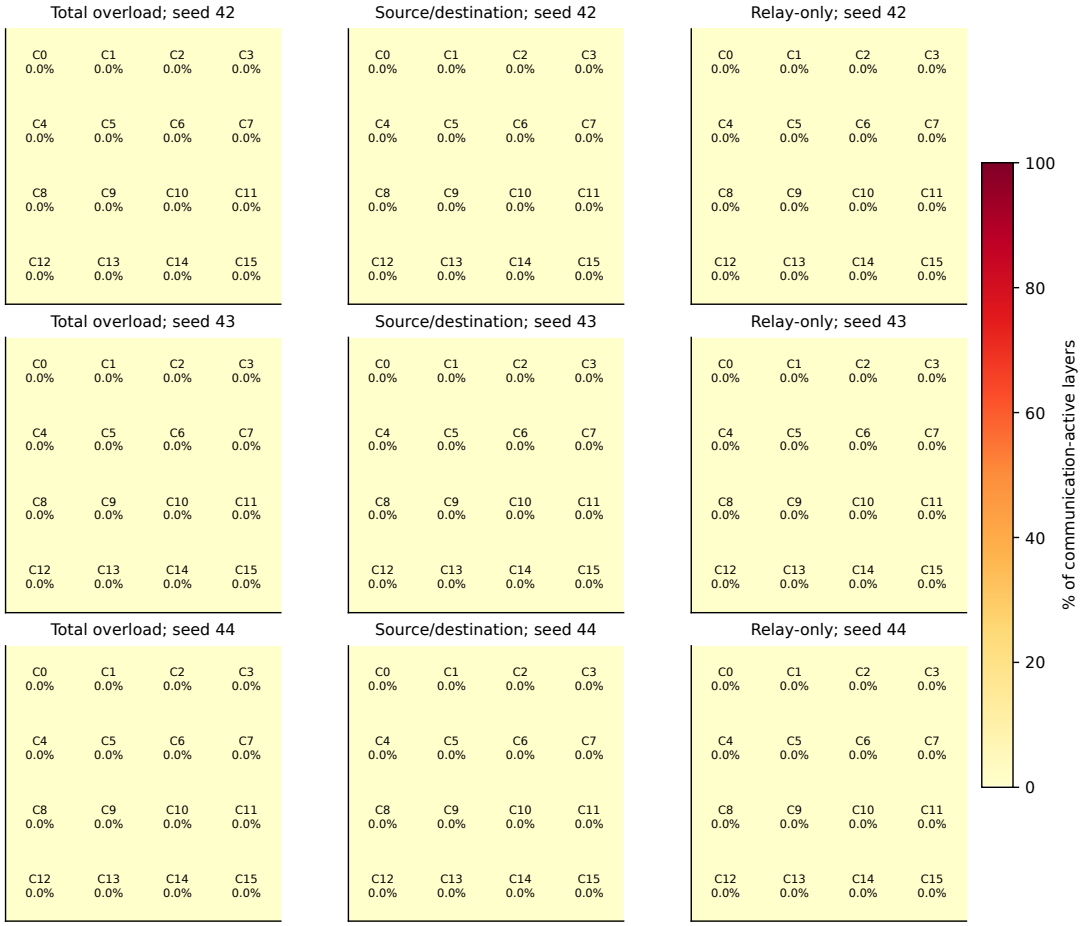


Figure 2.62: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.63: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

2.5 Torus / dijkstra

Torus dijkstra; M=2; route counting

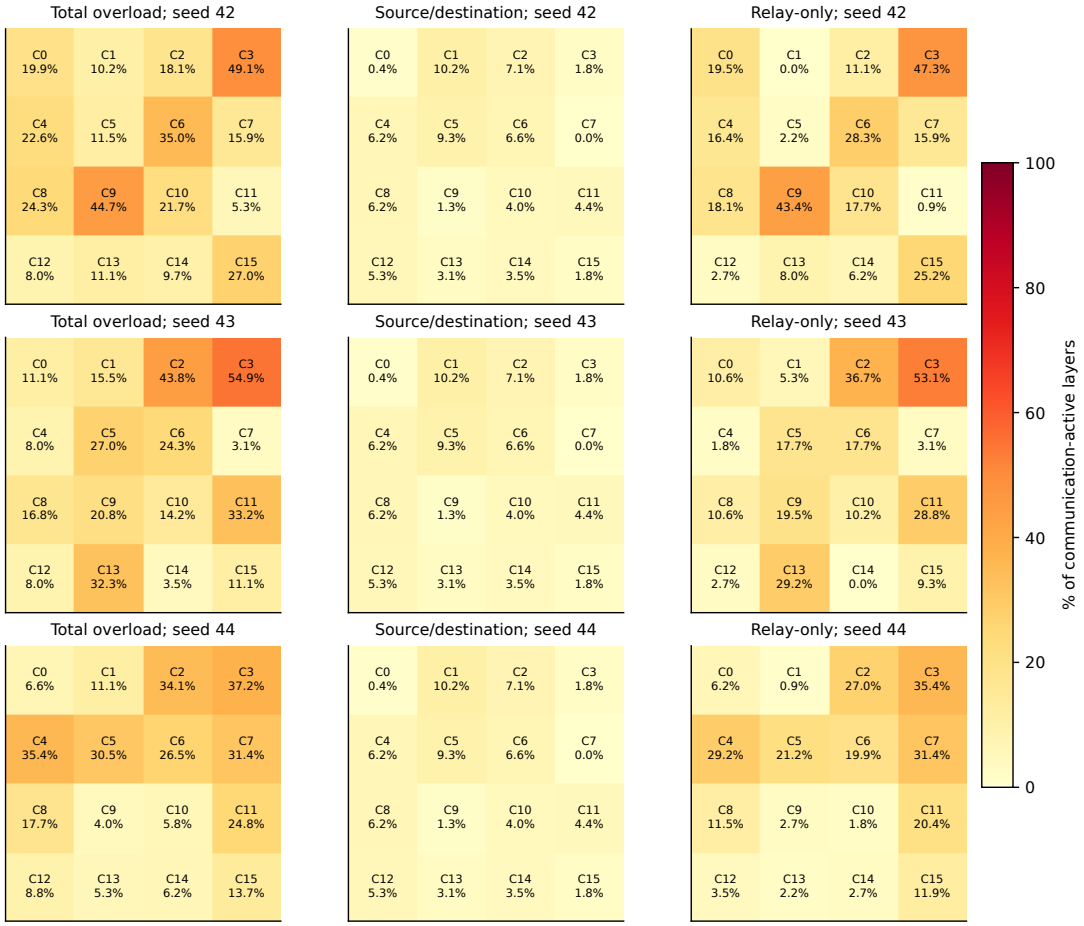


Figure 2.63: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	19.912	0.442	19.469	11.062	0.442	10.619	6.637	0.442	6.195
1	10.177	10.177	0.000	15.487	10.177	5.310	11.062	10.177	0.885
2	18.142	7.080	11.062	43.805	7.080	36.726	34.071	7.080	26.991
3	49.115	1.770	47.345	54.867	1.770	53.097	37.168	1.770	35.398
4	22.566	6.195	16.372	7.965	6.195	1.770	35.398	6.195	29.204
5	11.504	9.292	2.212	26.991	9.292	17.699	30.531	9.292	21.239
6	34.956	6.637	28.319	24.336	6.637	17.699	26.549	6.637	19.912
7	15.929	0.000	15.929	3.097	0.000	3.097	31.416	0.000	31.416
8	24.336	6.195	18.142	16.814	6.195	10.619	17.699	6.195	11.504
9	44.690	1.327	43.363	20.796	1.327	19.469	3.982	1.327	2.655
10	21.681	3.982	17.699	14.159	3.982	10.177	5.752	3.982	1.770
11	5.310	4.425	0.885	33.186	4.425	28.761	24.779	4.425	20.354
12	7.965	5.310	2.655	7.965	5.310	2.655	8.850	5.310	3.540
13	11.062	3.097	7.965	32.301	3.097	29.204	5.310	3.097	2.212
14	9.735	3.540	6.195	3.540	3.540	0.000	6.195	3.540	2.655
15	26.991	1.770	25.221	11.062	1.770	9.292	13.717	1.770	11.947

Table 2.64: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=3; route counting

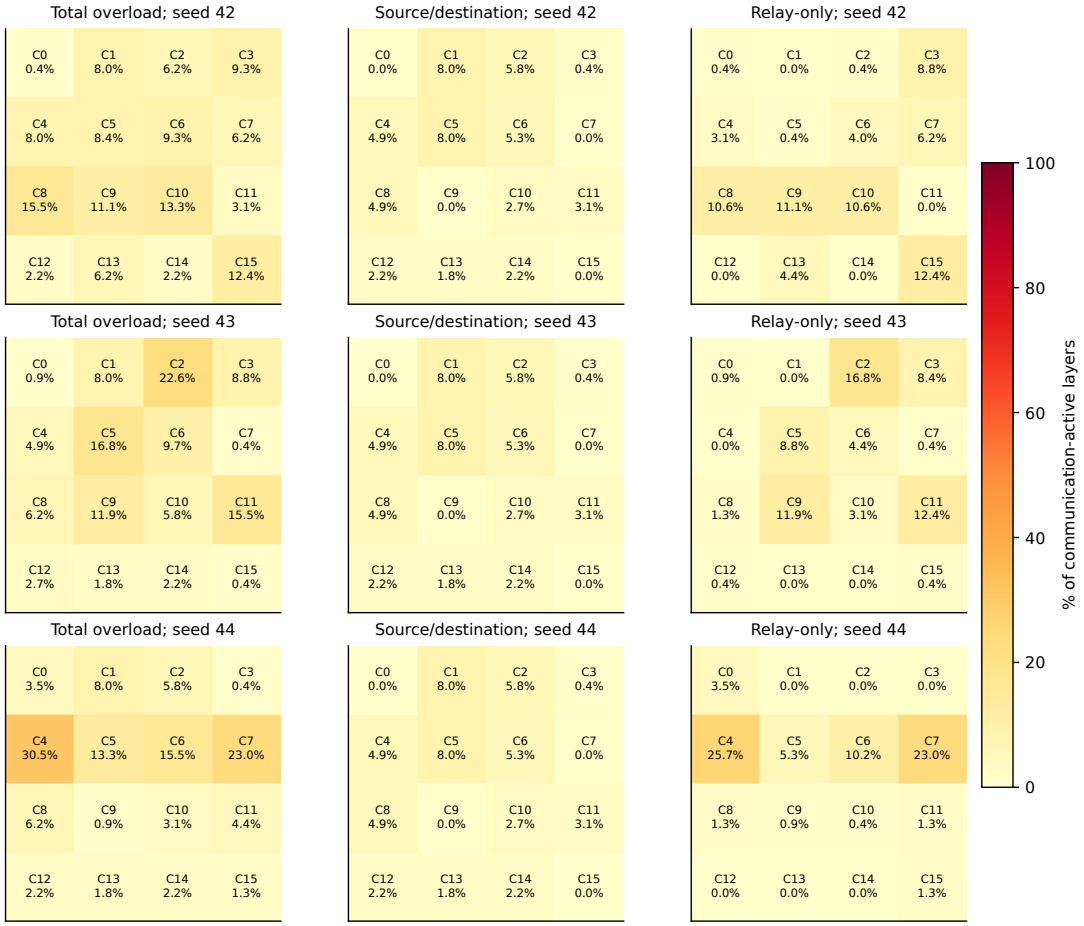


Figure 2.64: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.442	0.000	0.442	0.885	0.000	0.885	3.540	0.000	3.540
1	7.965	7.965	0.000	7.965	7.965	0.000	7.965	7.965	0.000
2	6.195	5.752	0.442	22.566	5.752	16.814	5.752	5.752	0.000
3	9.292	0.442	8.850	8.850	0.442	8.407	0.442	0.442	0.000
4	7.965	4.867	3.097	4.867	4.867	0.000	30.531	4.867	25.664
5	8.407	7.965	0.442	16.814	7.965	8.850	13.274	7.965	5.310
6	9.292	5.310	3.982	9.735	5.310	4.425	15.487	5.310	10.177
7	6.195	0.000	6.195	0.442	0.000	0.442	23.009	0.000	23.009
8	15.487	4.867	10.619	6.195	4.867	1.327	6.195	4.867	1.327
9	11.062	0.000	11.062	11.947	0.000	11.947	0.885	0.000	0.885
10	13.274	2.655	10.619	5.752	2.655	3.097	3.097	2.655	0.442
11	3.097	3.097	0.000	15.487	3.097	12.389	4.425	3.097	1.327
12	2.212	2.212	0.000	2.655	2.212	0.442	2.212	2.212	0.000
13	6.195	1.770	4.425	1.770	1.770	0.000	1.770	1.770	0.000
14	2.212	2.212	0.000	2.212	2.212	0.000	2.212	2.212	0.000
15	12.389	0.000	12.389	0.442	0.000	0.442	1.327	0.000	1.327

Table 2.65: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=4; route counting

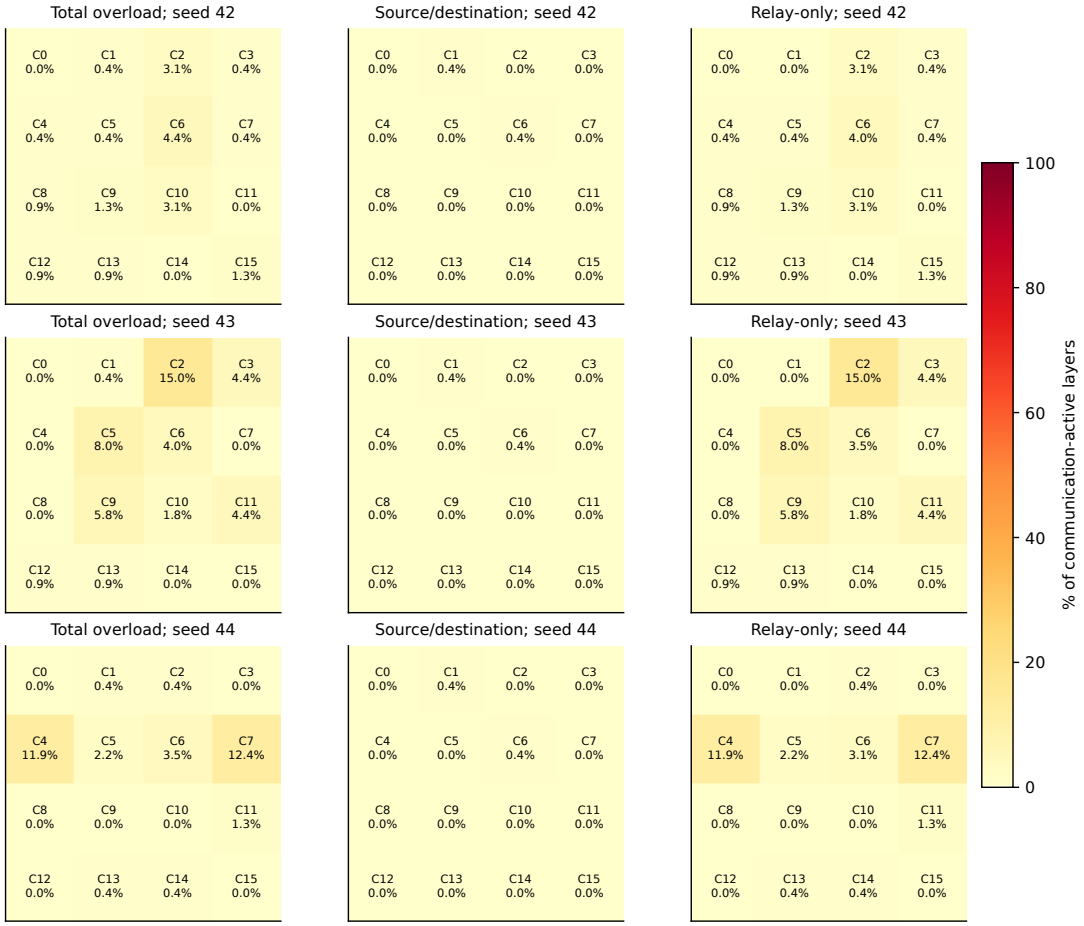


Figure 2.65: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
2	3.097	0.000	3.097	15.044	0.000	15.044	0.442	0.000	0.442
3	0.442	0.000	0.442	4.425	0.000	4.425	0.000	0.000	0.000
4	0.442	0.000	0.442	0.000	0.000	0.000	11.947	0.000	11.947
5	0.442	0.000	0.442	7.965	0.000	7.965	2.212	0.000	2.212
6	4.425	0.442	3.982	3.982	0.442	3.540	3.540	0.442	3.097
7	0.442	0.000	0.442	0.000	0.000	0.000	12.389	0.000	12.389
8	0.885	0.000	0.885	0.000	0.000	0.000	0.000	0.000	0.000
9	1.327	0.000	1.327	5.752	0.000	5.752	0.000	0.000	0.000
10	3.097	0.000	3.097	1.770	0.000	1.770	0.000	0.000	0.000
11	0.000	0.000	0.000	4.425	0.000	4.425	1.327	0.000	1.327
12	0.885	0.000	0.885	0.885	0.000	0.885	0.000	0.000	0.000
13	0.885	0.000	0.885	0.885	0.000	0.885	0.442	0.000	0.442
14	0.000	0.000	0.000	0.000	0.000	0.000	0.442	0.000	0.442
15	1.327	0.000	1.327	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.66: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=6; route counting

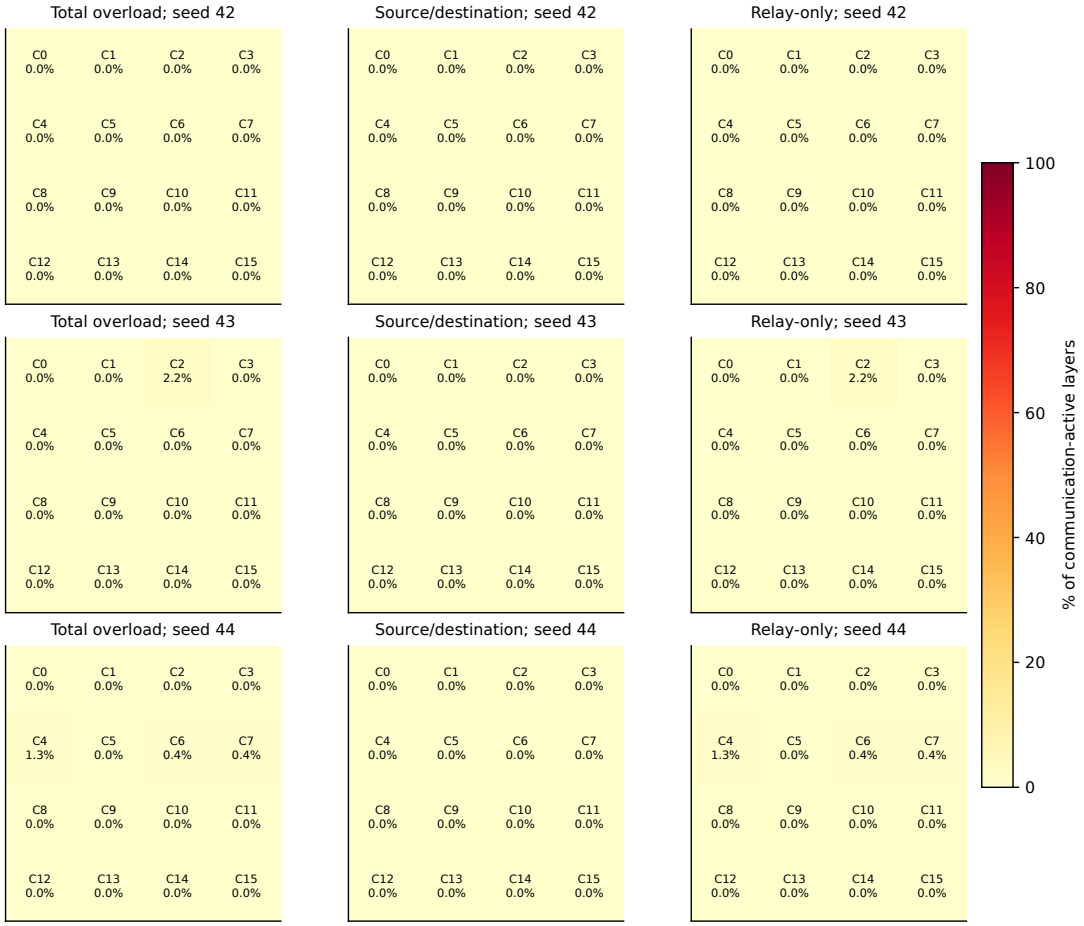


Figure 2.66: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	2.212	0.000	2.212	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	1.327	0.000	1.327
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.442	0.000	0.442
7	0.000	0.000	0.000	0.000	0.000	0.000	0.442	0.000	0.442
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.67: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=8; route counting

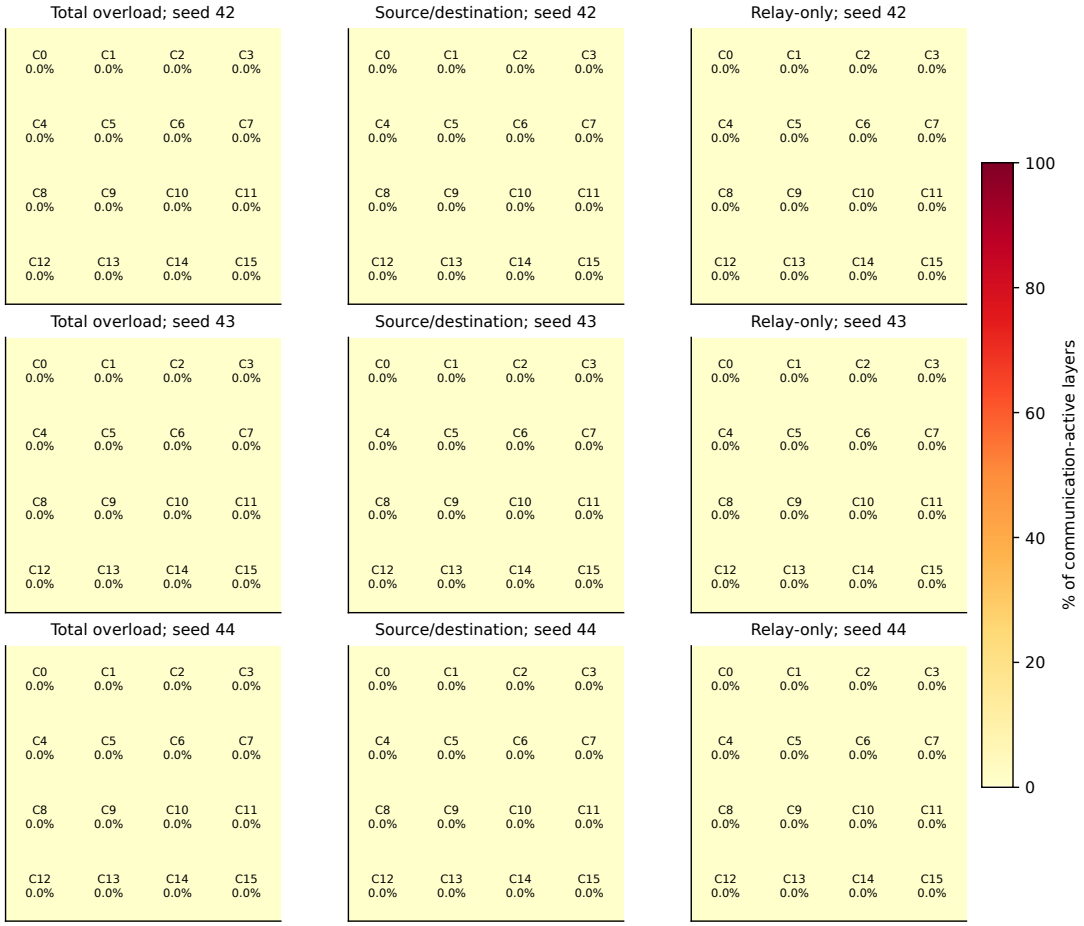


Figure 2.67: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.68: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=16; route counting

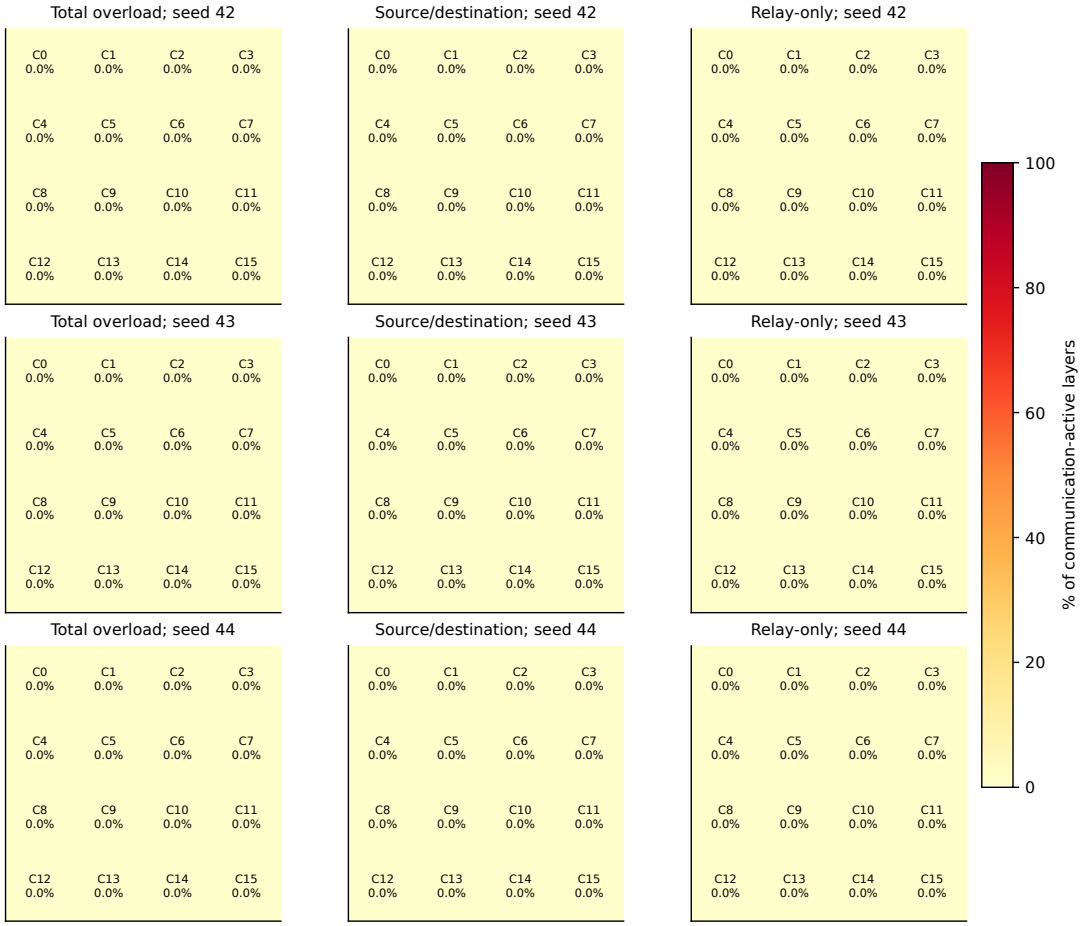


Figure 2.68: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.69: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=32; route counting

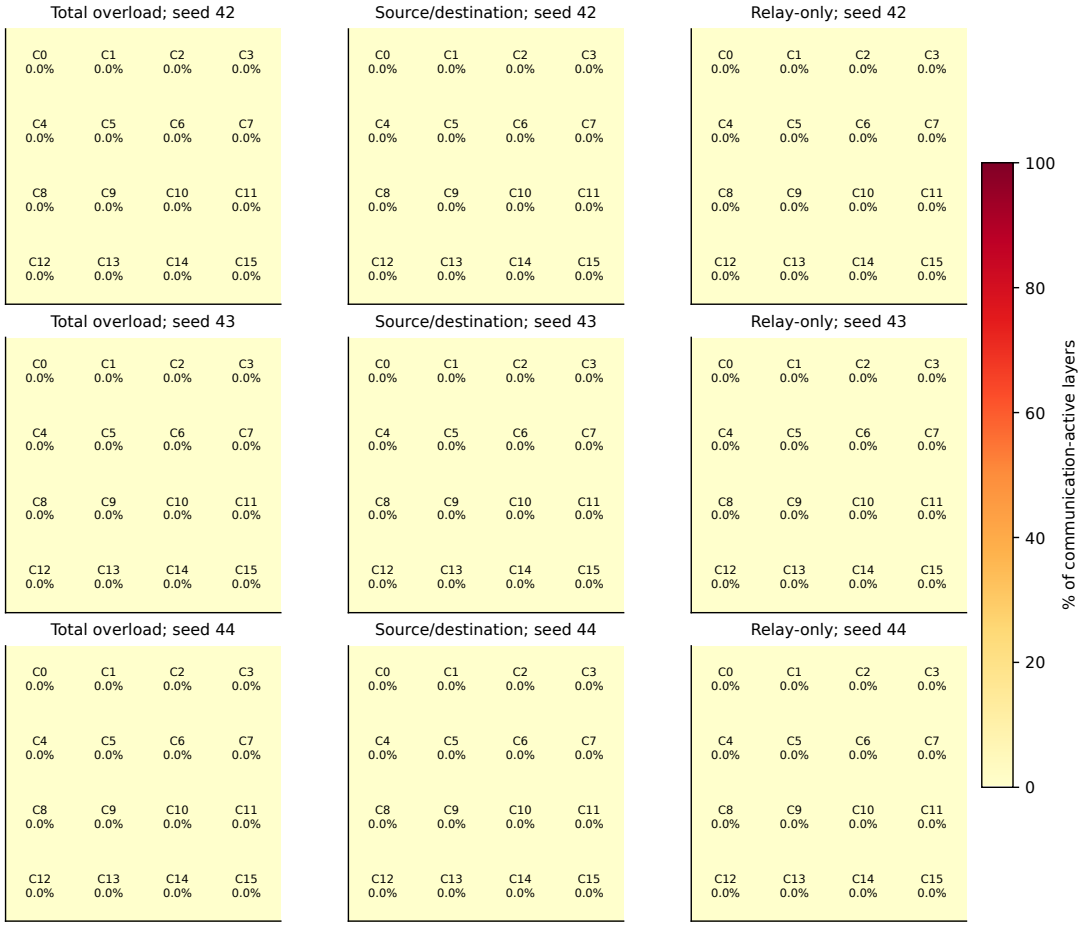


Figure 2.69: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.70: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=2; hop counting

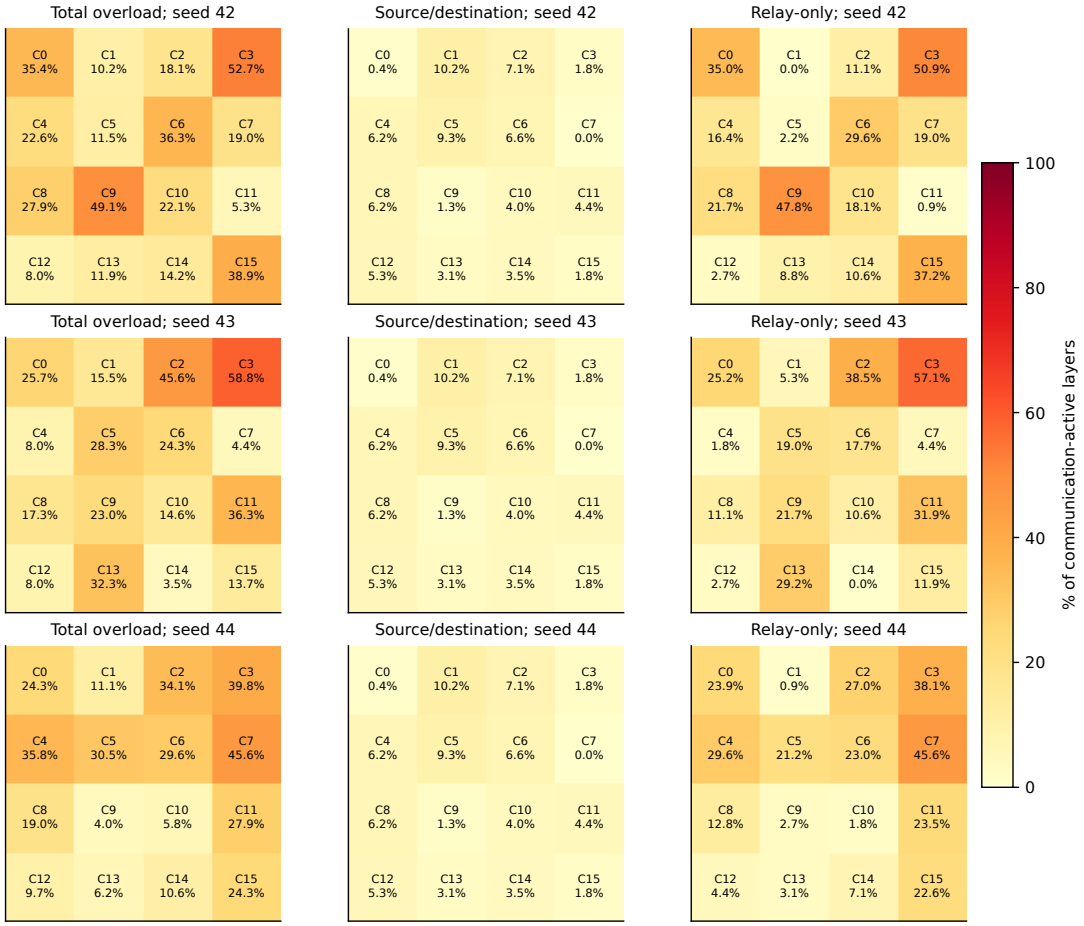


Figure 2.70: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	35.398	0.442	34.956	25.664	0.442	25.221	24.336	0.442	23.894
1	10.177	10.177	0.000	15.487	10.177	5.310	11.062	10.177	0.885
2	18.142	7.080	11.062	45.575	7.080	38.496	34.071	7.080	26.991
3	52.655	1.770	50.885	58.850	1.770	57.080	39.823	1.770	38.053
4	22.566	6.195	16.372	7.965	6.195	1.770	35.841	6.195	29.646
5	11.504	9.292	2.212	28.319	9.292	19.027	30.531	9.292	21.239
6	36.283	6.637	29.646	24.336	6.637	17.699	29.646	6.637	23.009
7	19.027	0.000	19.027	4.425	0.000	4.425	45.575	0.000	45.575
8	27.876	6.195	21.681	17.257	6.195	11.062	19.027	6.195	12.832
9	49.115	1.327	47.788	23.009	1.327	21.681	3.982	1.327	2.655
10	22.124	3.982	18.142	14.602	3.982	10.619	5.752	3.982	1.770
11	5.310	4.425	0.885	36.283	4.425	31.858	27.876	4.425	23.451
12	7.965	5.310	2.655	7.965	5.310	2.655	9.735	5.310	4.425
13	11.947	3.097	8.850	32.301	3.097	29.204	6.195	3.097	3.097
14	14.159	3.540	10.619	3.540	3.540	0.000	10.619	3.540	7.080
15	38.938	1.770	37.168	13.717	1.770	11.947	24.336	1.770	22.566

Table 2.71: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=3; hop counting

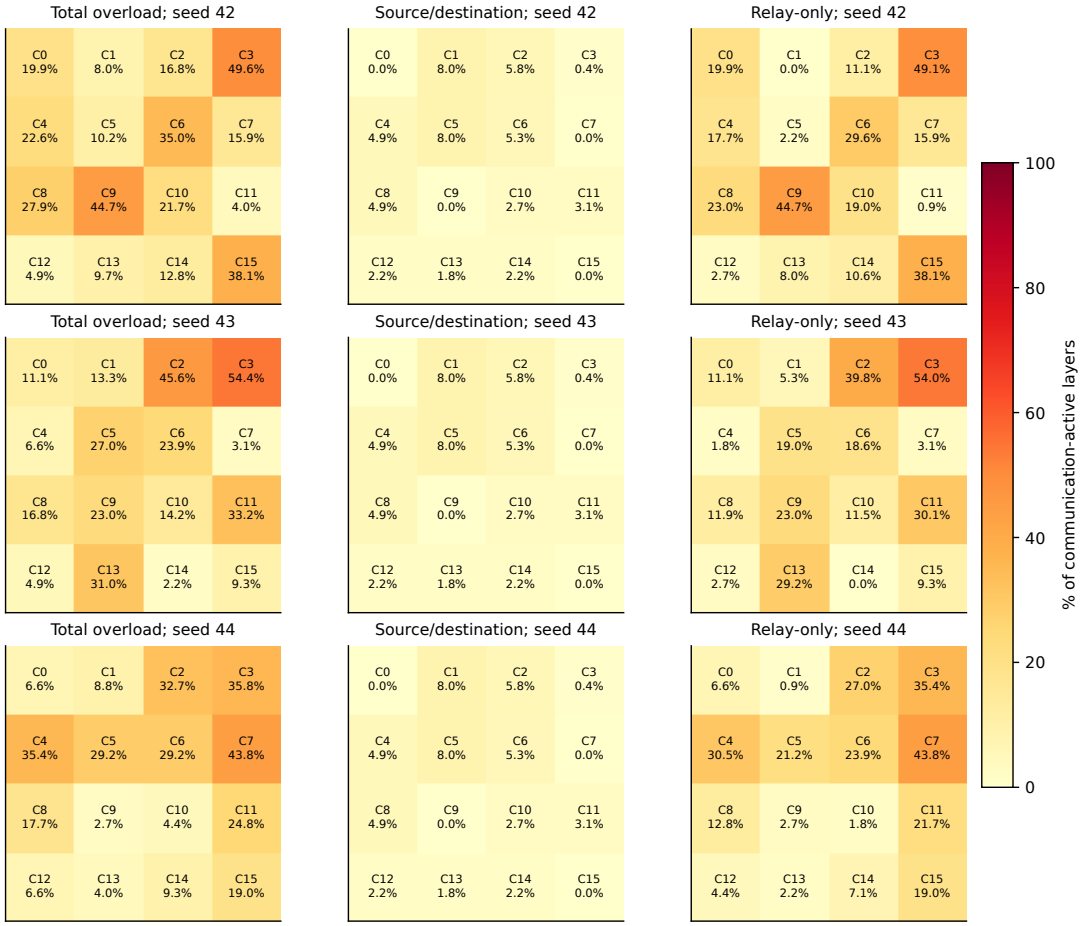


Figure 2.71: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	19.912	0.000	19.912	11.062	0.000	11.062	6.637	0.000	6.637
1	7.965	7.965	0.000	13.274	7.965	5.310	8.850	7.965	0.885
2	16.814	5.752	11.062	45.575	5.752	39.823	32.743	5.752	26.991
3	49.558	0.442	49.115	54.425	0.442	53.982	35.841	0.442	35.398
4	22.566	4.867	17.699	6.637	4.867	1.770	35.398	4.867	30.531
5	10.177	7.965	2.212	26.991	7.965	19.027	29.204	7.965	21.239
6	34.956	5.310	29.646	23.894	5.310	18.584	29.204	5.310	23.894
7	15.929	0.000	15.929	3.097	0.000	3.097	43.805	0.000	43.805
8	27.876	4.867	23.009	16.814	4.867	11.947	17.699	4.867	12.832
9	44.690	0.000	44.690	23.009	0.000	23.009	2.655	0.000	2.655
10	21.681	2.655	19.027	14.159	2.655	11.504	4.425	2.655	1.770
11	3.982	3.097	0.885	33.186	3.097	30.088	24.779	3.097	21.681
12	4.867	2.212	2.655	4.867	2.212	2.655	6.637	2.212	4.425
13	9.735	1.770	7.965	30.973	1.770	29.204	3.982	1.770	2.212
14	12.832	2.212	10.619	2.212	2.212	0.000	9.292	2.212	7.080
15	38.053	0.000	38.053	9.292	0.000	9.292	19.027	0.000	19.027

Table 2.72: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=4; hop counting

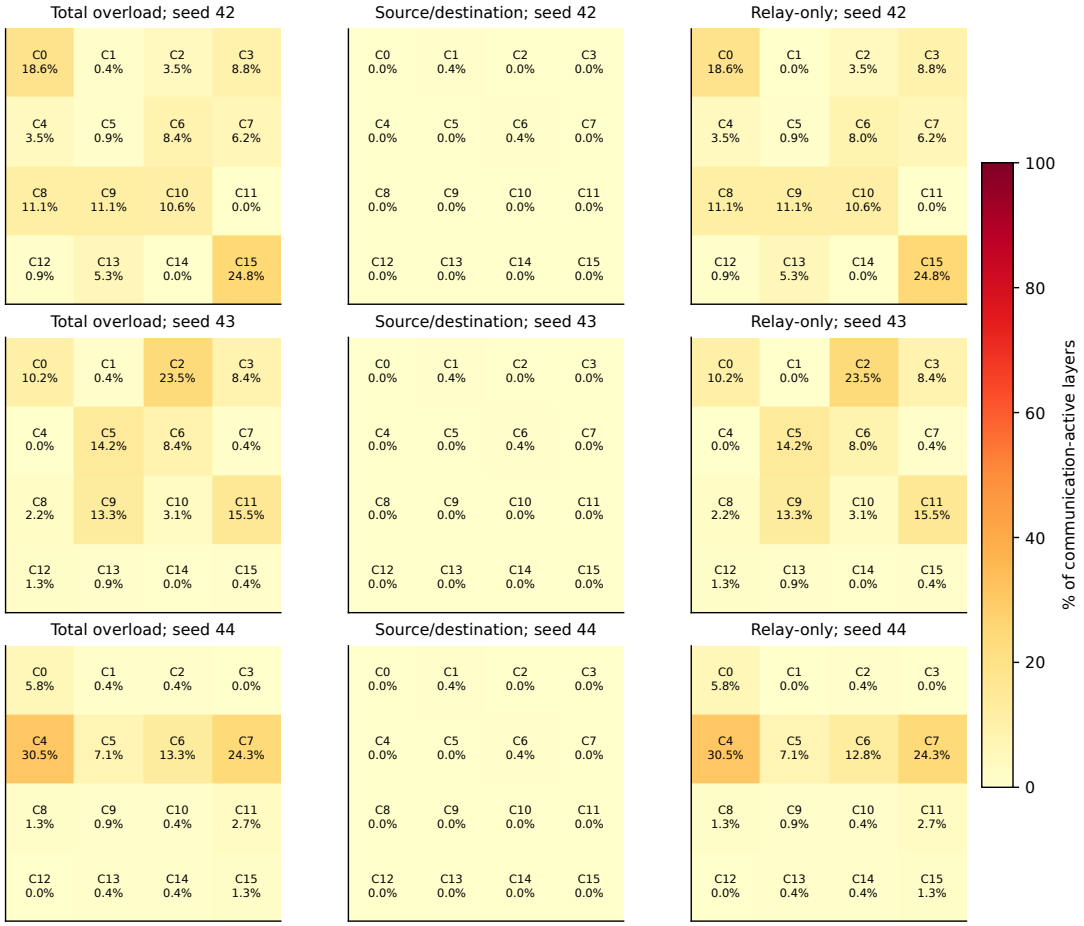


Figure 2.72: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	18.584	0.000	18.584	10.177	0.000	10.177	5.752	0.000	5.752
1	0.442	0.442	0.000	0.442	0.442	0.000	0.442	0.442	0.000
2	3.540	0.000	3.540	23.451	0.000	23.451	0.442	0.000	0.442
3	8.850	0.000	8.850	8.407	0.000	8.407	0.000	0.000	0.000
4	3.540	0.000	3.540	0.000	0.000	0.000	30.531	0.000	30.531
5	0.885	0.000	0.885	14.159	0.000	14.159	7.080	0.000	7.080
6	8.407	0.442	7.965	8.407	0.442	7.965	13.274	0.442	12.832
7	6.195	0.000	6.195	0.442	0.000	0.442	24.336	0.000	24.336
8	11.062	0.000	11.062	2.212	0.000	2.212	1.327	0.000	1.327
9	11.062	0.000	11.062	13.274	0.000	13.274	0.885	0.000	0.885
10	10.619	0.000	10.619	3.097	0.000	3.097	0.442	0.000	0.442
11	0.000	0.000	0.000	15.487	0.000	15.487	2.655	0.000	2.655
12	0.885	0.000	0.885	1.327	0.000	1.327	0.000	0.000	0.000
13	5.310	0.000	5.310	0.885	0.000	0.885	0.442	0.000	0.442
14	0.000	0.000	0.000	0.000	0.000	0.000	0.442	0.000	0.442
15	24.779	0.000	24.779	0.442	0.000	0.442	1.327	0.000	1.327

Table 2.73: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=6; hop counting

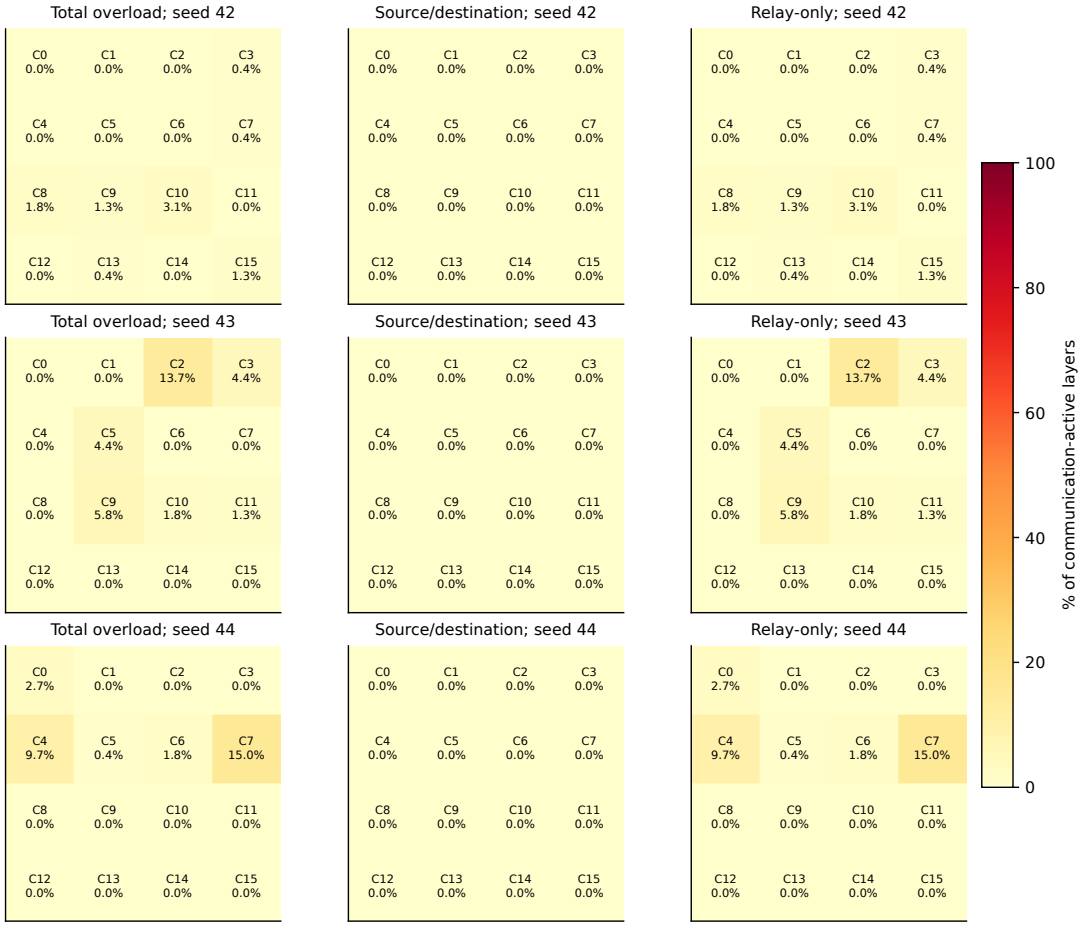


Figure 2.73: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	2.655	0.000	2.655
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	13.717	0.000	13.717	0.000	0.000	0.000
3	0.442	0.000	0.442	4.425	0.000	4.425	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	9.735	0.000	9.735
5	0.000	0.000	0.000	4.425	0.000	4.425	0.442	0.000	0.442
6	0.000	0.000	0.000	0.000	0.000	0.000	1.770	0.000	1.770
7	0.442	0.000	0.442	0.000	0.000	0.000	15.044	0.000	15.044
8	1.770	0.000	1.770	0.000	0.000	0.000	0.000	0.000	0.000
9	1.327	0.000	1.327	5.752	0.000	5.752	0.000	0.000	0.000
10	3.097	0.000	3.097	1.770	0.000	1.770	0.000	0.000	0.000
11	0.000	0.000	0.000	1.327	0.000	1.327	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.442	0.000	0.442	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	1.327	0.000	1.327	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.74: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=8; hop counting

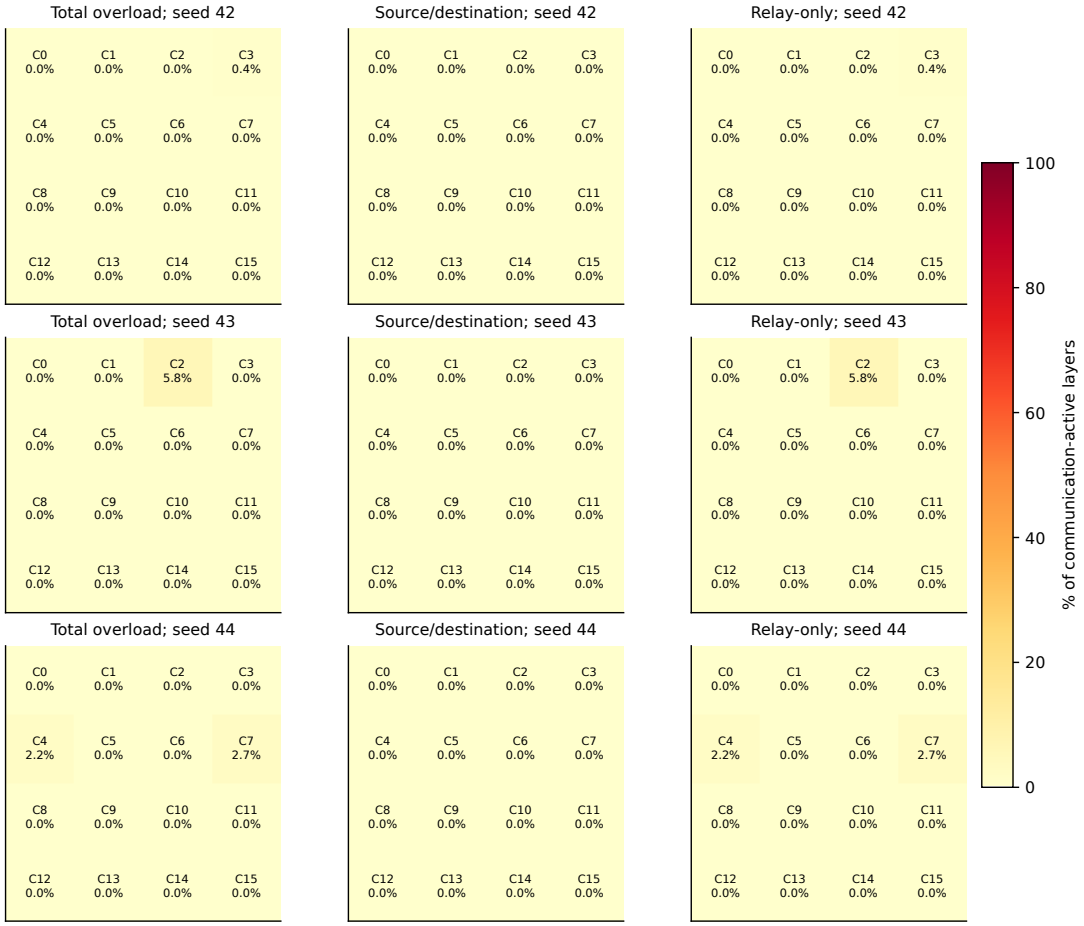


Figure 2.74: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	5.752	0.000	5.752	0.000	0.000	0.000
3	0.442	0.000	0.442	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	2.212	0.000	2.212
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	2.655	0.000	2.655
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.75: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=16; hop counting

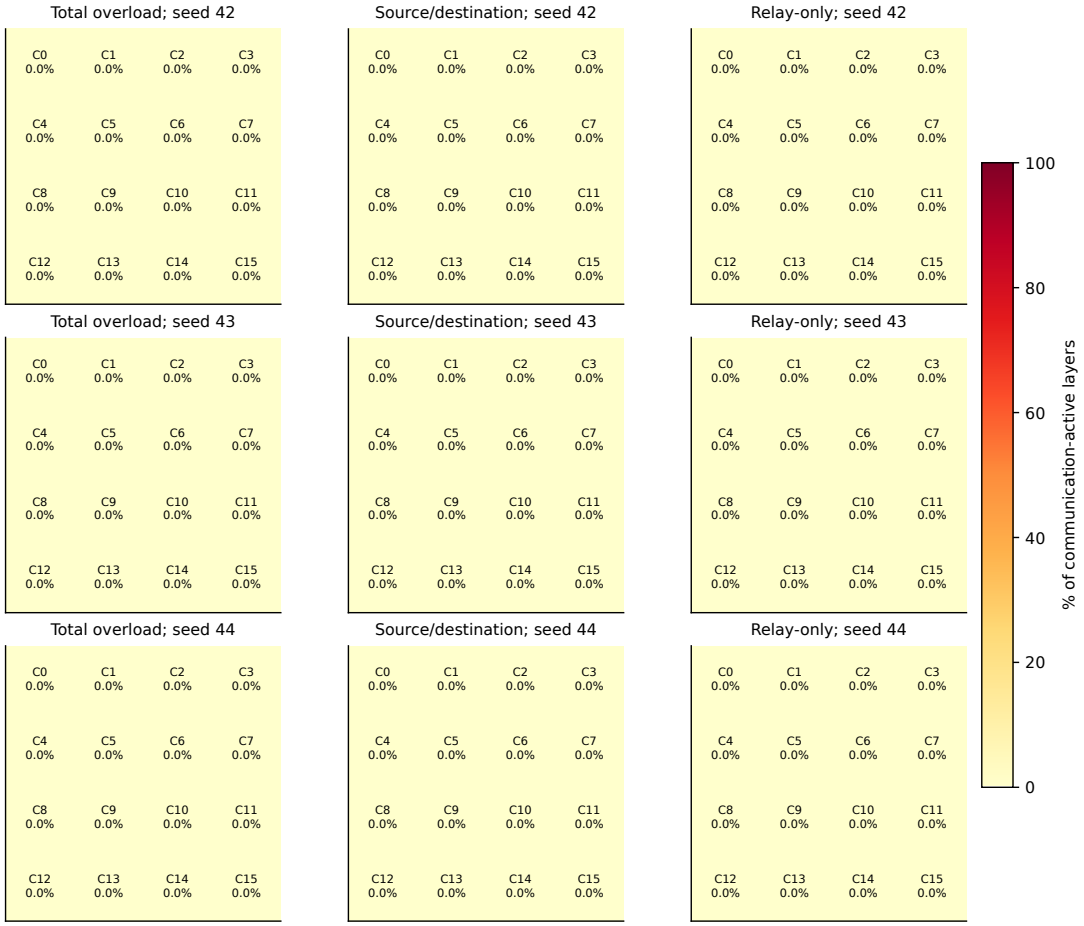


Figure 2.75: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.76: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Torus dijkstra; M=32; hop counting

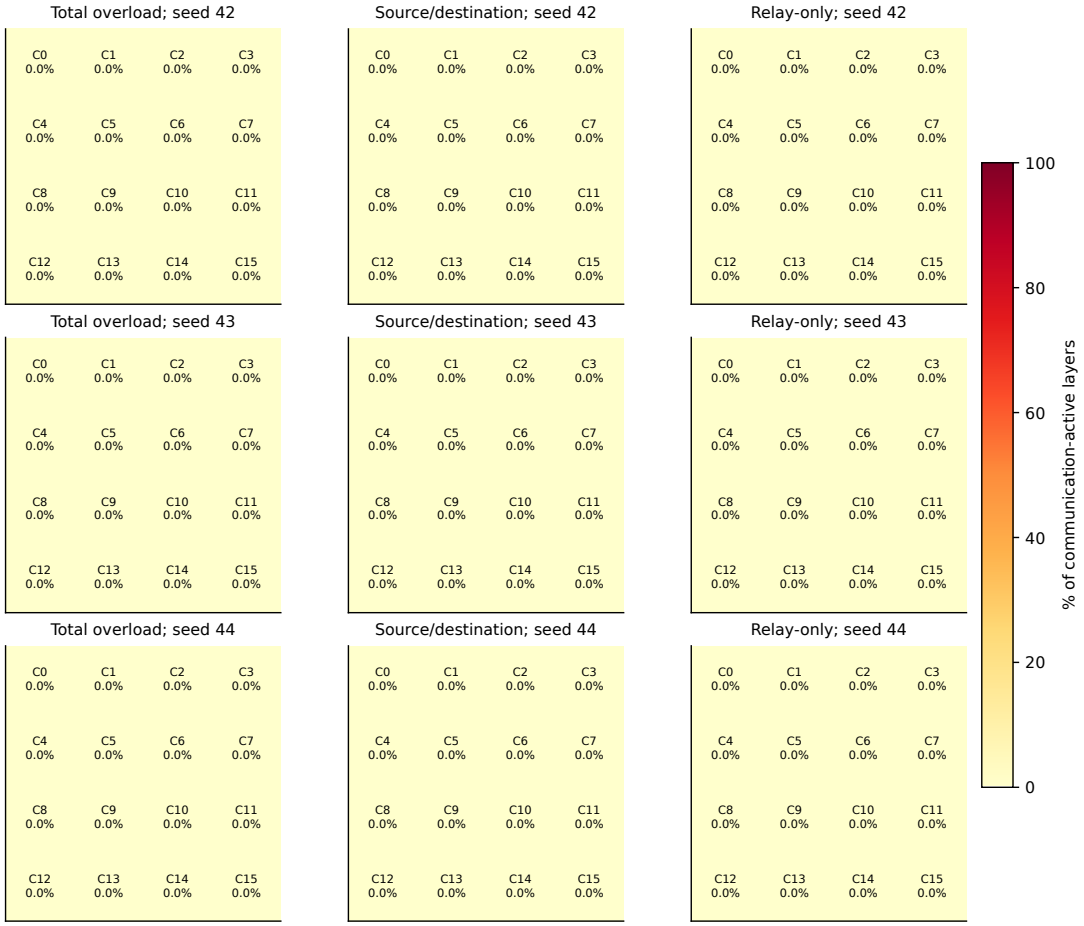


Figure 2.76: All three conceptual mapping seeds; common 0–100 percent colour scale.

Core	42 Tot	42 Own	42 Rel	43 Tot	43 Own	43 Rel	44 Tot	44 Own	44 Rel
0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
2	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
3	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
4	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
6	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
7	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
8	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
9	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
11	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
12	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
13	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
14	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 2.77: Exact heatmap percentages, with Tot = Own + Rel. Unrounded values are in the CSV.

Exact CSV values and sample counts

Chapter 3

Mesh: routing-specific memory and policy results

This chapter begins with latency and follows the same metric order for XY, YX, shortest-reliable and maximum-reliability. Each graph uses total communication memories per core on the horizontal axis and includes all instrumented base policies. Its immediate table provides the exact values and a committed CSV link. All 47 registered outcomes and diagnostic metrics are retained.

XY changes dimension 0 first (row first in the repository's coordinate convention); YX changes dimension 1 first. Shortest-reliable minimises hops and then maximises path reliability. Maximum-reliability maximises the product of link reliabilities, with hop count as a secondary criterion, so it can generate extra hops. Mapper reliability selects paths; these comparisons do not establish a calibrated heterogeneous physical link-success model.

All curves use ODG $C = 0$ and cached methods $C = M - 1$, with $G = \max(1, C)$. Compiler-specific readiness or waste is n/a for ODG/CGP/ACGP rather than being portrayed as a measured autonomous-cache hit statistic. The native protocol measurements are shown separately. Figure error bars are sample SD, with exact observation counts in each CSV.

3.1 XY

Mean request latency

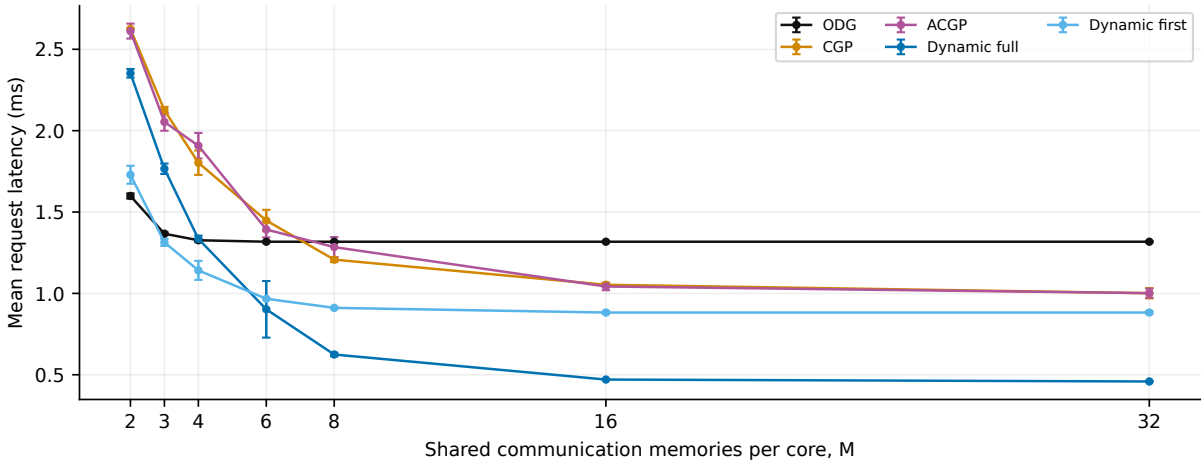


Figure 3.1: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.599 ± 0.016	2.625 ± 0.000	2.612 ± 0.046	2.353 ± 0.026	1.729 ± 0.055
3	1.367 ± 0.008	2.126 ± 0.020	2.054 ± 0.054	1.766 ± 0.032	1.314 ± 0.022
4	1.327 ± 0.006	1.803 ± 0.075	1.908 ± 0.079	1.335 ± 0.020	1.141 ± 0.058
6	1.317 ± 0.004	1.448 ± 0.066	1.393 ± 0.049	0.9021 ± 0.1738	0.9670 ± 0.0025
8	1.317 ± 0.004	1.208 ± 0.015	1.284 ± 0.062	0.6244 ± 0.0106	0.9111 ± 0.0051
16	1.317 ± 0.004	1.053 ± 0.011	1.042 ± 0.023	0.4705 ± 0.0020	0.8823 ± 0.0078
32	1.317 ± 0.004	1.001 ± 0.032	1.002 ± 0.028	0.4587 ± 0.0006	0.8823 ± 0.0078

Table 3.1: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Median request latency

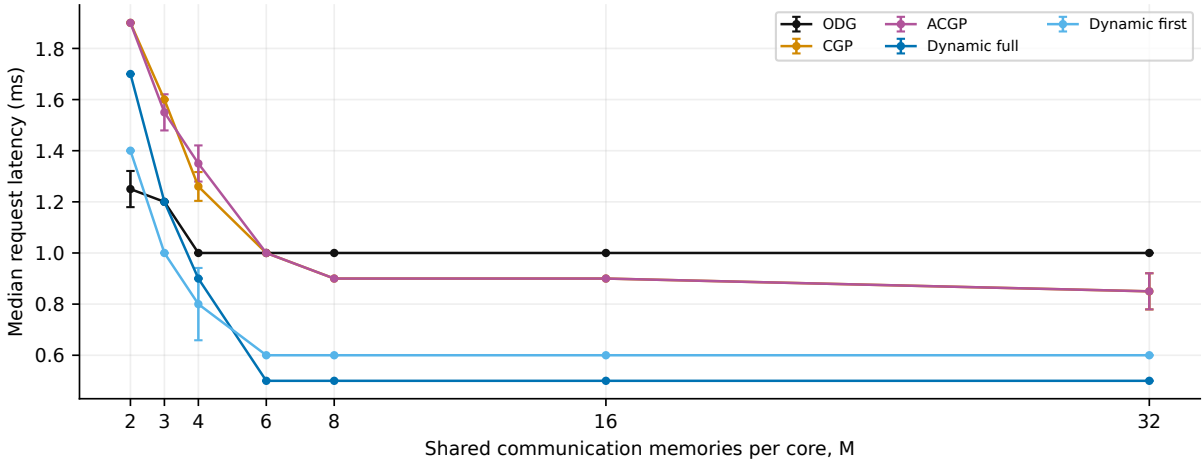


Figure 3.2: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.250 ± 0.071	1.900 ± 0.000	1.900 ± 0.000	1.700 ± 0.000	1.400 ± 0.000
3	1.200 ± 0.000	1.600 ± 0.000	1.550 ± 0.071	1.200 ± 0.000	1.000 ± 0.000
4	1.000 ± 0.000	1.260 ± 0.056	1.350 ± 0.071	0.9000 ± 0.0000	0.8000 ± 0.1414
6	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	0.5000 ± 0.0000	0.6000 ± 0.0000
8	1.000 ± 0.000	0.9000 ± 0.0000	0.9000 ± 0.0000	0.5000 ± 0.0000	0.6000 ± 0.0000
16	1.000 ± 0.000	0.9000 ± 0.0000	0.9000 ± 0.0000	0.5000 ± 0.0000	0.6000 ± 0.0000
32	1.000 ± 0.000	0.8500 ± 0.0707	0.8500 ± 0.0707	0.5000 ± 0.0000	0.6000 ± 0.0000

Table 3.2: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

p95 request latency

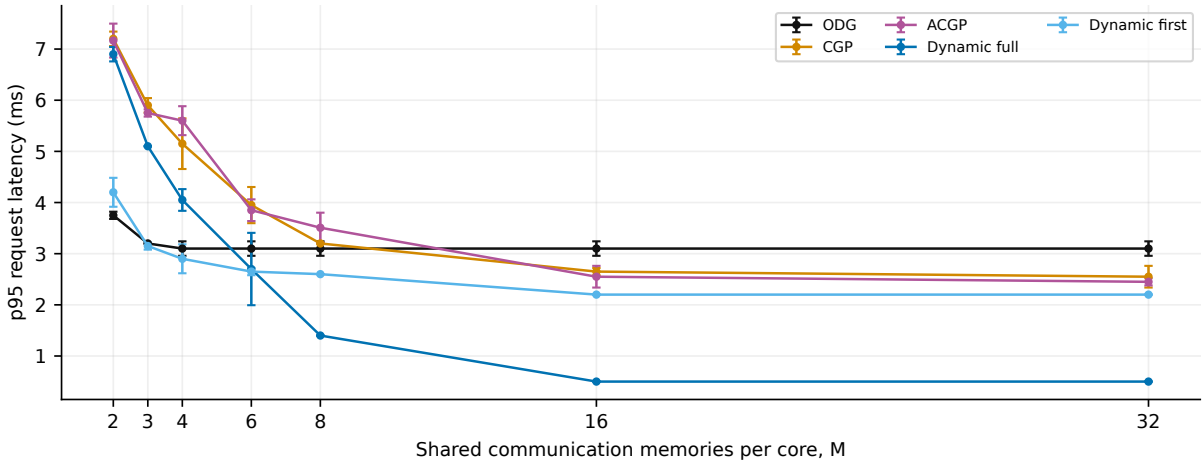


Figure 3.3: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	3.750 ± 0.071	7.200 ± 0.141	7.166 ± 0.332	6.900 ± 0.141	4.200 ± 0.283
3	3.200 ± 0.000	5.900 ± 0.141	5.750 ± 0.071	5.100 ± 0.000	3.150 ± 0.071
4	3.100 ± 0.141	5.150 ± 0.495	5.600 ± 0.283	4.050 ± 0.212	2.900 ± 0.283
6	3.100 ± 0.141	3.950 ± 0.354	3.850 ± 0.212	2.700 ± 0.707	2.650 ± 0.071
8	3.100 ± 0.141	3.200 ± 0.000	3.508 ± 0.294	1.400 ± 0.000	2.600 ± 0.000
16	3.100 ± 0.141	2.650 ± 0.071	2.550 ± 0.212	0.5000 ± 0.0000	2.200 ± 0.000
32	3.100 ± 0.141	2.550 ± 0.212	2.450 ± 0.071	0.5000 ± 0.0000	2.200 ± 0.000

Table 3.3: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum request latency

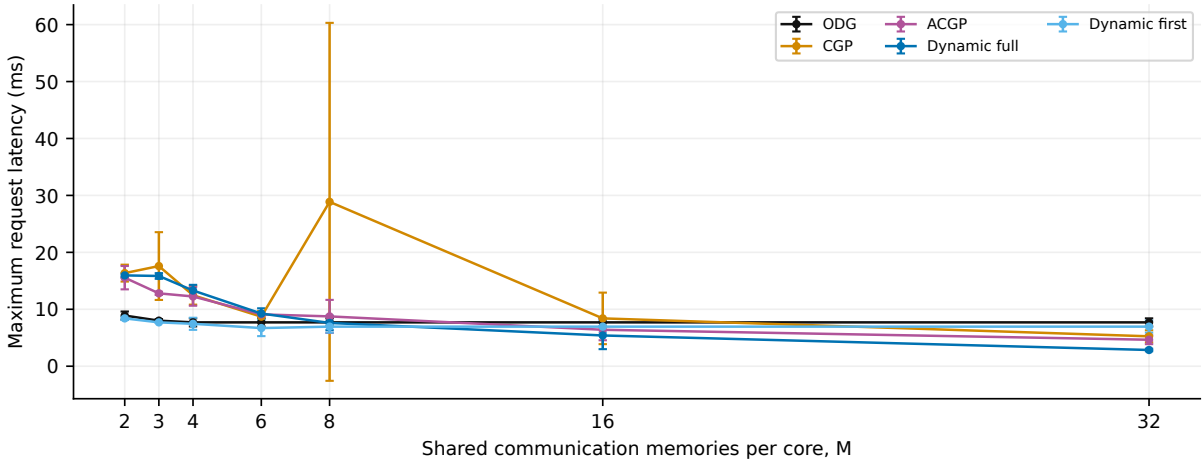


Figure 3.4: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	8.900 ± 0.707	16.350 ± 1.485	15.550 ± 2.051	15.950 ± 0.354	8.400 ± 0.283
3	8.000 ± 0.283	17.591 ± 5.953	12.800 ± 0.283	15.850 ± 0.495	7.700 ± 0.000
4	7.700 ± 0.707	12.468 ± 1.651	12.250 ± 1.626	13.300 ± 0.990	7.450 ± 1.061
6	7.700 ± 0.707	8.700 ± 0.990	9.100 ± 0.283	9.250 ± 0.919	6.700 ± 1.414
8	7.700 ± 0.707	28.871 ± 31.437	8.750 ± 2.899	7.600 ± 1.273	6.950 ± 1.061
16	7.700 ± 0.707	8.400 ± 4.526	6.400 ± 1.839	5.400 ± 2.404	6.950 ± 1.061
32	7.700 ± 0.707	5.250 ± 1.061	4.650 ± 0.778	2.850 ± 0.212	6.950 ± 1.061

Table 3.4: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Communication makespan

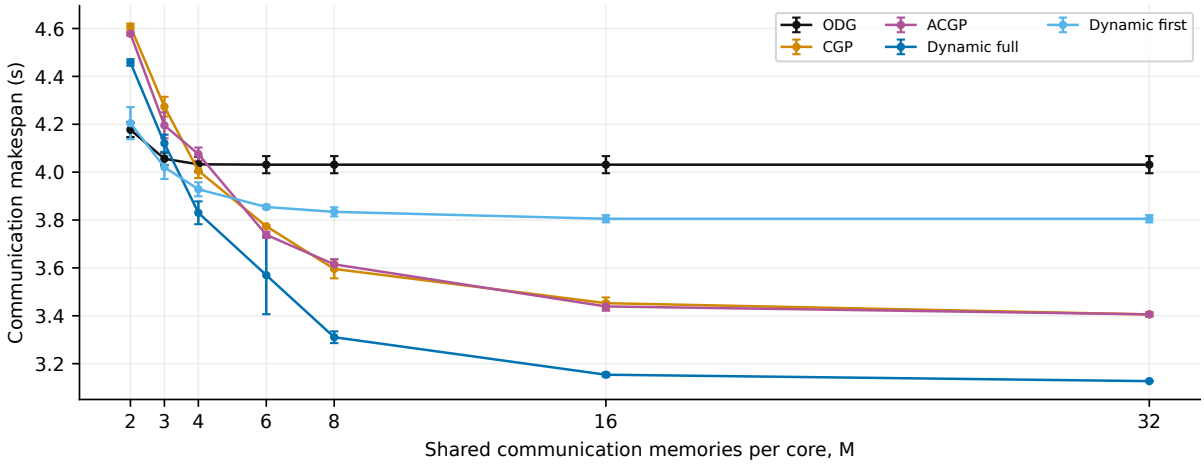


Figure 3.5: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	4.177 ± 0.031	4.608 ± 0.012	4.578 ± 0.008	4.458 ± 0.014	4.205 ± 0.067
3	4.056 ± 0.026	4.273 ± 0.041	4.196 ± 0.054	4.121 ± 0.036	4.021 ± 0.049
4	4.033 ± 0.031	4.006 ± 0.031	4.075 ± 0.028	3.830 ± 0.048	3.928 ± 0.029
6	4.031 ± 0.036	3.774 ± 0.004	3.738 ± 0.013	3.570 ± 0.163	3.854 ± 0.009
8	4.031 ± 0.036	3.596 ± 0.039	3.615 ± 0.022	3.311 ± 0.024	3.834 ± 0.019
16	4.031 ± 0.036	3.453 ± 0.024	3.439 ± 0.018	3.154 ± 0.008	3.805 ± 0.015
32	4.031 ± 0.036	3.406 ± 0.009	3.406 ± 0.008	3.127 ± 0.002	3.805 ± 0.015

Table 3.5: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean admission wait

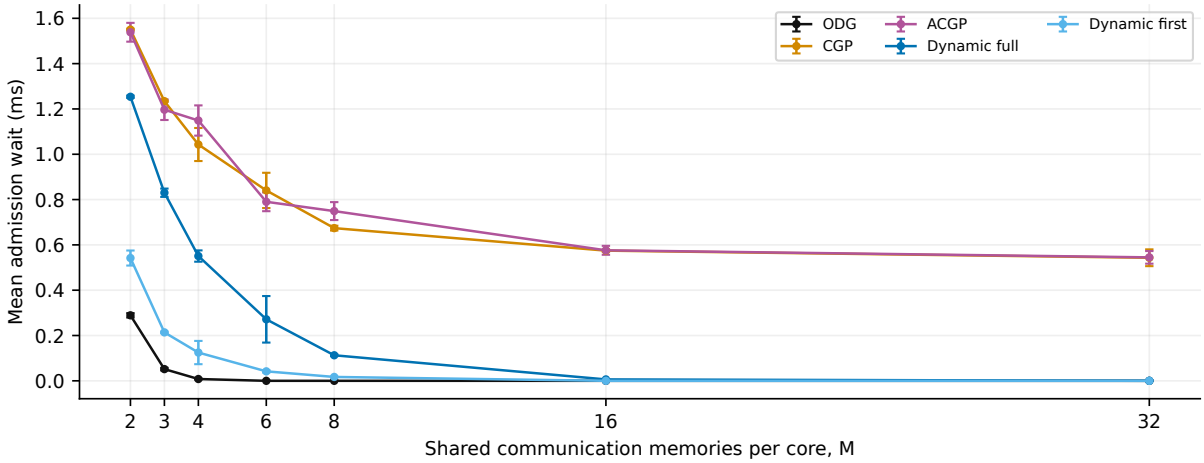


Figure 3.6: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.2891 ± 0.0096	1.550 ± 0.004	1.538 ± 0.041	1.254 ± 0.005	0.5419 ± 0.0332
3	0.0517 ± 0.0057	1.234 ± 0.003	1.197 ± 0.045	0.8302 ± 0.0184	0.2138 ± 0.0034
4	0.0080 ± 0.0022	1.043 ± 0.073	1.149 ± 0.067	0.5507 ± 0.0249	0.1248 ± 0.0514
6	0.0000 ± 0.0000	0.8403 ± 0.0779	0.7902 ± 0.0415	0.2715 ± 0.1027	0.0418 ± 0.0052
8	0.0000 ± 0.0000	0.6739 ± 0.0106	0.7492 ± 0.0396	0.1128 ± 0.0036	0.0171 ± 0.0013
16	0.0000 ± 0.0000	0.5746 ± 0.0055	0.5761 ± 0.0197	0.0062 ± 0.0002	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.5431 ± 0.0371	0.5449 ± 0.0279	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.6: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Delivered EPR fidelity

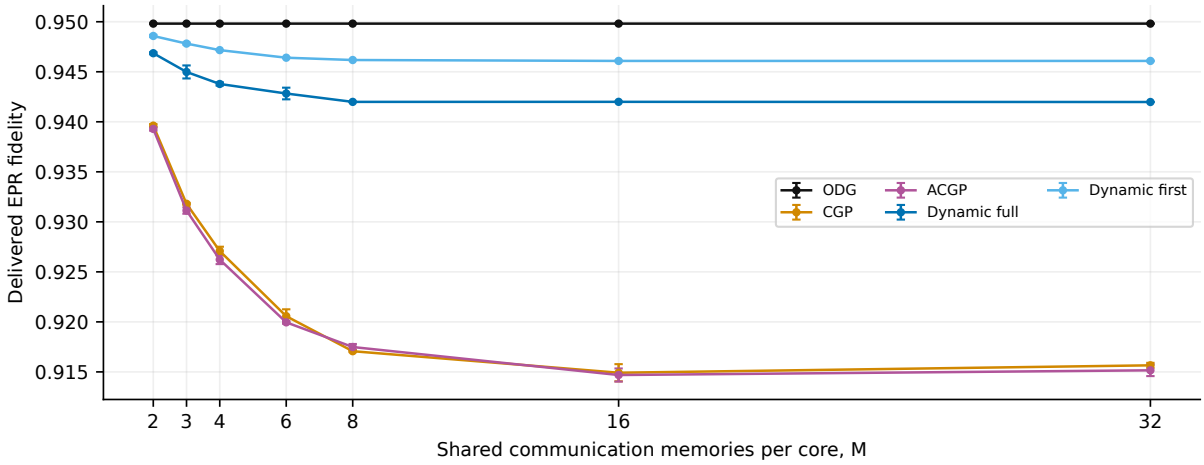


Figure 3.7: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.9498 ± 0.0000	0.9396 ± 0.0002	0.9393 ± 0.0002	0.9469 ± 0.0001	0.9486 ± 0.0001
3	0.9498 ± 0.0000	0.9318 ± 0.0001	0.9311 ± 0.0003	0.9450 ± 0.0007	0.9478 ± 0.0001
4	0.9498 ± 0.0000	0.9271 ± 0.0004	0.9262 ± 0.0004	0.9438 ± 0.0002	0.9472 ± 0.0000
6	0.9498 ± 0.0000	0.9206 ± 0.0007	0.9200 ± 0.0001	0.9428 ± 0.0006	0.9464 ± 0.0000
8	0.9498 ± 0.0000	0.9171 ± 0.0001	0.9175 ± 0.0003	0.9420 ± 0.0000	0.9462 ± 0.0000
16	0.9498 ± 0.0000	0.9149 ± 0.0009	0.9147 ± 0.0007	0.9420 ± 0.0000	0.9461 ± 0.0000
32	0.9498 ± 0.0000	0.9157 ± 0.0002	0.9152 ± 0.0006	0.9420 ± 0.0000	0.9461 ± 0.0000

Table 3.7: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler readiness fraction

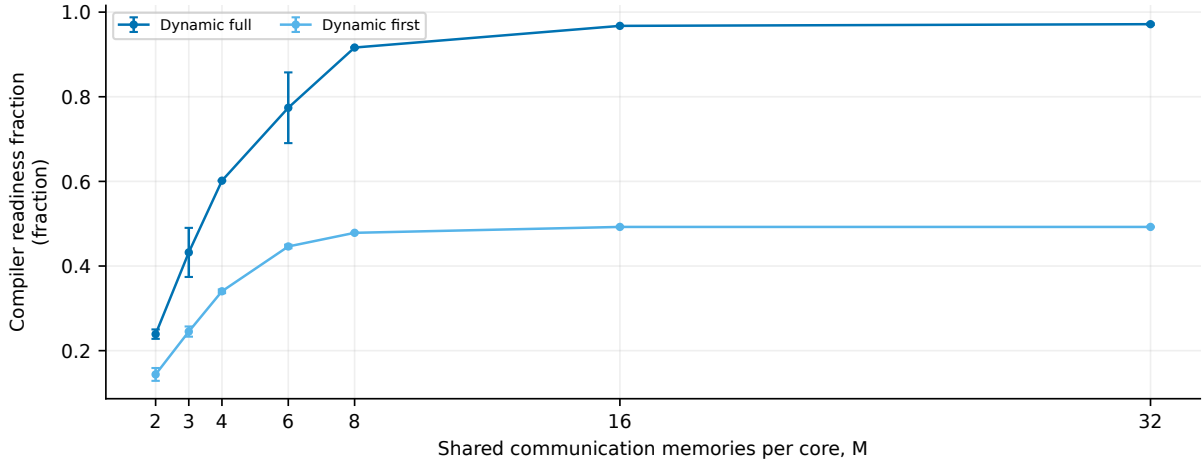


Figure 3.8: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2390 ± 0.0111	0.1438 ± 0.0151
3	n/a	n/a	n/a	0.4321 ± 0.0580	0.2451 ± 0.0120
4	n/a	n/a	n/a	0.6017 ± 0.0007	0.3403 ± 0.0044
6	n/a	n/a	n/a	0.7740 ± 0.0836	0.4462 ± 0.0042
8	n/a	n/a	n/a	0.9163 ± 0.0013	0.4785 ± 0.0005
16	n/a	n/a	n/a	0.9675 ± 0.0004	0.4924 ± 0.0009
32	n/a	n/a	n/a	0.9715 ± 0.0020	0.4924 ± 0.0009

Table 3.8: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit fraction

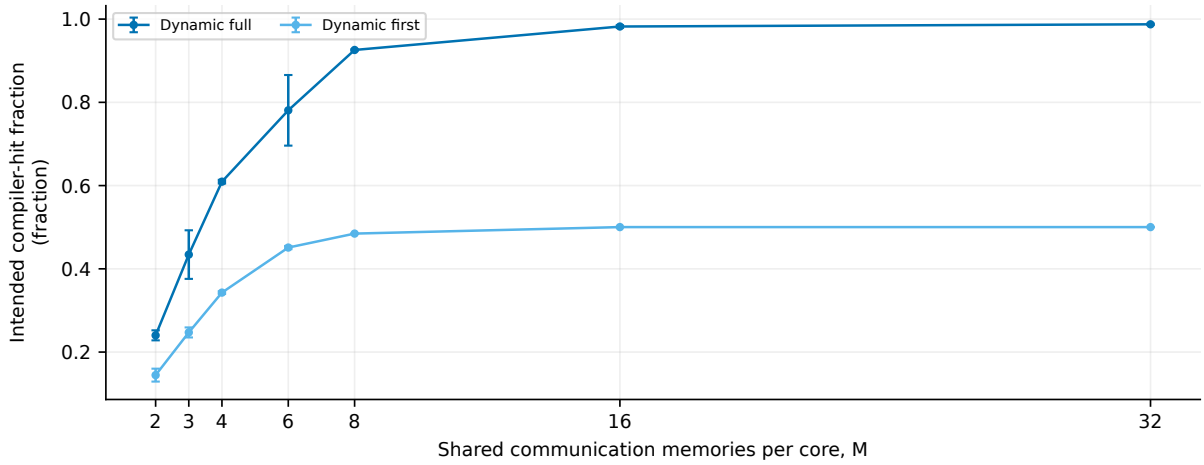


Figure 3.9: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2402 ± 0.0120	0.1446 ± 0.0155
3	n/a	n/a	n/a	0.4342 ± 0.0584	0.2472 ± 0.0120
4	n/a	n/a	n/a	0.6094 ± 0.0044	0.3429 ± 0.0033
6	n/a	n/a	n/a	0.7808 ± 0.0848	0.4511 ± 0.0038
8	n/a	n/a	n/a	0.9258 ± 0.0016	0.4846 ± 0.0002
16	n/a	n/a	n/a	0.9822 ± 0.0033	0.5003 ± 0.0004
32	n/a	n/a	n/a	0.9875 ± 0.0016	0.5003 ± 0.0004

Table 3.9: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback fraction

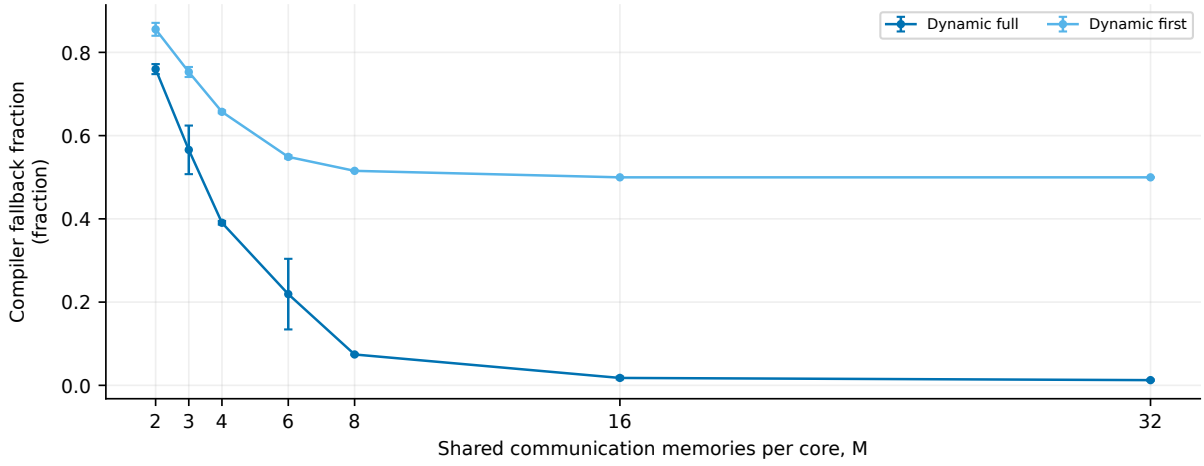


Figure 3.10: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.7598 ± 0.0120	0.8554 ± 0.0155
3	n/a	n/a	n/a	0.5658 ± 0.0584	0.7528 ± 0.0120
4	n/a	n/a	n/a	0.3906 ± 0.0044	0.6571 ± 0.0033
6	n/a	n/a	n/a	0.2192 ± 0.0848	0.5489 ± 0.0038
8	n/a	n/a	n/a	0.0742 ± 0.0016	0.5154 ± 0.0002
16	n/a	n/a	n/a	0.0178 ± 0.0033	0.4997 ± 0.0004
32	n/a	n/a	n/a	0.0125 ± 0.0016	0.4997 ± 0.0004

Table 3.10: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-cache waste

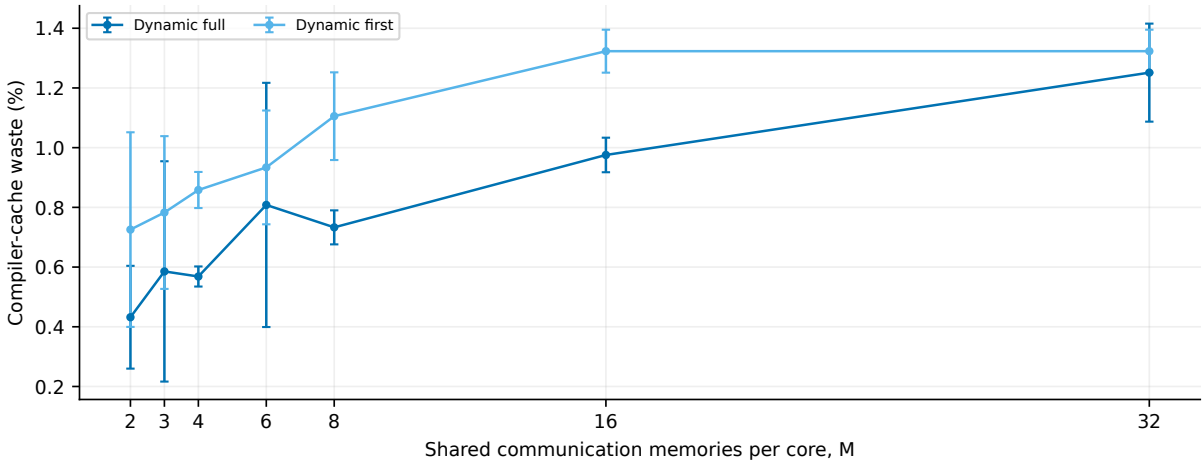


Figure 3.11: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.4320 ± 0.1722	0.7255 ± 0.3260
3	n/a	n/a	n/a	0.5854 ± 0.3690	0.7827 ± 0.2558
4	n/a	n/a	n/a	0.5684 ± 0.0337	0.8582 ± 0.0604
6	n/a	n/a	n/a	0.8081 ± 0.4090	0.9339 ± 0.1906
8	n/a	n/a	n/a	0.7330 ± 0.0570	1.105 ± 0.147
16	n/a	n/a	n/a	0.9755 ± 0.0579	1.323 ± 0.072
32	n/a	n/a	n/a	1.251 ± 0.164	1.323 ± 0.072

Table 3.11: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol waste

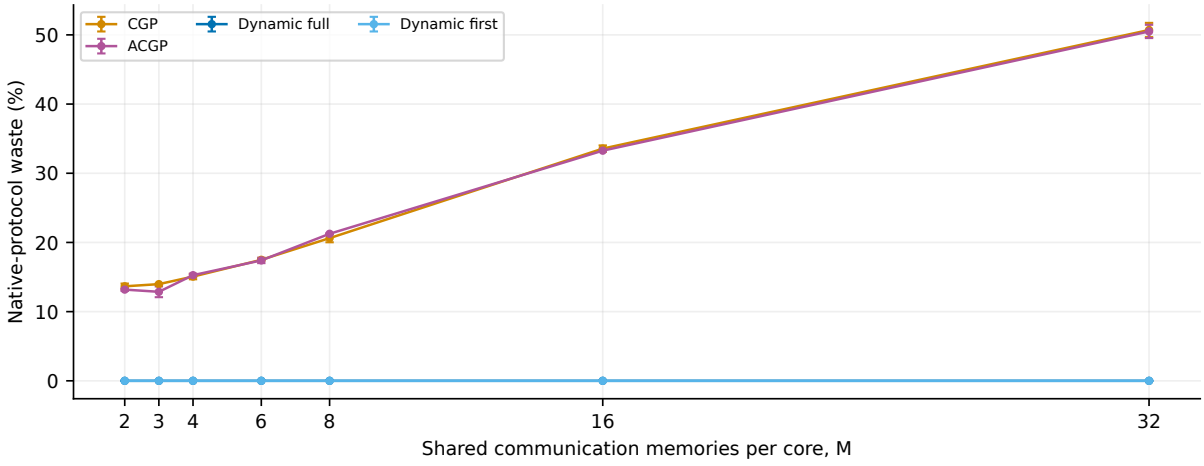


Figure 3.12: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	13.658 ± 0.398	13.185 ± 0.195	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	13.974 ± 0.073	12.865 ± 0.778	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	15.065 ± 0.392	15.269 ± 0.209	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	17.490 ± 0.122	17.405 ± 0.394	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	20.622 ± 0.599	21.252 ± 0.082	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	33.559 ± 0.465	33.265 ± 0.024	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	50.705 ± 1.032	50.498 ± 0.959	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.12: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-pair expiry

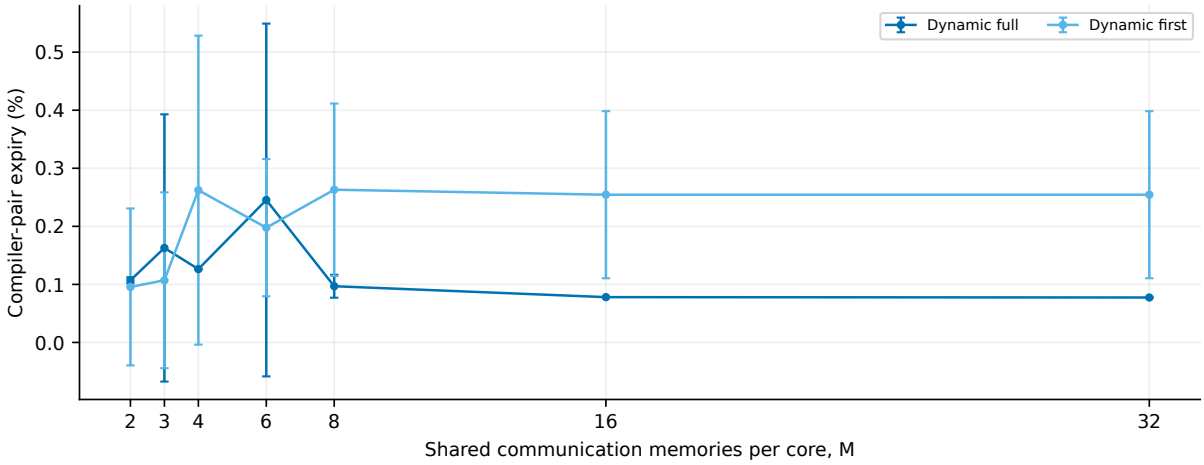


Figure 3.13: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.1071 ± 0.0052	0.0956 ± 0.1352
3	n/a	n/a	n/a	0.1628 ± 0.2302	0.1071 ± 0.1514
4	n/a	n/a	n/a	0.1263 ± 0.0009	0.2623 ± 0.2661
6	n/a	n/a	n/a	0.2454 ± 0.3038	0.1977 ± 0.1181
8	n/a	n/a	n/a	0.0968 ± 0.0198	0.2631 ± 0.1484
16	n/a	n/a	n/a	0.0780 ± 0.0002	0.2545 ± 0.1439
32	n/a	n/a	n/a	0.0774 ± 0.0000	0.2545 ± 0.1439

Table 3.13: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler-pair storage time

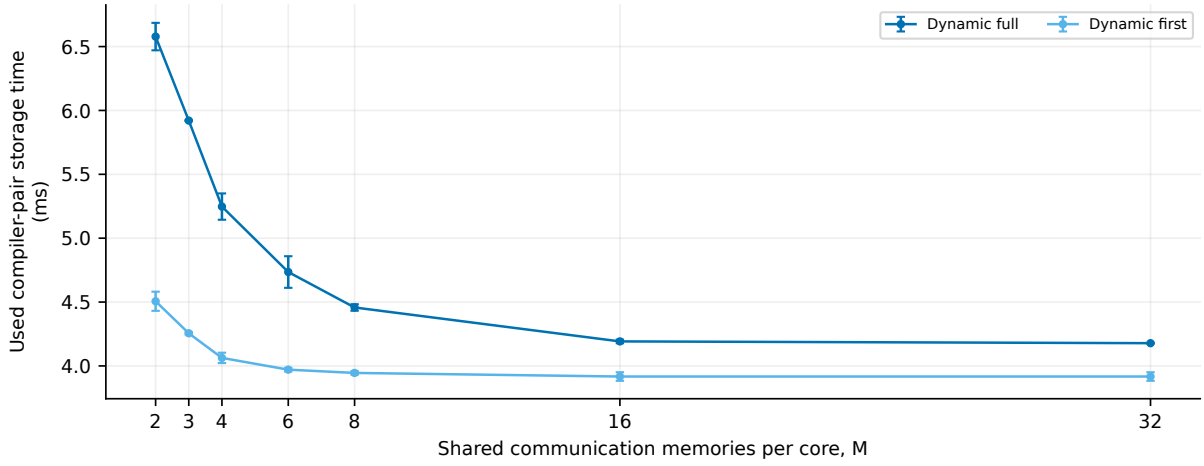


Figure 3.14: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	6.578 ± 0.107	4.506 ± 0.075
3	n/a	n/a	n/a	5.921 ± 0.001	4.256 ± 0.009
4	n/a	n/a	n/a	5.247 ± 0.103	4.063 ± 0.041
6	n/a	n/a	n/a	4.735 ± 0.124	3.971 ± 0.014
8	n/a	n/a	n/a	4.458 ± 0.026	3.945 ± 0.014
16	n/a	n/a	n/a	4.192 ± 0.014	3.917 ± 0.034
32	n/a	n/a	n/a	4.178 ± 0.003	3.917 ± 0.034

Table 3.14: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Delivered-hop throughput

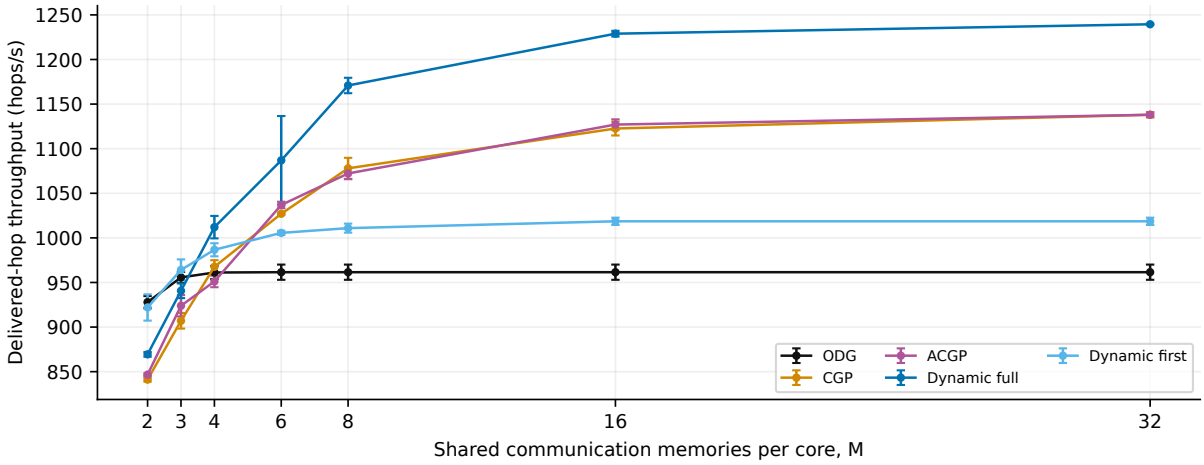


Figure 3.15: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	927.92 ± 6.83	841.10 ± 2.21	846.68 ± 1.42	869.42 ± 2.63	921.98 ± 14.73
3	955.68 ± 6.13	907.05 ± 8.75	923.90 ± 11.97	940.66 ± 8.18	964.11 ± 11.75
4	961.17 ± 7.33	967.59 ± 7.40	951.16 ± 6.47	1012.03 ± 12.59	986.67 ± 7.33
6	961.53 ± 8.53	1027.05 ± 1.16	1036.88 ± 3.65	1086.92 ± 49.67	1005.60 ± 2.32
8	961.53 ± 8.53	1077.97 ± 11.78	1072.23 ± 6.43	1170.85 ± 8.65	1010.92 ± 5.05
16	961.53 ± 8.53	1122.61 ± 7.82	1127.05 ± 5.86	1228.94 ± 3.22	1018.59 ± 4.07
32	961.53 ± 8.53	1138.05 ± 2.96	1138.00 ± 2.53	1239.49 ± 0.73	1018.59 ± 4.07

Table 3.15: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Completion fraction

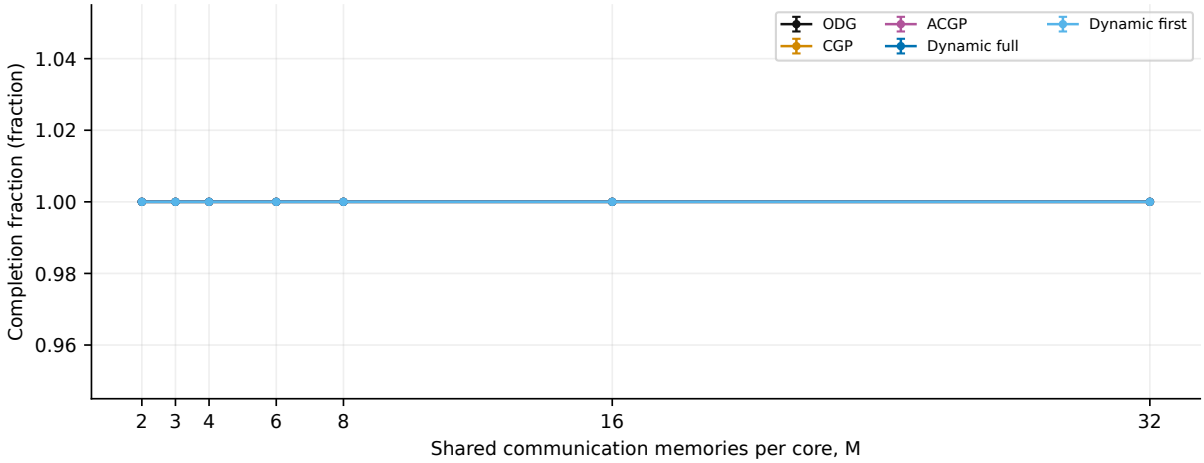


Figure 3.16: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
3	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
4	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
6	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
8	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
16	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
32	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000

Table 3.16: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum admission wait

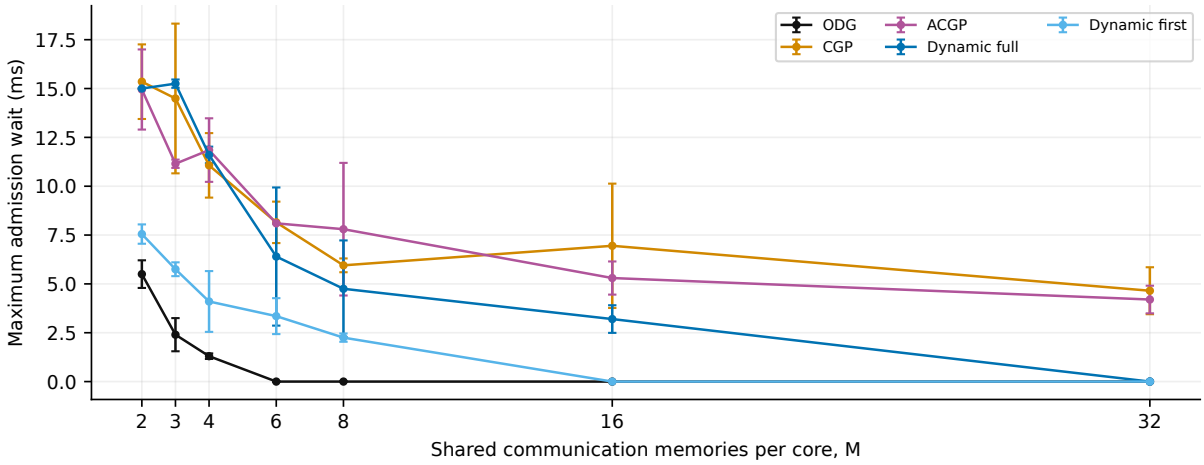


Figure 3.17: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	5.500 ± 0.707	15.350 ± 1.909	14.950 ± 2.051	15.000 ± 0.000	7.550 ± 0.495
3	2.400 ± 0.849	14.491 ± 3.832	11.150 ± 0.212	15.250 ± 0.212	5.750 ± 0.354
4	1.300 ± 0.141	11.067 ± 1.651	11.850 ± 1.626	11.600 ± 0.424	4.100 ± 1.556
6	0.0000 ± 0.0000	8.150 ± 1.061	8.100 ± 0.000	6.400 ± 3.536	3.350 ± 0.919
8	0.0000 ± 0.0000	5.950 ± 0.354	7.800 ± 3.394	4.750 ± 2.475	2.250 ± 0.212
16	0.0000 ± 0.0000	6.950 ± 3.182	5.300 ± 0.849	3.200 ± 0.707	0.0000 ± 0.0000
32	0.0000 ± 0.0000	4.650 ± 1.202	4.200 ± 0.707	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.17: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with admission wait

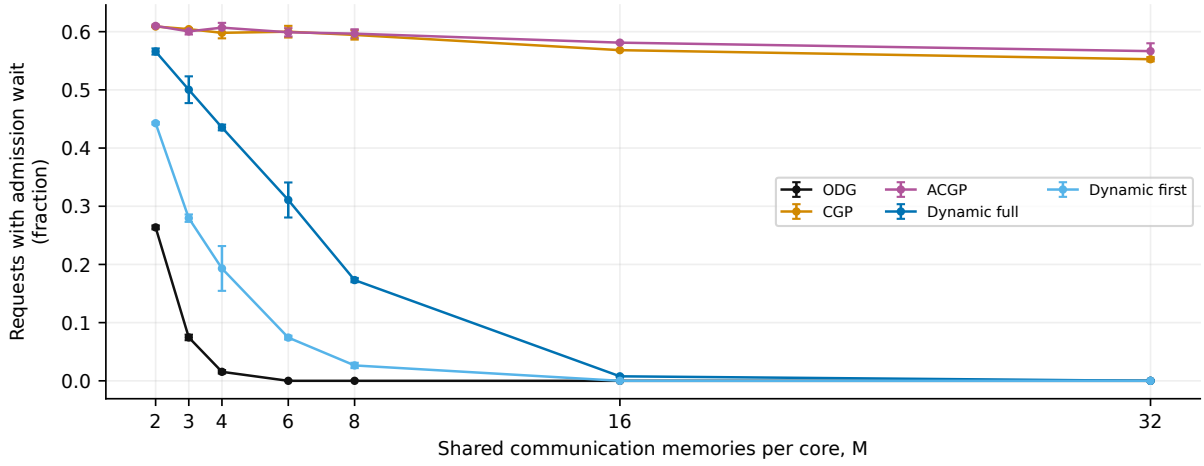


Figure 3.18: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.2637 ± 0.0033	0.6089 ± 0.0007	0.6099 ± 0.0022	0.5659 ± 0.0053	0.4427 ± 0.0022
3	0.0746 ± 0.0047	0.6044 ± 0.0013	0.6005 ± 0.0053	0.5003 ± 0.0230	0.2795 ± 0.0064
4	0.0155 ± 0.0029	0.5980 ± 0.0095	0.6069 ± 0.0082	0.4354 ± 0.0049	0.1931 ± 0.0385
6	0.0000 ± 0.0000	0.6000 ± 0.0100	0.5989 ± 0.0071	0.3108 ± 0.0301	0.0743 ± 0.0033
8	0.0000 ± 0.0000	0.5944 ± 0.0080	0.5966 ± 0.0075	0.1731 ± 0.0036	0.0264 ± 0.0046
16	0.0000 ± 0.0000	0.5682 ± 0.0005	0.5811 ± 0.0013	0.0077 ± 0.0015	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.5526 ± 0.0036	0.5666 ± 0.0135	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.18: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded reservation-setup counter

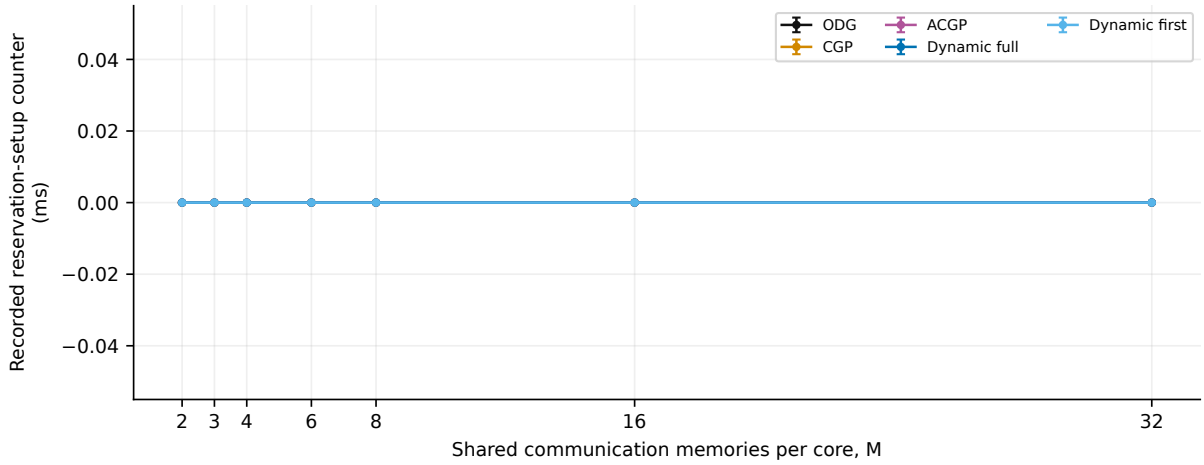


Figure 3.19: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.19: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean generation/service time

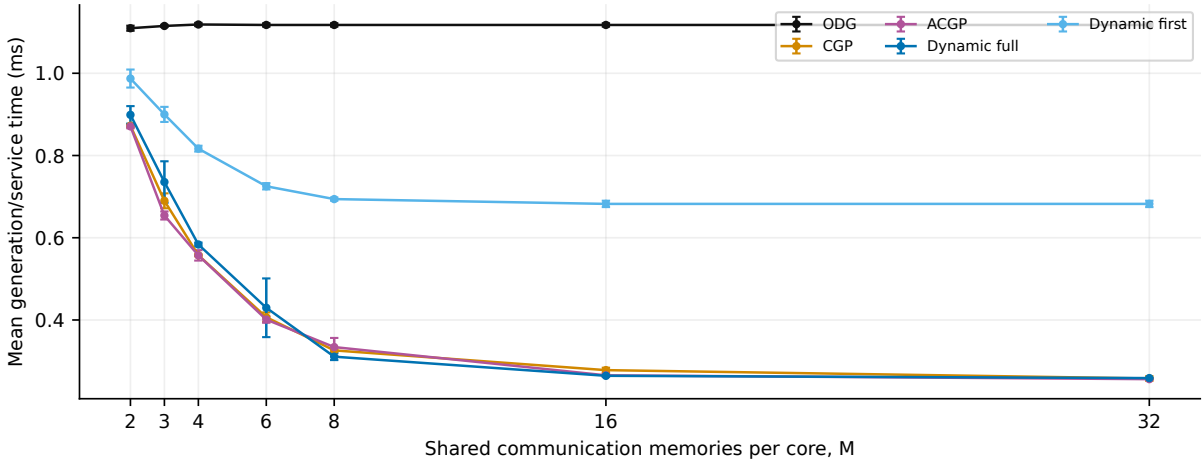


Figure 3.20: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.110 ± 0.006	0.8724 ± 0.0038	0.8709 ± 0.0047	0.8989 ± 0.0212	0.9872 ± 0.0219
3	1.115 ± 0.003	0.6898 ± 0.0181	0.6541 ± 0.0098	0.7355 ± 0.0504	0.9000 ± 0.0183
4	1.119 ± 0.004	0.5576 ± 0.0023	0.5571 ± 0.0126	0.5836 ± 0.0046	0.8167 ± 0.0071
6	1.117 ± 0.004	0.4067 ± 0.0117	0.4009 ± 0.0077	0.4297 ± 0.0714	0.7252 ± 0.0077
8	1.117 ± 0.004	0.3261 ± 0.0043	0.3341 ± 0.0222	0.3108 ± 0.0082	0.6940 ± 0.0039
16	1.117 ± 0.004	0.2780 ± 0.0059	0.2654 ± 0.0039	0.2643 ± 0.0018	0.6823 ± 0.0078
32	1.117 ± 0.004	0.2577 ± 0.0057	0.2561 ± 0.0004	0.2587 ± 0.0006	0.6823 ± 0.0078

Table 3.20: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded retry-wait time

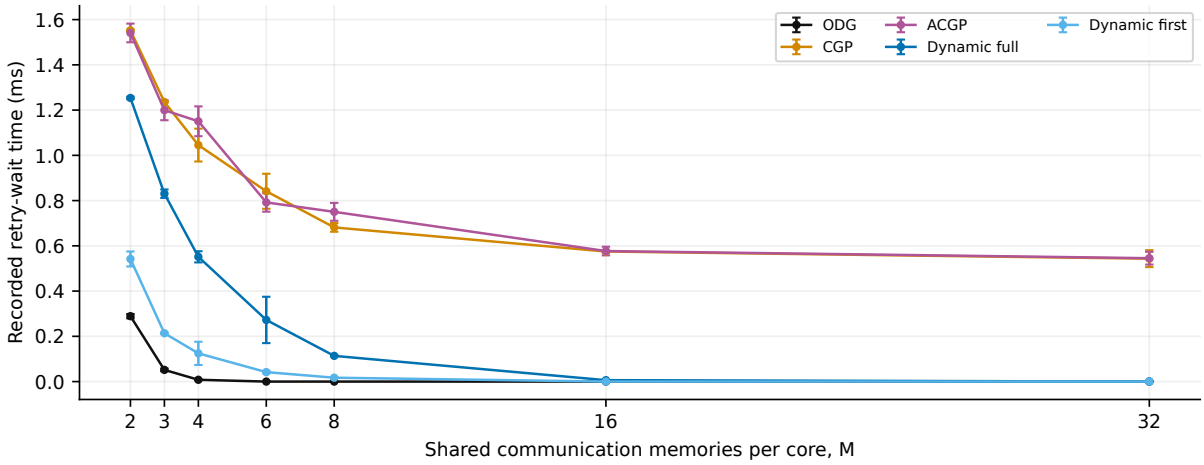


Figure 3.21: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.2891 ± 0.0096	1.552 ± 0.004	1.541 ± 0.041	1.254 ± 0.005	0.5419 ± 0.0332
3	0.0517 ± 0.0057	1.236 ± 0.002	1.200 ± 0.044	0.8305 ± 0.0186	0.2138 ± 0.0034
4	0.0080 ± 0.0022	1.045 ± 0.073	1.151 ± 0.066	0.5515 ± 0.0248	0.1248 ± 0.0514
6	0.0000 ± 0.0000	0.8413 ± 0.0774	0.7919 ± 0.0409	0.2724 ± 0.1025	0.0418 ± 0.0052
8	0.0000 ± 0.0000	0.6815 ± 0.0193	0.7503 ± 0.0395	0.1137 ± 0.0024	0.0171 ± 0.0013
16	0.0000 ± 0.0000	0.5749 ± 0.0055	0.5770 ± 0.0191	0.0062 ± 0.0002	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.5433 ± 0.0373	0.5454 ± 0.0282	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.21: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Request retries

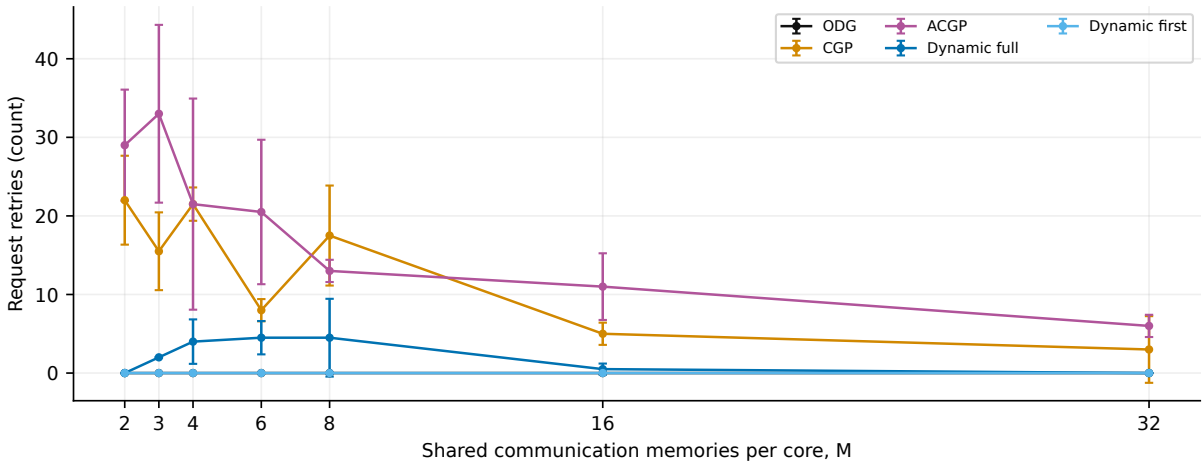


Figure 3.22: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	22.000 ± 5.657	29.000 ± 7.071	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	15.500 ± 4.950	33.000 ± 11.314	2.000 ± 0.000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	21.500 ± 2.121	21.500 ± 13.435	4.000 ± 2.828	0.0000 ± 0.0000
6	0.0000 ± 0.0000	8.000 ± 1.414	20.500 ± 9.192	4.500 ± 2.121	0.0000 ± 0.0000
8	0.0000 ± 0.0000	17.500 ± 6.364	13.000 ± 1.414	4.500 ± 4.950	0.0000 ± 0.0000
16	0.0000 ± 0.0000	5.000 ± 1.414	11.000 ± 4.243	0.5000 ± 0.7071	0.0000 ± 0.0000
32	0.0000 ± 0.0000	3.000 ± 4.243	6.000 ± 1.414	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.22: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with retries

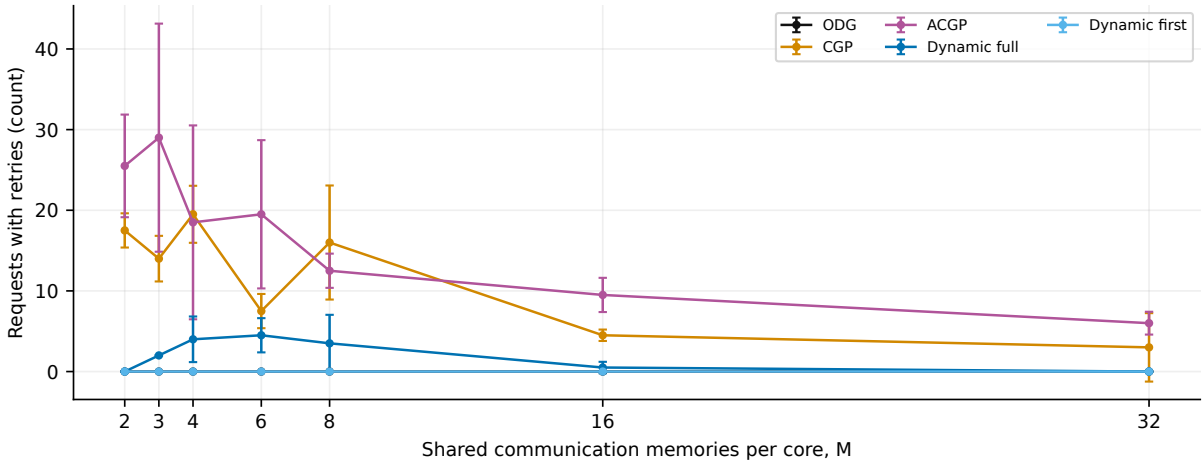


Figure 3.23: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	17.500 ± 2.121	25.500 ± 6.364	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	14.000 ± 2.828	29.000 ± 14.142	2.000 ± 0.000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	19.500 ± 3.536	18.500 ± 12.021	4.000 ± 2.828	0.0000 ± 0.0000
6	0.0000 ± 0.0000	7.500 ± 2.121	19.500 ± 9.192	4.500 ± 2.121	0.0000 ± 0.0000
8	0.0000 ± 0.0000	16.000 ± 7.071	12.500 ± 2.121	3.500 ± 3.536	0.0000 ± 0.0000
16	0.0000 ± 0.0000	4.500 ± 0.707	9.500 ± 2.121	0.5000 ± 0.7071	0.0000 ± 0.0000
32	0.0000 ± 0.0000	3.000 ± 4.243	6.000 ± 1.414	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.23: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol generated-pair counter

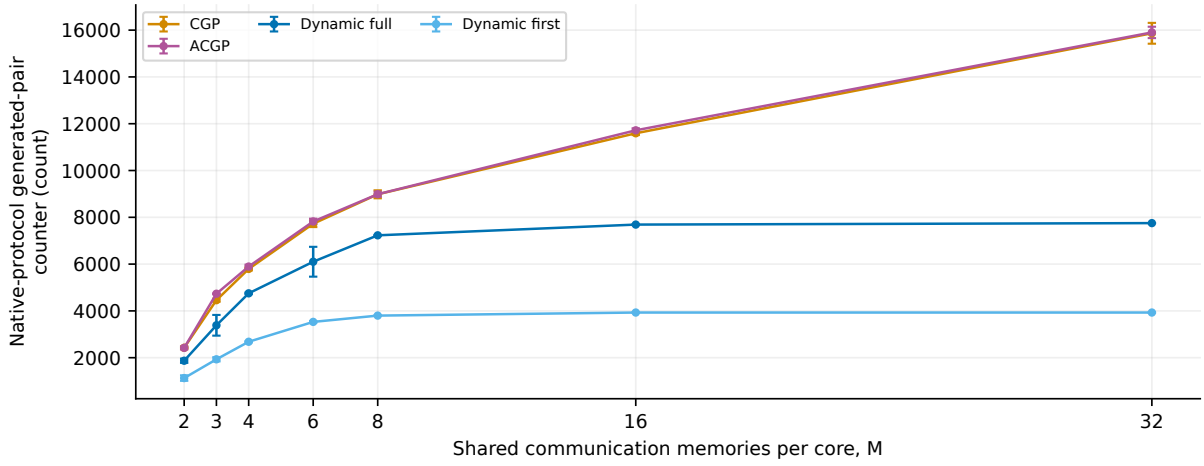


Figure 3.24: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	2424.00 ± 39.60	2420.00 ± 67.88	1870.00 ± 90.51	1129.00 ± 117.38
3	n/a	4458.00 ± 67.88	4734.00 ± 11.31	3385.00 ± 442.65	1931.00 ± 89.10
4	n/a	5794.00 ± 65.05	5895.00 ± 80.61	4751.00 ± 32.53	2681.00 ± 24.04
6	n/a	7725.00 ± 142.84	7821.00 ± 120.21	6101.00 ± 637.81	3530.00 ± 36.77
8	n/a	8983.00 ± 171.12	8987.00 ± 111.72	7230.00 ± 16.97	3799.00 ± 7.07
16	n/a	11592.00 ± 76.37	11718.00 ± 84.85	7689.00 ± 21.21	3930.00 ± 0.00
32	n/a	15865.00 ± 445.48	15902.00 ± 243.24	7752.00 ± 0.00	3930.00 ± 0.00

Table 3.24: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol used-pair counter

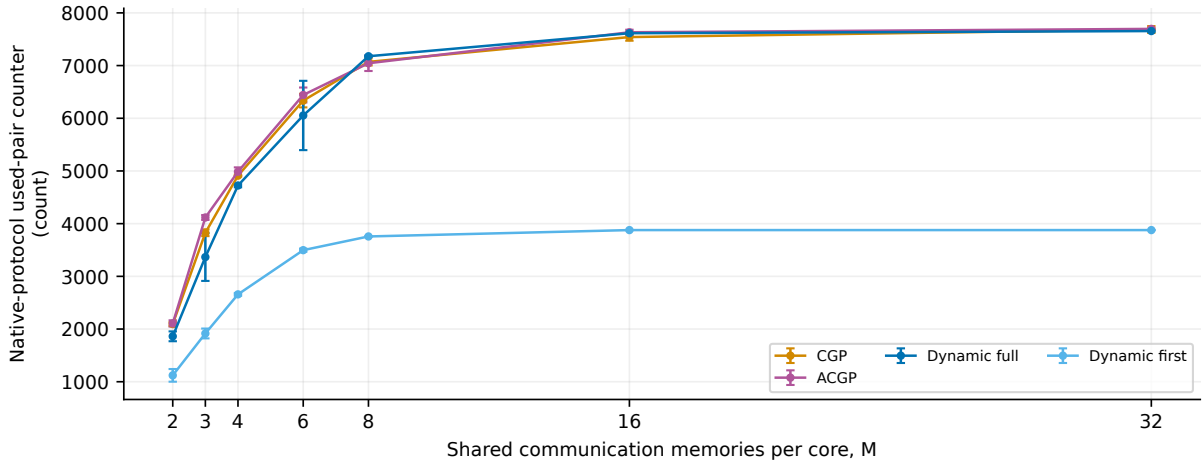


Figure 3.25: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	2094.00 ± 36.77	2106.00 ± 59.40	1862.00 ± 93.34	1121.00 ± 120.21
3	n/a	3827.00 ± 63.64	4117.00 ± 46.67	3366.00 ± 452.55	1916.00 ± 93.34
4	n/a	4911.00 ± 18.38	4986.00 ± 82.02	4724.00 ± 33.94	2658.00 ± 25.46
6	n/a	6335.00 ± 128.69	6442.00 ± 141.42	6053.00 ± 657.61	3497.00 ± 29.70
8	n/a	7070.00 ± 67.88	7044.00 ± 147.08	7177.00 ± 12.73	3757.00 ± 1.41
16	n/a	7541.00 ± 69.30	7632.00 ± 48.08	7614.00 ± 25.46	3878.00 ± 2.83
32	n/a	7684.00 ± 65.05	7696.00 ± 16.97	7655.00 ± 12.73	3878.00 ± 2.83

Table 3.25: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol unused-pair counter

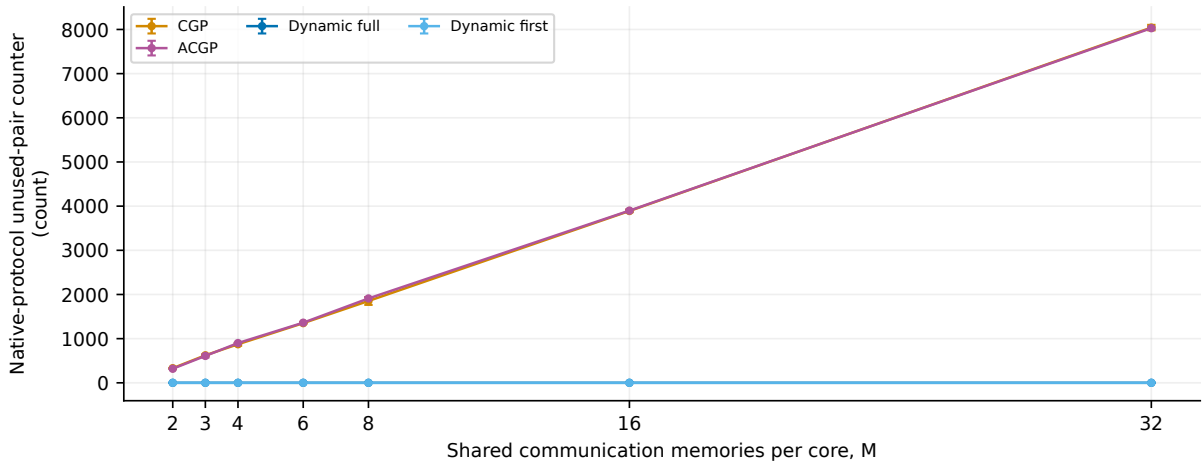


Figure 3.26: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	331.00 ± 4.24	319.00 ± 4.24	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	623.00 ± 12.73	609.00 ± 35.36	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	873.00 ± 32.53	900.00 ± 0.00	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	1351.00 ± 15.56	1361.00 ± 9.90	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	1853.00 ± 89.10	1910.00 ± 31.11	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	3890.00 ± 28.28	3898.00 ± 25.46	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	8042.00 ± 62.23	8029.00 ± 29.70	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.26: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Scheduled compiler preparations

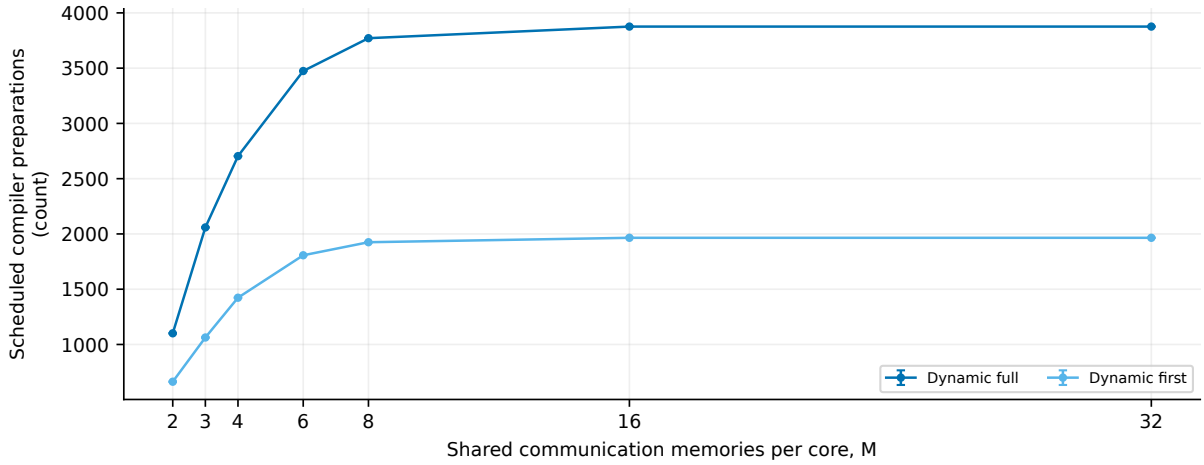


Figure 3.27: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1101.00 ± 0.00	663.00 ± 0.00
3	n/a	n/a	n/a	2059.00 ± 0.00	1063.00 ± 0.00
4	n/a	n/a	n/a	2704.00 ± 0.00	1423.00 ± 0.00
6	n/a	n/a	n/a	3474.00 ± 0.00	1807.00 ± 0.00
8	n/a	n/a	n/a	3771.00 ± 0.00	1925.00 ± 0.00
16	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.27: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner-blocked preparations

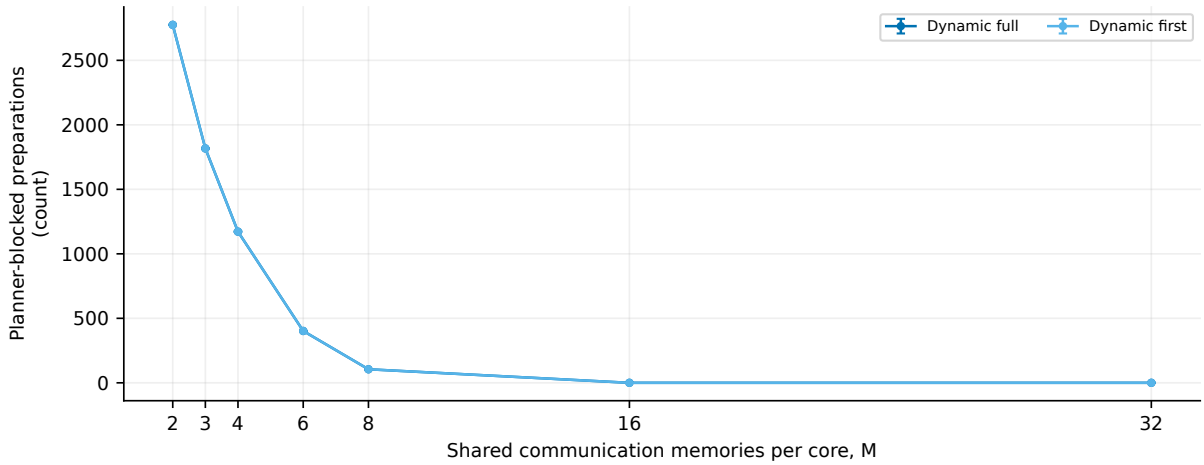


Figure 3.28: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2775.00 ± 0.00	2775.00 ± 0.00
3	n/a	n/a	n/a	1817.00 ± 0.00	1817.00 ± 0.00
4	n/a	n/a	n/a	1172.00 ± 0.00	1172.00 ± 0.00
6	n/a	n/a	n/a	402.00 ± 0.00	402.00 ± 0.00
8	n/a	n/a	n/a	105.00 ± 0.00	105.00 ± 0.00
16	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.28: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner peak compiler memory

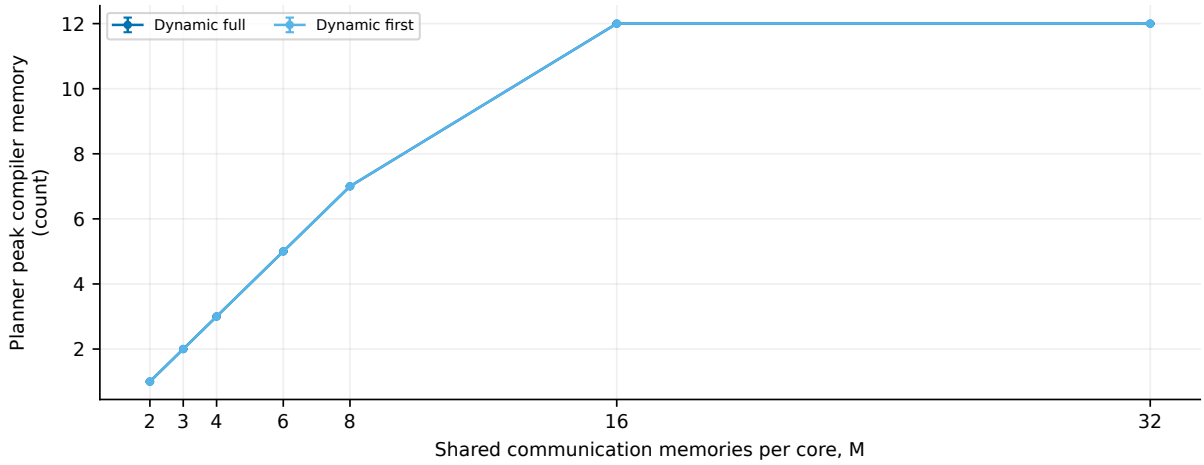


Figure 3.29: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1.000 ± 0.000	1.000 ± 0.000
3	n/a	n/a	n/a	2.000 ± 0.000	2.000 ± 0.000
4	n/a	n/a	n/a	3.000 ± 0.000	3.000 ± 0.000
6	n/a	n/a	n/a	5.000 ± 0.000	5.000 ± 0.000
8	n/a	n/a	n/a	7.000 ± 0.000	7.000 ± 0.000
16	n/a	n/a	n/a	12.000 ± 0.000	12.000 ± 0.000
32	n/a	n/a	n/a	12.000 ± 0.000	12.000 ± 0.000

Table 3.29: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler preparation admission attempts

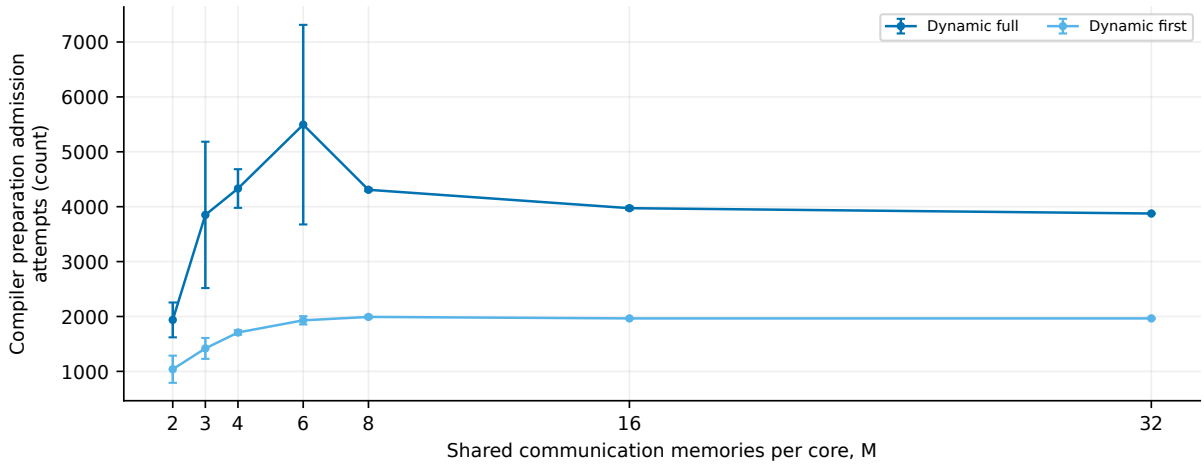


Figure 3.30: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1937.50 ± 317.49	1039.00 ± 247.49
3	n/a	n/a	n/a	3850.50 ± 1332.90	1418.50 ± 190.21
4	n/a	n/a	n/a	4331.00 ± 352.14	1708.50 ± 40.31
6	n/a	n/a	n/a	5494.50 ± 1817.97	1930.00 ± 74.95
8	n/a	n/a	n/a	4308.00 ± 22.63	1992.00 ± 21.21
16	n/a	n/a	n/a	3973.00 ± 29.70	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.30: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Launched compiler preparations

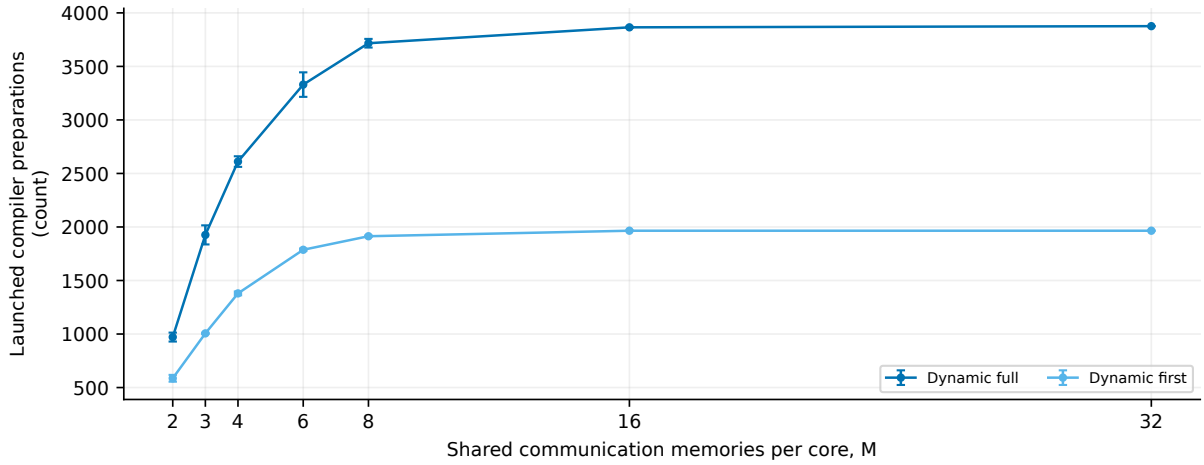


Figure 3.31: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	971.50 ± 41.72	586.50 ± 31.82
3	n/a	n/a	n/a	1926.00 ± 89.10	1006.00 ± 5.66
4	n/a	n/a	n/a	2611.00 ± 49.50	1379.50 ± 17.68
6	n/a	n/a	n/a	3330.00 ± 114.55	1787.00 ± 11.31
8	n/a	n/a	n/a	3716.50 ± 40.31	1913.50 ± 6.36
16	n/a	n/a	n/a	3865.00 ± 5.66	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.31: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Accepted compiler preparations

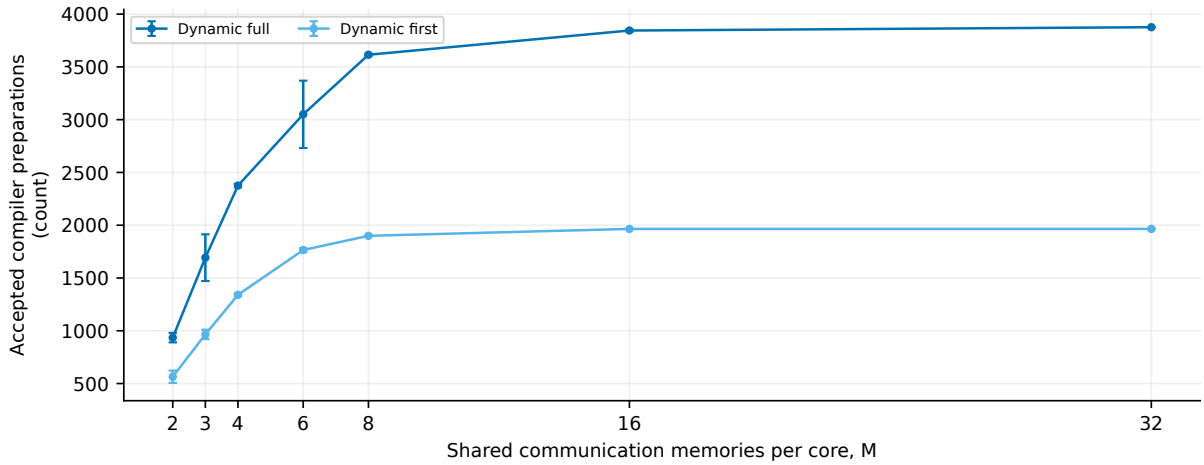


Figure 3.32: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	935.00 ± 45.25	564.50 ± 58.69
3	n/a	n/a	n/a	1692.50 ± 221.32	965.50 ± 44.55
4	n/a	n/a	n/a	2375.50 ± 16.26	1340.50 ± 12.02
6	n/a	n/a	n/a	3050.50 ± 318.91	1765.00 ± 18.38
8	n/a	n/a	n/a	3615.00 ± 8.49	1899.50 ± 3.54
16	n/a	n/a	n/a	3844.50 ± 10.61	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.32: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Rejected compiler preparations

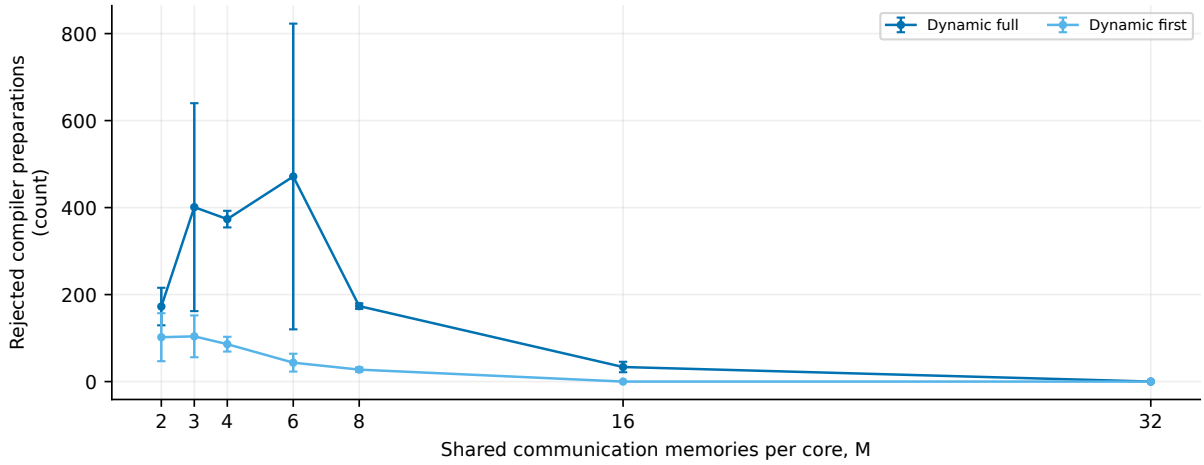


Figure 3.33: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	172.50 ± 43.13	102.00 ± 55.15
3	n/a	n/a	n/a	401.00 ± 239.00	104.00 ± 48.08
4	n/a	n/a	n/a	373.50 ± 19.09	86.000 ± 16.971
6	n/a	n/a	n/a	471.50 ± 351.43	43.500 ± 20.506
8	n/a	n/a	n/a	173.50 ± 6.36	27.500 ± 4.950
16	n/a	n/a	n/a	33.500 ± 12.021	0.0000 ± 0.0000
32	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.33: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-ready request count

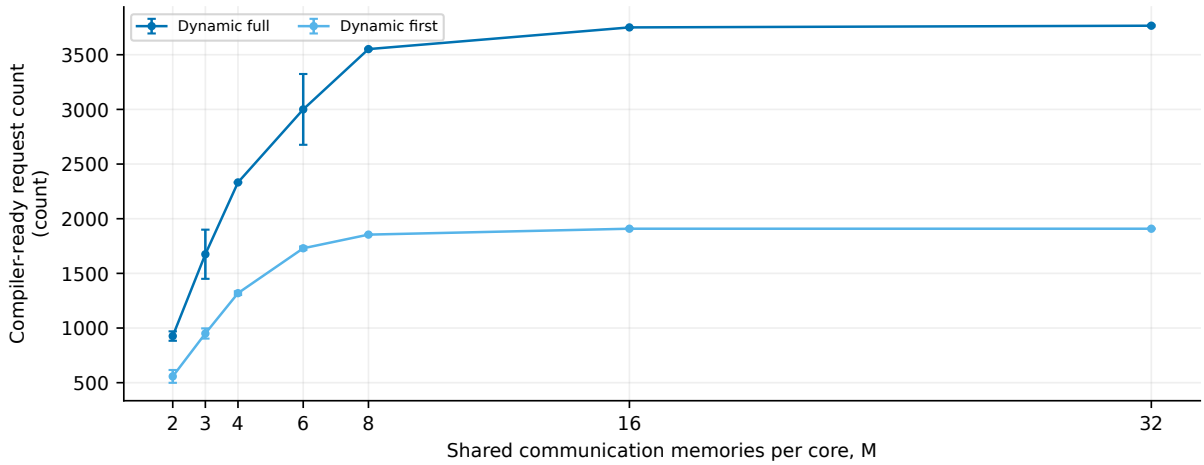


Figure 3.34: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	926.50 ± 43.13	557.50 ± 58.69
3	n/a	n/a	n/a	1675.00 ± 224.86	950.00 ± 46.67
4	n/a	n/a	n/a	2332.00 ± 2.83	1319.00 ± 16.97
6	n/a	n/a	n/a	3000.00 ± 323.85	1729.50 ± 16.26
8	n/a	n/a	n/a	3551.50 ± 4.95	1854.50 ± 2.12
16	n/a	n/a	n/a	3750.00 ± 1.41	1908.50 ± 3.54
32	n/a	n/a	n/a	3765.50 ± 7.78	1908.50 ± 3.54

Table 3.34: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit count

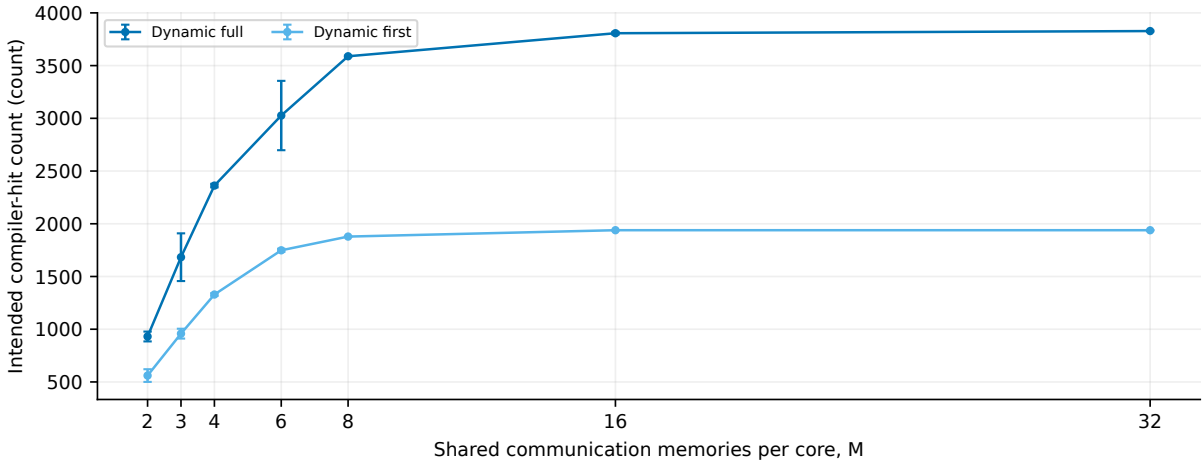


Figure 3.35: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	931.00 ± 46.67	560.50 ± 60.10
3	n/a	n/a	n/a	1683.00 ± 226.27	958.00 ± 46.67
4	n/a	n/a	n/a	2362.00 ± 16.97	1329.00 ± 12.73
6	n/a	n/a	n/a	3026.50 ± 328.80	1748.50 ± 14.85
8	n/a	n/a	n/a	3588.50 ± 6.36	1878.50 ± 0.71
16	n/a	n/a	n/a	3807.00 ± 12.73	1939.00 ± 1.41
32	n/a	n/a	n/a	3827.50 ± 6.36	1939.00 ± 1.41

Table 3.35: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-not-ready request count

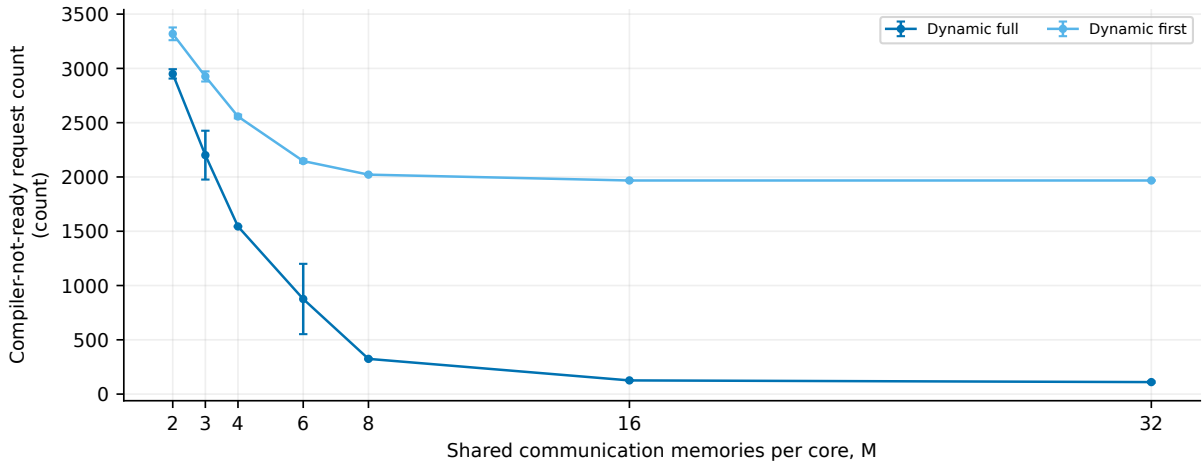


Figure 3.36: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2949.50 ± 43.13	3318.50 ± 58.69
3	n/a	n/a	n/a	2201.00 ± 224.86	2926.00 ± 46.67
4	n/a	n/a	n/a	1544.00 ± 2.83	2557.00 ± 16.97
6	n/a	n/a	n/a	876.00 ± 323.85	2146.50 ± 16.26
8	n/a	n/a	n/a	324.50 ± 4.95	2021.50 ± 2.12
16	n/a	n/a	n/a	126.00 ± 1.41	1967.50 ± 3.54
32	n/a	n/a	n/a	110.50 ± 7.78	1967.50 ± 3.54

Table 3.36: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Late compiler-pair uses

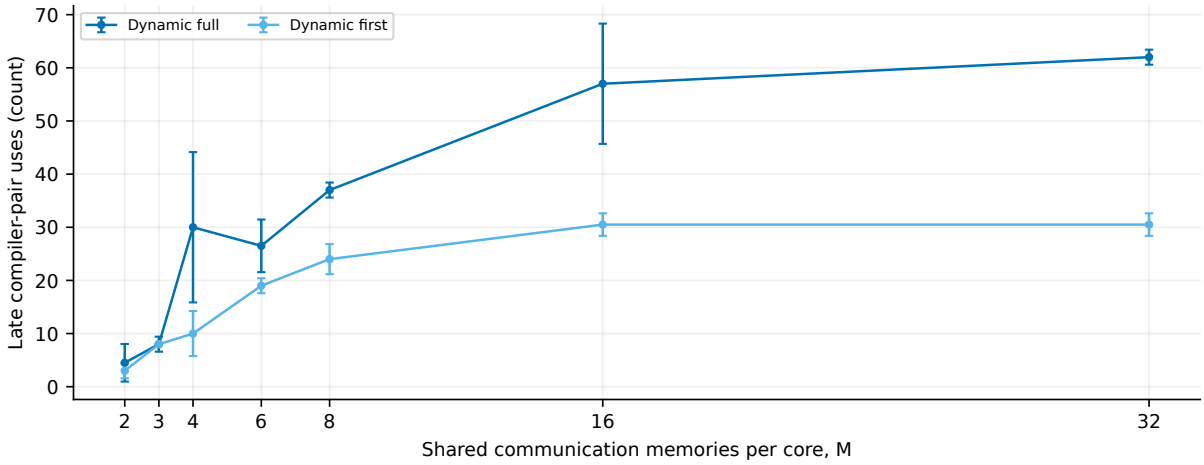


Figure 3.37: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	4.500 ± 3.536	3.000 ± 1.414
3	n/a	n/a	n/a	8.000 ± 1.414	8.000 ± 0.000
4	n/a	n/a	n/a	30.000 ± 14.142	10.000 ± 4.243
6	n/a	n/a	n/a	26.500 ± 4.950	19.000 ± 1.414
8	n/a	n/a	n/a	37.000 ± 1.414	24.000 ± 2.828
16	n/a	n/a	n/a	57.000 ± 11.314	30.500 ± 2.121
32	n/a	n/a	n/a	62.000 ± 1.414	30.500 ± 2.121

Table 3.37: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback count

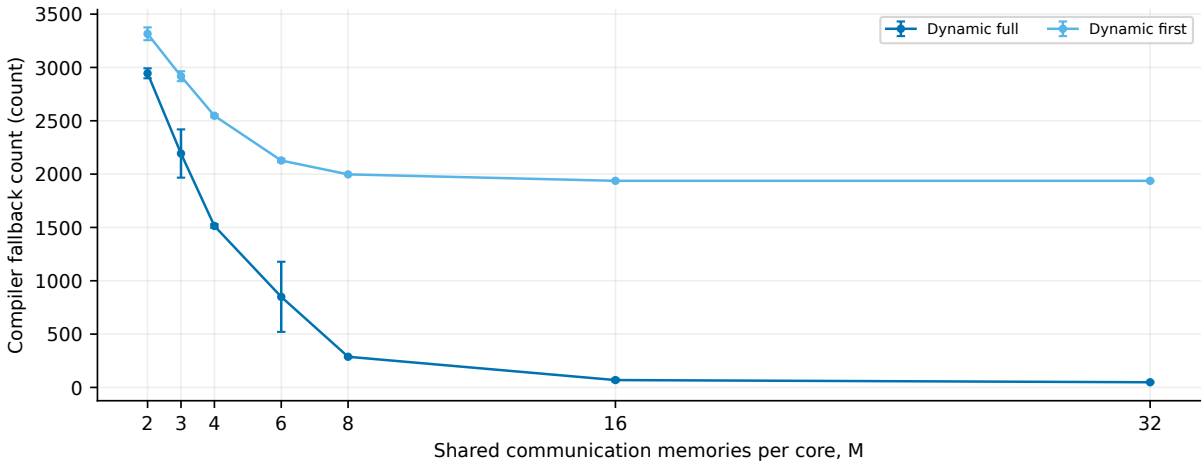


Figure 3.38: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2945.00 ± 46.67	3315.50 ± 60.10
3	n/a	n/a	n/a	2193.00 ± 226.27	2918.00 ± 46.67
4	n/a	n/a	n/a	1514.00 ± 16.97	2547.00 ± 12.73
6	n/a	n/a	n/a	849.50 ± 328.80	2127.50 ± 14.85
8	n/a	n/a	n/a	287.50 ± 6.36	1997.50 ± 0.71
16	n/a	n/a	n/a	69.000 ± 12.728	1937.00 ± 1.41
32	n/a	n/a	n/a	48.500 ± 6.364	1937.00 ± 1.41

Table 3.38: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Generated compiler pairs

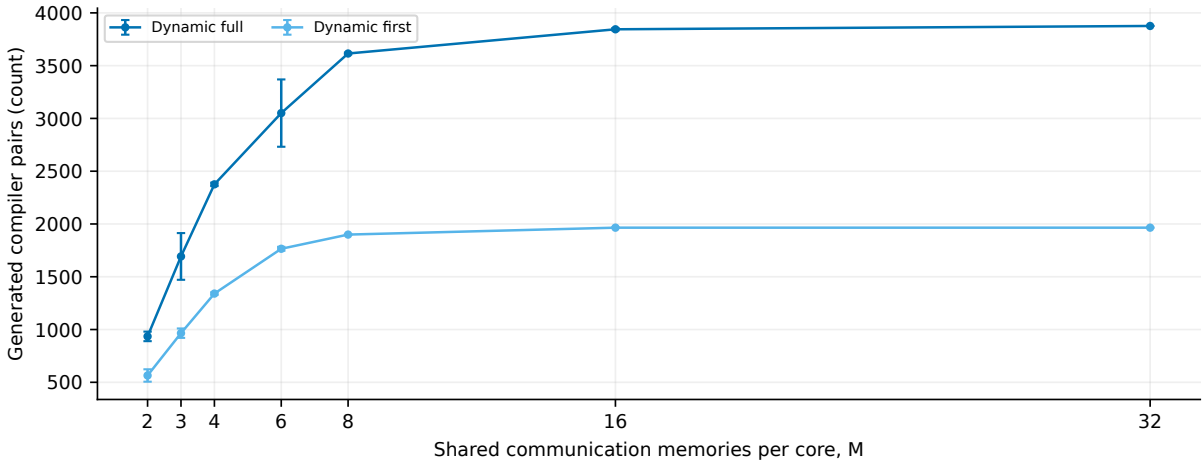


Figure 3.39: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	935.00 ± 45.25	564.50 ± 58.69
3	n/a	n/a	n/a	1692.50 ± 221.32	965.50 ± 44.55
4	n/a	n/a	n/a	2375.50 ± 16.26	1340.50 ± 12.02
6	n/a	n/a	n/a	3050.50 ± 318.91	1765.00 ± 18.38
8	n/a	n/a	n/a	3615.00 ± 8.49	1899.50 ± 3.54
16	n/a	n/a	n/a	3844.50 ± 10.61	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.39: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler pairs

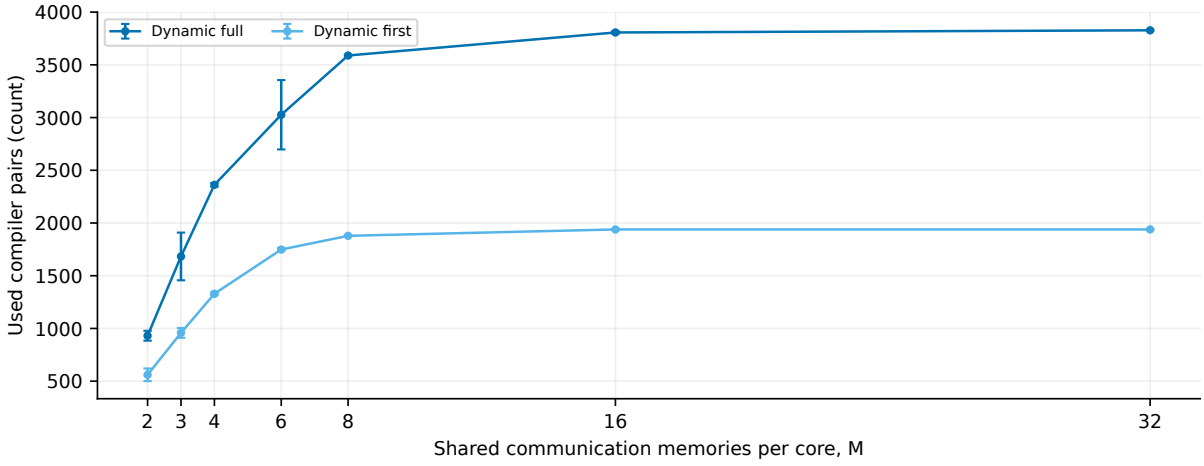


Figure 3.40: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	931.00 ± 46.67	560.50 ± 60.10
3	n/a	n/a	n/a	1683.00 ± 226.27	958.00 ± 46.67
4	n/a	n/a	n/a	2362.00 ± 16.97	1329.00 ± 12.73
6	n/a	n/a	n/a	3026.50 ± 328.80	1748.50 ± 14.85
8	n/a	n/a	n/a	3588.50 ± 6.36	1878.50 ± 0.71
16	n/a	n/a	n/a	3807.00 ± 12.73	1939.00 ± 1.41
32	n/a	n/a	n/a	3827.50 ± 6.36	1939.00 ± 1.41

Table 3.40: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Expired compiler pairs

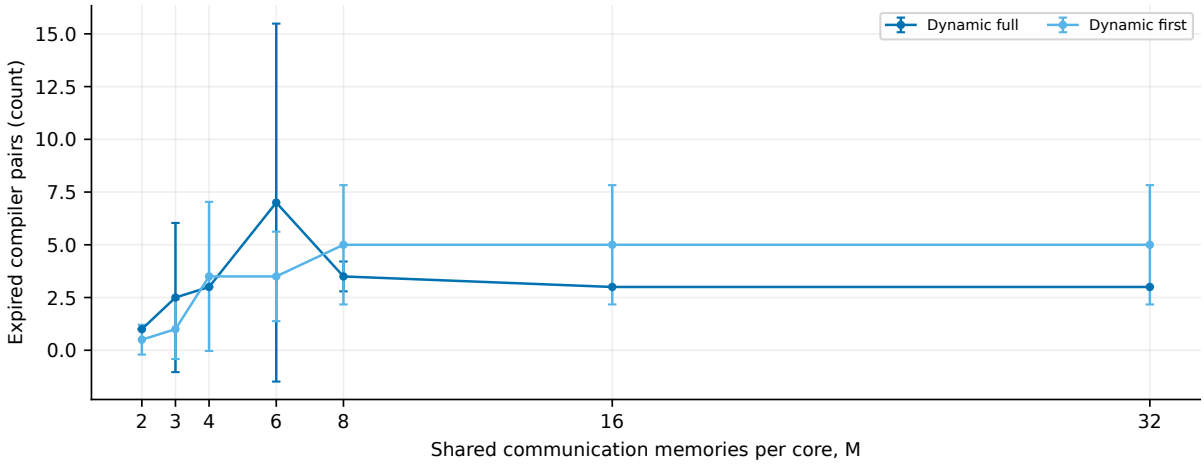


Figure 3.41: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1.000 ± 0.000	0.5000 ± 0.7071
3	n/a	n/a	n/a	2.500 ± 3.536	1.000 ± 1.414
4	n/a	n/a	n/a	3.000 ± 0.000	3.500 ± 3.536
6	n/a	n/a	n/a	7.000 ± 8.485	3.500 ± 2.121
8	n/a	n/a	n/a	3.500 ± 0.707	5.000 ± 2.828
16	n/a	n/a	n/a	3.000 ± 0.000	5.000 ± 2.828
32	n/a	n/a	n/a	3.000 ± 0.000	5.000 ± 2.828

Table 3.41: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Remaining compiler pairs

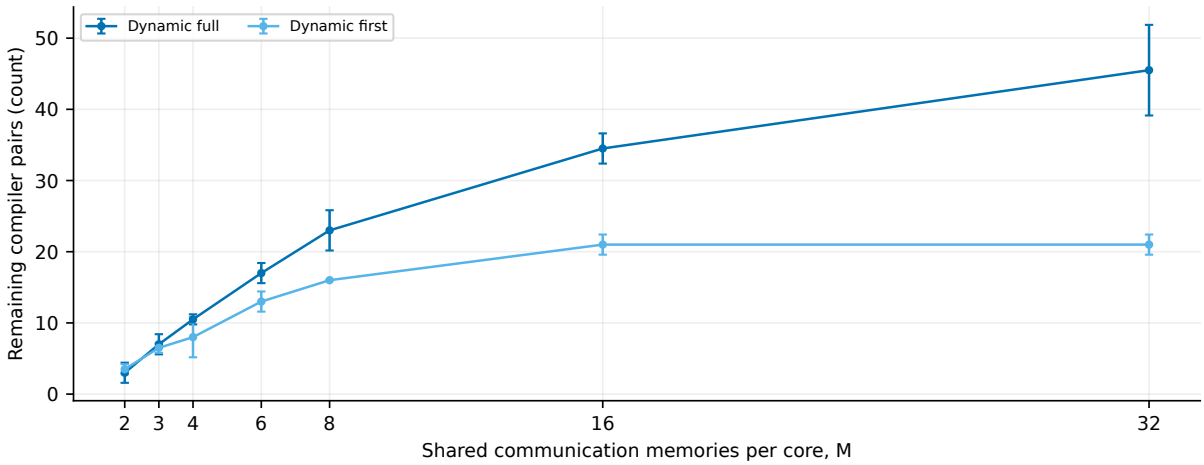


Figure 3.42: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	3.000 ± 1.414	3.500 ± 0.707
3	n/a	n/a	n/a	7.000 ± 1.414	6.500 ± 0.707
4	n/a	n/a	n/a	10.500 ± 0.707	8.000 ± 2.828
6	n/a	n/a	n/a	17.000 ± 1.414	13.000 ± 1.414
8	n/a	n/a	n/a	23.000 ± 2.828	16.000 ± 0.000
16	n/a	n/a	n/a	34.500 ± 2.121	21.000 ± 1.414
32	n/a	n/a	n/a	45.500 ± 6.364	21.000 ± 1.414

Table 3.42: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at creation

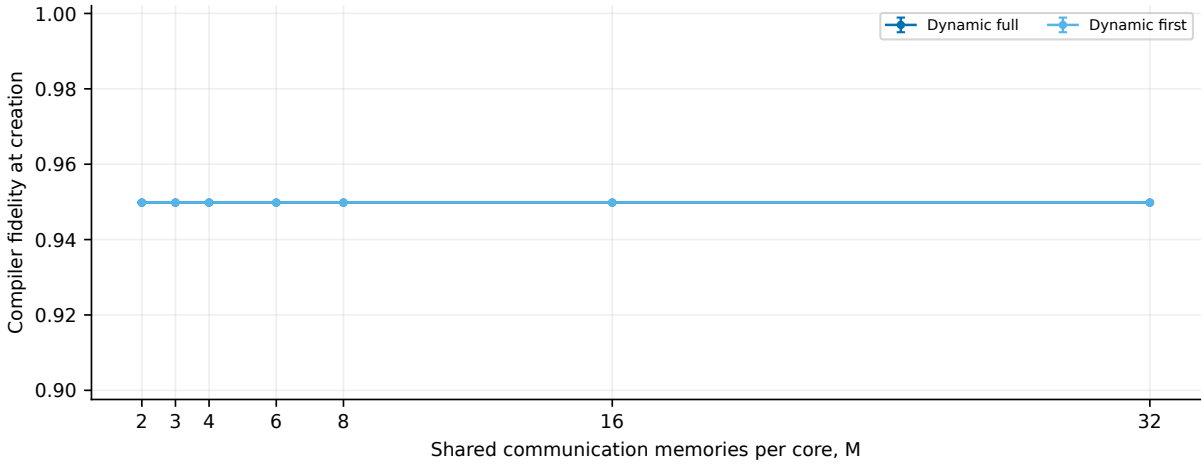


Figure 3.43: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
3	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
4	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
6	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
8	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
16	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
32	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000

Table 3.43: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at use

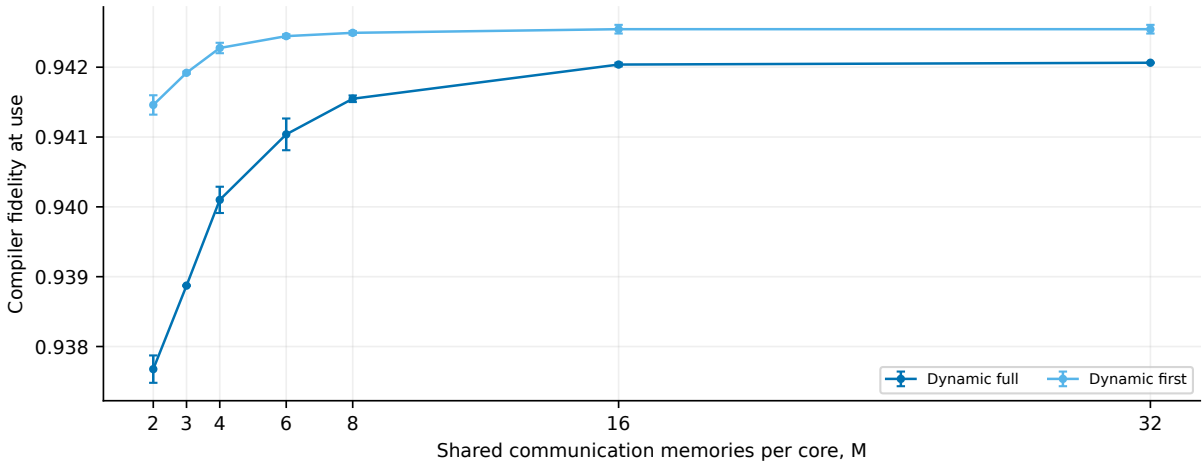


Figure 3.44: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9377 ± 0.0002	0.9415 ± 0.0001
3	n/a	n/a	n/a	0.9389 ± 0.0000	0.9419 ± 0.0000
4	n/a	n/a	n/a	0.9401 ± 0.0002	0.9423 ± 0.0001
6	n/a	n/a	n/a	0.9410 ± 0.0002	0.9424 ± 0.0000
8	n/a	n/a	n/a	0.9415 ± 0.0000	0.9425 ± 0.0000
16	n/a	n/a	n/a	0.9420 ± 0.0000	0.9425 ± 0.0001
32	n/a	n/a	n/a	0.9421 ± 0.0000	0.9425 ± 0.0001

Table 3.44: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean layer latency

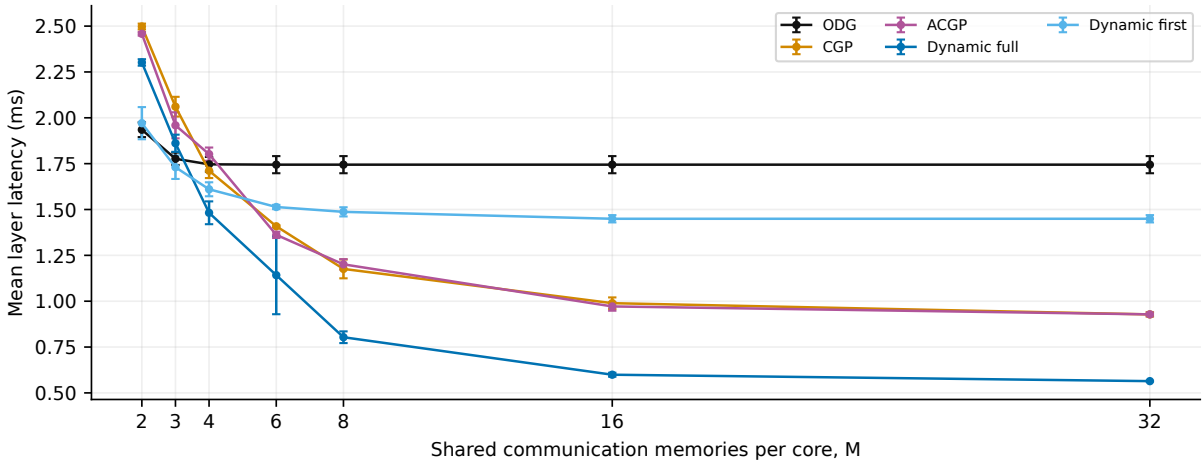


Figure 3.45: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.935 ± 0.040	2.498 ± 0.016	2.458 ± 0.010	2.302 ± 0.018	1.971 ± 0.088
3	1.777 ± 0.034	2.061 ± 0.054	1.959 ± 0.071	1.861 ± 0.047	1.731 ± 0.064
4	1.746 ± 0.040	1.711 ± 0.040	1.802 ± 0.036	1.482 ± 0.062	1.610 ± 0.038
6	1.744 ± 0.047	1.409 ± 0.006	1.362 ± 0.017	1.142 ± 0.213	1.514 ± 0.012
8	1.744 ± 0.047	1.176 ± 0.051	1.201 ± 0.028	0.8035 ± 0.0319	1.487 ± 0.025
16	1.744 ± 0.047	0.9892 ± 0.0314	0.9714 ± 0.0233	0.5992 ± 0.0108	1.449 ± 0.020
32	1.744 ± 0.047	0.9280 ± 0.0115	0.9282 ± 0.0099	0.5641 ± 0.0024	1.449 ± 0.020

Table 3.45: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum layer latency

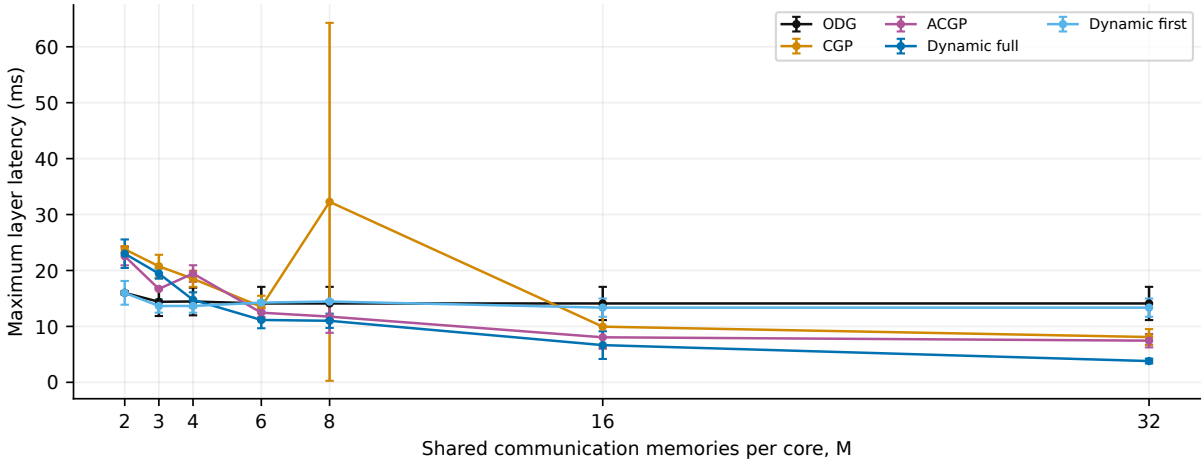


Figure 3.46: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	16.000 ± 0.283	23.801 ± 0.566	22.551 ± 1.626	23.001 ± 2.546	16.000 ± 2.121
3	14.400 ± 2.546	20.750 ± 2.051	16.700 ± 0.141	19.450 ± 0.919	13.650 ± 1.202
4	14.450 ± 2.475	18.518 ± 1.439	19.450 ± 1.485	14.750 ± 1.344	13.650 ± 1.202
6	14.100 ± 2.970	13.500 ± 1.980	12.450 ± 0.778	11.150 ± 1.485	14.250 ± 0.354
8	14.100 ± 2.970	32.271 ± 32.003	11.750 ± 2.899	11.000 ± 1.273	14.450 ± 0.071
16	14.100 ± 2.970	9.950 ± 3.748	8.050 ± 2.051	6.650 ± 2.475	13.350 ± 1.626
32	14.100 ± 2.970	8.100 ± 1.414	7.450 ± 1.202	3.800 ± 0.424	13.350 ± 1.626

Table 3.46: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Minimum layer latency

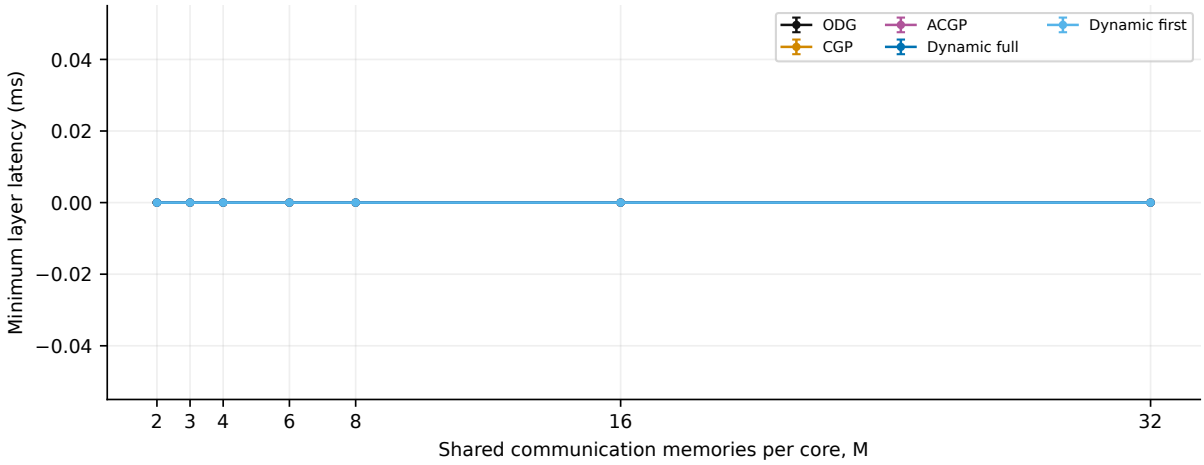


Figure 3.47: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.47: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

3.2 YX

Mean request latency

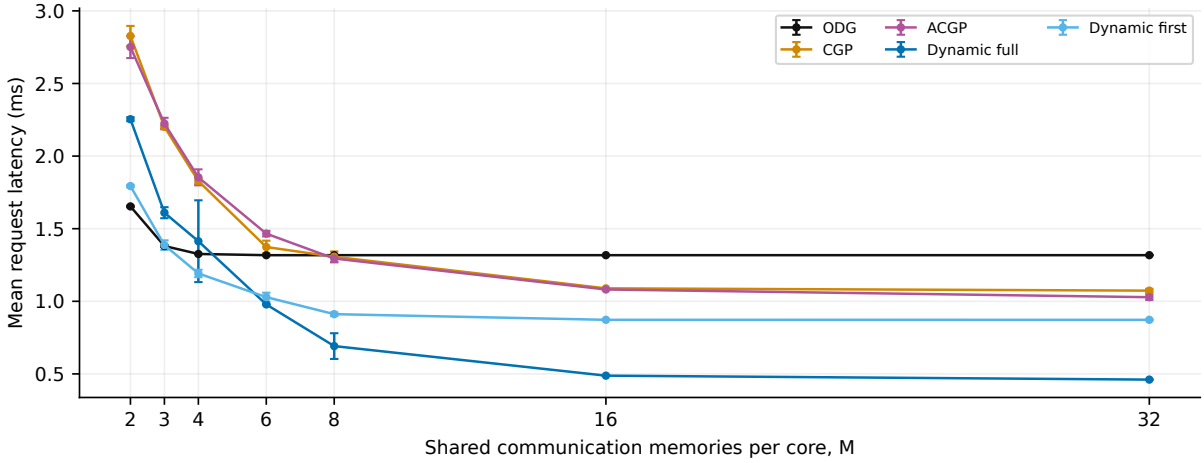


Figure 3.48: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.653 ± 0.005	2.827 ± 0.069	2.751 ± 0.076	2.254 ± 0.014	1.793 ± 0.008
3	1.381 ± 0.005	2.202 ± 0.010	2.224 ± 0.040	1.610 ± 0.038	1.387 ± 0.033
4	1.326 ± 0.001	1.828 ± 0.019	1.854 ± 0.055	1.414 ± 0.282	1.192 ± 0.025
6	1.318 ± 0.000	1.374 ± 0.044	1.466 ± 0.019	0.9785 ± 0.0017	1.029 ± 0.030
8	1.318 ± 0.000	1.307 ± 0.037	1.295 ± 0.026	0.6916 ± 0.0885	0.9115 ± 0.0118
16	1.318 ± 0.000	1.089 ± 0.001	1.081 ± 0.005	0.4880 ± 0.0003	0.8725 ± 0.0012
32	1.318 ± 0.000	1.073 ± 0.012	1.028 ± 0.019	0.4607 ± 0.0012	0.8724 ± 0.0011

Table 3.48: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Median request latency

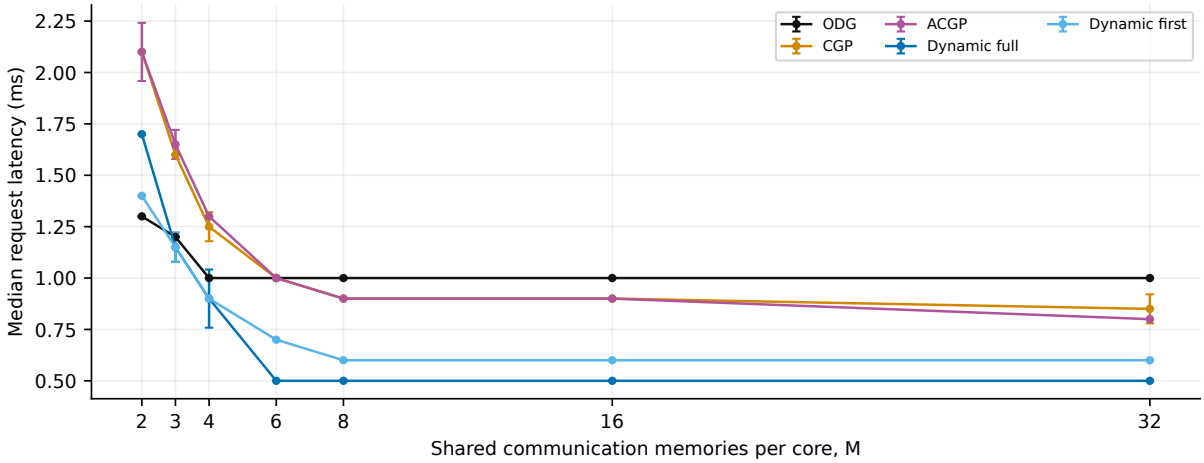


Figure 3.49: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.300 ± 0.000	2.100 ± 0.000	2.100 ± 0.141	1.700 ± 0.000	1.400 ± 0.000
3	1.200 ± 0.000	1.600 ± 0.000	1.650 ± 0.071	1.150 ± 0.071	1.150 ± 0.071
4	1.000 ± 0.000	1.250 ± 0.071	1.300 ± 0.000	0.9000 ± 0.1414	0.9000 ± 0.0000
6	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	0.5000 ± 0.0000	0.7000 ± 0.0000
8	1.000 ± 0.000	0.9000 ± 0.0000	0.9000 ± 0.0000	0.5000 ± 0.0000	0.6000 ± 0.0000
16	1.000 ± 0.000	0.9000 ± 0.0000	0.9000 ± 0.0000	0.5000 ± 0.0000	0.6000 ± 0.0000
32	1.000 ± 0.000	0.8500 ± 0.0707	0.8000 ± 0.0000	0.5000 ± 0.0000	0.6000 ± 0.0000

Table 3.49: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

p95 request latency

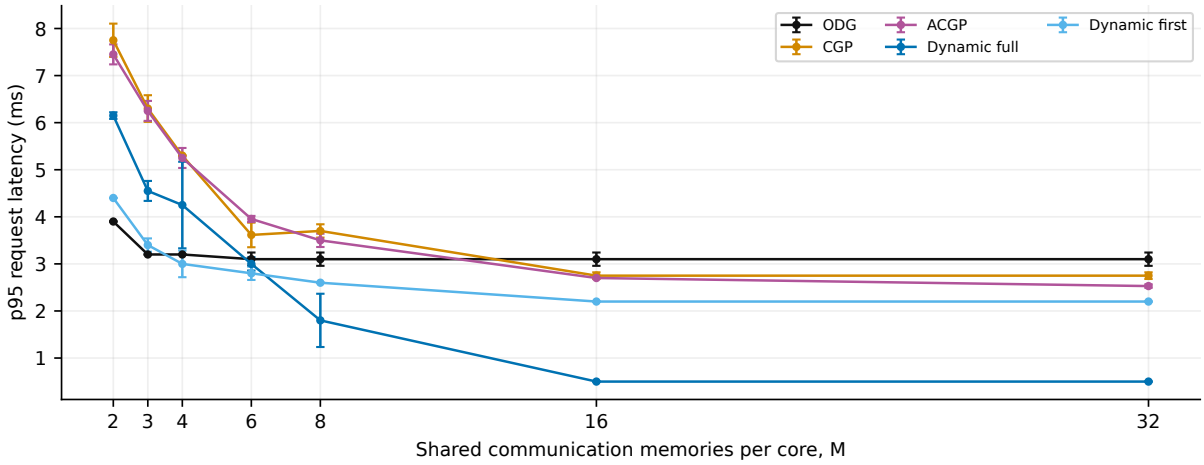


Figure 3.50: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	3.900 ± 0.000	7.750 ± 0.354	7.450 ± 0.212	6.150 ± 0.071	4.400 ± 0.000
3	3.200 ± 0.000	6.300 ± 0.283	6.250 ± 0.212	4.550 ± 0.212	3.400 ± 0.141
4	3.200 ± 0.000	5.300 ± 0.000	5.250 ± 0.212	4.250 ± 0.919	3.000 ± 0.283
6	3.100 ± 0.141	3.615 ± 0.262	3.955 ± 0.064	3.000 ± 0.141	2.800 ± 0.141
8	3.100 ± 0.141	3.700 ± 0.141	3.500 ± 0.141	1.800 ± 0.566	2.600 ± 0.000
16	3.100 ± 0.141	2.750 ± 0.071	2.700 ± 0.000	0.5000 ± 0.0000	2.200 ± 0.000
32	3.100 ± 0.141	2.750 ± 0.071	2.529 ± 0.036	0.5000 ± 0.0000	2.200 ± 0.000

Table 3.50: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum request latency

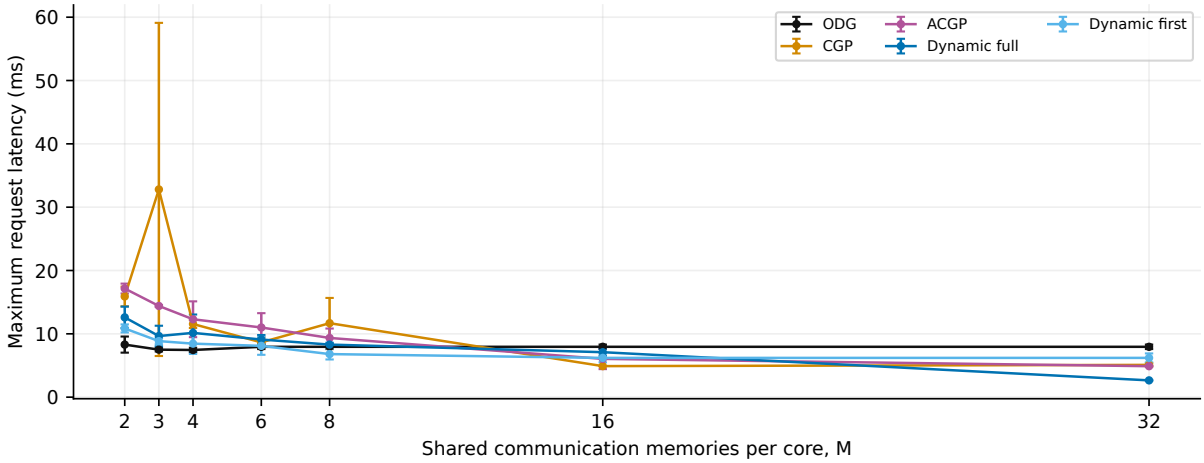


Figure 3.51: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	8.300 ± 1.273	15.900 ± 1.556	17.150 ± 0.778	12.600 ± 1.697	10.850 ± 0.636
3	7.500 ± 0.283	32.800 ± 26.304	14.400 ± 0.141	9.650 ± 1.626	8.850 ± 0.495
4	7.450 ± 0.354	11.550 ± 0.636	12.300 ± 2.828	10.150 ± 2.899	8.450 ± 1.626
6	7.950 ± 0.354	8.650 ± 0.778	11.000 ± 2.263	9.100 ± 0.707	8.100 ± 1.414
8	7.950 ± 0.354	11.682 ± 3.986	9.350 ± 1.485	8.300 ± 0.283	6.800 ± 0.849
16	7.950 ± 0.354	4.900 ± 0.000	6.043 ± 1.616	7.100 ± 0.566	6.200 ± 0.707
32	7.950 ± 0.354	5.096 ± 0.277	4.889 ± 0.016	2.650 ± 0.071	6.200 ± 0.707

Table 3.51: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Communication makespan

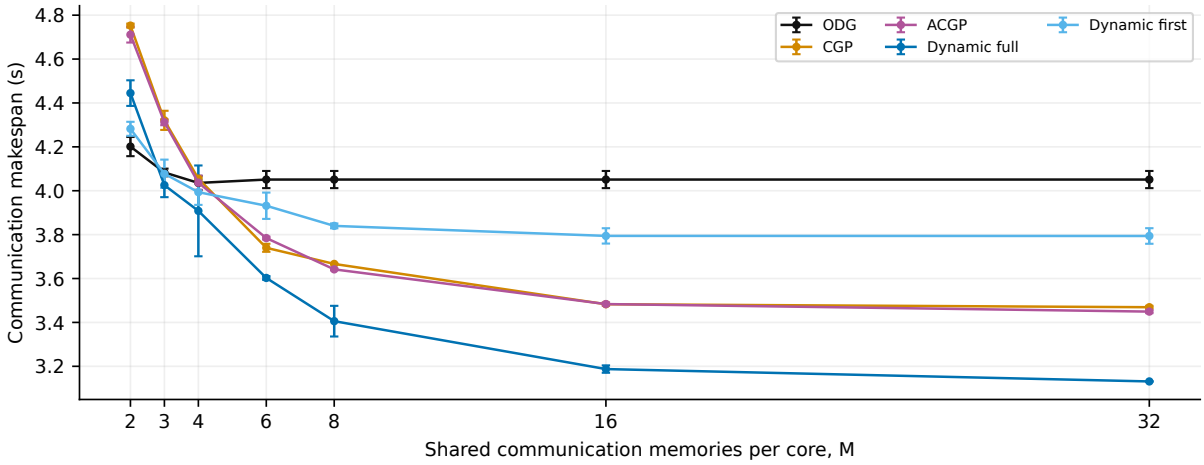


Figure 3.52: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	4.201 ± 0.044	4.752 ± 0.009	4.711 ± 0.036	4.445 ± 0.058	4.282 ± 0.032
3	4.083 ± 0.017	4.321 ± 0.044	4.312 ± 0.013	4.025 ± 0.055	4.077 ± 0.064
4	4.036 ± 0.032	4.055 ± 0.006	4.037 ± 0.032	3.908 ± 0.207	3.993 ± 0.058
6	4.051 ± 0.039	3.740 ± 0.018	3.784 ± 0.006	3.603 ± 0.008	3.932 ± 0.060
8	4.051 ± 0.039	3.666 ± 0.002	3.642 ± 0.004	3.406 ± 0.070	3.840 ± 0.011
16	4.051 ± 0.039	3.483 ± 0.001	3.484 ± 0.008	3.187 ± 0.017	3.794 ± 0.035
32	4.051 ± 0.039	3.469 ± 0.006	3.449 ± 0.007	3.131 ± 0.001	3.794 ± 0.035

Table 3.52: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean admission wait

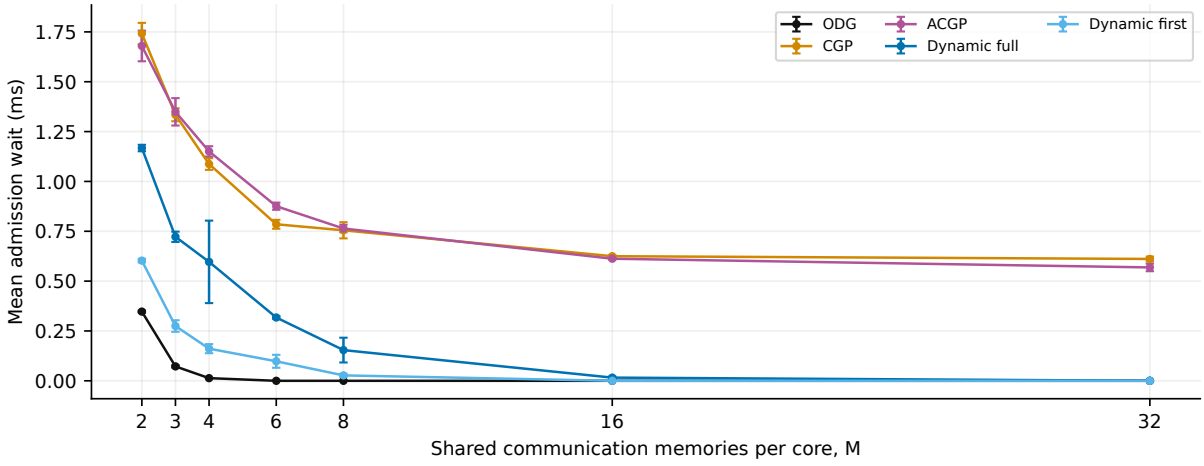


Figure 3.53: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.3471 ± 0.0048	1.742 ± 0.054	1.679 ± 0.077	1.167 ± 0.016	0.6028 ± 0.0088
3	0.0722 ± 0.0055	1.334 ± 0.033	1.349 ± 0.069	0.7224 ± 0.0258	0.2747 ± 0.0290
4	0.0133 ± 0.0009	1.087 ± 0.029	1.151 ± 0.026	0.5966 ± 0.2069	0.1613 ± 0.0227
6	0.0000 ± 0.0000	0.7850 ± 0.0223	0.8758 ± 0.0180	0.3175 ± 0.0065	0.0979 ± 0.0325
8	0.0000 ± 0.0000	0.7549 ± 0.0405	0.7639 ± 0.0186	0.1541 ± 0.0621	0.0272 ± 0.0076
16	0.0000 ± 0.0000	0.6250 ± 0.0060	0.6123 ± 0.0040	0.0160 ± 0.0051	0.0001 ± 0.0001
32	0.0000 ± 0.0000	0.6112 ± 0.0119	0.5687 ± 0.0190	0.0001 ± 0.0002	0.0000 ± 0.0000

Table 3.53: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Delivered EPR fidelity

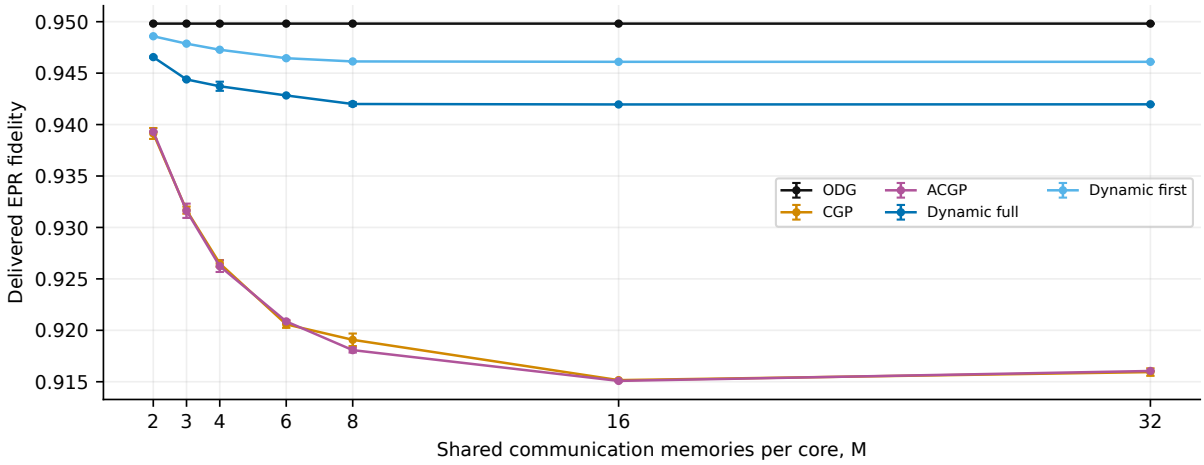


Figure 3.54: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.9498 ± 0.0000	0.9391 ± 0.0005	0.9393 ± 0.0000	0.9466 ± 0.0001	0.9486 ± 0.0000
3	0.9498 ± 0.0000	0.9317 ± 0.0003	0.9316 ± 0.0007	0.9444 ± 0.0001	0.9479 ± 0.0000
4	0.9498 ± 0.0000	0.9265 ± 0.0003	0.9262 ± 0.0006	0.9437 ± 0.0004	0.9473 ± 0.0000
6	0.9498 ± 0.0000	0.9206 ± 0.0003	0.9209 ± 0.0001	0.9428 ± 0.0000	0.9465 ± 0.0001
8	0.9498 ± 0.0000	0.9191 ± 0.0006	0.9181 ± 0.0002	0.9420 ± 0.0002	0.9461 ± 0.0000
16	0.9498 ± 0.0000	0.9152 ± 0.0000	0.9151 ± 0.0001	0.9420 ± 0.0000	0.9461 ± 0.0000
32	0.9498 ± 0.0000	0.9159 ± 0.0004	0.9160 ± 0.0000	0.9420 ± 0.0000	0.9461 ± 0.0000

Table 3.54: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler readiness fraction

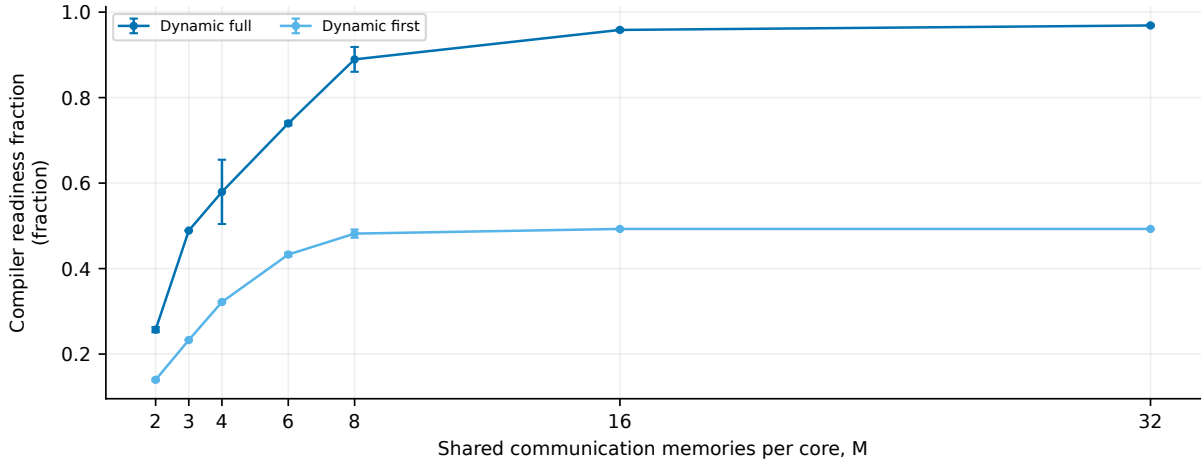


Figure 3.55: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2571 ± 0.0060	0.1398 ± 0.0026
3	n/a	n/a	n/a	0.4889 ± 0.0004	0.2328 ± 0.0005
4	n/a	n/a	n/a	0.5795 ± 0.0752	0.3219 ± 0.0020
6	n/a	n/a	n/a	0.7397 ± 0.0044	0.4329 ± 0.0044
8	n/a	n/a	n/a	0.8894 ± 0.0290	0.4818 ± 0.0097
16	n/a	n/a	n/a	0.9583 ± 0.0027	0.4928 ± 0.0011
32	n/a	n/a	n/a	0.9688 ± 0.0022	0.4928 ± 0.0011

Table 3.55: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit fraction

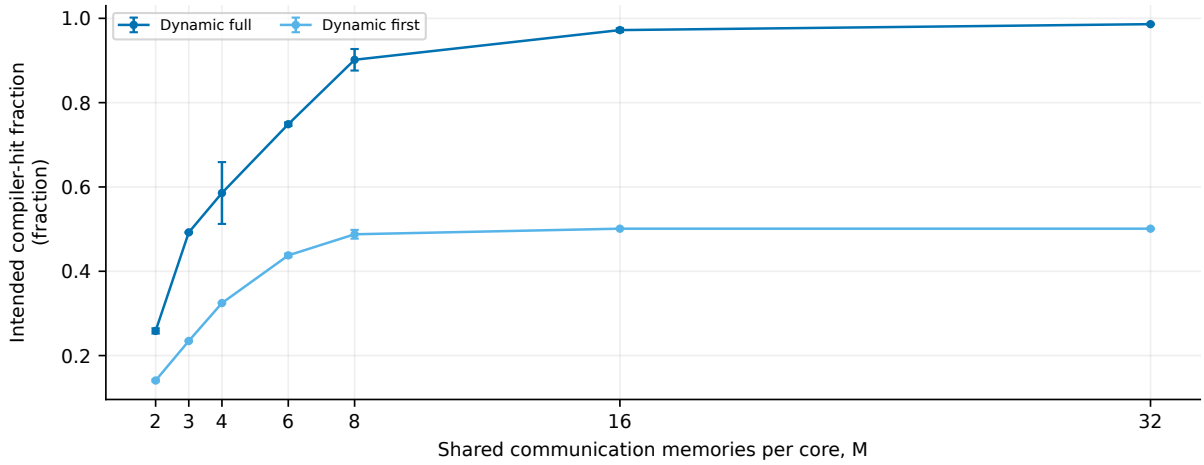


Figure 3.56: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2585 ± 0.0062	0.1409 ± 0.0026
3	n/a	n/a	n/a	0.4923 ± 0.0015	0.2346 ± 0.0013
4	n/a	n/a	n/a	0.5857 ± 0.0733	0.3246 ± 0.0007
6	n/a	n/a	n/a	0.7488 ± 0.0042	0.4377 ± 0.0042
8	n/a	n/a	n/a	0.9017 ± 0.0255	0.4877 ± 0.0104
16	n/a	n/a	n/a	0.9721 ± 0.0044	0.5010 ± 0.0011
32	n/a	n/a	n/a	0.9862 ± 0.0013	0.5010 ± 0.0011

Table 3.56: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback fraction

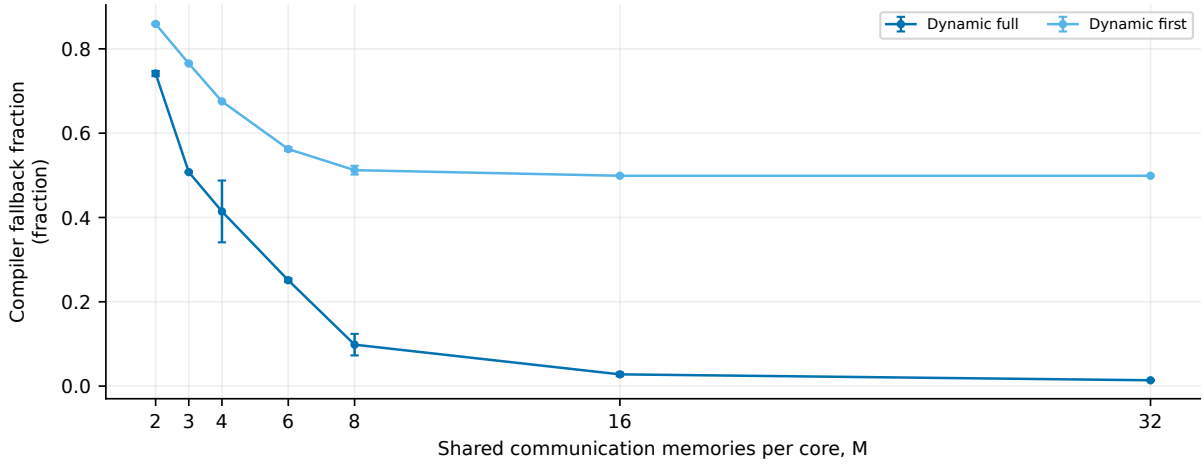


Figure 3.57: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.7415 ± 0.0062	0.8591 ± 0.0026
3	n/a	n/a	n/a	0.5077 ± 0.0015	0.7654 ± 0.0013
4	n/a	n/a	n/a	0.4143 ± 0.0733	0.6754 ± 0.0007
6	n/a	n/a	n/a	0.2512 ± 0.0042	0.5623 ± 0.0042
8	n/a	n/a	n/a	0.0983 ± 0.0255	0.5123 ± 0.0104
16	n/a	n/a	n/a	0.0279 ± 0.0044	0.4990 ± 0.0011
32	n/a	n/a	n/a	0.0138 ± 0.0013	0.4990 ± 0.0011

Table 3.57: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-cache waste

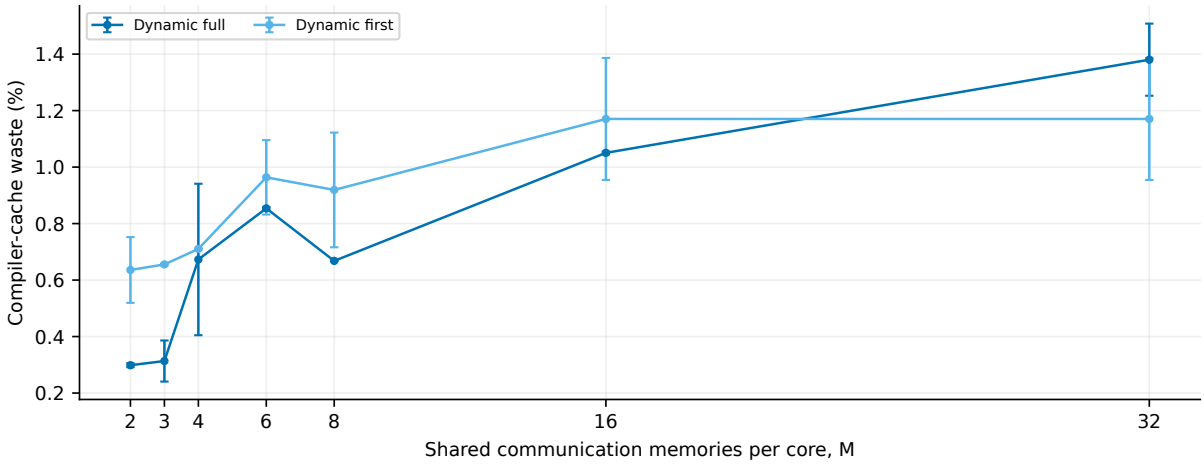


Figure 3.58: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2986 ± 0.0071	0.6358 ± 0.1164
3	n/a	n/a	n/a	0.3133 ± 0.0727	0.6554 ± 0.0035
4	n/a	n/a	n/a	0.6729 ± 0.2681	0.7103 ± 0.0016
6	n/a	n/a	n/a	0.8540 ± 0.0047	0.9638 ± 0.1318
8	n/a	n/a	n/a	0.6679 ± 0.0012	0.9191 ± 0.2030
16	n/a	n/a	n/a	1.050 ± 0.005	1.170 ± 0.216
32	n/a	n/a	n/a	1.380 ± 0.128	1.170 ± 0.216

Table 3.58: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol waste

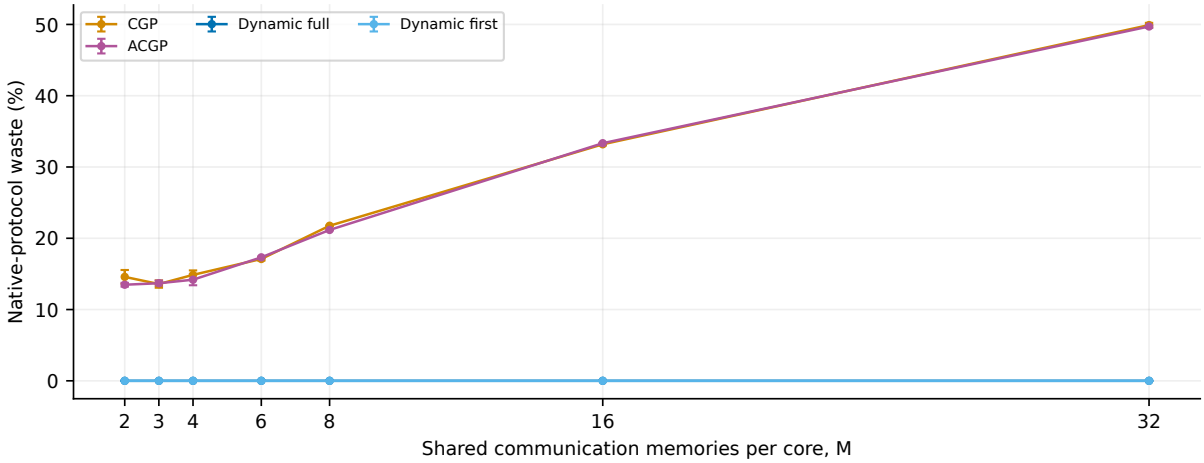


Figure 3.59: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	14.584 ± 0.965	13.483 ± 0.264	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	13.576 ± 0.514	13.689 ± 0.374	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	14.863 ± 0.627	14.186 ± 0.779	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	17.093 ± 0.215	17.325 ± 0.096	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	21.758 ± 0.013	21.168 ± 0.053	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	33.183 ± 0.156	33.336 ± 0.069	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	49.910 ± 0.312	49.715 ± 0.211	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.59: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-pair expiry

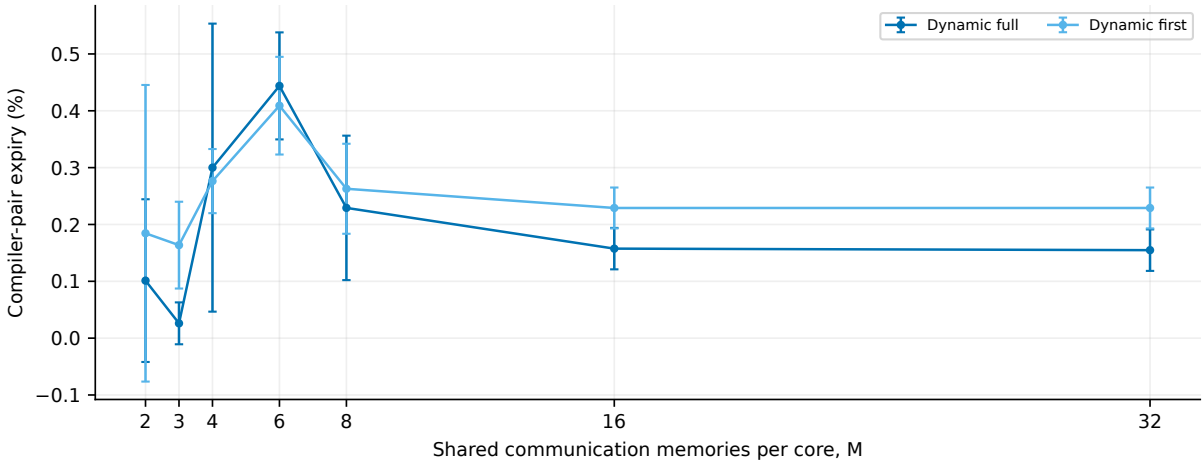


Figure 3.60: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.1012 ± 0.1431	0.1845 ± 0.2609
3	n/a	n/a	n/a	0.0261 ± 0.0368	0.1636 ± 0.0764
4	n/a	n/a	n/a	0.3000 ± 0.2534	0.2763 ± 0.0564
6	n/a	n/a	n/a	0.4438 ± 0.0942	0.4090 ± 0.0859
8	n/a	n/a	n/a	0.2292 ± 0.1271	0.2628 ± 0.0792
16	n/a	n/a	n/a	0.1575 ± 0.0364	0.2290 ± 0.0360
32	n/a	n/a	n/a	0.1548 ± 0.0365	0.2290 ± 0.0360

Table 3.60: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler-pair storage time

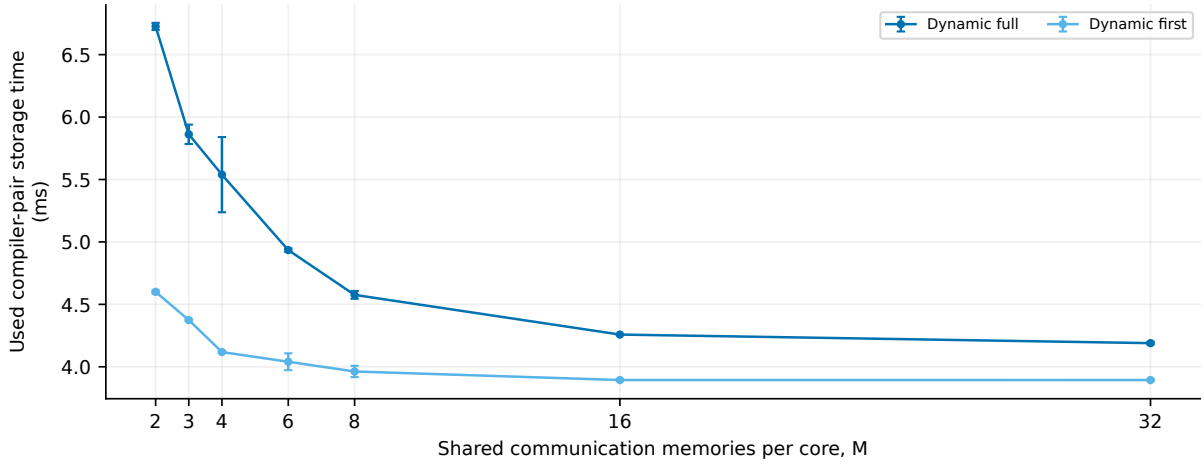


Figure 3.61: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	6.726 ± 0.029	4.600 ± 0.012
3	n/a	n/a	n/a	5.862 ± 0.078	4.374 ± 0.004
4	n/a	n/a	n/a	5.539 ± 0.301	4.118 ± 0.008
6	n/a	n/a	n/a	4.935 ± 0.013	4.040 ± 0.067
8	n/a	n/a	n/a	4.576 ± 0.031	3.962 ± 0.045
16	n/a	n/a	n/a	4.258 ± 0.004	3.894 ± 0.006
32	n/a	n/a	n/a	4.189 ± 0.010	3.894 ± 0.006

Table 3.61: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Delivered-hop throughput

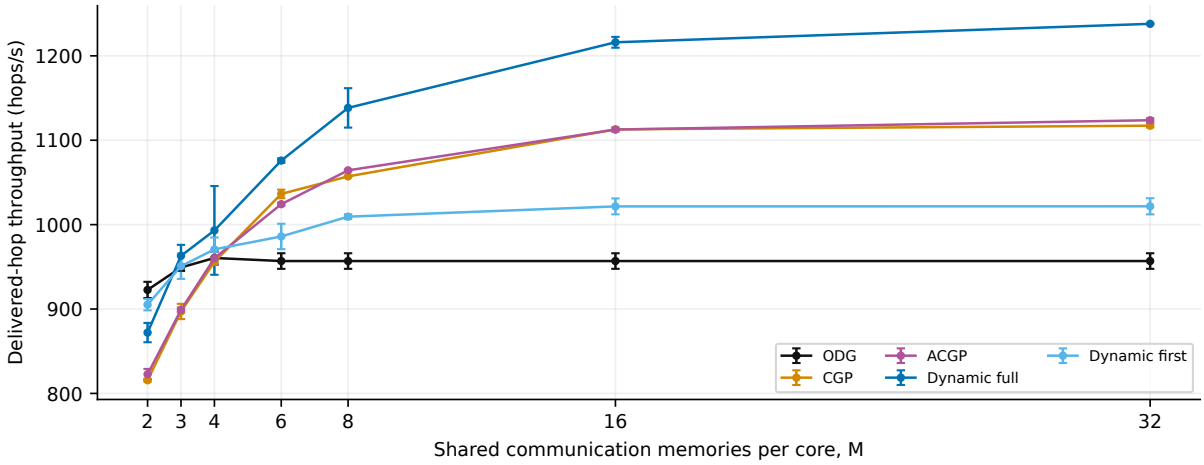


Figure 3.62: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	922.64 ± 9.60	815.59 ± 1.56	822.74 ± 6.27	872.09 ± 11.45	905.17 ± 6.74
3	949.24 ± 4.06	897.11 ± 9.06	898.90 ± 2.79	962.99 ± 13.06	950.73 ± 15.02
4	960.49 ± 7.66	955.82 ± 1.48	960.24 ± 7.66	993.15 ± 52.58	970.68 ± 14.08
6	956.85 ± 9.24	1036.39 ± 5.06	1024.22 ± 1.73	1075.89 ± 2.53	985.97 ± 15.04
8	956.85 ± 9.24	1057.15 ± 0.59	1064.32 ± 1.21	1138.33 ± 23.35	1009.43 ± 2.90
16	956.85 ± 9.24	1112.88 ± 0.48	1112.65 ± 2.46	1216.05 ± 6.42	1021.60 ± 9.41
32	956.85 ± 9.24	1117.24 ± 2.01	1123.71 ± 2.26	1237.92 ± 0.25	1021.71 ± 9.56

Table 3.62: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Completion fraction

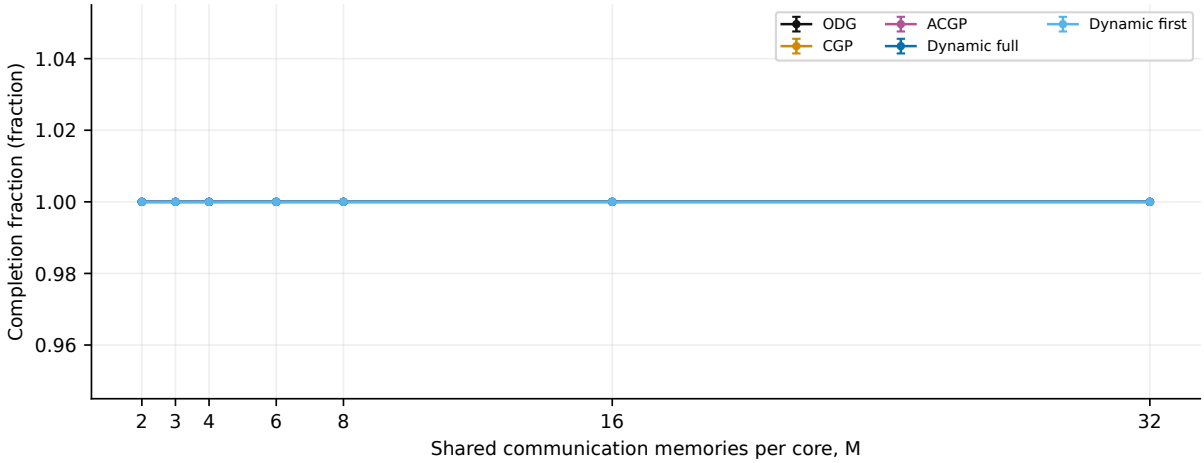


Figure 3.63: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
3	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
4	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
6	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
8	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
16	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
32	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000

Table 3.63: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum admission wait

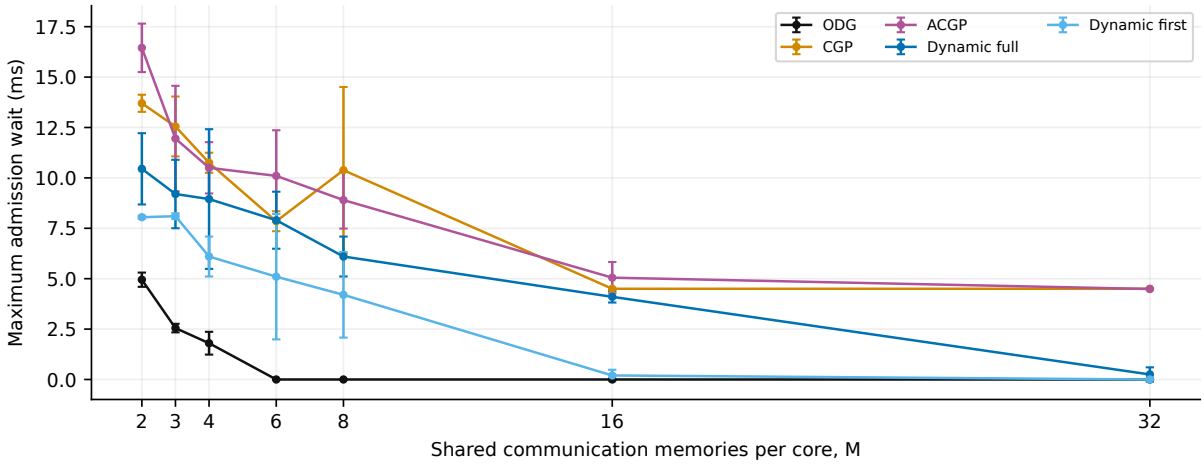


Figure 3.64: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	4.950 ± 0.354	13.700 ± 0.424	16.450 ± 1.202	10.450 ± 1.768	8.050 ± 0.071
3	2.550 ± 0.212	12.550 ± 1.485	11.950 ± 2.616	9.200 ± 1.697	8.100 ± 0.141
4	1.800 ± 0.566	10.752 ± 0.497	10.500 ± 1.273	8.950 ± 3.465	6.100 ± 0.990
6	0.0000 ± 0.0000	7.850 ± 0.495	10.100 ± 2.263	7.900 ± 1.414	5.100 ± 3.111
8	0.0000 ± 0.0000	10.382 ± 4.127	8.900 ± 1.414	6.100 ± 0.990	4.200 ± 2.121
16	0.0000 ± 0.0000	4.500 ± 0.000	5.050 ± 0.778	4.100 ± 0.283	0.2000 ± 0.2828
32	0.0000 ± 0.0000	4.500 ± 0.000	4.489 ± 0.016	0.2500 ± 0.3536	0.0000 ± 0.0000

Table 3.64: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with admission wait

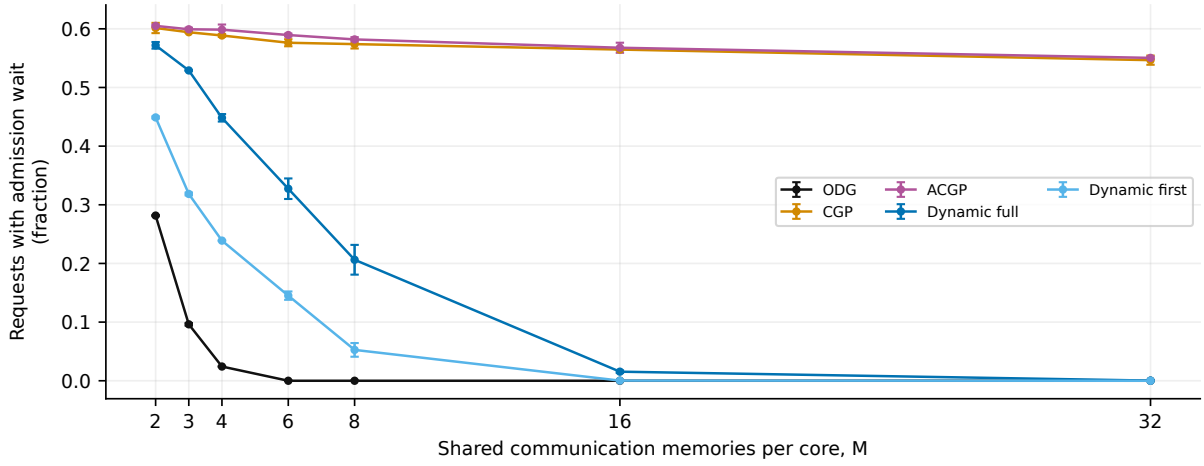


Figure 3.65: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.2816 ± 0.0009	0.6014 ± 0.0088	0.6050 ± 0.0018	0.5719 ± 0.0057	0.4489 ± 0.0018
3	0.0962 ± 0.0022	0.5942 ± 0.0011	0.5992 ± 0.0027	0.5290 ± 0.0005	0.3185 ± 0.0024
4	0.0243 ± 0.0000	0.5886 ± 0.0024	0.5986 ± 0.0088	0.4483 ± 0.0064	0.2389 ± 0.0007
6	0.0000 ± 0.0000	0.5762 ± 0.0060	0.5894 ± 0.0024	0.3274 ± 0.0175	0.1451 ± 0.0071
8	0.0000 ± 0.0000	0.5739 ± 0.0075	0.5819 ± 0.0038	0.2063 ± 0.0254	0.0526 ± 0.0117
16	0.0000 ± 0.0000	0.5646 ± 0.0009	0.5677 ± 0.0086	0.0155 ± 0.0022	0.0003 ± 0.0004
32	0.0000 ± 0.0000	0.5466 ± 0.0078	0.5504 ± 0.0020	0.0003 ± 0.0004	0.0000 ± 0.0000

Table 3.65: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded reservation-setup counter

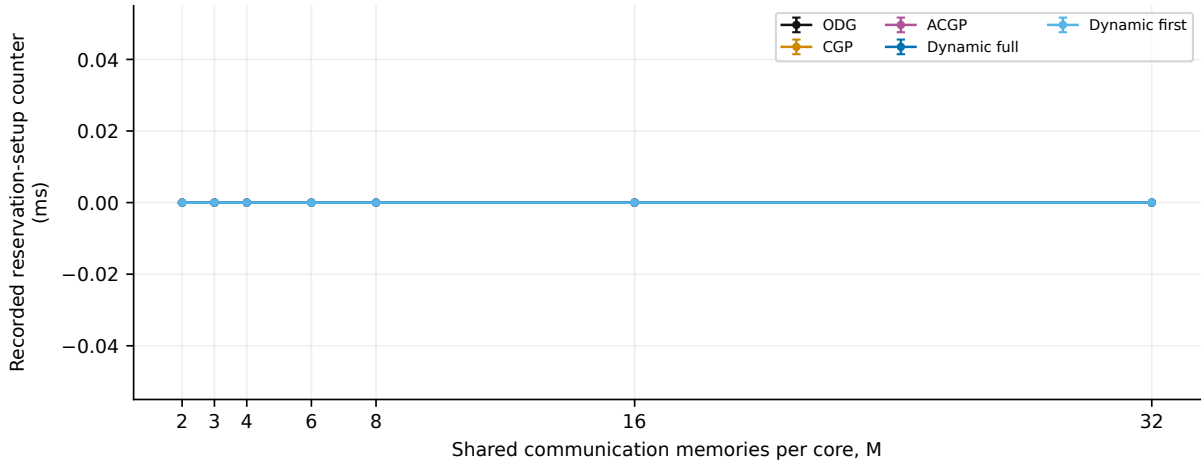


Figure 3.66: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.66: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean generation/service time

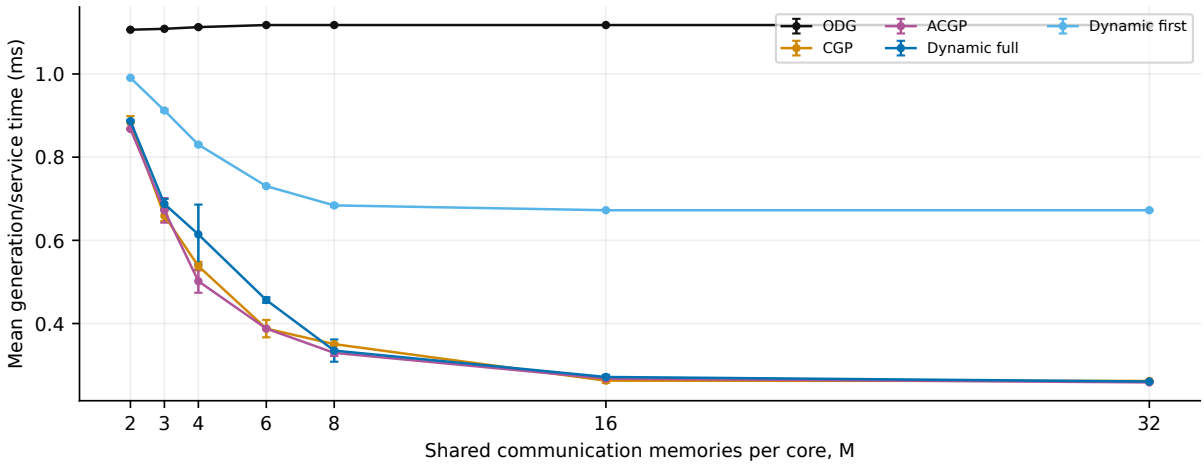


Figure 3.67: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.106 ± 0.000	0.8831 ± 0.0155	0.8679 ± 0.0006	0.8866 ± 0.0024	0.9907 ± 0.0007
3	1.109 ± 0.000	0.6591 ± 0.0124	0.6720 ± 0.0296	0.6876 ± 0.0120	0.9122 ± 0.0037
4	1.113 ± 0.002	0.5381 ± 0.0104	0.5018 ± 0.0279	0.6142 ± 0.0718	0.8301 ± 0.0028
6	1.118 ± 0.000	0.3878 ± 0.0210	0.3878 ± 0.0002	0.4565 ± 0.0067	0.7303 ± 0.0022
8	1.118 ± 0.000	0.3505 ± 0.0028	0.3295 ± 0.0074	0.3349 ± 0.0267	0.6840 ± 0.0037
16	1.118 ± 0.000	0.2627 ± 0.0052	0.2676 ± 0.0012	0.2715 ± 0.0052	0.6724 ± 0.0011
32	1.118 ± 0.000	0.2620 ± 0.0002	0.2585 ± 0.0008	0.2606 ± 0.0010	0.6724 ± 0.0011

Table 3.67: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded retry-wait time

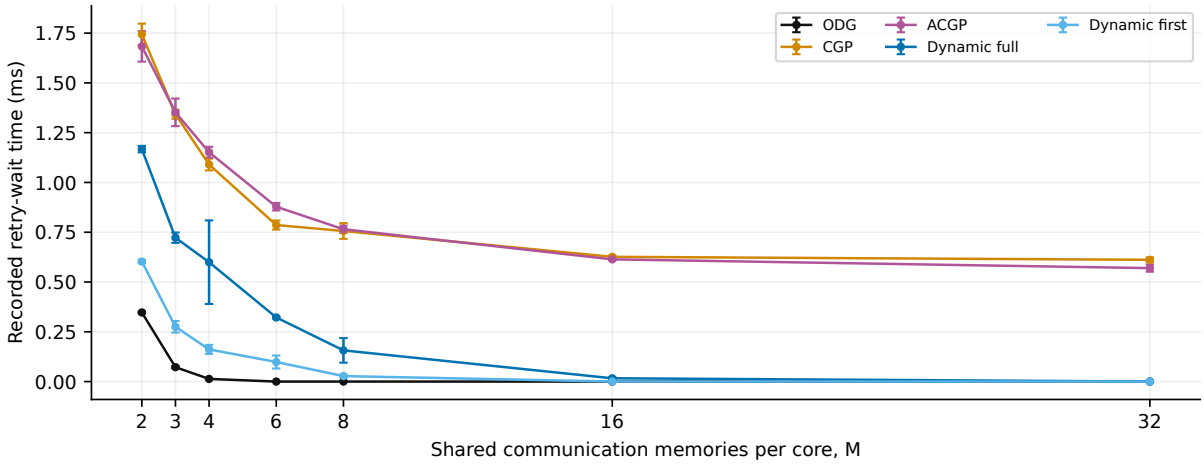


Figure 3.68: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.3471 ± 0.0048	1.744 ± 0.054	1.683 ± 0.077	1.167 ± 0.016	0.6028 ± 0.0088
3	0.0722 ± 0.0055	1.343 ± 0.022	1.352 ± 0.069	0.7225 ± 0.0260	0.2750 ± 0.0290
4	0.0133 ± 0.0009	1.090 ± 0.030	1.152 ± 0.027	0.5996 ± 0.2099	0.1616 ± 0.0227
6	0.0000 ± 0.0000	0.7861 ± 0.0227	0.8781 ± 0.0188	0.3220 ± 0.0051	0.0983 ± 0.0326
8	0.0000 ± 0.0000	0.7562 ± 0.0396	0.7651 ± 0.0183	0.1567 ± 0.0618	0.0275 ± 0.0080
16	0.0000 ± 0.0000	0.6264 ± 0.0058	0.6138 ± 0.0041	0.0165 ± 0.0049	0.0001 ± 0.0001
32	0.0000 ± 0.0000	0.6115 ± 0.0121	0.5697 ± 0.0179	0.0001 ± 0.0002	0.0000 ± 0.0000

Table 3.68: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Request retries

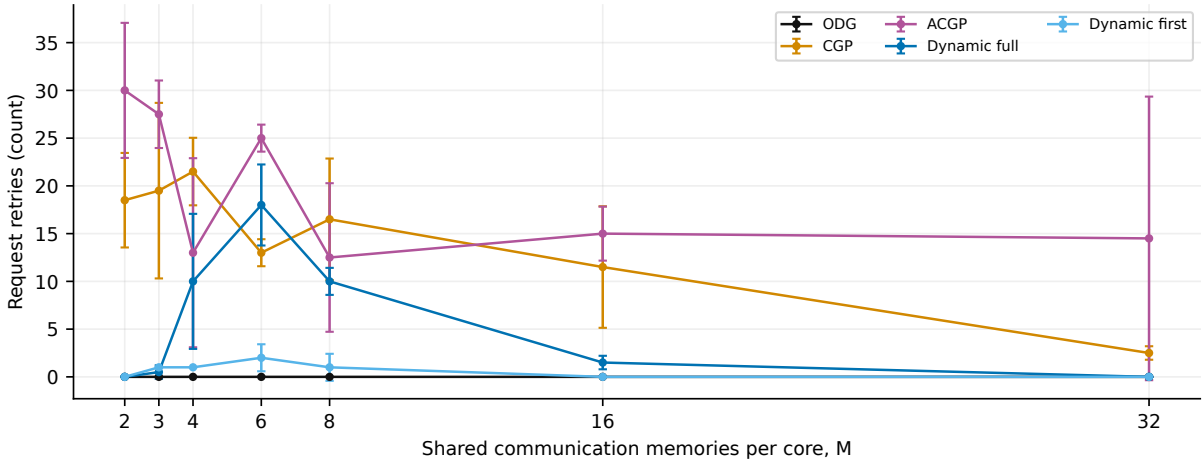


Figure 3.69: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	18.500 ± 4.950	30.000 ± 7.071	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	19.500 ± 9.192	27.500 ± 3.536	0.5000 ± 0.7071	1.000 ± 0.000
4	0.0000 ± 0.0000	21.500 ± 3.536	13.000 ± 9.899	10.000 ± 7.071	1.000 ± 0.000
6	0.0000 ± 0.0000	13.000 ± 1.414	25.000 ± 1.414	18.000 ± 4.243	2.000 ± 1.414
8	0.0000 ± 0.0000	16.500 ± 6.364	12.500 ± 7.778	10.000 ± 1.414	1.000 ± 1.414
16	0.0000 ± 0.0000	11.500 ± 6.364	15.000 ± 2.828	1.500 ± 0.707	0.0000 ± 0.0000
32	0.0000 ± 0.0000	2.500 ± 0.707	14.500 ± 14.849	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.69: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with retries

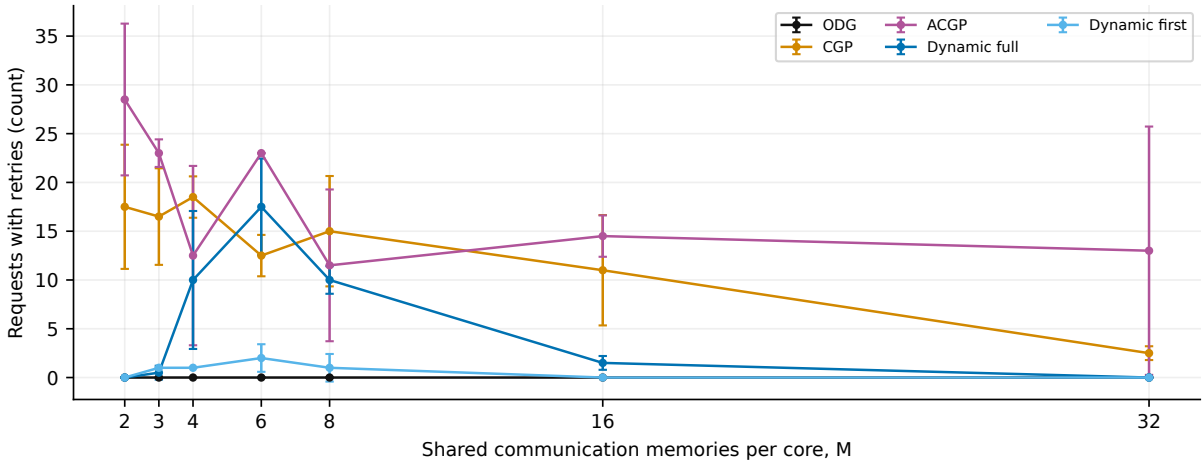


Figure 3.70: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	17.500 ± 6.364	28.500 ± 7.778	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	16.500 ± 4.950	23.000 ± 1.414	0.5000 ± 0.7071	1.000 ± 0.000
4	0.0000 ± 0.0000	18.500 ± 2.121	12.500 ± 9.192	10.000 ± 7.071	1.000 ± 0.000
6	0.0000 ± 0.0000	12.500 ± 2.121	23.000 ± 0.000	17.500 ± 4.950	2.000 ± 1.414
8	0.0000 ± 0.0000	15.000 ± 5.657	11.500 ± 7.778	10.000 ± 1.414	1.000 ± 1.414
16	0.0000 ± 0.0000	11.000 ± 5.657	14.500 ± 2.121	1.500 ± 0.707	0.0000 ± 0.0000
32	0.0000 ± 0.0000	2.500 ± 0.707	13.000 ± 12.728	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.70: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol generated-pair counter

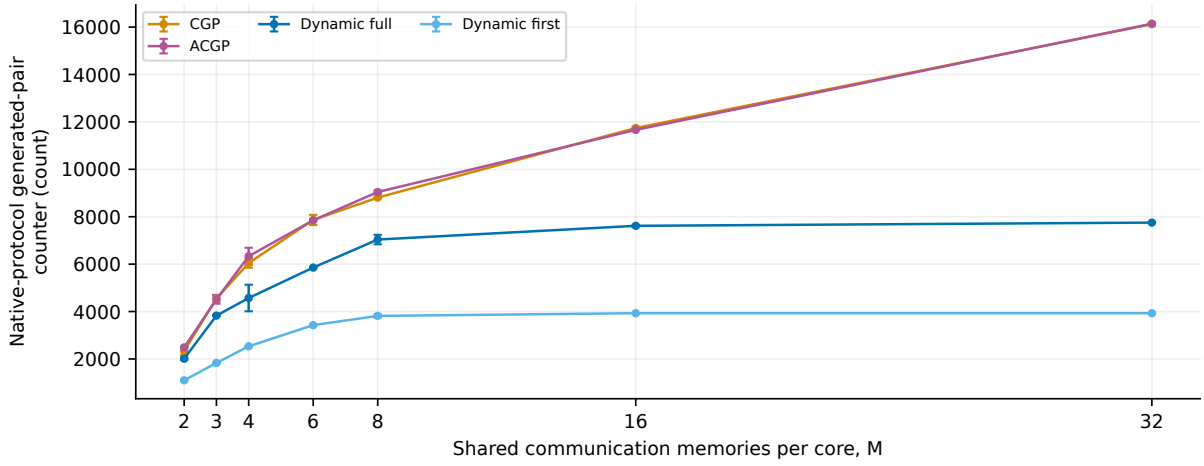


Figure 3.71: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	2337.00 ± 173.95	2485.00 ± 38.18	2010.00 ± 48.08	1099.00 ± 21.21
3	n/a	4547.00 ± 120.21	4517.00 ± 185.26	3828.00 ± 14.14	1831.00 ± 9.90
4	n/a	6046.00 ± 197.99	6333.00 ± 357.80	4570.00 ± 560.03	2534.00 ± 5.66
6	n/a	7864.00 ± 214.96	7850.00 ± 5.66	5855.00 ± 32.53	3426.00 ± 28.28
8	n/a	8806.00 ± 31.11	9042.00 ± 70.71	7037.00 ± 199.40	3816.00 ± 73.54
16	n/a	11741.00 ± 55.15	11663.00 ± 1.41	7616.00 ± 33.94	3930.00 ± 0.00
32	n/a	16125.00 ± 52.33	16142.00 ± 25.46	7752.00 ± 0.00	3930.00 ± 0.00

Table 3.71: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol used-pair counter

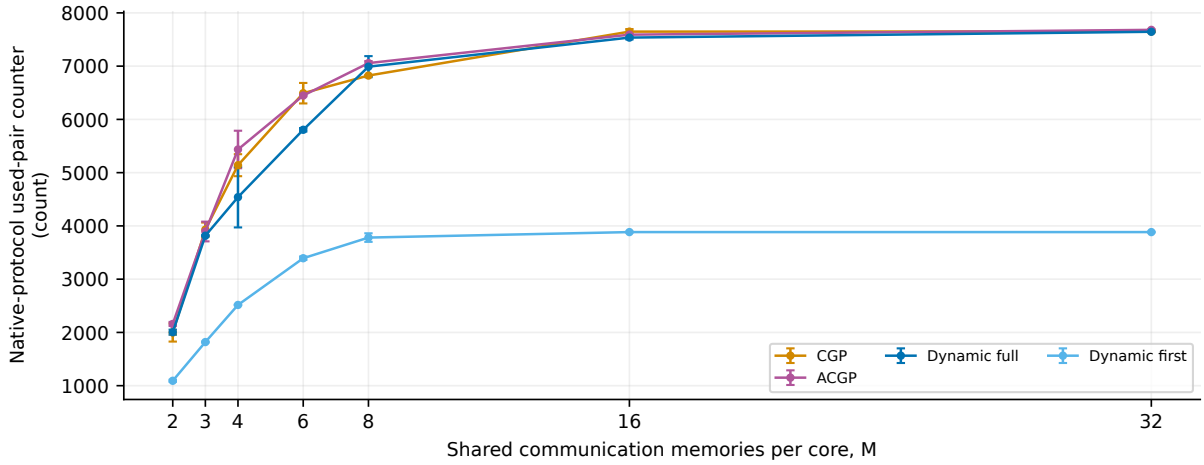


Figure 3.72: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	1998.00 ± 169.71	2159.00 ± 38.18	2004.00 ± 48.08	1092.00 ± 19.80
3	n/a	3930.00 ± 132.94	3895.00 ± 185.26	3816.00 ± 11.31	1819.00 ± 9.90
4	n/a	5140.00 ± 206.48	5435.00 ± 352.14	4540.00 ± 568.51	2516.00 ± 5.66
6	n/a	6492.00 ± 192.33	6448.00 ± 14.14	5805.00 ± 32.53	3393.00 ± 32.53
8	n/a	6823.00 ± 9.90	7057.00 ± 38.18	6990.00 ± 197.99	3781.00 ± 80.61
16	n/a	7648.00 ± 48.08	7591.00 ± 7.07	7536.00 ± 33.94	3884.00 ± 8.49
32	n/a	7651.00 ± 12.73	7681.00 ± 12.73	7645.00 ± 9.90	3884.00 ± 8.49

Table 3.72: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol unused-pair counter

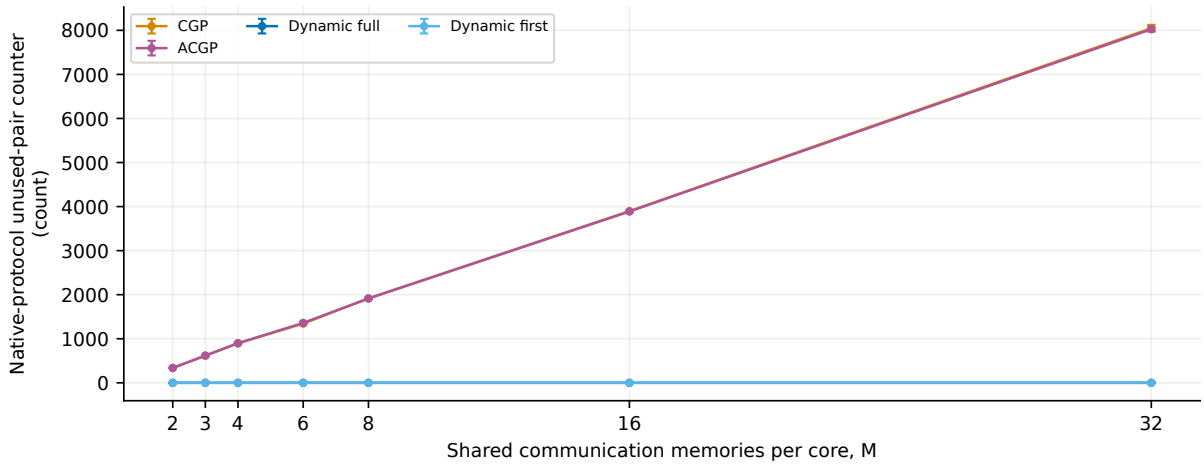


Figure 3.73: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	340.00 ± 2.83	335.00 ± 1.41	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	617.00 ± 7.07	618.00 ± 8.49	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	898.00 ± 8.49	897.00 ± 1.41	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	1344.00 ± 19.80	1360.00 ± 8.49	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	1916.00 ± 5.66	1914.00 ± 19.80	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	3896.00 ± 0.00	3888.00 ± 8.49	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	8048.00 ± 76.37	8025.00 ± 46.67	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.73: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Scheduled compiler preparations

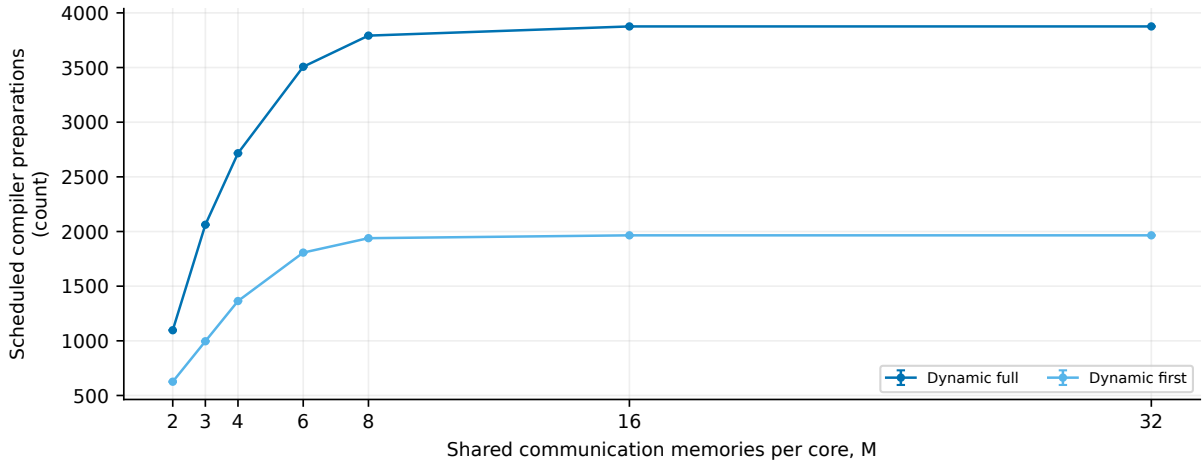


Figure 3.74: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1097.00 ± 0.00	626.00 ± 0.00
3	n/a	n/a	n/a	2062.00 ± 0.00	996.00 ± 0.00
4	n/a	n/a	n/a	2716.00 ± 0.00	1364.00 ± 0.00
6	n/a	n/a	n/a	3507.00 ± 0.00	1807.00 ± 0.00
8	n/a	n/a	n/a	3792.00 ± 0.00	1939.00 ± 0.00
16	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.74: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner-blocked preparations

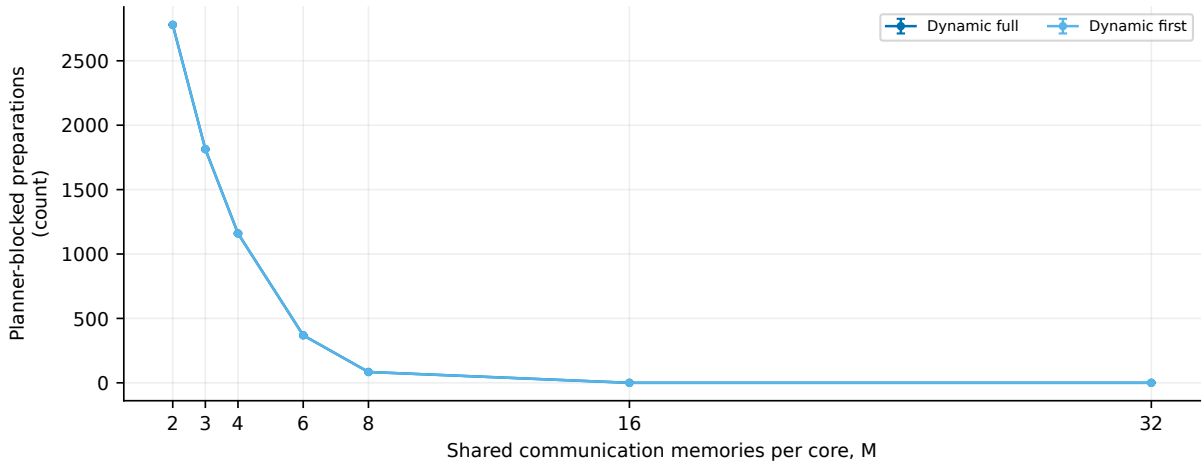


Figure 3.75: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2779.00 ± 0.00	2779.00 ± 0.00
3	n/a	n/a	n/a	1814.00 ± 0.00	1814.00 ± 0.00
4	n/a	n/a	n/a	1160.00 ± 0.00	1160.00 ± 0.00
6	n/a	n/a	n/a	369.00 ± 0.00	369.00 ± 0.00
8	n/a	n/a	n/a	84.000 ± 0.000	84.000 ± 0.000
16	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.75: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner peak compiler memory

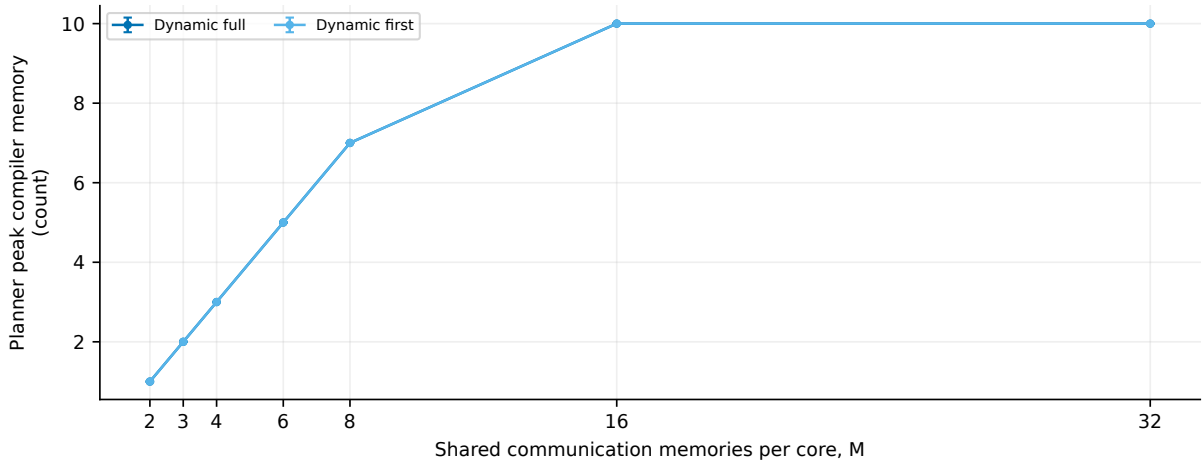


Figure 3.76: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1.000 ± 0.000	1.000 ± 0.000
3	n/a	n/a	n/a	2.000 ± 0.000	2.000 ± 0.000
4	n/a	n/a	n/a	3.000 ± 0.000	3.000 ± 0.000
6	n/a	n/a	n/a	5.000 ± 0.000	5.000 ± 0.000
8	n/a	n/a	n/a	7.000 ± 0.000	7.000 ± 0.000
16	n/a	n/a	n/a	10.000 ± 0.000	10.000 ± 0.000
32	n/a	n/a	n/a	10.000 ± 0.000	10.000 ± 0.000

Table 3.76: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler preparation admission attempts

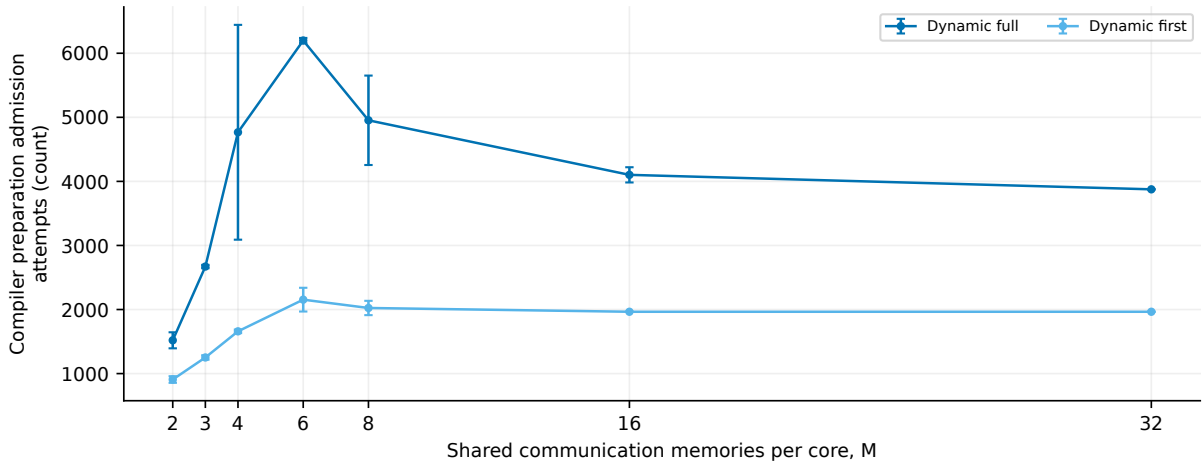


Figure 3.77: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1519.50 ± 125.16	907.50 ± 51.62
3	n/a	n/a	n/a	2670.50 ± 26.16	1251.50 ± 34.65
4	n/a	n/a	n/a	4766.50 ± 1676.55	1659.50 ± 27.58
6	n/a	n/a	n/a	6198.50 ± 40.31	2154.00 ± 185.26
8	n/a	n/a	n/a	4953.50 ± 697.91	2024.00 ± 111.72
16	n/a	n/a	n/a	4102.00 ± 118.79	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.77: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Launched compiler preparations

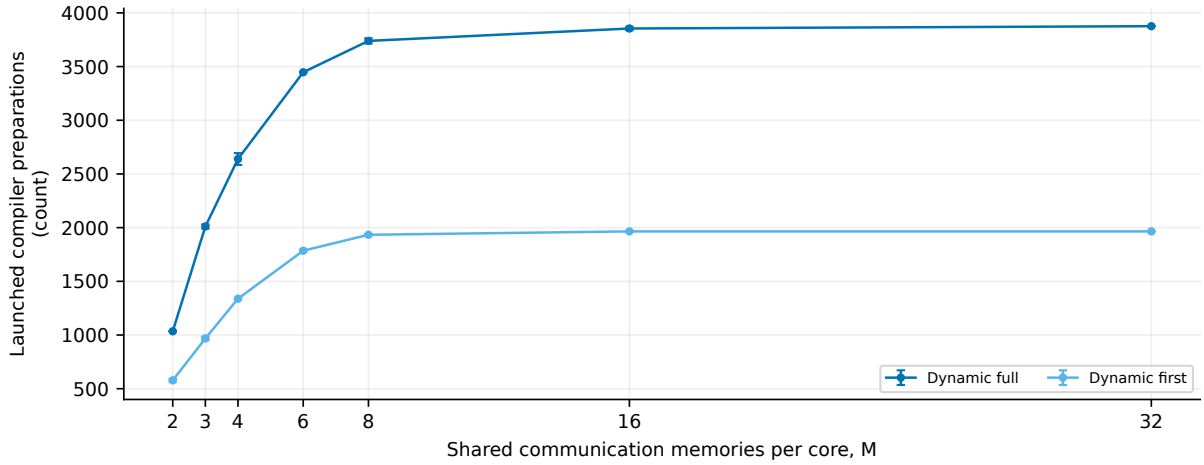


Figure 3.78: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1035.00 ± 2.83	578.00 ± 12.73
3	n/a	n/a	n/a	2010.50 ± 19.09	968.00 ± 16.97
4	n/a	n/a	n/a	2639.00 ± 55.15	1338.00 ± 7.07
6	n/a	n/a	n/a	3447.00 ± 1.41	1785.00 ± 9.90
8	n/a	n/a	n/a	3739.00 ± 24.04	1933.50 ± 6.36
16	n/a	n/a	n/a	3854.50 ± 16.26	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.78: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Accepted compiler preparations

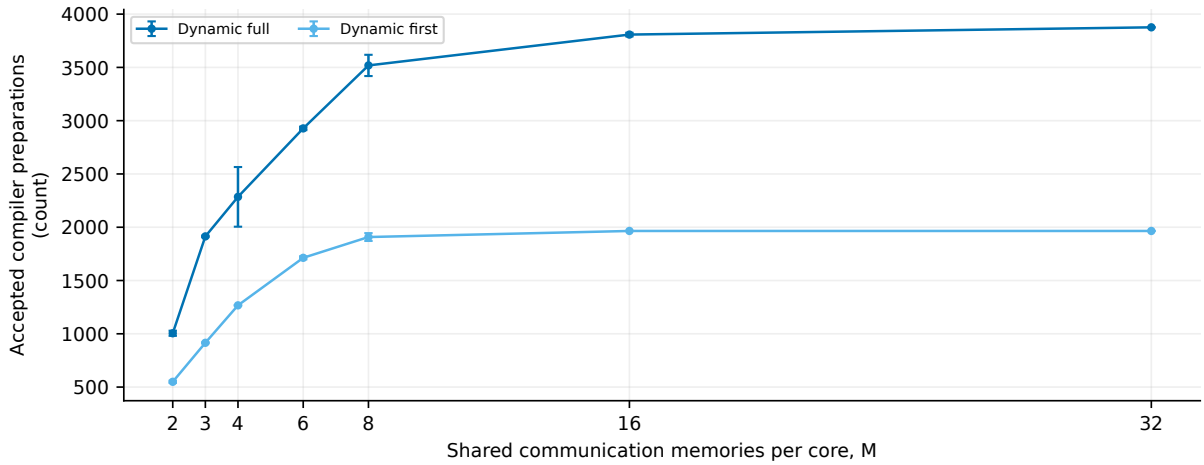


Figure 3.79: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1005.00 ± 24.04	549.50 ± 10.61
3	n/a	n/a	n/a	1914.00 ± 7.07	915.50 ± 4.95
4	n/a	n/a	n/a	2285.00 ± 280.01	1267.00 ± 2.83
6	n/a	n/a	n/a	2927.50 ± 16.26	1713.00 ± 14.14
8	n/a	n/a	n/a	3518.50 ± 99.70	1908.00 ± 36.77
16	n/a	n/a	n/a	3808.00 ± 16.97	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.79: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Rejected compiler preparations

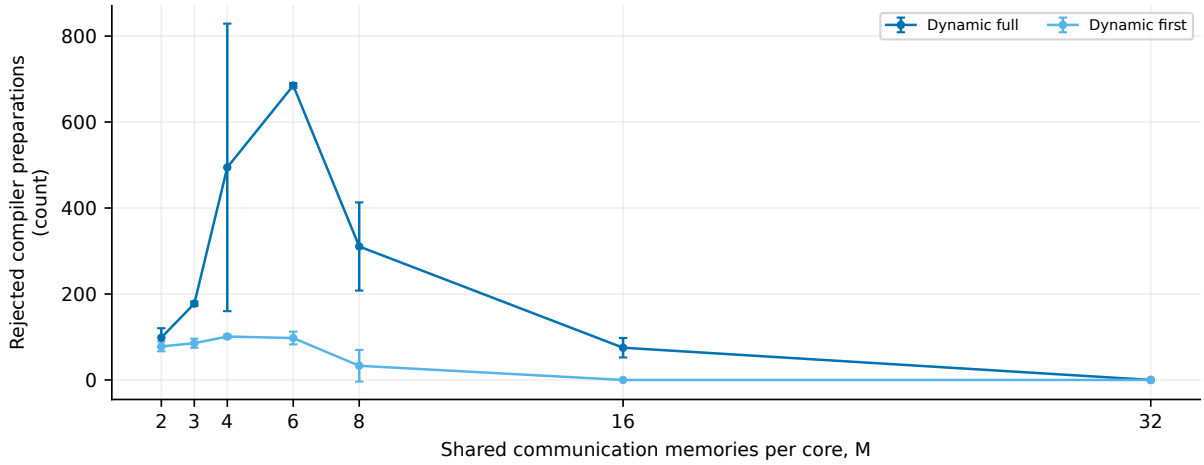


Figure 3.80: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	98.500 ± 21.920	78.000 ± 11.314
3	n/a	n/a	n/a	177.50 ± 4.95	85.500 ± 10.607
4	n/a	n/a	n/a	494.50 ± 334.46	101.00 ± 4.24
6	n/a	n/a	n/a	685.00 ± 5.66	97.500 ± 14.849
8	n/a	n/a	n/a	310.50 ± 102.53	33.000 ± 36.770
16	n/a	n/a	n/a	75.000 ± 22.627	0.0000 ± 0.0000
32	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.80: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-ready request count

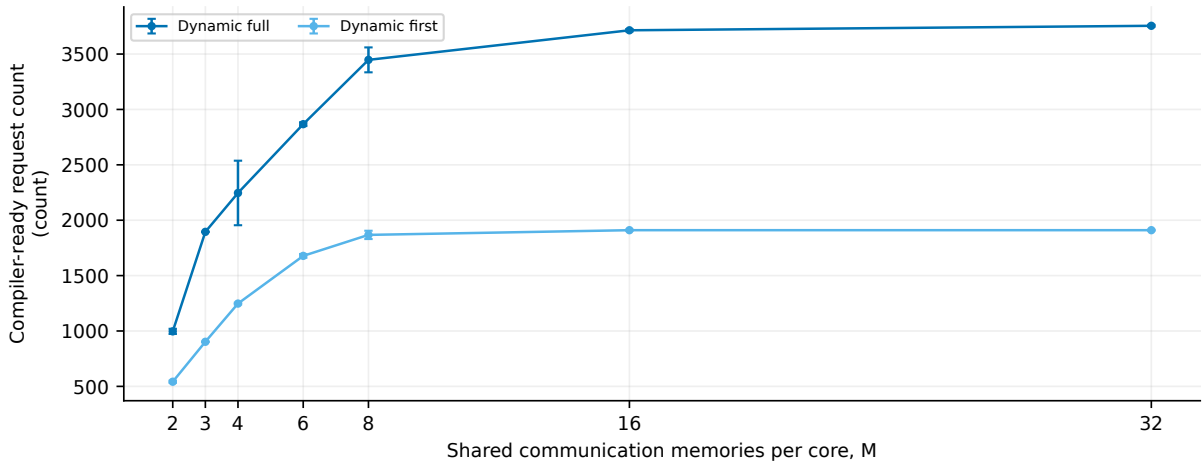


Figure 3.81: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	996.50 ± 23.33	542.00 ± 9.90
3	n/a	n/a	n/a	1895.00 ± 1.41	902.50 ± 2.12
4	n/a	n/a	n/a	2246.00 ± 291.33	1247.50 ± 7.78
6	n/a	n/a	n/a	2867.00 ± 16.97	1678.00 ± 16.97
8	n/a	n/a	n/a	3447.50 ± 112.43	1867.50 ± 37.48
16	n/a	n/a	n/a	3714.50 ± 10.61	1910.00 ± 4.24
32	n/a	n/a	n/a	3755.00 ± 8.49	1910.00 ± 4.24

Table 3.81: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit count

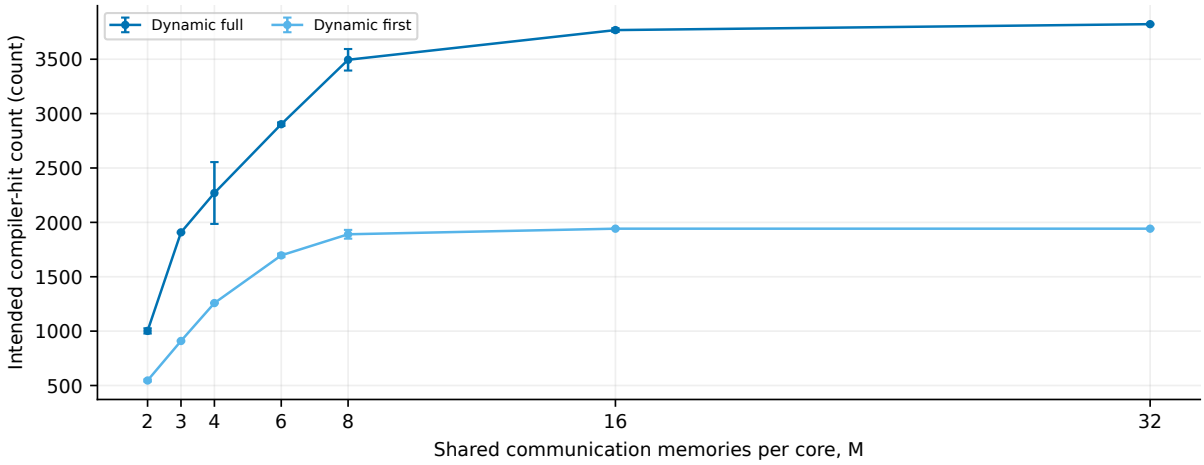


Figure 3.82: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1002.00 ± 24.04	546.00 ± 9.90
3	n/a	n/a	n/a	1908.00 ± 5.66	909.50 ± 4.95
4	n/a	n/a	n/a	2270.00 ± 284.26	1258.00 ± 2.83
6	n/a	n/a	n/a	2902.50 ± 16.26	1696.50 ± 16.26
8	n/a	n/a	n/a	3495.00 ± 98.99	1890.50 ± 40.31
16	n/a	n/a	n/a	3768.00 ± 16.97	1942.00 ± 4.24
32	n/a	n/a	n/a	3822.50 ± 4.95	1942.00 ± 4.24

Table 3.82: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-not-ready request count

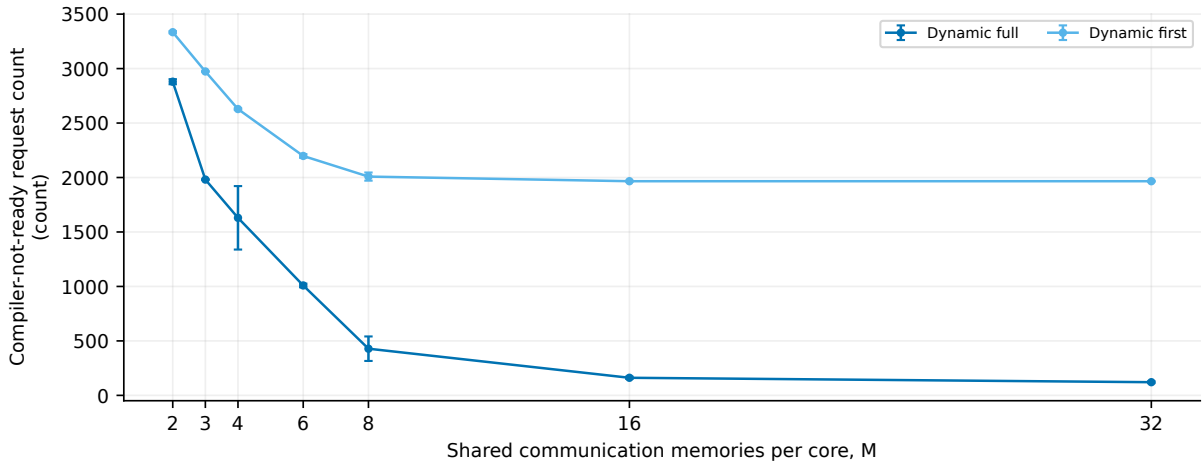


Figure 3.83: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2879.50 ± 23.33	3334.00 ± 9.90
3	n/a	n/a	n/a	1981.00 ± 1.41	2973.50 ± 2.12
4	n/a	n/a	n/a	1630.00 ± 291.33	2628.50 ± 7.78
6	n/a	n/a	n/a	1009.00 ± 16.97	2198.00 ± 16.97
8	n/a	n/a	n/a	428.50 ± 112.43	2008.50 ± 37.48
16	n/a	n/a	n/a	161.50 ± 10.61	1966.00 ± 4.24
32	n/a	n/a	n/a	121.00 ± 8.49	1966.00 ± 4.24

Table 3.83: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Late compiler-pair uses

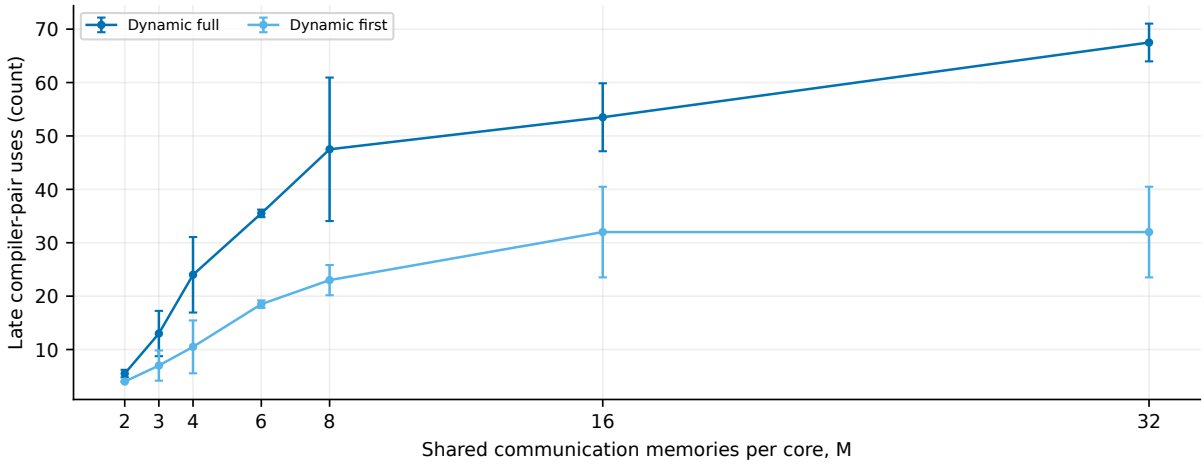


Figure 3.84: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	5.500 ± 0.707	4.000 ± 0.000
3	n/a	n/a	n/a	13.000 ± 4.243	7.000 ± 2.828
4	n/a	n/a	n/a	24.000 ± 7.071	10.500 ± 4.950
6	n/a	n/a	n/a	35.500 ± 0.707	18.500 ± 0.707
8	n/a	n/a	n/a	47.500 ± 13.435	23.000 ± 2.828
16	n/a	n/a	n/a	53.500 ± 6.364	32.000 ± 8.485
32	n/a	n/a	n/a	67.500 ± 3.536	32.000 ± 8.485

Table 3.84: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback count

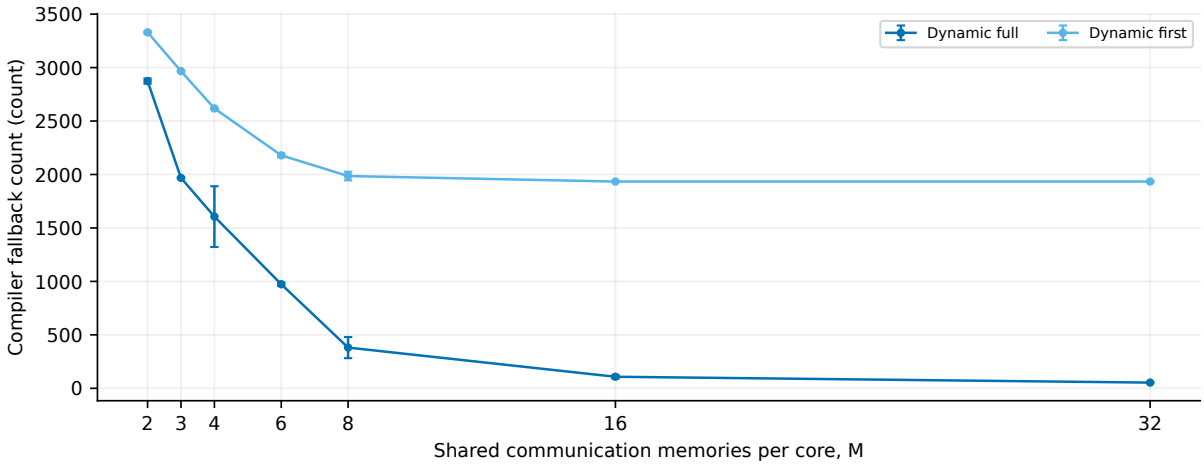


Figure 3.85: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2874.00 ± 24.04	3330.00 ± 9.90
3	n/a	n/a	n/a	1968.00 ± 5.66	2966.50 ± 4.95
4	n/a	n/a	n/a	1606.00 ± 284.26	2618.00 ± 2.83
6	n/a	n/a	n/a	973.50 ± 16.26	2179.50 ± 16.26
8	n/a	n/a	n/a	381.00 ± 98.99	1985.50 ± 40.31
16	n/a	n/a	n/a	108.00 ± 16.97	1934.00 ± 4.24
32	n/a	n/a	n/a	53.500 ± 4.950	1934.00 ± 4.24

Table 3.85: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Generated compiler pairs

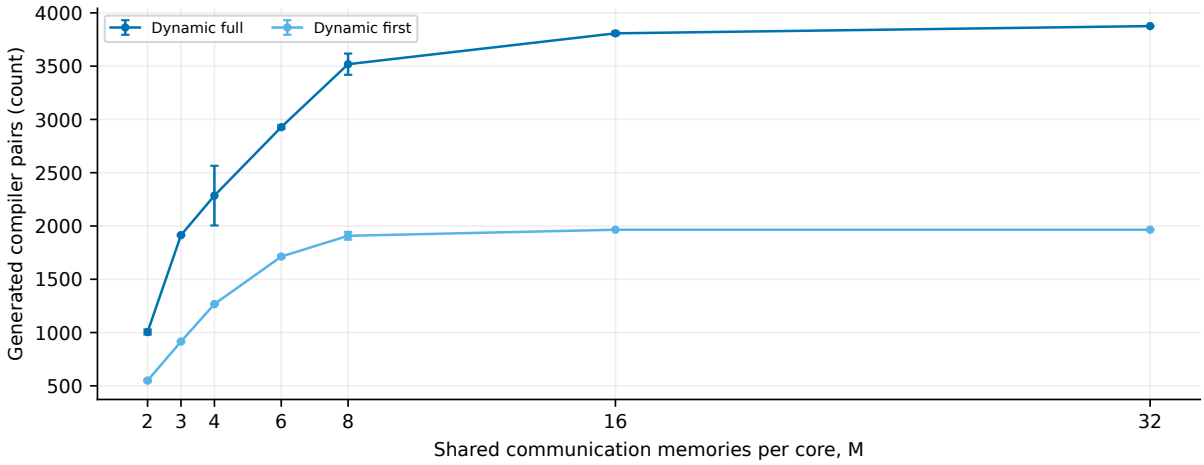


Figure 3.86: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1005.00 ± 24.04	549.50 ± 10.61
3	n/a	n/a	n/a	1914.00 ± 7.07	915.50 ± 4.95
4	n/a	n/a	n/a	2285.00 ± 280.01	1267.00 ± 2.83
6	n/a	n/a	n/a	2927.50 ± 16.26	1713.00 ± 14.14
8	n/a	n/a	n/a	3518.50 ± 99.70	1908.00 ± 36.77
16	n/a	n/a	n/a	3808.00 ± 16.97	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.86: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler pairs

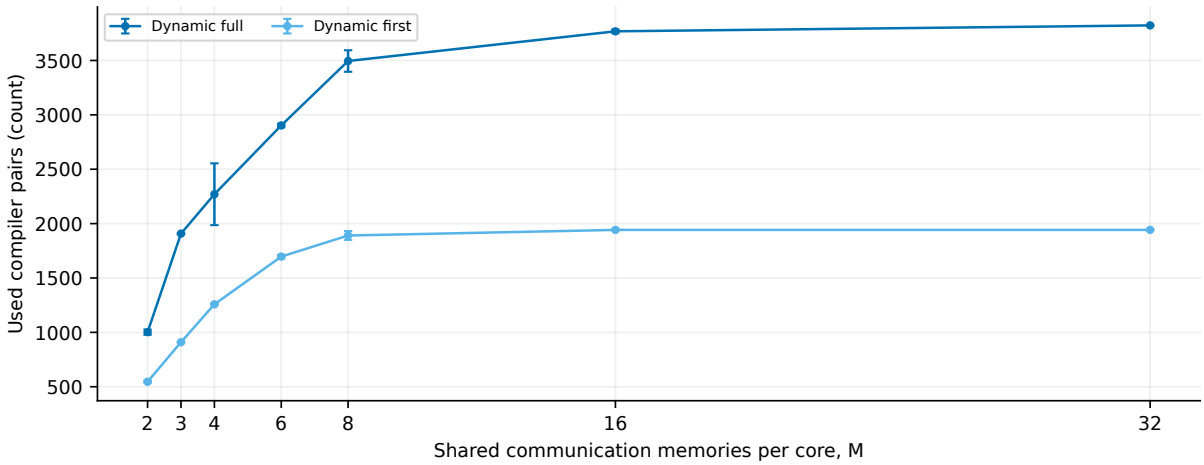


Figure 3.87: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1002.00 ± 24.04	546.00 ± 9.90
3	n/a	n/a	n/a	1908.00 ± 5.66	909.50 ± 4.95
4	n/a	n/a	n/a	2270.00 ± 284.26	1258.00 ± 2.83
6	n/a	n/a	n/a	2902.50 ± 16.26	1696.50 ± 16.26
8	n/a	n/a	n/a	3495.00 ± 98.99	1890.50 ± 40.31
16	n/a	n/a	n/a	3768.00 ± 16.97	1942.00 ± 4.24
32	n/a	n/a	n/a	3822.50 ± 4.95	1942.00 ± 4.24

Table 3.87: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Expired compiler pairs

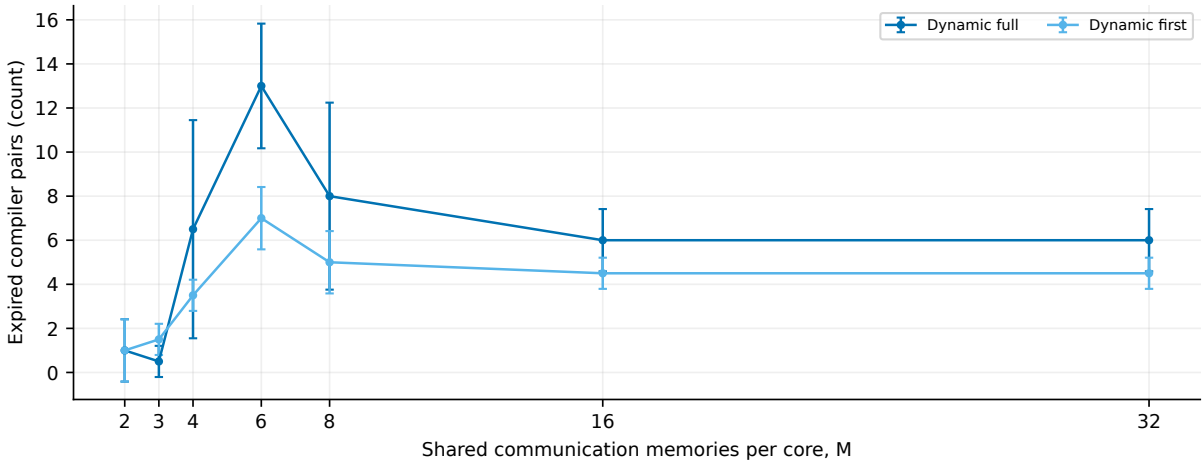


Figure 3.88: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1.000 ± 1.414	1.000 ± 1.414
3	n/a	n/a	n/a	0.5000 ± 0.7071	1.500 ± 0.707
4	n/a	n/a	n/a	6.500 ± 4.950	3.500 ± 0.707
6	n/a	n/a	n/a	13.000 ± 2.828	7.000 ± 1.414
8	n/a	n/a	n/a	8.000 ± 4.243	5.000 ± 1.414
16	n/a	n/a	n/a	6.000 ± 1.414	4.500 ± 0.707
32	n/a	n/a	n/a	6.000 ± 1.414	4.500 ± 0.707

Table 3.88: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Remaining compiler pairs

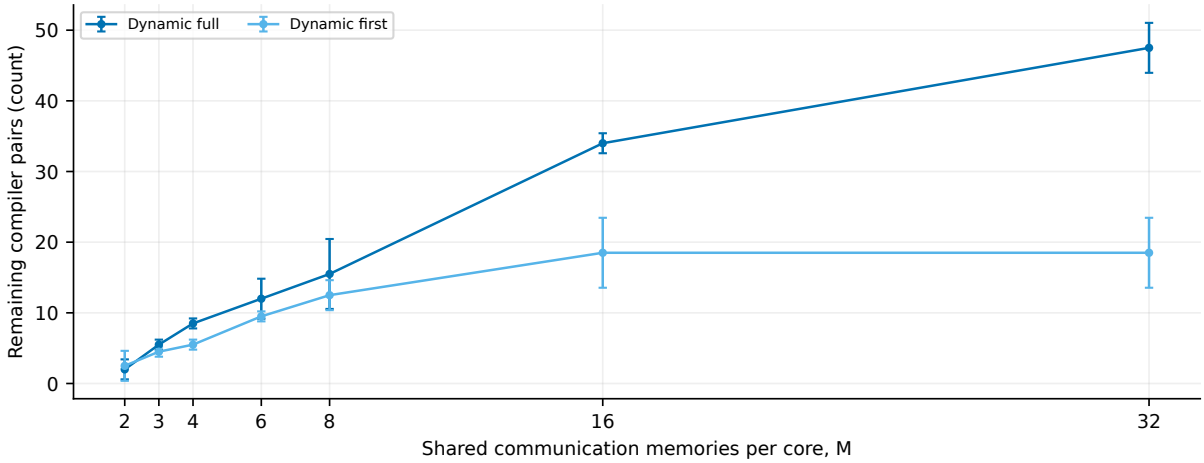


Figure 3.89: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2.000 ± 1.414	2.500 ± 2.121
3	n/a	n/a	n/a	5.500 ± 0.707	4.500 ± 0.707
4	n/a	n/a	n/a	8.500 ± 0.707	5.500 ± 0.707
6	n/a	n/a	n/a	12.000 ± 2.828	9.500 ± 0.707
8	n/a	n/a	n/a	15.500 ± 4.950	12.500 ± 2.121
16	n/a	n/a	n/a	34.000 ± 1.414	18.500 ± 4.950
32	n/a	n/a	n/a	47.500 ± 3.536	18.500 ± 4.950

Table 3.89: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at creation

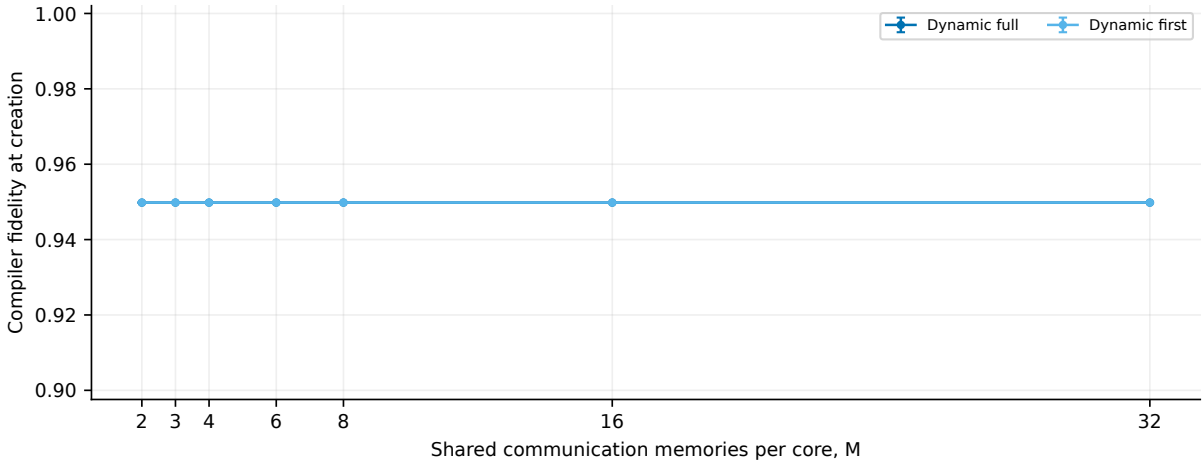


Figure 3.90: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
3	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
4	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
6	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
8	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
16	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
32	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000

Table 3.90: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at use

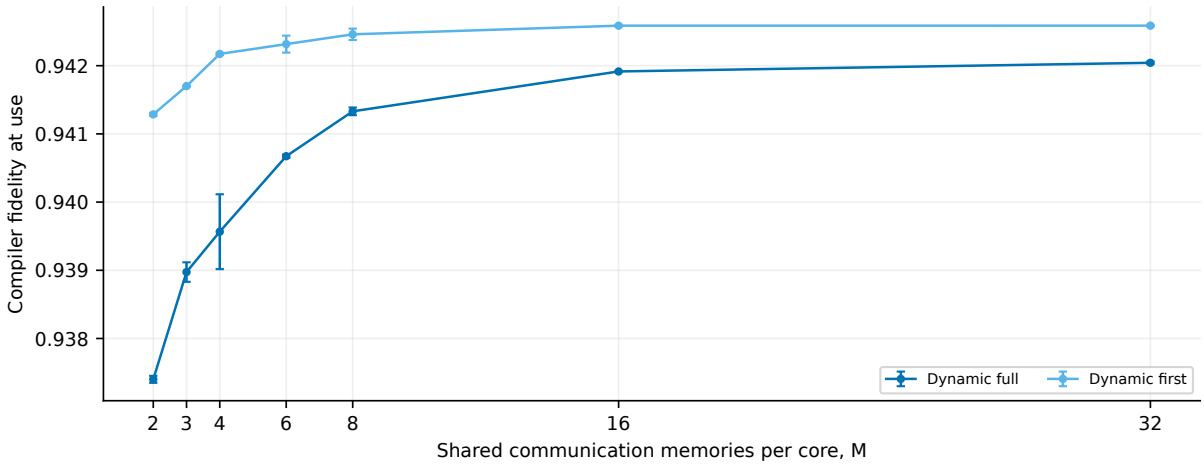


Figure 3.91: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9374 ± 0.0001	0.9413 ± 0.0000
3	n/a	n/a	n/a	0.9390 ± 0.0001	0.9417 ± 0.0000
4	n/a	n/a	n/a	0.9396 ± 0.0005	0.9422 ± 0.0000
6	n/a	n/a	n/a	0.9407 ± 0.0000	0.9423 ± 0.0001
8	n/a	n/a	n/a	0.9413 ± 0.0001	0.9425 ± 0.0001
16	n/a	n/a	n/a	0.9419 ± 0.0000	0.9426 ± 0.0000
32	n/a	n/a	n/a	0.9420 ± 0.0000	0.9426 ± 0.0000

Table 3.91: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean layer latency

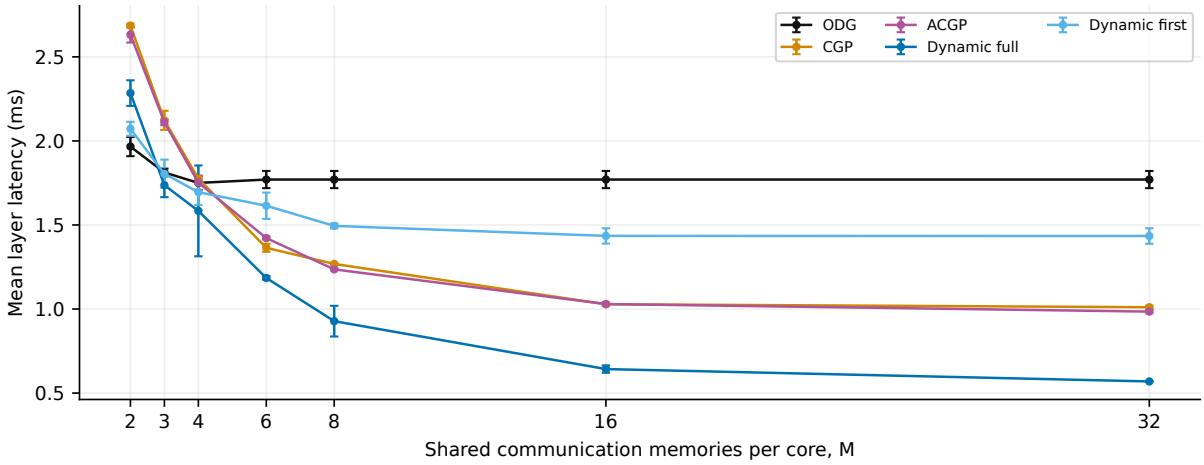


Figure 3.92: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.966 ± 0.057	2.686 ± 0.012	2.632 ± 0.047	2.284 ± 0.076	2.072 ± 0.042
3	1.812 ± 0.023	2.122 ± 0.057	2.111 ± 0.017	1.737 ± 0.071	1.805 ± 0.084
4	1.750 ± 0.042	1.776 ± 0.008	1.751 ± 0.042	1.584 ± 0.270	1.695 ± 0.076
6	1.770 ± 0.051	1.364 ± 0.024	1.422 ± 0.008	1.185 ± 0.011	1.614 ± 0.078
8	1.770 ± 0.051	1.268 ± 0.003	1.236 ± 0.005	0.9278 ± 0.0912	1.495 ± 0.014
16	1.770 ± 0.051	1.029 ± 0.002	1.029 ± 0.010	0.6428 ± 0.0220	1.435 ± 0.046
32	1.770 ± 0.051	1.011 ± 0.008	0.9847 ± 0.0091	0.5693 ± 0.0008	1.434 ± 0.046

Table 3.92: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum layer latency

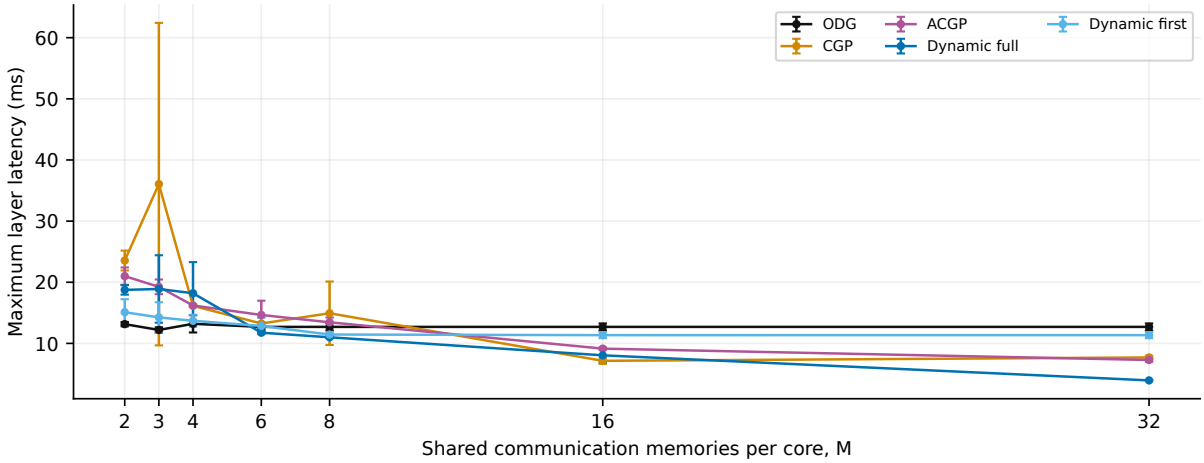


Figure 3.93: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	13.150 ± 0.354	23.551 ± 1.626	21.000 ± 1.414	18.750 ± 0.778	15.100 ± 2.121
3	12.200 ± 0.424	36.050 ± 26.375	19.250 ± 1.202	18.900 ± 5.516	14.250 ± 2.475
4	13.200 ± 1.414	16.150 ± 0.212	16.200 ± 0.141	18.200 ± 5.091	13.700 ± 0.990
6	12.700 ± 0.566	13.250 ± 0.212	14.650 ± 2.333	11.750 ± 0.212	12.850 ± 1.344
8	12.700 ± 0.566	14.932 ± 5.188	13.450 ± 0.778	11.000 ± 0.141	11.450 ± 0.354
16	12.700 ± 0.566	7.150 ± 0.495	9.143 ± 0.202	8.050 ± 1.202	11.350 ± 0.495
32	12.700 ± 0.566	7.700 ± 0.283	7.289 ± 0.298	3.950 ± 0.071	11.350 ± 0.495

Table 3.93: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Minimum layer latency

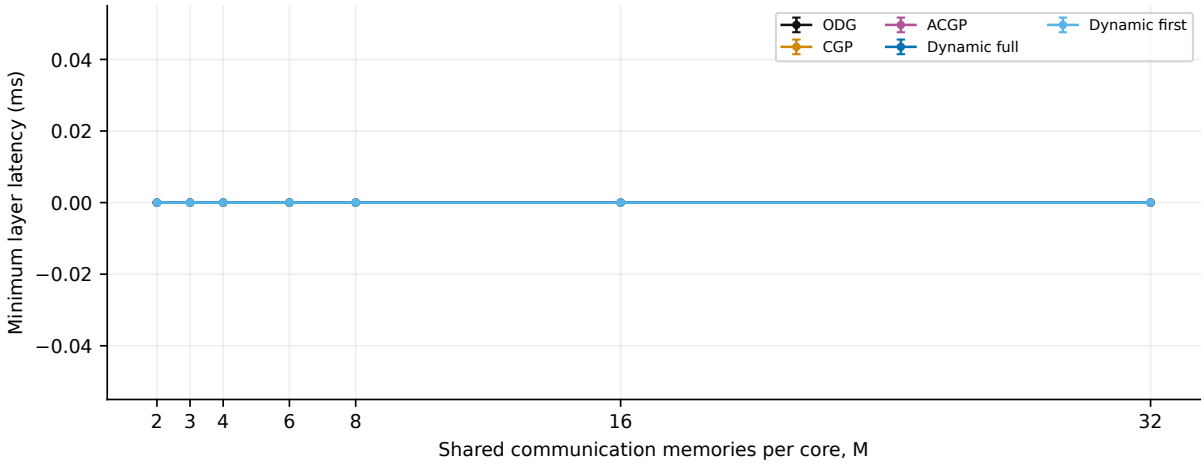


Figure 3.94: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.94: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

3.3 Shortest Reliable

Mean request latency

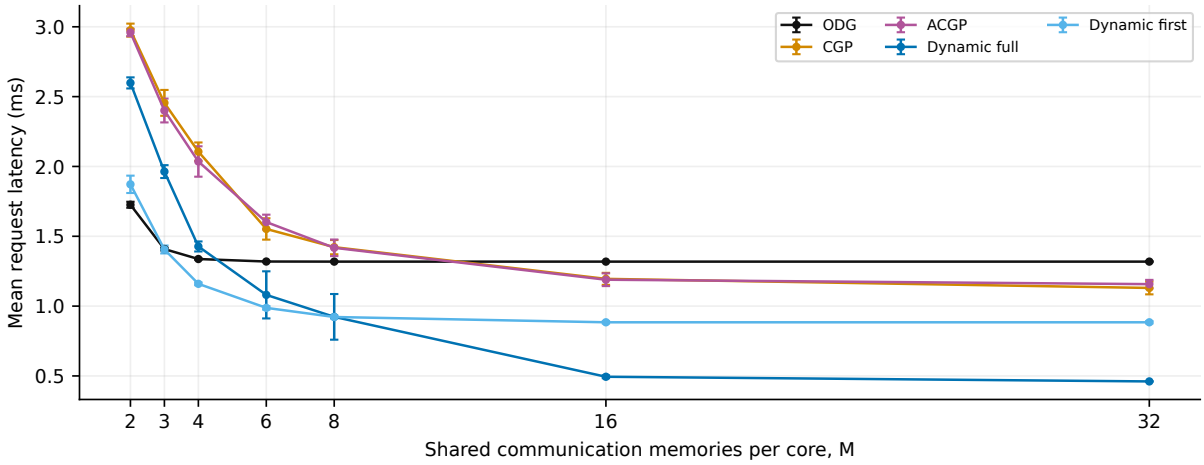


Figure 3.95: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.726 ± 0.022	2.976 ± 0.047	2.959 ± 0.027	2.598 ± 0.040	1.872 ± 0.062
3	1.408 ± 0.010	2.455 ± 0.093	2.401 ± 0.085	1.963 ± 0.046	1.405 ± 0.028
4	1.337 ± 0.005	2.106 ± 0.066	2.035 ± 0.109	1.427 ± 0.036	1.160 ± 0.010
6	1.319 ± 0.004	1.553 ± 0.077	1.602 ± 0.053	1.080 ± 0.169	0.9875 ± 0.0125
8	1.319 ± 0.004	1.422 ± 0.051	1.417 ± 0.059	0.9230 ± 0.1635	0.9220 ± 0.0102
16	1.318 ± 0.004	1.195 ± 0.043	1.189 ± 0.046	0.4941 ± 0.0101	0.8841 ± 0.0083
32	1.318 ± 0.004	1.130 ± 0.046	1.157 ± 0.030	0.4607 ± 0.0011	0.8841 ± 0.0083

Table 3.95: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Median request latency

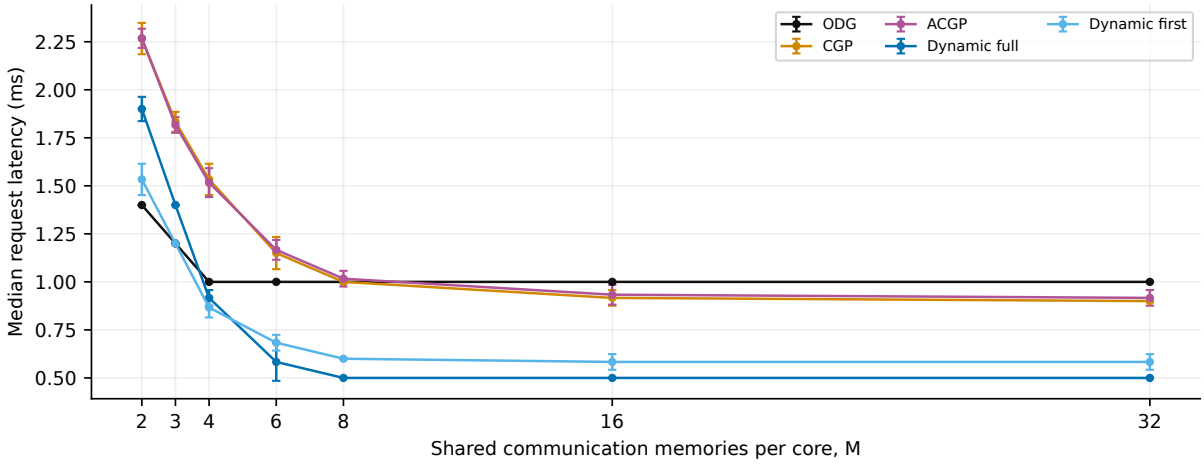


Figure 3.96: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.400 ± 0.000	2.267 ± 0.082	2.268 ± 0.050	1.900 ± 0.063	1.533 ± 0.082
3	1.200 ± 0.000	1.833 ± 0.052	1.817 ± 0.041	1.400 ± 0.000	1.200 ± 0.000
4	1.000 ± 0.000	1.533 ± 0.082	1.517 ± 0.075	0.9167 ± 0.0408	0.8667 ± 0.0516
6	1.000 ± 0.000	1.150 ± 0.084	1.167 ± 0.052	0.5833 ± 0.0983	0.6833 ± 0.0408
8	1.000 ± 0.000	1.000 ± 0.000	1.017 ± 0.041	0.5000 ± 0.0000	0.6000 ± 0.0000
16	1.000 ± 0.000	0.9167 ± 0.0408	0.9333 ± 0.0516	0.5000 ± 0.0000	0.5833 ± 0.0408
32	1.000 ± 0.000	0.9000 ± 0.0000	0.9167 ± 0.0408	0.5000 ± 0.0000	0.5833 ± 0.0408

Table 3.96: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

p95 request latency

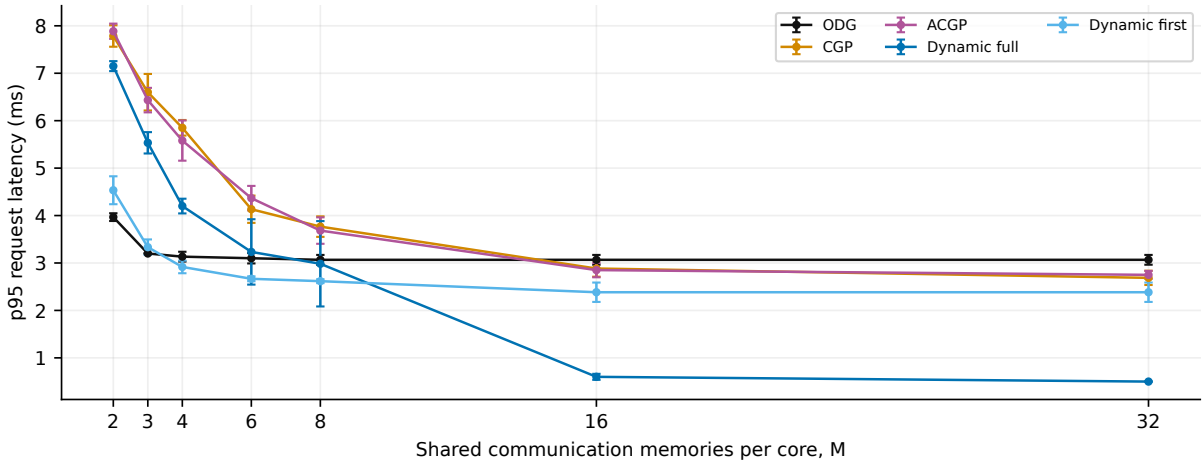


Figure 3.97: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	3.967 ± 0.082	7.785 ± 0.226	7.886 ± 0.161	7.150 ± 0.105	4.533 ± 0.294
3	3.200 ± 0.000	6.600 ± 0.385	6.433 ± 0.258	5.533 ± 0.225	3.333 ± 0.163
4	3.133 ± 0.103	5.850 ± 0.164	5.581 ± 0.424	4.200 ± 0.155	2.917 ± 0.133
6	3.100 ± 0.110	4.133 ± 0.288	4.367 ± 0.258	3.233 ± 0.689	2.667 ± 0.052
8	3.067 ± 0.103	3.767 ± 0.216	3.683 ± 0.279	2.983 ± 0.900	2.617 ± 0.041
16	3.067 ± 0.103	2.883 ± 0.172	2.850 ± 0.152	0.6000 ± 0.0633	2.383 ± 0.204
32	3.067 ± 0.103	2.687 ± 0.150	2.750 ± 0.084	0.5000 ± 0.0000	2.383 ± 0.204

Table 3.97: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum request latency

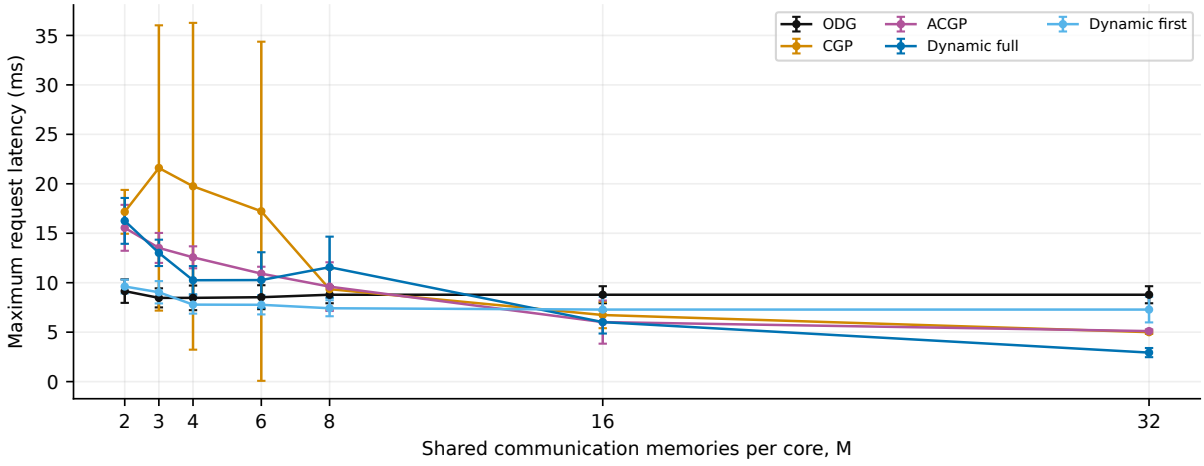


Figure 3.98: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	9.150 ± 1.190	17.166 ± 2.216	15.550 ± 2.321	16.250 ± 2.318	9.617 ± 0.697
3	8.467 ± 0.965	21.600 ± 14.422	13.517 ± 1.515	13.017 ± 1.332	9.034 ± 1.129
4	8.467 ± 1.244	19.750 ± 16.521	12.567 ± 1.111	10.250 ± 1.429	7.784 ± 0.911
6	8.534 ± 1.211	17.224 ± 17.144	10.917 ± 0.697	10.267 ± 2.813	7.767 ± 0.973
8	8.784 ± 0.861	9.347 ± 2.058	9.602 ± 2.462	11.567 ± 3.089	7.417 ± 0.809
16	8.784 ± 0.861	6.733 ± 1.332	6.017 ± 2.181	6.017 ± 1.155	7.284 ± 1.298
32	8.784 ± 0.861	5.000 ± 0.179	5.107 ± 0.175	2.933 ± 0.463	7.284 ± 1.298

Table 3.98: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Communication makespan

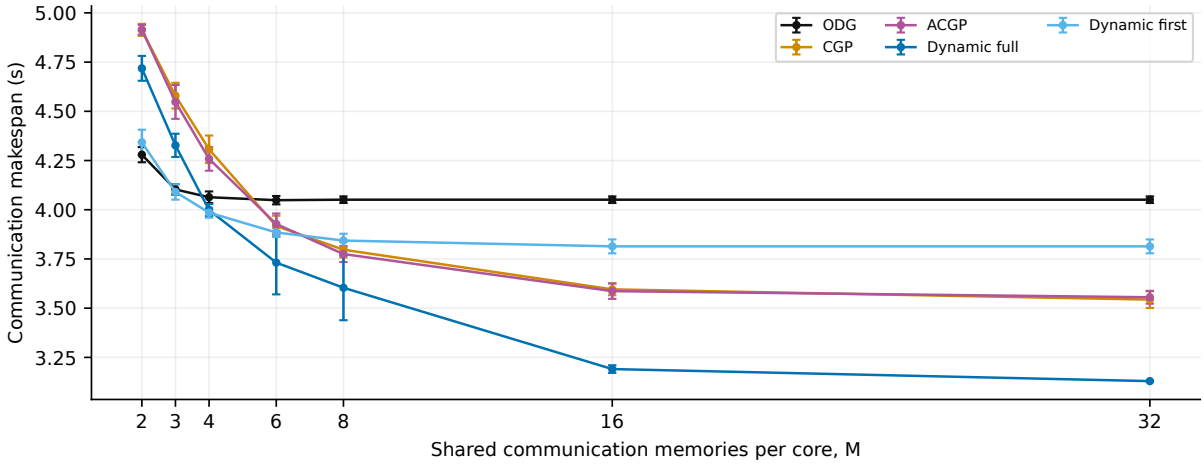


Figure 3.99: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	4.280 ± 0.038	4.914 ± 0.031	4.914 ± 0.025	4.718 ± 0.063	4.342 ± 0.064
3	4.103 ± 0.026	4.580 ± 0.065	4.548 ± 0.086	4.327 ± 0.059	4.090 ± 0.039
4	4.064 ± 0.029	4.307 ± 0.070	4.258 ± 0.060	3.998 ± 0.031	3.985 ± 0.026
6	4.049 ± 0.021	3.917 ± 0.052	3.927 ± 0.053	3.731 ± 0.161	3.885 ± 0.024
8	4.051 ± 0.017	3.797 ± 0.039	3.775 ± 0.041	3.604 ± 0.165	3.843 ± 0.035
16	4.051 ± 0.017	3.596 ± 0.030	3.586 ± 0.039	3.191 ± 0.019	3.814 ± 0.035
32	4.051 ± 0.017	3.543 ± 0.043	3.555 ± 0.033	3.129 ± 0.002	3.814 ± 0.035

Table 3.99: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean admission wait

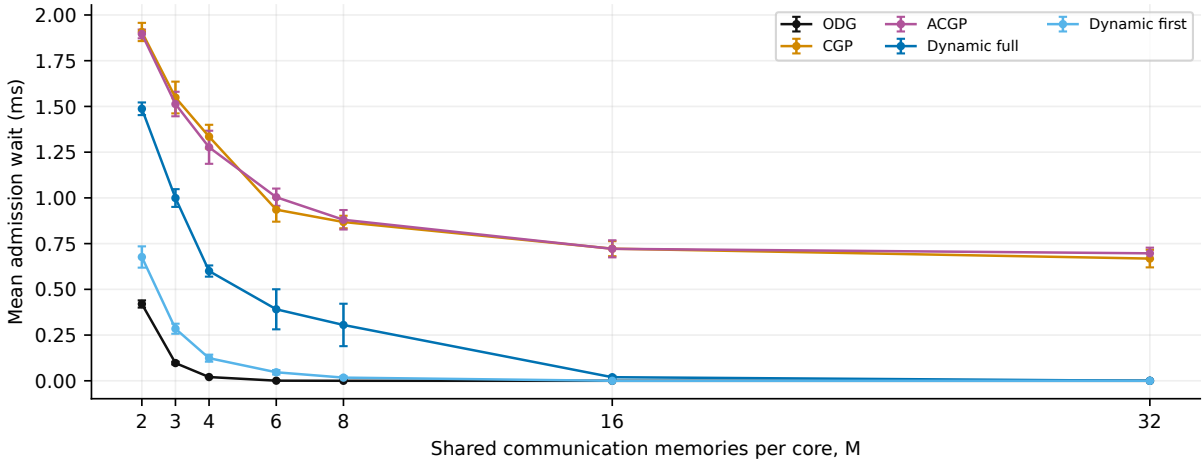


Figure 3.100: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.4199 ± 0.0197	1.907 ± 0.050	1.896 ± 0.024	1.487 ± 0.035	0.6768 ± 0.0582
3	0.0969 ± 0.0073	1.549 ± 0.087	1.513 ± 0.067	0.9992 ± 0.0485	0.2847 ± 0.0275
4	0.0205 ± 0.0007	1.335 ± 0.065	1.277 ± 0.090	0.6000 ± 0.0306	0.1238 ± 0.0192
6	0.0007 ± 0.0006	0.9356 ± 0.0657	1.004 ± 0.047	0.3909 ± 0.1095	0.0466 ± 0.0122
8	0.0000 ± 0.0001	0.8681 ± 0.0341	0.8804 ± 0.0532	0.3053 ± 0.1160	0.0174 ± 0.0073
16	0.0000 ± 0.0000	0.7223 ± 0.0410	0.7215 ± 0.0467	0.0196 ± 0.0071	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.6681 ± 0.0480	0.6969 ± 0.0310	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.100: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Delivered EPR fidelity

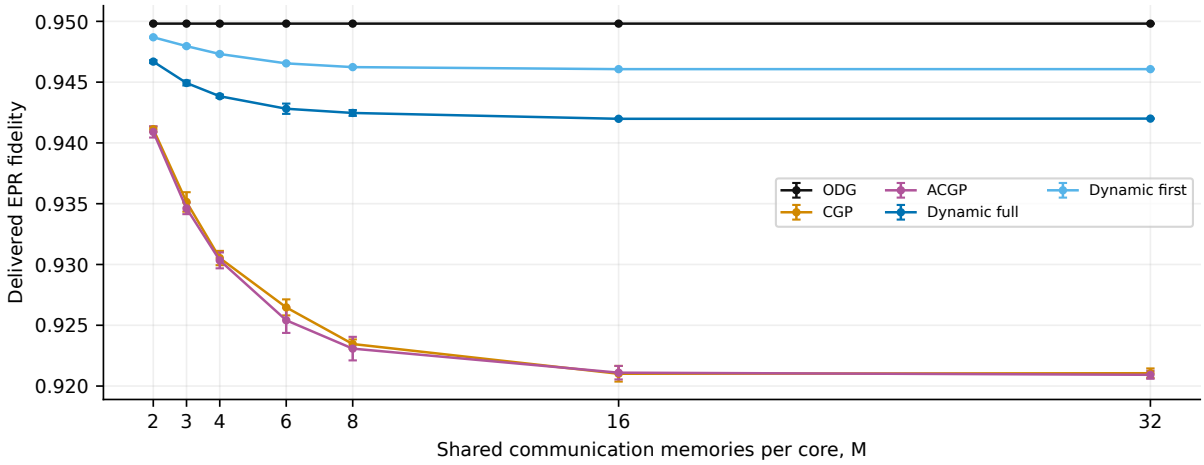


Figure 3.101: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.9498 ± 0.0000	0.9411 ± 0.0002	0.9409 ± 0.0005	0.9467 ± 0.0001	0.9487 ± 0.0000
3	0.9498 ± 0.0000	0.9351 ± 0.0008	0.9346 ± 0.0005	0.9449 ± 0.0002	0.9480 ± 0.0001
4	0.9498 ± 0.0000	0.9305 ± 0.0006	0.9303 ± 0.0007	0.9438 ± 0.0001	0.9473 ± 0.0001
6	0.9498 ± 0.0000	0.9265 ± 0.0007	0.9254 ± 0.0010	0.9428 ± 0.0004	0.9465 ± 0.0000
8	0.9498 ± 0.0000	0.9235 ± 0.0004	0.9231 ± 0.0010	0.9425 ± 0.0002	0.9462 ± 0.0000
16	0.9498 ± 0.0000	0.9210 ± 0.0006	0.9211 ± 0.0006	0.9420 ± 0.0000	0.9461 ± 0.0000
32	0.9498 ± 0.0000	0.9211 ± 0.0004	0.9209 ± 0.0003	0.9420 ± 0.0000	0.9461 ± 0.0000

Table 3.101: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler readiness fraction

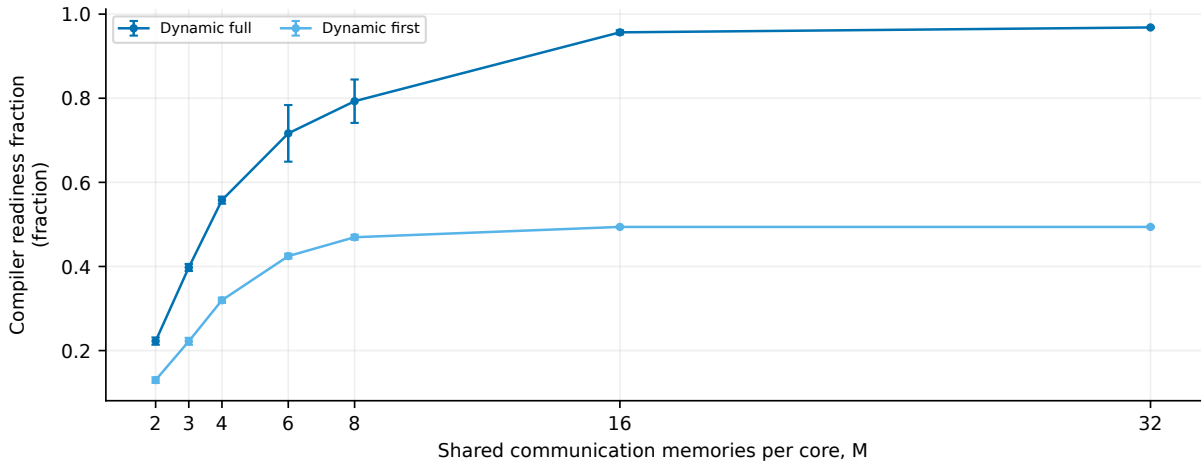


Figure 3.102: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2226 ± 0.0087	0.1299 ± 0.0067
3	n/a	n/a	n/a	0.3976 ± 0.0084	0.2221 ± 0.0083
4	n/a	n/a	n/a	0.5577 ± 0.0084	0.3197 ± 0.0063
6	n/a	n/a	n/a	0.7165 ± 0.0674	0.4246 ± 0.0058
8	n/a	n/a	n/a	0.7930 ± 0.0516	0.4695 ± 0.0060
16	n/a	n/a	n/a	0.9567 ± 0.0049	0.4940 ± 0.0016
32	n/a	n/a	n/a	0.9683 ± 0.0013	0.4940 ± 0.0016

Table 3.102: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit fraction

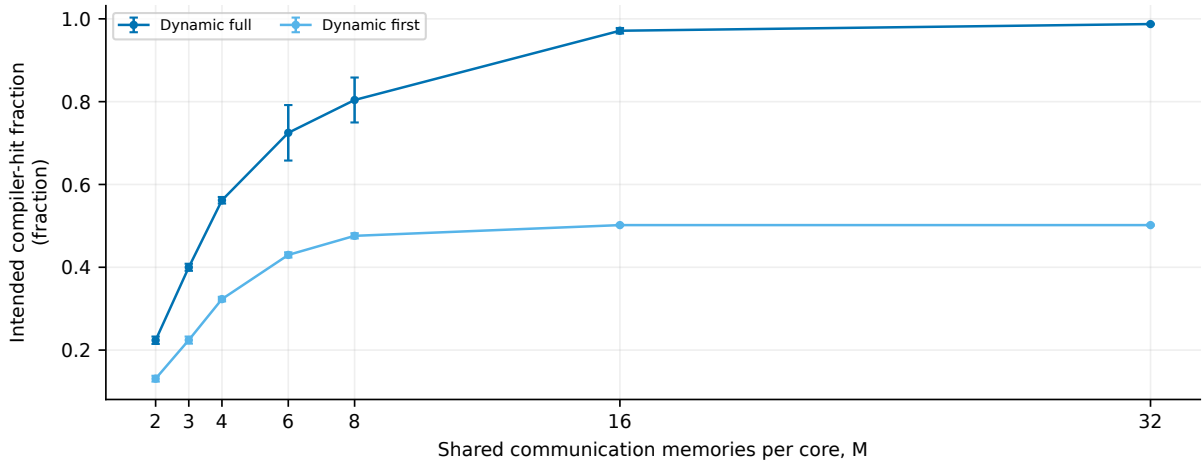


Figure 3.103: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2238 ± 0.0089	0.1309 ± 0.0070
3	n/a	n/a	n/a	0.4000 ± 0.0085	0.2242 ± 0.0085
4	n/a	n/a	n/a	0.5618 ± 0.0079	0.3231 ± 0.0055
6	n/a	n/a	n/a	0.7248 ± 0.0670	0.4298 ± 0.0063
8	n/a	n/a	n/a	0.8040 ± 0.0543	0.4759 ± 0.0063
16	n/a	n/a	n/a	0.9713 ± 0.0066	0.5018 ± 0.0015
32	n/a	n/a	n/a	0.9874 ± 0.0011	0.5018 ± 0.0015

Table 3.103: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback fraction

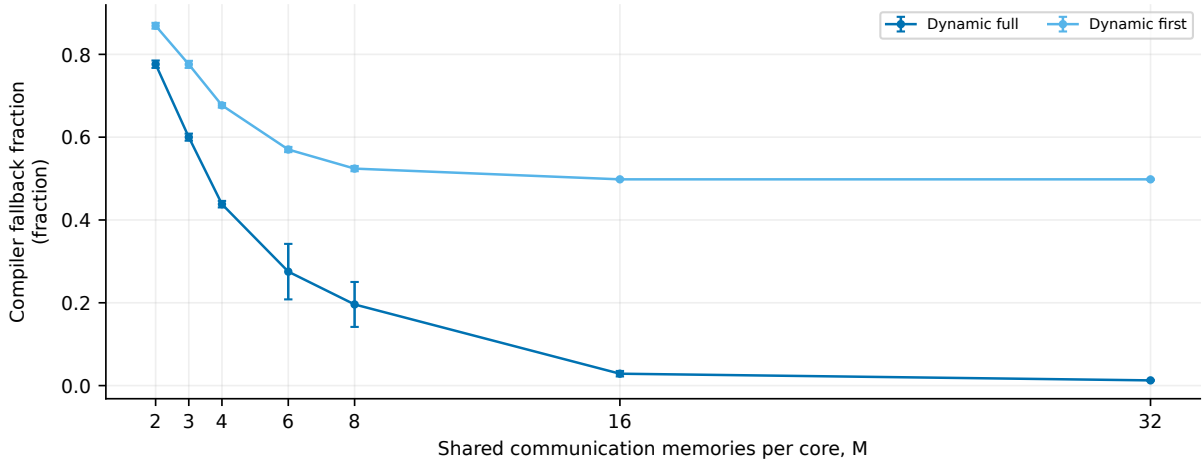


Figure 3.104: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.7762 ± 0.0089	0.8691 ± 0.0070
3	n/a	n/a	n/a	0.6000 ± 0.0085	0.7758 ± 0.0085
4	n/a	n/a	n/a	0.4382 ± 0.0079	0.6769 ± 0.0055
6	n/a	n/a	n/a	0.2752 ± 0.0670	0.5702 ± 0.0063
8	n/a	n/a	n/a	0.1960 ± 0.0543	0.5241 ± 0.0063
16	n/a	n/a	n/a	0.0287 ± 0.0066	0.4982 ± 0.0015
32	n/a	n/a	n/a	0.0126 ± 0.0011	0.4982 ± 0.0015

Table 3.104: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-cache waste

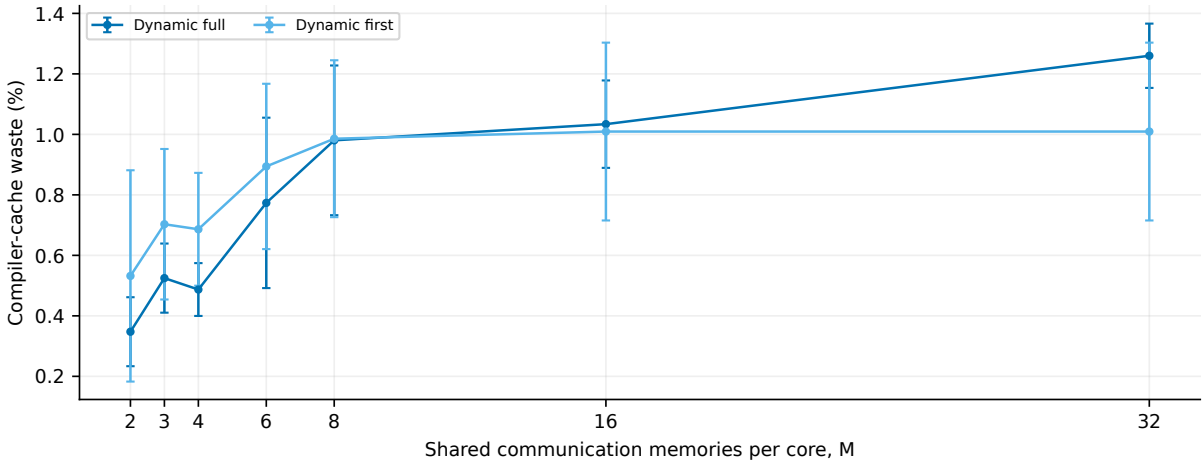


Figure 3.105: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.3475 ± 0.1140	0.5320 ± 0.3493
3	n/a	n/a	n/a	0.5248 ± 0.1143	0.7029 ± 0.2488
4	n/a	n/a	n/a	0.4870 ± 0.0873	0.6862 ± 0.1865
6	n/a	n/a	n/a	0.7735 ± 0.2817	0.8940 ± 0.2733
8	n/a	n/a	n/a	0.9803 ± 0.2475	0.9856 ± 0.2594
16	n/a	n/a	n/a	1.034 ± 0.145	1.009 ± 0.294
32	n/a	n/a	n/a	1.260 ± 0.106	1.009 ± 0.294

Table 3.105: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.
Exact CSV values and sample counts

Native-protocol waste

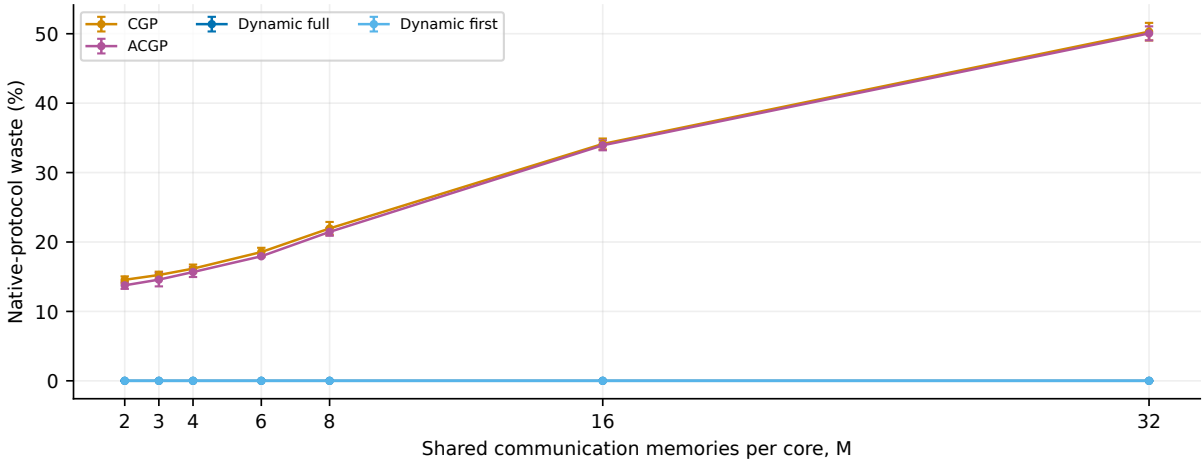


Figure 3.106: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	14.553 ± 0.495	13.758 ± 0.513	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	15.245 ± 0.479	14.578 ± 0.972	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	16.160 ± 0.590	15.671 ± 0.719	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	18.551 ± 0.613	17.943 ± 0.129	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	21.953 ± 0.935	21.454 ± 0.560	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	34.123 ± 0.785	33.927 ± 0.719	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	50.300 ± 1.267	50.052 ± 1.012	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.106: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.
Exact CSV values and sample counts

Compiler-pair expiry

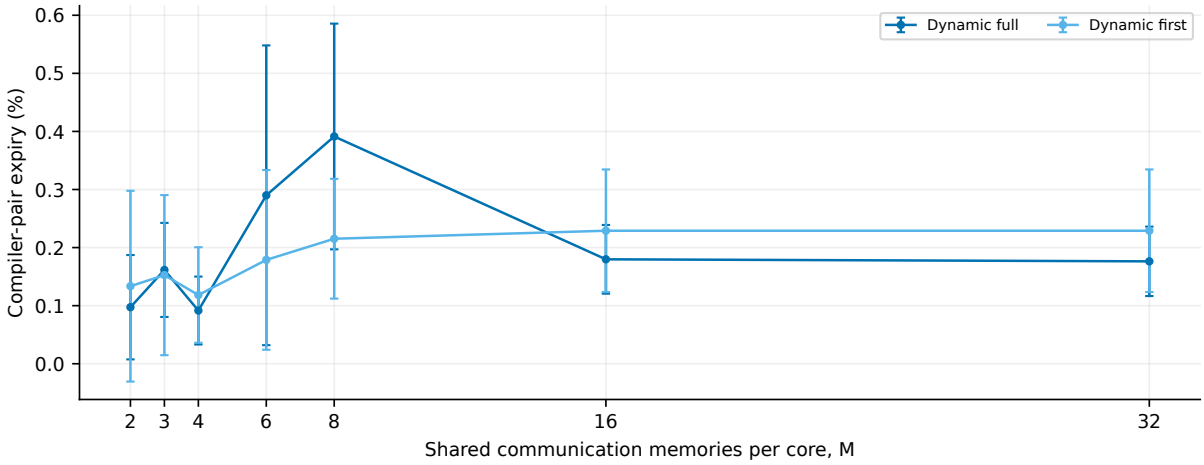


Figure 3.107: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.0973 ± 0.0898	0.1335 ± 0.1642
3	n/a	n/a	n/a	0.1615 ± 0.0810	0.1526 ± 0.1378
4	n/a	n/a	n/a	0.0916 ± 0.0585	0.1184 ± 0.0822
6	n/a	n/a	n/a	0.2900 ± 0.2580	0.1788 ± 0.1547
8	n/a	n/a	n/a	0.3913 ± 0.1943	0.2152 ± 0.1031
16	n/a	n/a	n/a	0.1798 ± 0.0591	0.2290 ± 0.1055
32	n/a	n/a	n/a	0.1763 ± 0.0598	0.2290 ± 0.1055

Table 3.107: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler-pair storage time

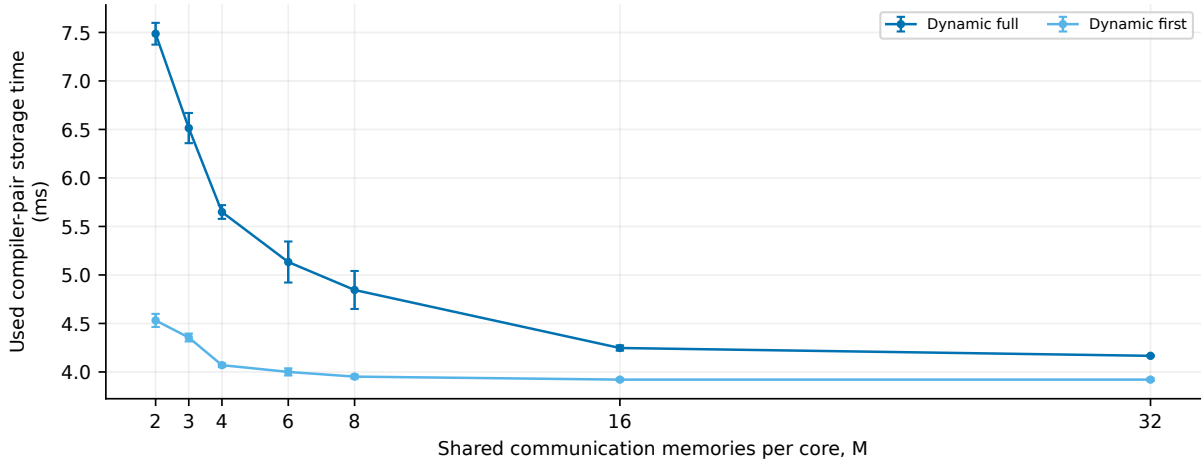


Figure 3.108: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	7.486 ± 0.112	4.531 ± 0.068
3	n/a	n/a	n/a	6.514 ± 0.156	4.355 ± 0.041
4	n/a	n/a	n/a	5.649 ± 0.071	4.070 ± 0.019
6	n/a	n/a	n/a	5.133 ± 0.211	4.001 ± 0.037
8	n/a	n/a	n/a	4.845 ± 0.196	3.952 ± 0.019
16	n/a	n/a	n/a	4.247 ± 0.027	3.921 ± 0.012
32	n/a	n/a	n/a	4.166 ± 0.005	3.921 ± 0.012

Table 3.108: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Delivered-hop throughput

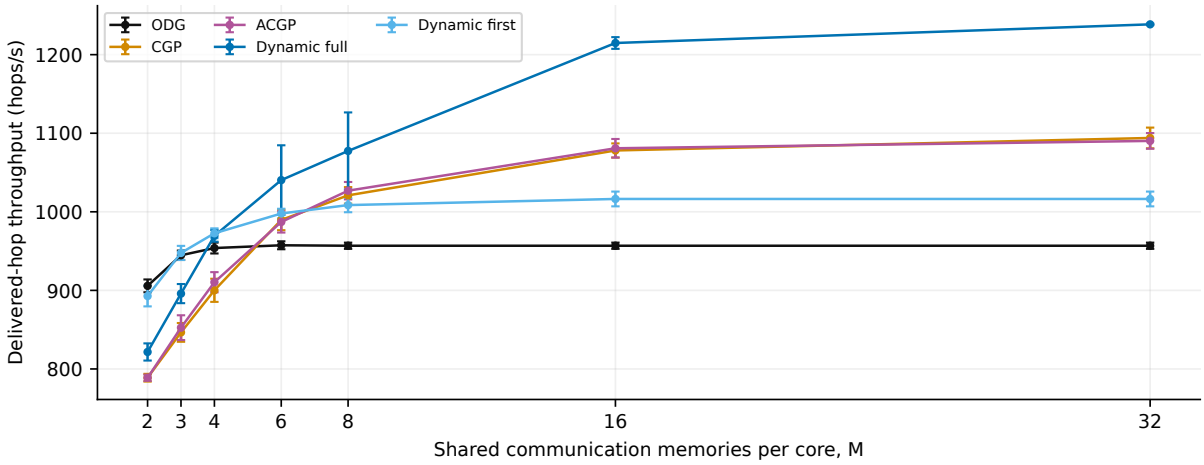


Figure 3.109: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	905.76 ± 8.15	788.85 ± 4.92	788.75 ± 3.98	821.61 ± 10.93	892.79 ± 13.16
3	944.69 ± 5.99	846.52 ± 11.93	852.55 ± 15.77	895.90 ± 12.18	947.66 ± 8.99
4	953.88 ± 6.91	900.10 ± 14.72	910.38 ± 12.82	969.43 ± 7.48	972.64 ± 6.28
6	957.40 ± 5.06	989.64 ± 13.04	987.06 ± 13.48	1040.35 ± 44.31	997.83 ± 6.04
8	956.81 ± 3.94	1020.92 ± 10.52	1026.88 ± 11.06	1077.45 ± 49.03	1008.54 ± 9.10
16	956.81 ± 3.96	1078.06 ± 9.00	1080.84 ± 11.84	1214.84 ± 7.44	1016.34 ± 9.40
32	956.81 ± 3.96	1093.98 ± 13.19	1090.23 ± 9.98	1238.57 ± 0.93	1016.34 ± 9.40

Table 3.109: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Completion fraction

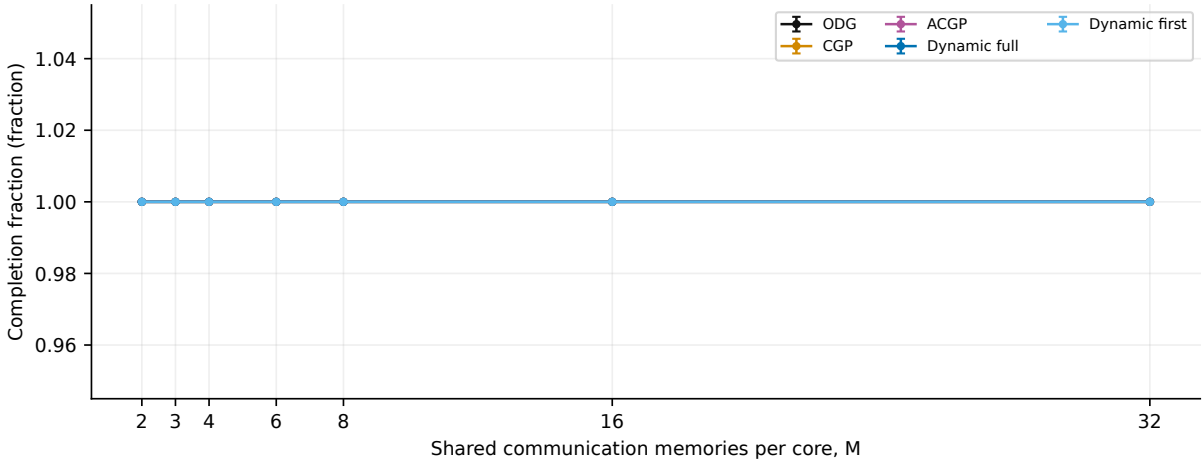


Figure 3.110: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
3	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
4	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
6	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
8	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
16	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
32	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000

Table 3.110: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum admission wait

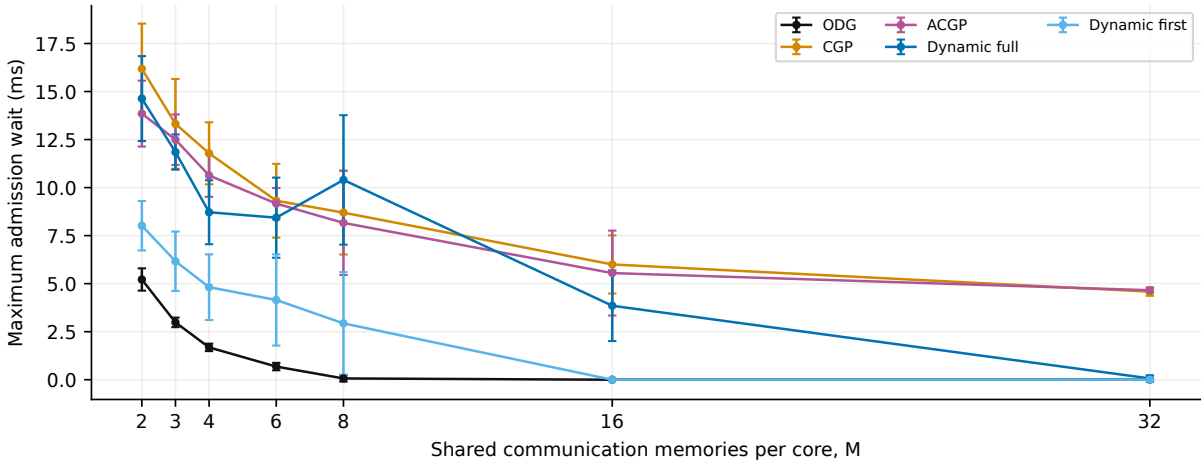


Figure 3.111: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	5.217 ± 0.581	16.183 ± 2.352	13.850 ± 1.714	14.634 ± 2.210	8.017 ± 1.286
3	2.983 ± 0.248	13.317 ± 2.337	12.494 ± 1.313	11.850 ± 0.916	6.167 ± 1.546
4	1.683 ± 0.194	11.784 ± 1.614	10.634 ± 1.117	8.717 ± 1.664	4.817 ± 1.708
6	0.6834 ± 0.1941	9.317 ± 1.920	9.167 ± 0.812	8.434 ± 2.085	4.150 ± 2.374
8	0.0667 ± 0.1633	8.697 ± 2.182	8.163 ± 2.716	10.400 ± 3.368	2.933 ± 2.666
16	0.0000 ± 0.0000	6.000 ± 1.513	5.550 ± 2.210	3.850 ± 1.838	0.0000 ± 0.0000
32	0.0000 ± 0.0000	4.583 ± 0.214	4.657 ± 0.136	0.0667 ± 0.1633	0.0000 ± 0.0000

Table 3.111: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with admission wait

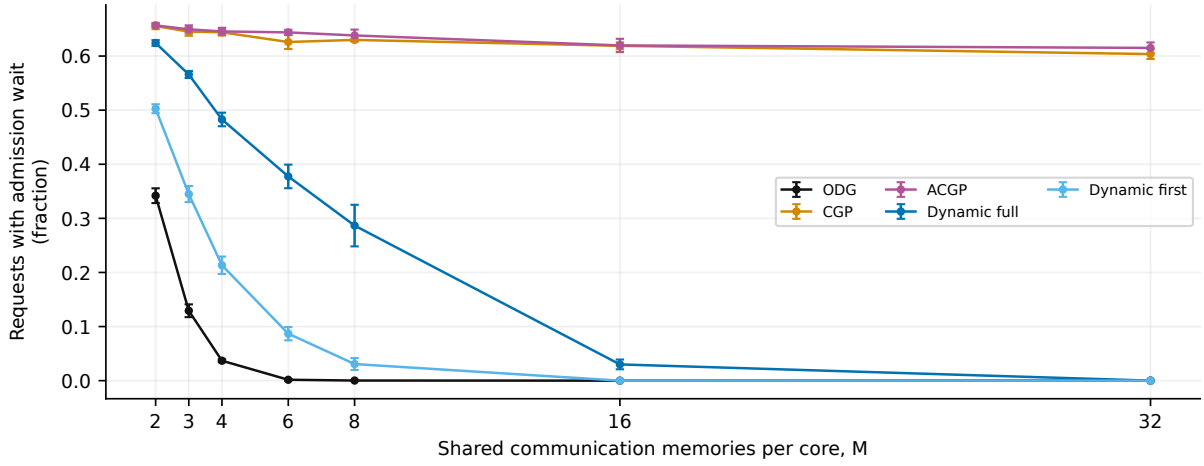


Figure 3.112: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.3419 ± 0.0136	0.6555 ± 0.0058	0.6567 ± 0.0030	0.6242 ± 0.0053	0.5027 ± 0.0083
3	0.1292 ± 0.0118	0.6452 ± 0.0077	0.6494 ± 0.0074	0.5659 ± 0.0065	0.3449 ± 0.0149
4	0.0369 ± 0.0026	0.6439 ± 0.0058	0.6455 ± 0.0068	0.4828 ± 0.0126	0.2133 ± 0.0162
6	0.0016 ± 0.0013	0.6260 ± 0.0128	0.6437 ± 0.0048	0.3775 ± 0.0218	0.0869 ± 0.0123
8	0.0002 ± 0.0005	0.6299 ± 0.0024	0.6381 ± 0.0108	0.2866 ± 0.0384	0.0307 ± 0.0110
16	0.0000 ± 0.0000	0.6189 ± 0.0065	0.6196 ± 0.0123	0.0300 ± 0.0090	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.6037 ± 0.0091	0.6151 ± 0.0101	0.0000 ± 0.0001	0.0000 ± 0.0000

Table 3.112: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded reservation-setup counter

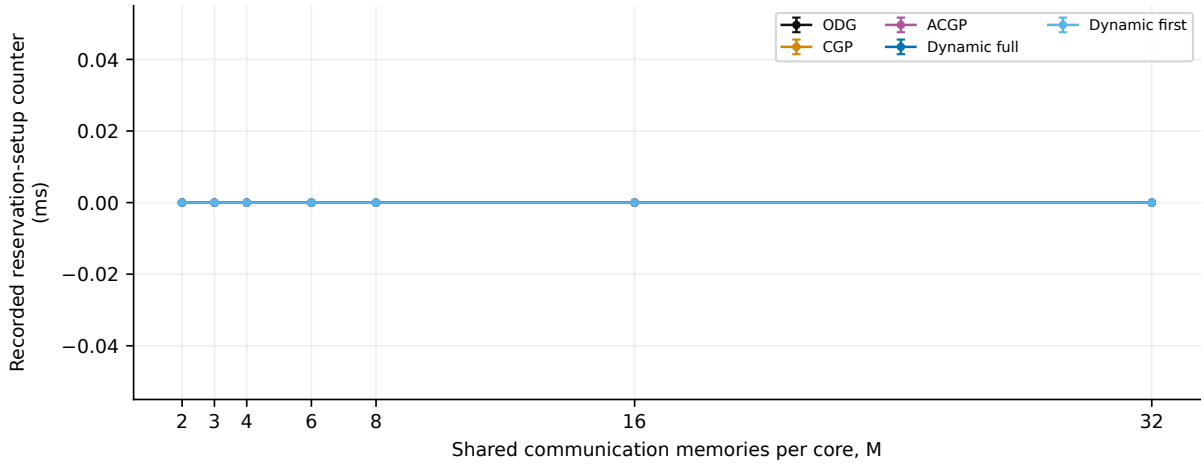


Figure 3.113: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.113: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean generation/service time

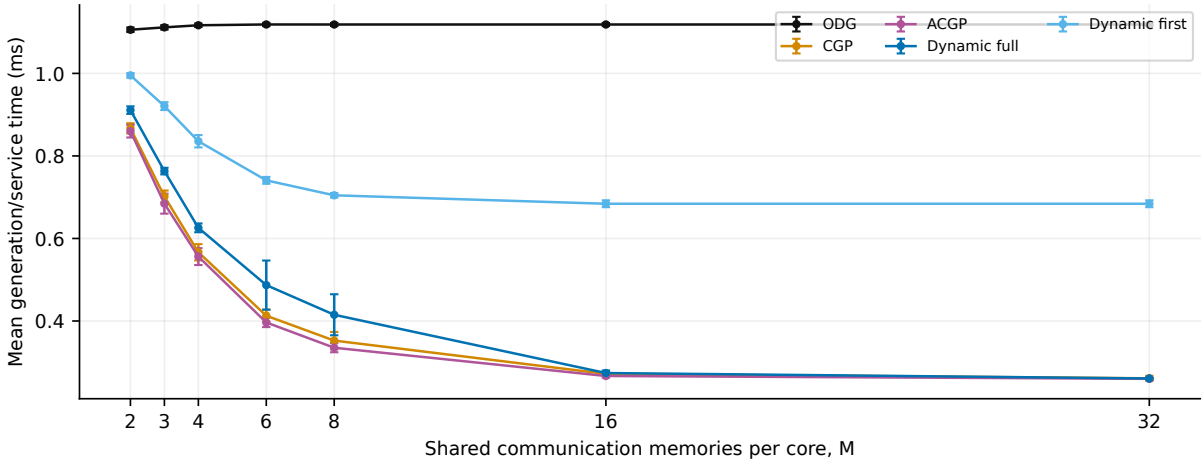


Figure 3.114: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.106 ± 0.006	0.8669 ± 0.0124	0.8600 ± 0.0153	0.9110 ± 0.0092	0.9952 ± 0.0056
3	1.112 ± 0.005	0.7018 ± 0.0143	0.6844 ± 0.0242	0.7633 ± 0.0080	0.9207 ± 0.0095
4	1.117 ± 0.004	0.5666 ± 0.0197	0.5561 ± 0.0205	0.6258 ± 0.0107	0.8356 ± 0.0149
6	1.119 ± 0.004	0.4128 ± 0.0148	0.3965 ± 0.0112	0.4870 ± 0.0595	0.7408 ± 0.0083
8	1.118 ± 0.004	0.3526 ± 0.0210	0.3352 ± 0.0109	0.4151 ± 0.0497	0.7046 ± 0.0054
16	1.118 ± 0.004	0.2719 ± 0.0053	0.2668 ± 0.0039	0.2739 ± 0.0061	0.6841 ± 0.0083
32	1.118 ± 0.004	0.2611 ± 0.0061	0.2599 ± 0.0031	0.2607 ± 0.0011	0.6841 ± 0.0083

Table 3.114: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded retry-wait time

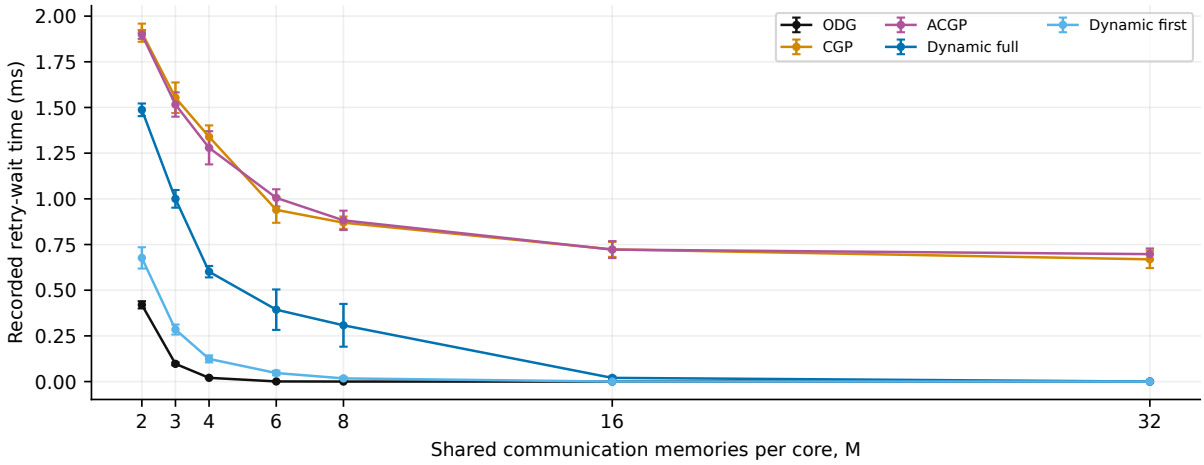


Figure 3.115: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.4199 ± 0.0197	1.909 ± 0.050	1.899 ± 0.024	1.487 ± 0.035	0.6768 ± 0.0582
3	0.0969 ± 0.0073	1.553 ± 0.084	1.516 ± 0.067	0.9999 ± 0.0484	0.2848 ± 0.0274
4	0.0205 ± 0.0007	1.339 ± 0.063	1.279 ± 0.091	0.6014 ± 0.0313	0.1240 ± 0.0192
6	0.0007 ± 0.0006	0.9397 ± 0.0707	1.005 ± 0.047	0.3935 ± 0.1107	0.0467 ± 0.0122
8	0.0000 ± 0.0001	0.8696 ± 0.0338	0.8822 ± 0.0531	0.3079 ± 0.1170	0.0174 ± 0.0074
16	0.0000 ± 0.0000	0.7232 ± 0.0409	0.7222 ± 0.0465	0.0202 ± 0.0073	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.6689 ± 0.0479	0.6974 ± 0.0310	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.115: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Request retries

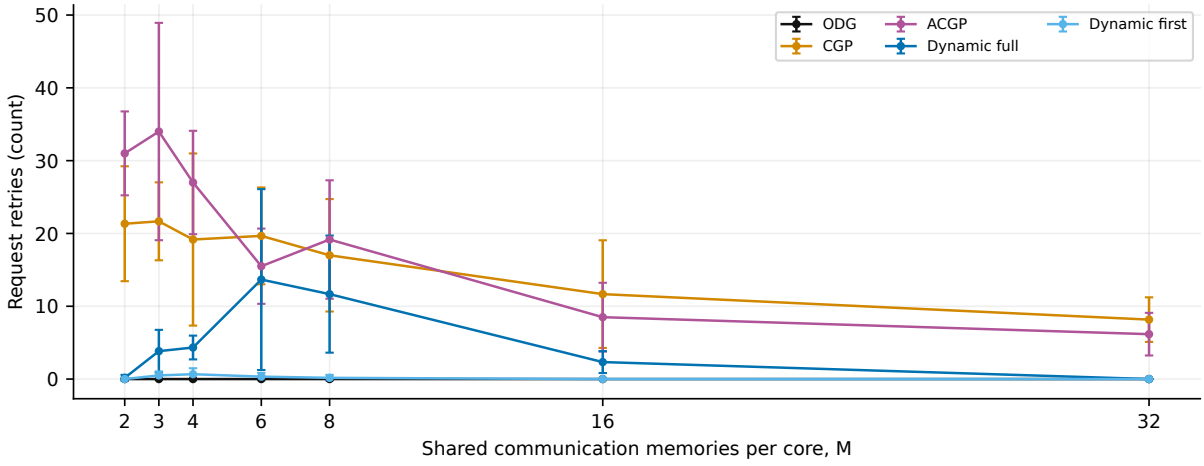


Figure 3.116: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	21.333 ± 7.891	31.000 ± 5.762	0.1667 ± 0.4082	0.0000 ± 0.0000
3	0.0000 ± 0.0000	21.667 ± 5.354	34.000 ± 14.926	3.833 ± 2.927	0.5000 ± 0.5477
4	0.0000 ± 0.0000	19.167 ± 11.822	27.000 ± 7.099	4.333 ± 1.633	0.6667 ± 0.8165
6	0.0000 ± 0.0000	19.667 ± 6.653	15.500 ± 5.167	13.667 ± 12.420	0.3333 ± 0.5164
8	0.0000 ± 0.0000	17.000 ± 7.720	19.167 ± 8.134	11.667 ± 8.042	0.1667 ± 0.4082
16	0.0000 ± 0.0000	11.667 ± 7.394	8.500 ± 4.722	2.333 ± 1.506	0.0000 ± 0.0000
32	0.0000 ± 0.0000	8.167 ± 3.061	6.167 ± 2.927	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.116: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with retries

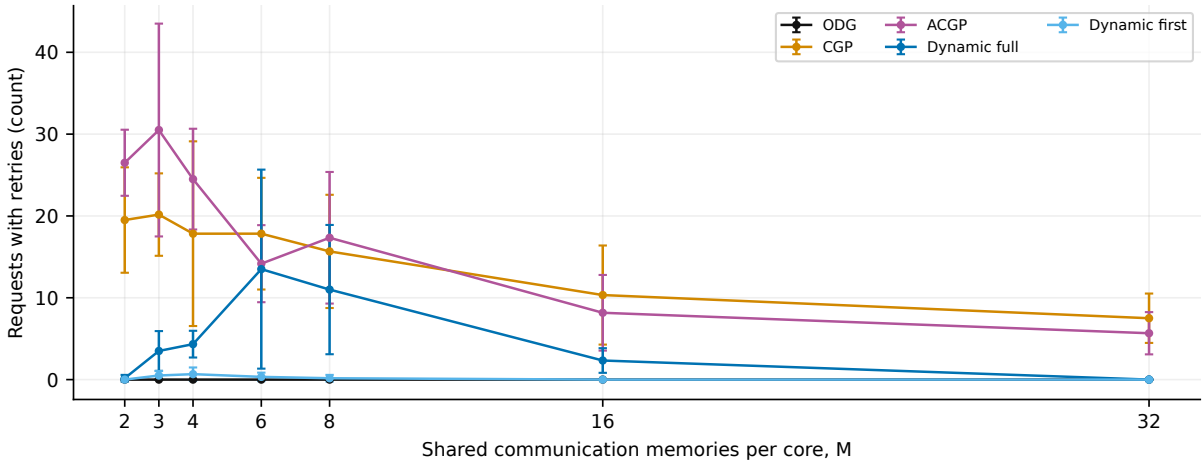


Figure 3.117: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	19.500 ± 6.442	26.500 ± 4.037	0.1667 ± 0.4082	0.0000 ± 0.0000
3	0.0000 ± 0.0000	20.167 ± 5.037	30.500 ± 13.004	3.500 ± 2.429	0.5000 ± 0.5477
4	0.0000 ± 0.0000	17.833 ± 11.286	24.500 ± 6.156	4.333 ± 1.633	0.6667 ± 0.8165
6	0.0000 ± 0.0000	17.833 ± 6.824	14.167 ± 4.708	13.500 ± 12.161	0.3333 ± 0.5164
8	0.0000 ± 0.0000	15.667 ± 6.919	17.333 ± 8.042	11.000 ± 7.899	0.1667 ± 0.4082
16	0.0000 ± 0.0000	10.333 ± 6.055	8.167 ± 4.622	2.333 ± 1.506	0.0000 ± 0.0000
32	0.0000 ± 0.0000	7.500 ± 3.017	5.667 ± 2.582	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.117: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol generated-pair counter

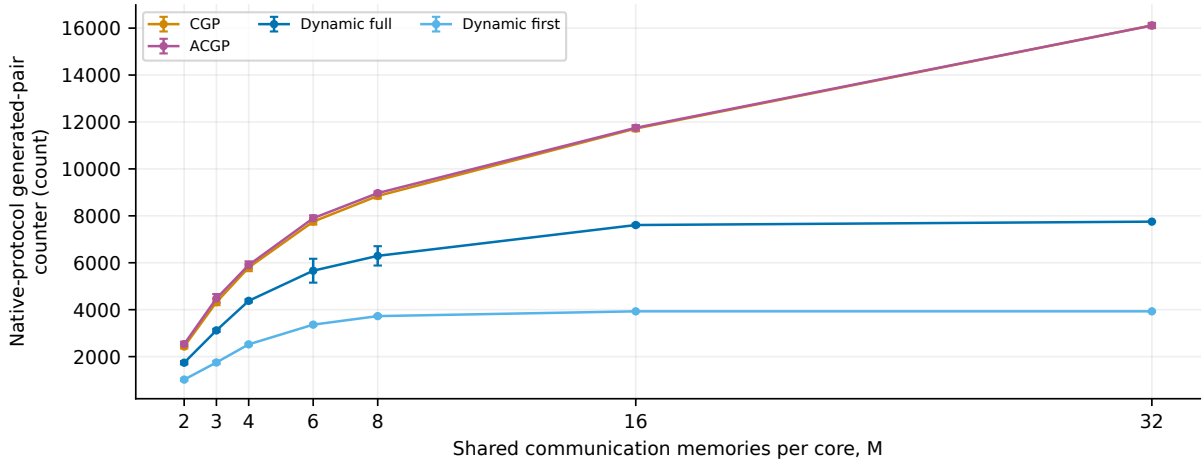


Figure 3.118: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	2429.33 ± 80.19	2532.67 ± 103.77	1740.67 ± 67.93	1020.33 ± 52.14
3	n/a	4318.67 ± 125.64	4478.00 ± 189.63	3117.00 ± 64.99	1750.00 ± 67.54
4	n/a	5798.00 ± 157.11	5902.00 ± 157.36	4376.67 ± 62.77	2522.00 ± 44.76
6	n/a	7752.33 ± 121.27	7898.00 ± 122.64	5661.00 ± 508.95	3362.00 ± 43.12
8	n/a	8846.33 ± 109.12	8968.00 ± 73.64	6293.67 ± 411.75	3726.00 ± 42.86
16	n/a	11719.33 ± 114.94	11751.67 ± 112.46	7608.00 ± 53.56	3930.00 ± 0.00
32	n/a	16112.00 ± 60.99	16111.33 ± 112.67	7752.00 ± 0.00	3930.00 ± 0.00

Table 3.118: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol used-pair counter

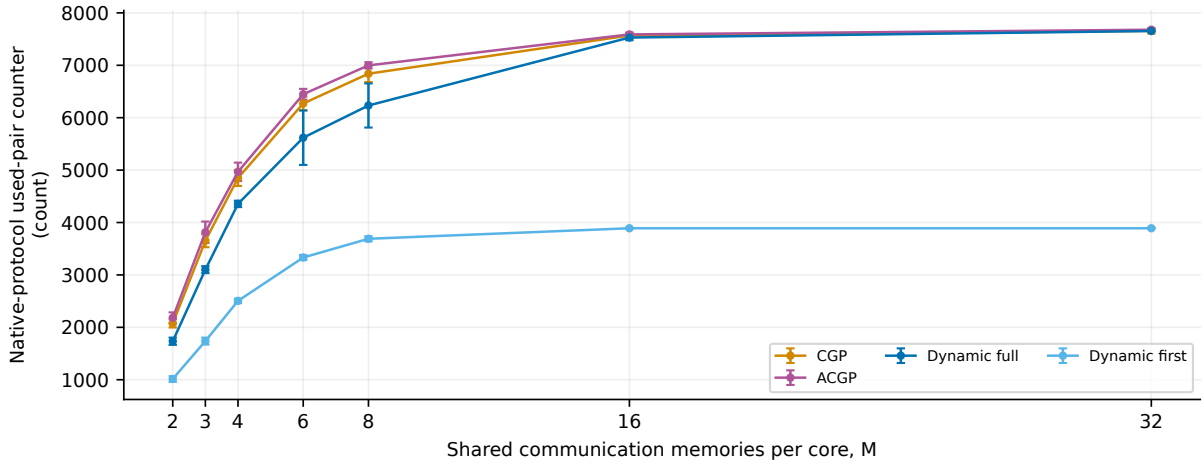


Figure 3.119: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	2073.33 ± 76.59	2182.67 ± 102.42	1734.67 ± 69.21	1015.00 ± 54.31
3	n/a	3652.33 ± 123.99	3814.33 ± 203.83	3100.67 ± 66.12	1737.67 ± 66.10
4	n/a	4850.00 ± 152.65	4967.33 ± 175.54	4355.33 ± 61.11	2504.67 ± 42.89
6	n/a	6271.00 ± 129.71	6447.67 ± 102.21	5618.33 ± 519.56	3332.00 ± 48.58
8	n/a	6839.00 ± 158.87	6998.00 ± 60.37	6232.67 ± 420.75	3689.33 ± 49.08
16	n/a	7569.00 ± 48.16	7589.33 ± 34.86	7529.33 ± 51.02	3890.33 ± 11.55
32	n/a	7656.33 ± 51.22	7678.67 ± 22.44	7654.33 ± 8.24	3890.33 ± 11.55

Table 3.119: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol unused-pair counter

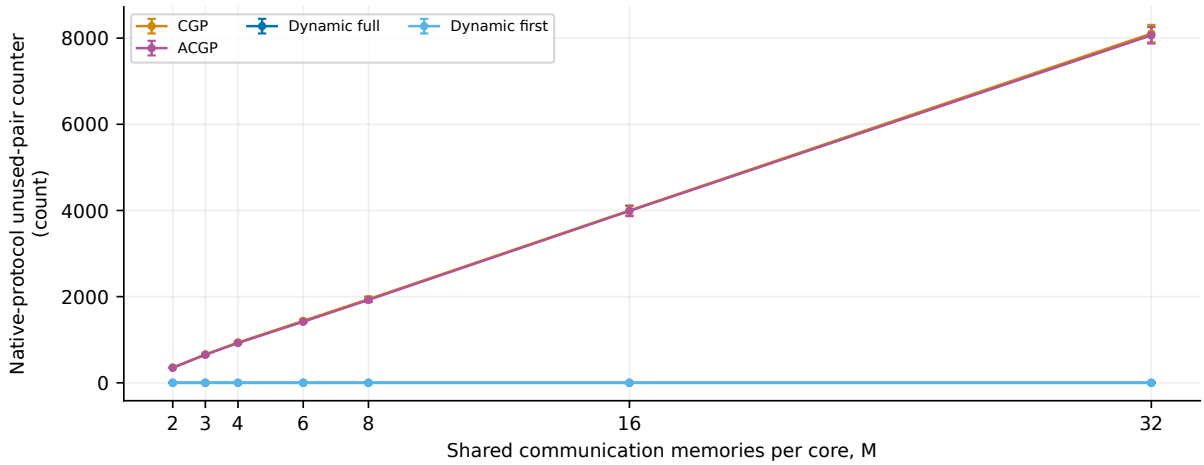


Figure 3.120: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	353.33 ± 10.41	348.00 ± 2.19	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	658.00 ± 15.39	651.33 ± 16.86	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	936.33 ± 21.96	924.00 ± 21.39	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	1437.67 ± 33.88	1417.00 ± 12.88	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	1941.33 ± 62.64	1924.00 ± 51.07	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	3999.33 ± 114.57	3987.67 ± 120.58	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	8104.33 ± 202.89	8064.33 ± 190.79	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.120: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Scheduled compiler preparations

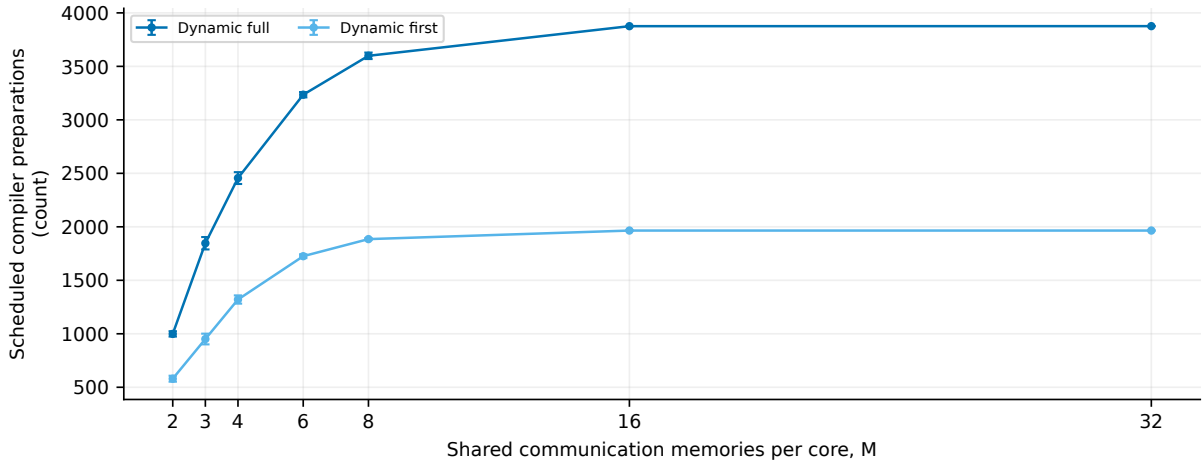


Figure 3.121: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	999.00 ± 24.93	580.00 ± 27.90
3	n/a	n/a	n/a	1846.33 ± 57.91	951.00 ± 50.11
4	n/a	n/a	n/a	2455.67 ± 55.36	1320.33 ± 38.55
6	n/a	n/a	n/a	3235.00 ± 24.93	1725.33 ± 17.76
8	n/a	n/a	n/a	3598.67 ± 30.27	1885.00 ± 8.81
16	n/a	n/a	n/a	3875.67 ± 0.52	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.121: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner-blocked preparations

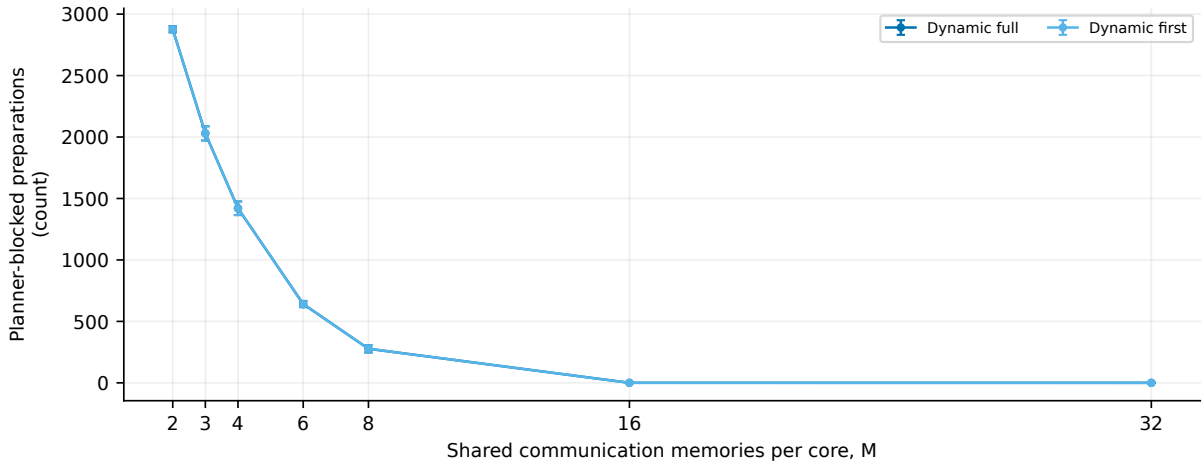


Figure 3.122: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2877.00 ± 24.93	2877.00 ± 24.93
3	n/a	n/a	n/a	2029.67 ± 57.91	2029.67 ± 57.91
4	n/a	n/a	n/a	1420.33 ± 55.36	1420.33 ± 55.36
6	n/a	n/a	n/a	641.00 ± 24.93	641.00 ± 24.93
8	n/a	n/a	n/a	277.33 ± 30.27	277.33 ± 30.27
16	n/a	n/a	n/a	0.3333 ± 0.5164	0.3333 ± 0.5164
32	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.122: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner peak compiler memory

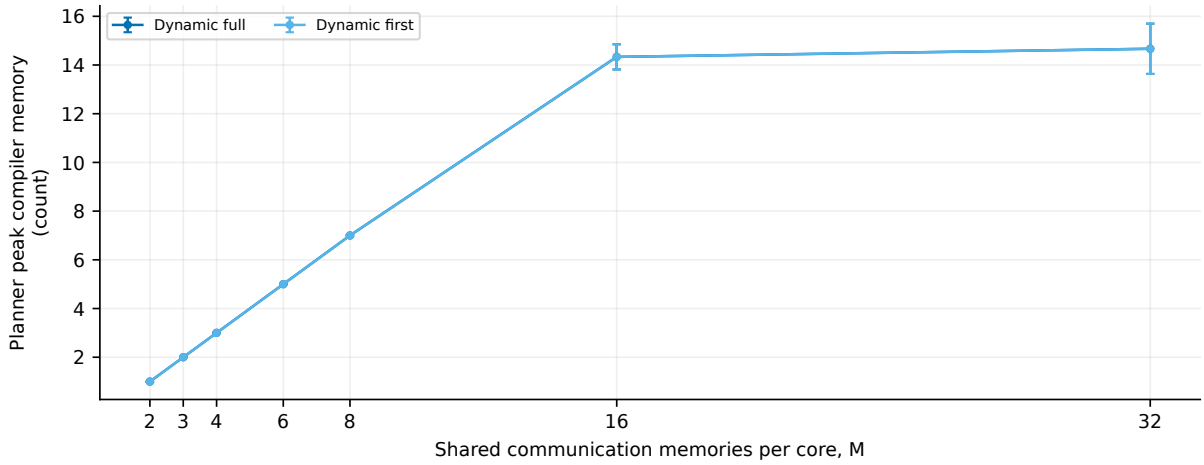


Figure 3.123: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1.000 ± 0.000	1.000 ± 0.000
3	n/a	n/a	n/a	2.000 ± 0.000	2.000 ± 0.000
4	n/a	n/a	n/a	3.000 ± 0.000	3.000 ± 0.000
6	n/a	n/a	n/a	5.000 ± 0.000	5.000 ± 0.000
8	n/a	n/a	n/a	7.000 ± 0.000	7.000 ± 0.000
16	n/a	n/a	n/a	14.333 ± 0.516	14.333 ± 0.516
32	n/a	n/a	n/a	14.667 ± 1.033	14.667 ± 1.033

Table 3.123: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler preparation admission attempts

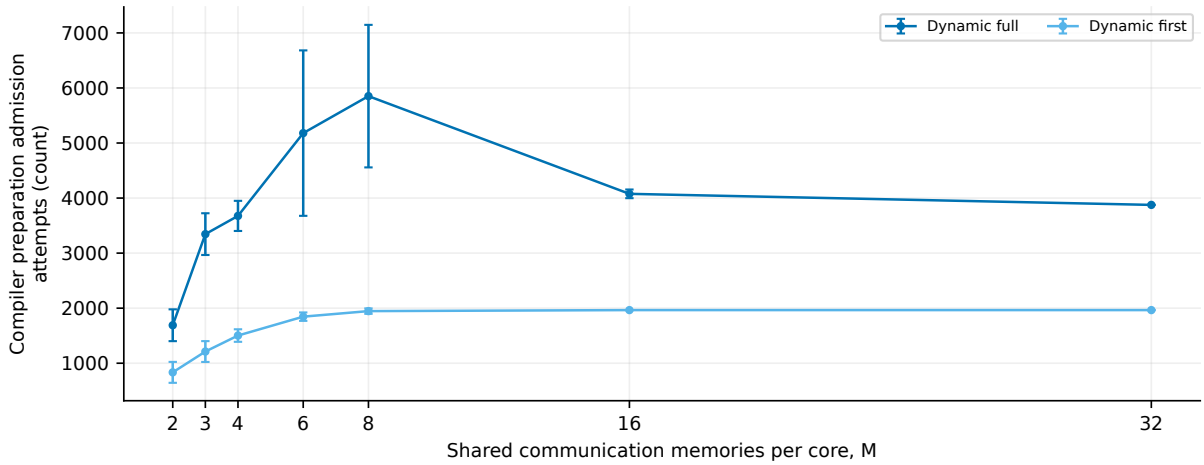


Figure 3.124: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1689.83 ± 288.92	834.00 ± 190.08
3	n/a	n/a	n/a	3345.00 ± 379.29	1212.17 ± 189.19
4	n/a	n/a	n/a	3676.00 ± 273.67	1502.67 ± 113.90
6	n/a	n/a	n/a	5179.83 ± 1502.58	1845.83 ± 76.55
8	n/a	n/a	n/a	5851.67 ± 1294.63	1946.50 ± 49.09
16	n/a	n/a	n/a	4076.83 ± 78.70	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.124: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Launched compiler preparations

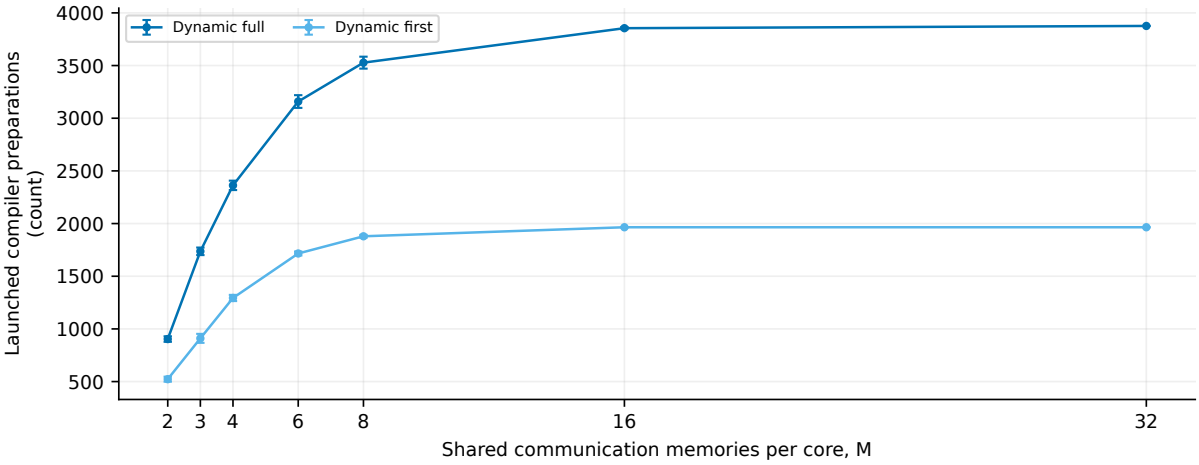


Figure 3.125: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	903.67 ± 26.24	522.83 ± 23.83
3	n/a	n/a	n/a	1736.50 ± 35.84	910.33 ± 42.63
4	n/a	n/a	n/a	2362.67 ± 44.62	1293.67 ± 29.38
6	n/a	n/a	n/a	3158.50 ± 60.38	1716.00 ± 18.93
8	n/a	n/a	n/a	3527.50 ± 56.72	1879.17 ± 13.35
16	n/a	n/a	n/a	3854.67 ± 10.58	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.125: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Accepted compiler preparations

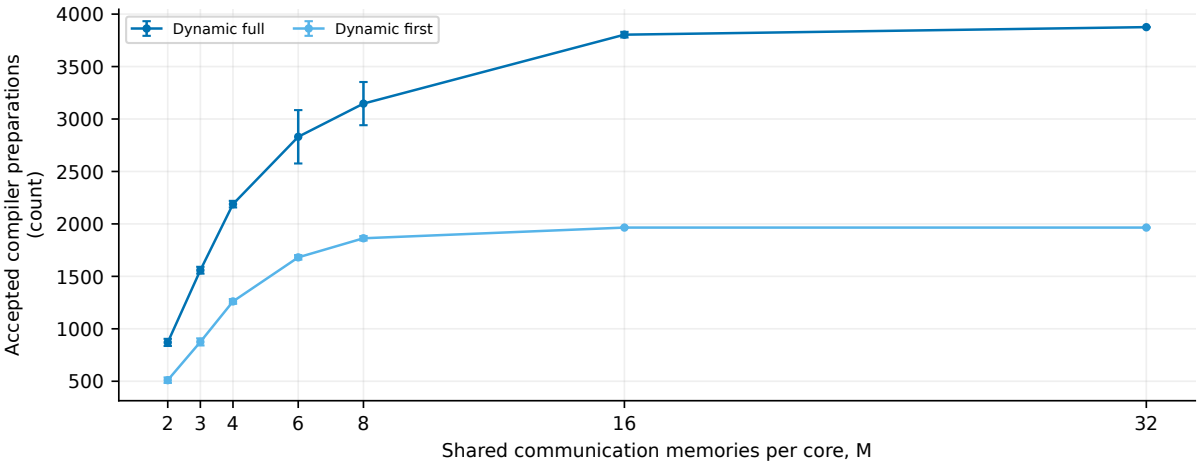


Figure 3.126: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	870.33 ± 33.96	510.17 ± 26.07
3	n/a	n/a	n/a	1558.50 ± 32.49	875.00 ± 33.77
4	n/a	n/a	n/a	2188.33 ± 31.39	1261.00 ± 22.38
6	n/a	n/a	n/a	2830.50 ± 254.47	1681.00 ± 21.56
8	n/a	n/a	n/a	3146.83 ± 205.87	1863.00 ± 21.43
16	n/a	n/a	n/a	3804.00 ± 26.78	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.126: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Rejected compiler preparations

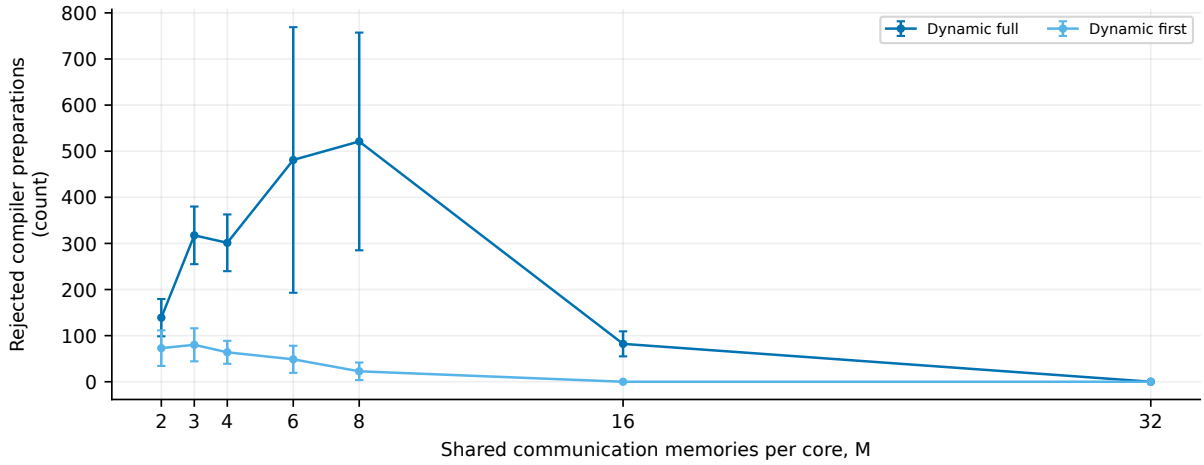


Figure 3.127: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	139.00 ± 40.42	72.833 ± 38.603
3	n/a	n/a	n/a	317.50 ± 62.48	80.167 ± 35.830
4	n/a	n/a	n/a	301.33 ± 61.52	63.833 ± 24.871
6	n/a	n/a	n/a	481.00 ± 288.04	48.667 ± 29.385
8	n/a	n/a	n/a	521.17 ± 236.10	22.667 ± 19.054
16	n/a	n/a	n/a	82.167 ± 27.147	0.0000 ± 0.0000
32	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.127: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-ready request count

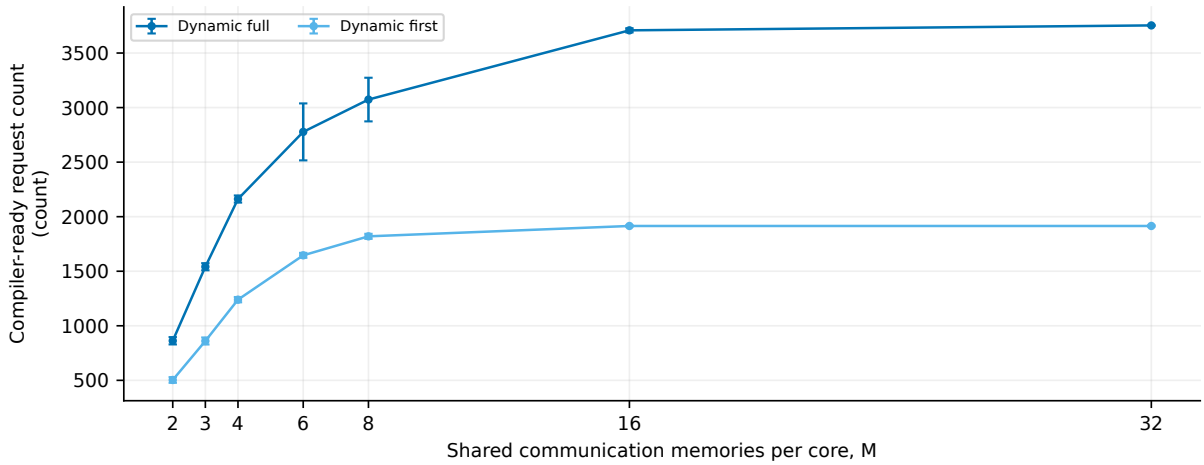


Figure 3.128: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	862.67 ± 33.61	503.33 ± 26.06
3	n/a	n/a	n/a	1541.17 ± 32.71	860.67 ± 32.18
4	n/a	n/a	n/a	2161.83 ± 32.62	1239.33 ± 24.30
6	n/a	n/a	n/a	2777.17 ± 261.05	1645.83 ± 22.49
8	n/a	n/a	n/a	3073.50 ± 199.98	1819.83 ± 23.16
16	n/a	n/a	n/a	3708.00 ± 18.97	1914.83 ± 6.11
32	n/a	n/a	n/a	3753.17 ± 5.04	1914.83 ± 6.11

Table 3.128: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit count

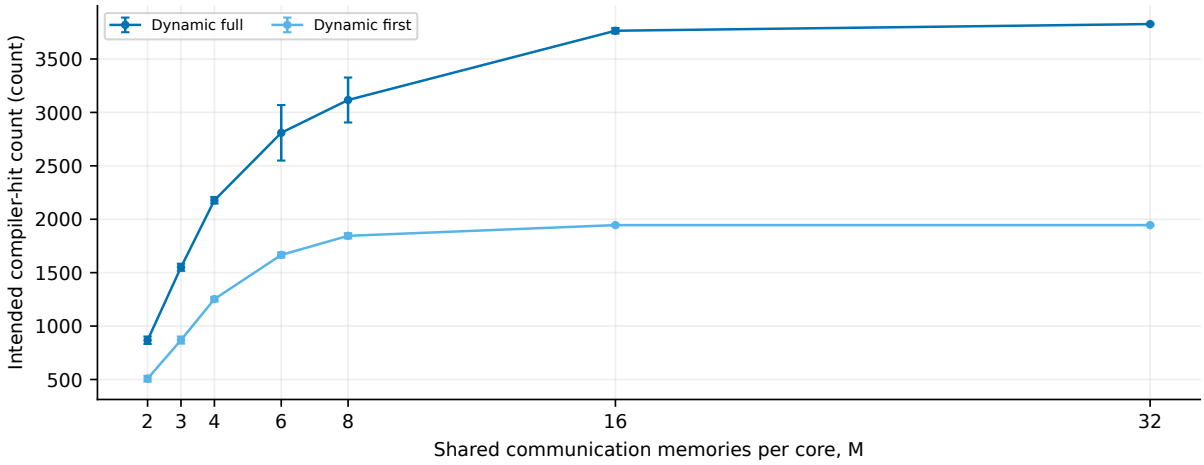


Figure 3.129: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	867.33 ± 34.60	507.50 ± 27.16
3	n/a	n/a	n/a	1550.33 ± 33.06	868.83 ± 33.05
4	n/a	n/a	n/a	2177.67 ± 30.55	1252.33 ± 21.44
6	n/a	n/a	n/a	2809.17 ± 259.78	1666.00 ± 24.29
8	n/a	n/a	n/a	3116.33 ± 210.37	1844.67 ± 24.54
16	n/a	n/a	n/a	3764.67 ± 25.51	1945.17 ± 5.78
32	n/a	n/a	n/a	3827.17 ± 4.12	1945.17 ± 5.78

Table 3.129: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-not-ready request count

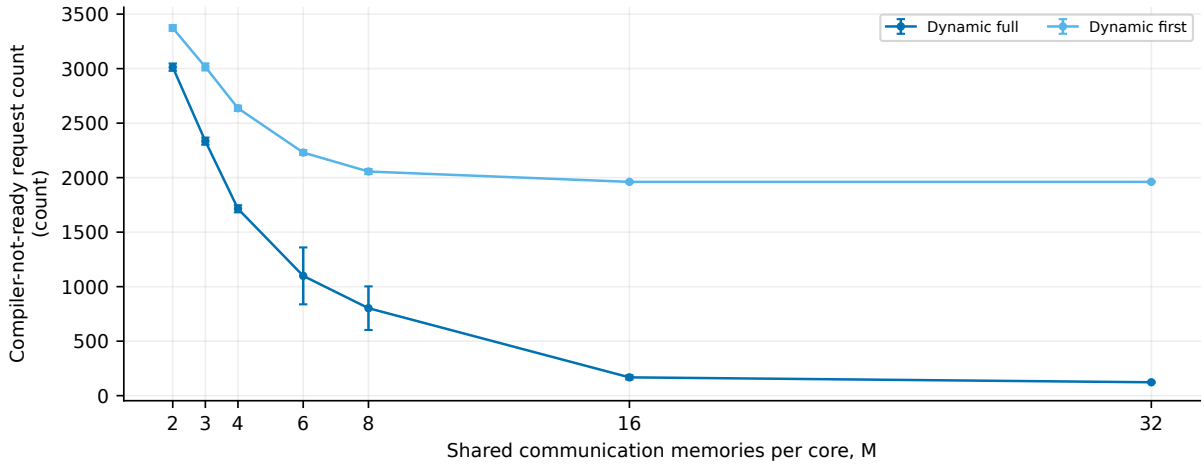


Figure 3.130: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	3013.33 ± 33.61	3372.67 ± 26.06
3	n/a	n/a	n/a	2334.83 ± 32.71	3015.33 ± 32.18
4	n/a	n/a	n/a	1714.17 ± 32.62	2636.67 ± 24.30
6	n/a	n/a	n/a	1098.83 ± 261.05	2230.17 ± 22.49
8	n/a	n/a	n/a	802.50 ± 199.98	2056.17 ± 23.16
16	n/a	n/a	n/a	168.00 ± 18.97	1961.17 ± 6.11
32	n/a	n/a	n/a	122.83 ± 5.04	1961.17 ± 6.11

Table 3.130: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Late compiler-pair uses

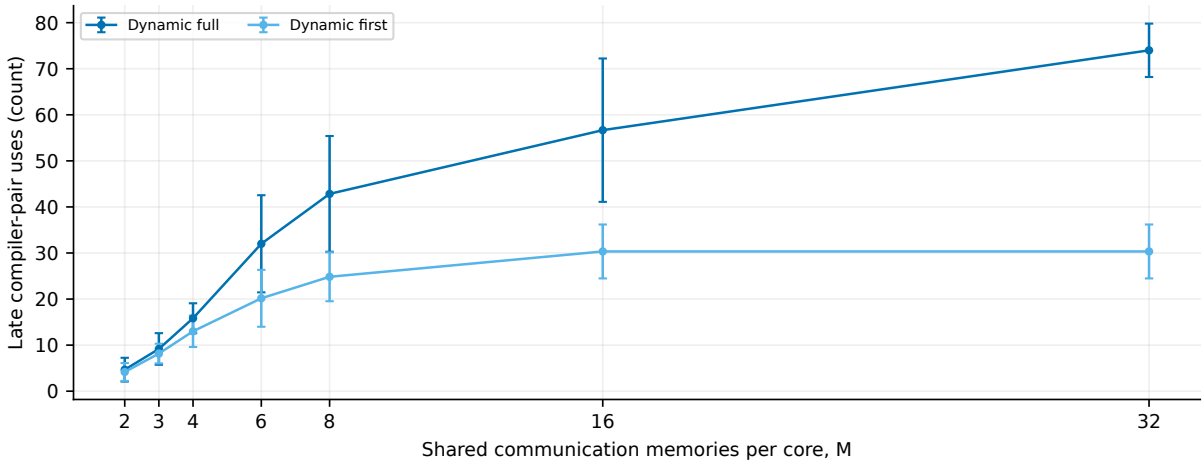


Figure 3.131: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	4.667 ± 2.582	4.167 ± 1.941
3	n/a	n/a	n/a	9.167 ± 3.430	8.167 ± 2.137
4	n/a	n/a	n/a	15.833 ± 3.251	13.000 ± 3.406
6	n/a	n/a	n/a	32.000 ± 10.545	20.167 ± 6.178
8	n/a	n/a	n/a	42.833 ± 12.561	24.833 ± 5.307
16	n/a	n/a	n/a	56.667 ± 15.565	30.333 ± 5.854
32	n/a	n/a	n/a	74.000 ± 5.797	30.333 ± 5.854

Table 3.131: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback count

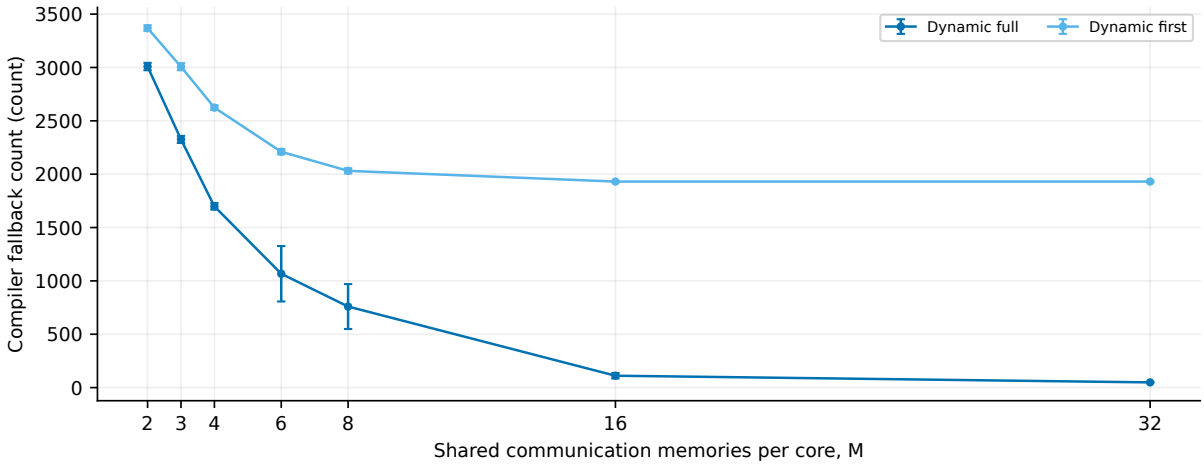


Figure 3.132: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	3008.67 ± 34.60	3368.50 ± 27.16
3	n/a	n/a	n/a	2325.67 ± 33.06	3007.17 ± 33.05
4	n/a	n/a	n/a	1698.33 ± 30.55	2623.67 ± 21.44
6	n/a	n/a	n/a	1066.83 ± 259.78	2210.00 ± 24.29
8	n/a	n/a	n/a	759.67 ± 210.37	2031.33 ± 24.54
16	n/a	n/a	n/a	111.33 ± 25.51	1930.83 ± 5.78
32	n/a	n/a	n/a	48.833 ± 4.119	1930.83 ± 5.78

Table 3.132: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Generated compiler pairs

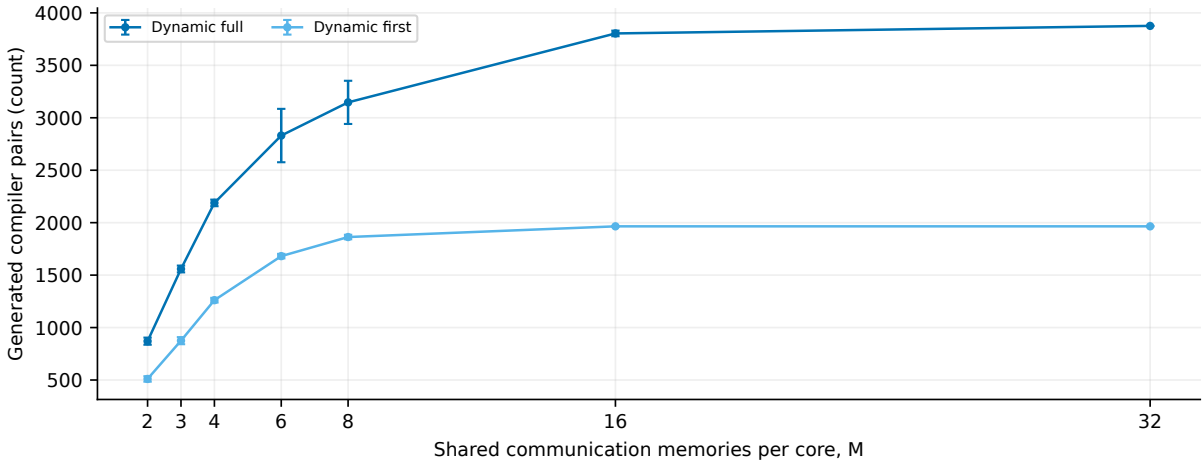


Figure 3.133: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	870.33 ± 33.96	510.17 ± 26.07
3	n/a	n/a	n/a	1558.50 ± 32.49	875.00 ± 33.77
4	n/a	n/a	n/a	2188.33 ± 31.39	1261.00 ± 22.38
6	n/a	n/a	n/a	2830.50 ± 254.47	1681.00 ± 21.56
8	n/a	n/a	n/a	3146.83 ± 205.87	1863.00 ± 21.43
16	n/a	n/a	n/a	3804.00 ± 26.78	1965.00 ± 0.00
32	n/a	n/a	n/a	3876.00 ± 0.00	1965.00 ± 0.00

Table 3.133: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler pairs

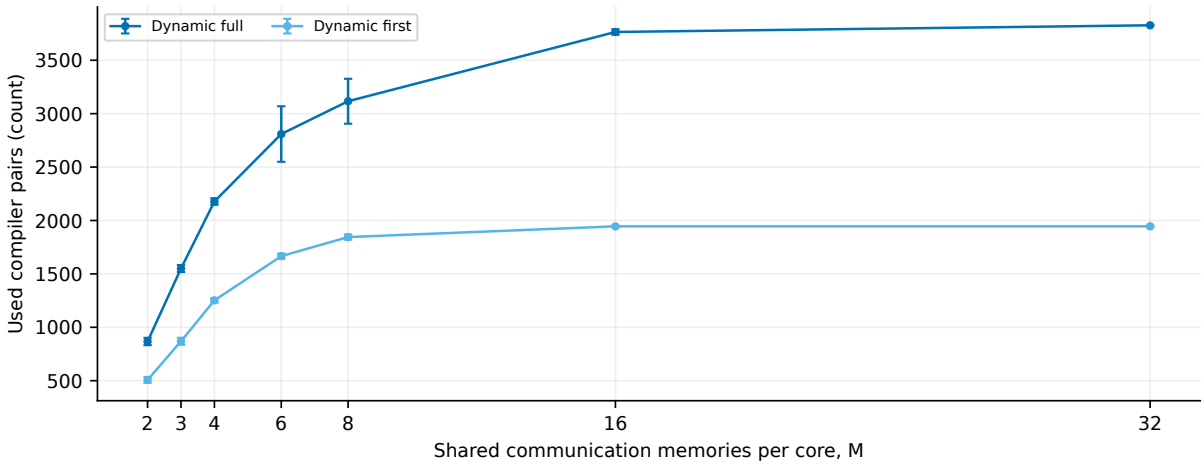


Figure 3.134: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	867.33 ± 34.60	507.50 ± 27.16
3	n/a	n/a	n/a	1550.33 ± 33.06	868.83 ± 33.05
4	n/a	n/a	n/a	2177.67 ± 30.55	1252.33 ± 21.44
6	n/a	n/a	n/a	2809.17 ± 259.78	1666.00 ± 24.29
8	n/a	n/a	n/a	3116.33 ± 210.37	1844.67 ± 24.54
16	n/a	n/a	n/a	3764.67 ± 25.51	1945.17 ± 5.78
32	n/a	n/a	n/a	3827.17 ± 4.12	1945.17 ± 5.78

Table 3.134: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Expired compiler pairs

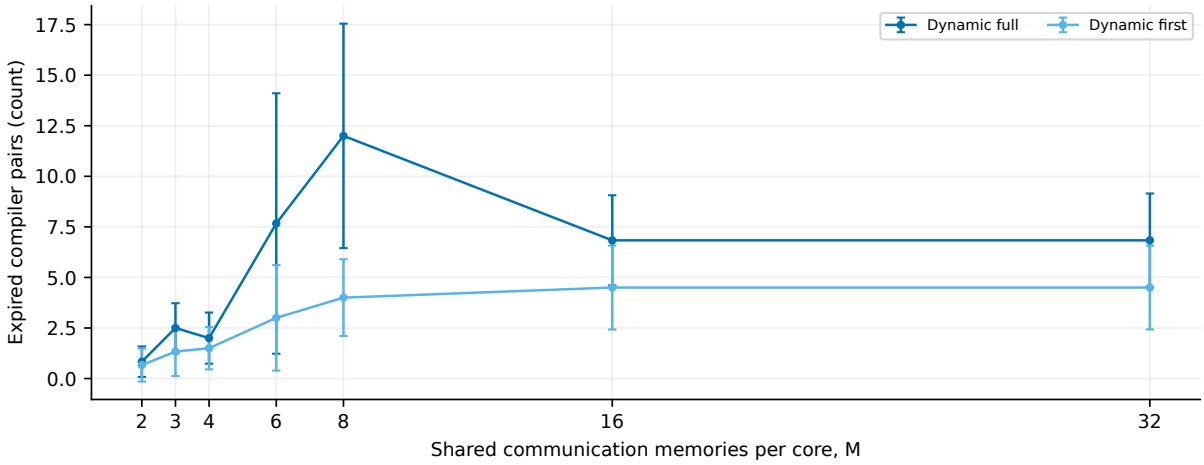


Figure 3.135: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.8333 ± 0.7528	0.6667 ± 0.8165
3	n/a	n/a	n/a	2.500 ± 1.225	1.333 ± 1.211
4	n/a	n/a	n/a	2.000 ± 1.265	1.500 ± 1.049
6	n/a	n/a	n/a	7.667 ± 6.439	3.000 ± 2.608
8	n/a	n/a	n/a	12.000 ± 5.550	4.000 ± 1.897
16	n/a	n/a	n/a	6.833 ± 2.229	4.500 ± 2.074
32	n/a	n/a	n/a	6.833 ± 2.317	4.500 ± 2.074

Table 3.135: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Remaining compiler pairs

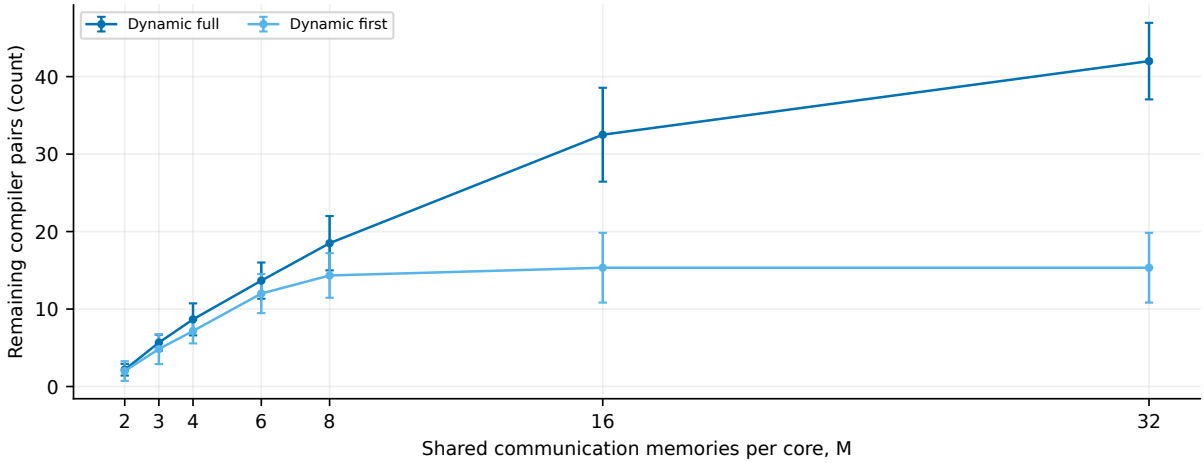


Figure 3.136: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2.167 ± 0.753	2.000 ± 1.265
3	n/a	n/a	n/a	5.667 ± 1.033	4.833 ± 1.941
4	n/a	n/a	n/a	8.667 ± 2.066	7.167 ± 1.602
6	n/a	n/a	n/a	13.667 ± 2.338	12.000 ± 2.530
8	n/a	n/a	n/a	18.500 ± 3.507	14.333 ± 2.875
16	n/a	n/a	n/a	32.500 ± 6.058	15.333 ± 4.502
32	n/a	n/a	n/a	42.000 ± 4.940	15.333 ± 4.502

Table 3.136: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at creation

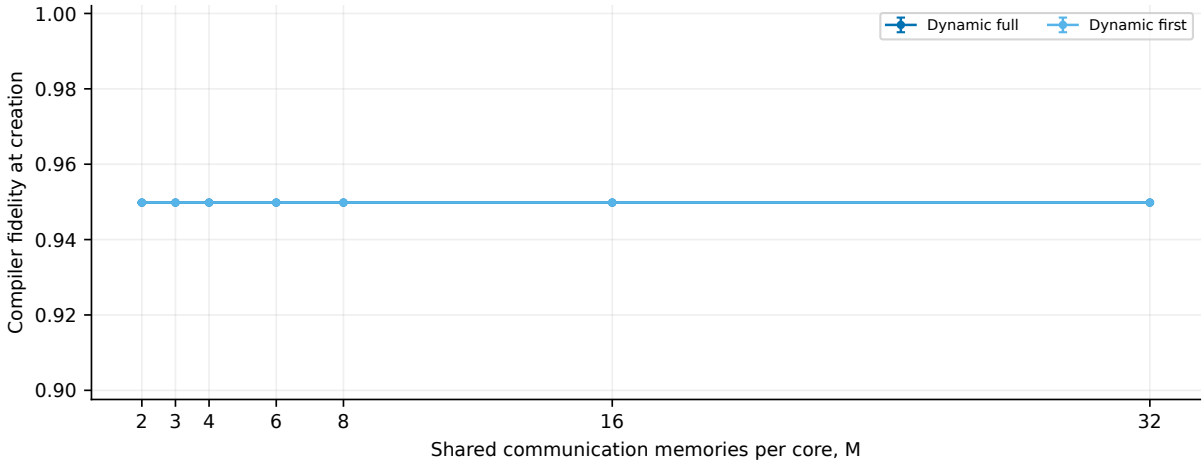


Figure 3.137: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
3	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
4	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
6	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
8	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
16	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
32	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000

Table 3.137: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at use

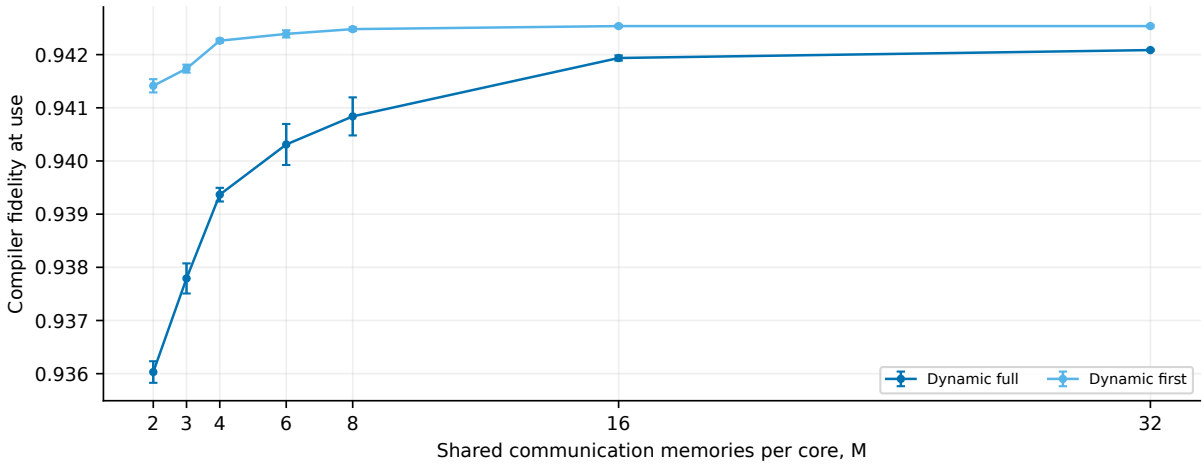


Figure 3.138: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9360 ± 0.0002	0.9414 ± 0.0001
3	n/a	n/a	n/a	0.9378 ± 0.0003	0.9417 ± 0.0001
4	n/a	n/a	n/a	0.9394 ± 0.0001	0.9423 ± 0.0000
6	n/a	n/a	n/a	0.9403 ± 0.0004	0.9424 ± 0.0001
8	n/a	n/a	n/a	0.9408 ± 0.0004	0.9425 ± 0.0000
16	n/a	n/a	n/a	0.9419 ± 0.0000	0.9425 ± 0.0000
32	n/a	n/a	n/a	0.9421 ± 0.0000	0.9425 ± 0.0000

Table 3.138: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean layer latency

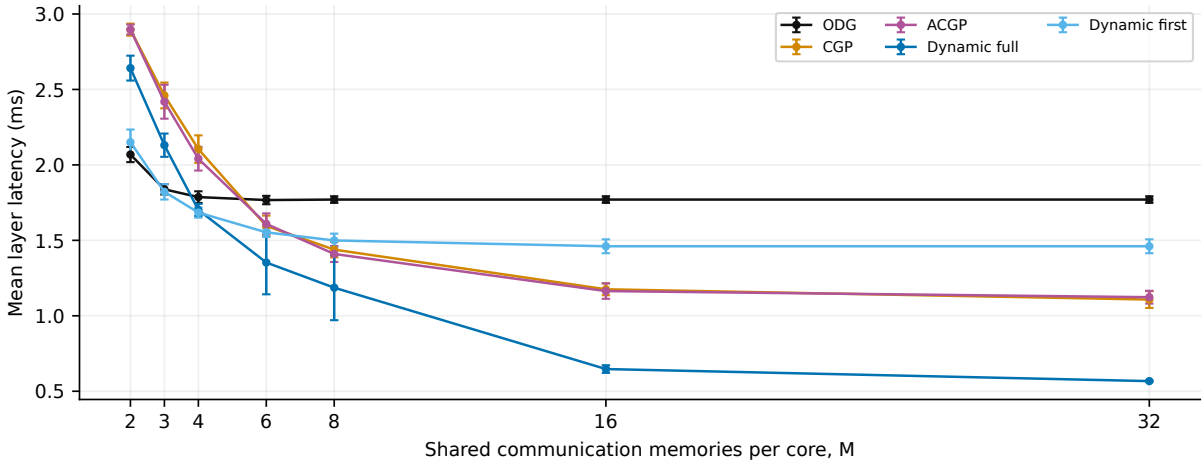


Figure 3.139: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	2.069 ± 0.050	2.896 ± 0.040	2.897 ± 0.032	2.641 ± 0.082	2.150 ± 0.084
3	1.838 ± 0.034	2.460 ± 0.085	2.419 ± 0.112	2.131 ± 0.077	1.822 ± 0.051
4	1.787 ± 0.038	2.105 ± 0.091	2.041 ± 0.078	1.702 ± 0.040	1.684 ± 0.034
6	1.767 ± 0.028	1.595 ± 0.068	1.609 ± 0.070	1.353 ± 0.211	1.553 ± 0.031
8	1.770 ± 0.022	1.439 ± 0.051	1.410 ± 0.053	1.186 ± 0.215	1.499 ± 0.045
16	1.770 ± 0.022	1.176 ± 0.039	1.164 ± 0.051	0.6470 ± 0.0254	1.461 ± 0.046
32	1.770 ± 0.022	1.108 ± 0.056	1.123 ± 0.043	0.5671 ± 0.0031	1.461 ± 0.046

Table 3.139: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum layer latency

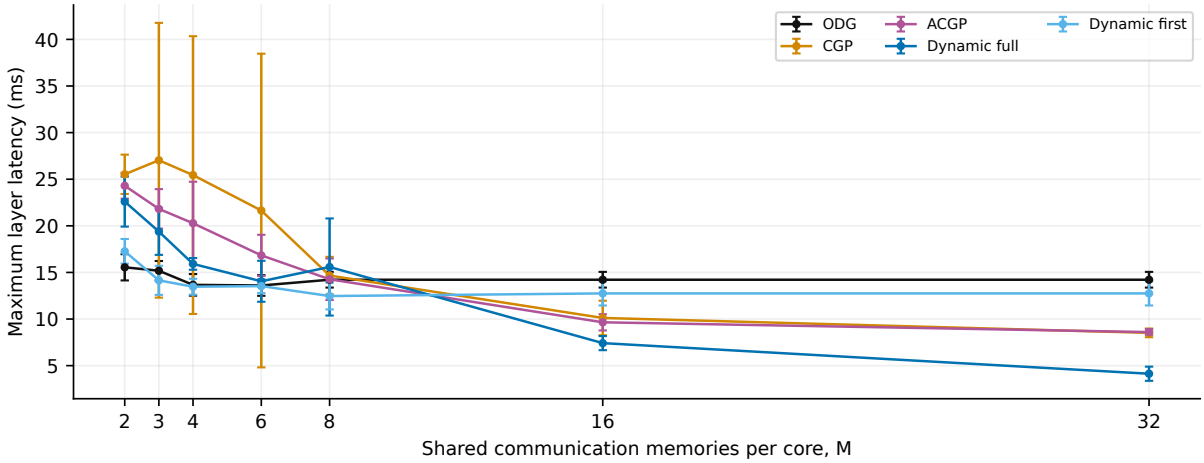


Figure 3.140: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	15.550 ± 1.408	25.527 ± 2.109	24.296 ± 1.387	22.601 ± 2.685	17.267 ± 1.320
3	15.184 ± 1.042	27.034 ± 14.738	21.817 ± 2.120	19.384 ± 2.499	14.150 ± 1.559
4	13.667 ± 1.159	25.444 ± 14.897	20.276 ± 4.452	15.917 ± 0.627	13.467 ± 0.855
6	13.600 ± 1.108	21.640 ± 16.826	16.834 ± 2.204	14.050 ± 2.197	13.534 ± 0.747
8	14.217 ± 0.842	14.664 ± 2.007	14.266 ± 2.220	15.584 ± 5.209	12.467 ± 1.435
16	14.217 ± 0.842	10.117 ± 1.850	9.650 ± 0.874	7.417 ± 0.757	12.750 ± 1.294
32	14.217 ± 0.842	8.517 ± 0.467	8.600 ± 0.310	4.133 ± 0.761	12.750 ± 1.294

Table 3.140: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Minimum layer latency

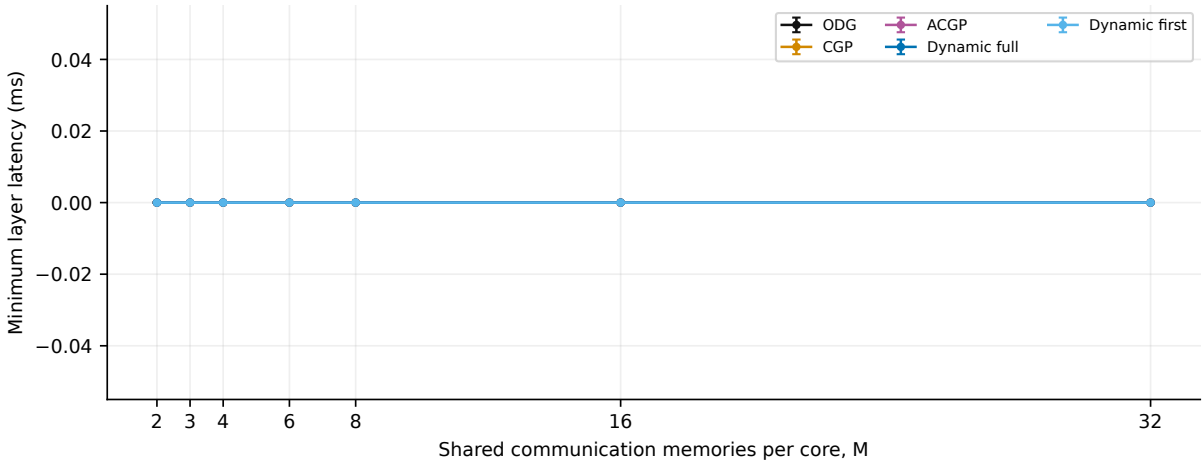


Figure 3.141: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.141: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

3.4 Max Reliability

Mean request latency

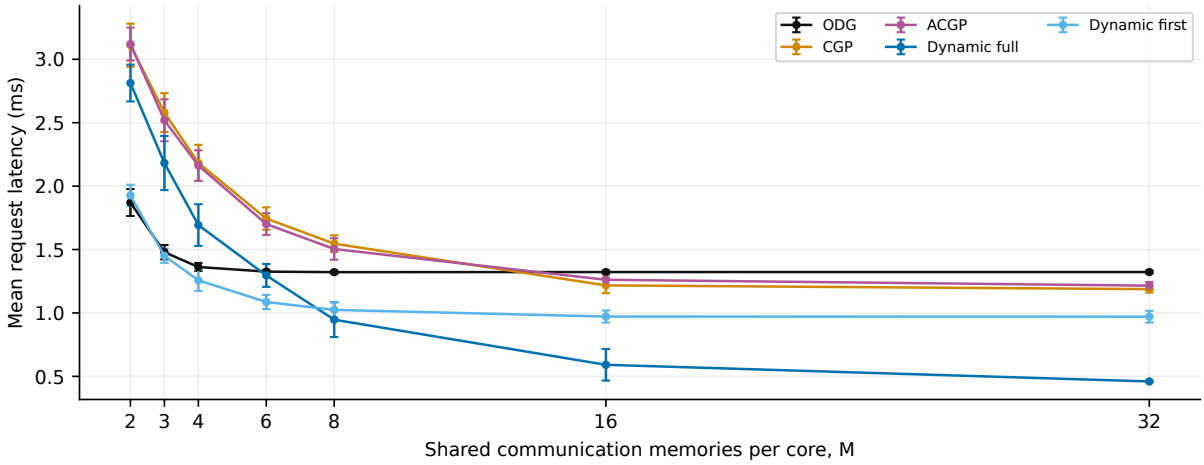


Figure 3.142: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.871 ± 0.106	3.111 ± 0.170	3.120 ± 0.130	2.813 ± 0.145	1.926 ± 0.084
3	1.479 ± 0.057	2.580 ± 0.153	2.519 ± 0.165	2.182 ± 0.213	1.450 ± 0.056
4	1.362 ± 0.032	2.183 ± 0.142	2.162 ± 0.120	1.693 ± 0.164	1.257 ± 0.083
6	1.326 ± 0.014	1.745 ± 0.088	1.701 ± 0.085	1.296 ± 0.090	1.086 ± 0.056
8	1.322 ± 0.011	1.546 ± 0.066	1.504 ± 0.085	0.9469 ± 0.1370	1.024 ± 0.061
16	1.322 ± 0.012	1.217 ± 0.061	1.262 ± 0.042	0.5912 ± 0.1245	0.9715 ± 0.0476
32	1.322 ± 0.012	1.188 ± 0.027	1.215 ± 0.029	0.4599 ± 0.0011	0.9706 ± 0.0465

Table 3.142: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Median request latency

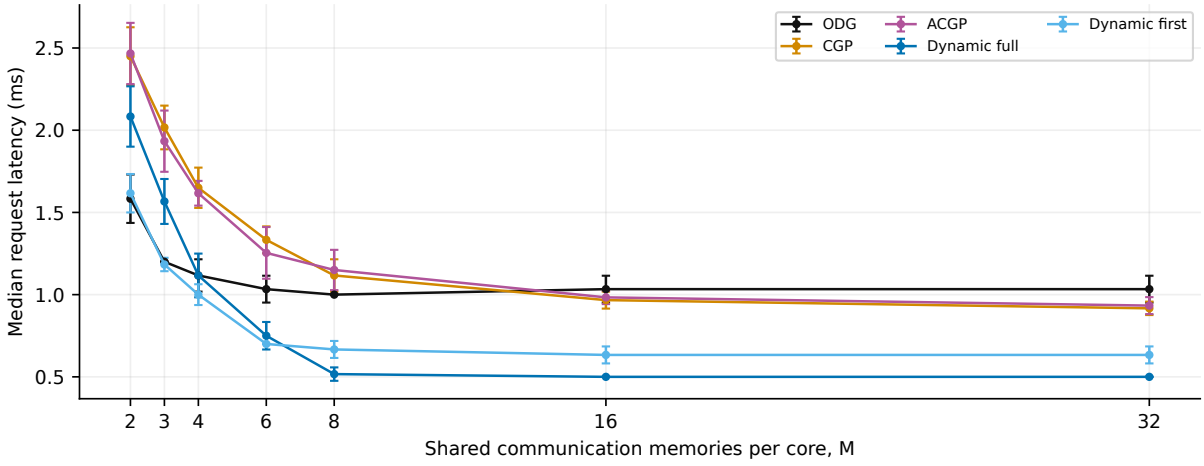


Figure 3.143: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.583 ± 0.147	2.450 ± 0.176	2.467 ± 0.186	2.083 ± 0.183	1.617 ± 0.117
3	1.200 ± 0.000	2.017 ± 0.133	1.933 ± 0.186	1.567 ± 0.137	1.183 ± 0.041
4	1.117 ± 0.098	1.650 ± 0.122	1.617 ± 0.075	1.117 ± 0.133	1.000 ± 0.063
6	1.033 ± 0.082	1.333 ± 0.082	1.254 ± 0.157	0.7500 ± 0.0837	0.7000 ± 0.0000
8	1.000 ± 0.000	1.117 ± 0.098	1.150 ± 0.122	0.5167 ± 0.0408	0.6667 ± 0.0516
16	1.033 ± 0.082	0.9667 ± 0.0516	0.9833 ± 0.0408	0.5000 ± 0.0000	0.6333 ± 0.0516
32	1.033 ± 0.082	0.9167 ± 0.0408	0.9333 ± 0.0516	0.5000 ± 0.0000	0.6333 ± 0.0516

Table 3.143: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

p95 request latency

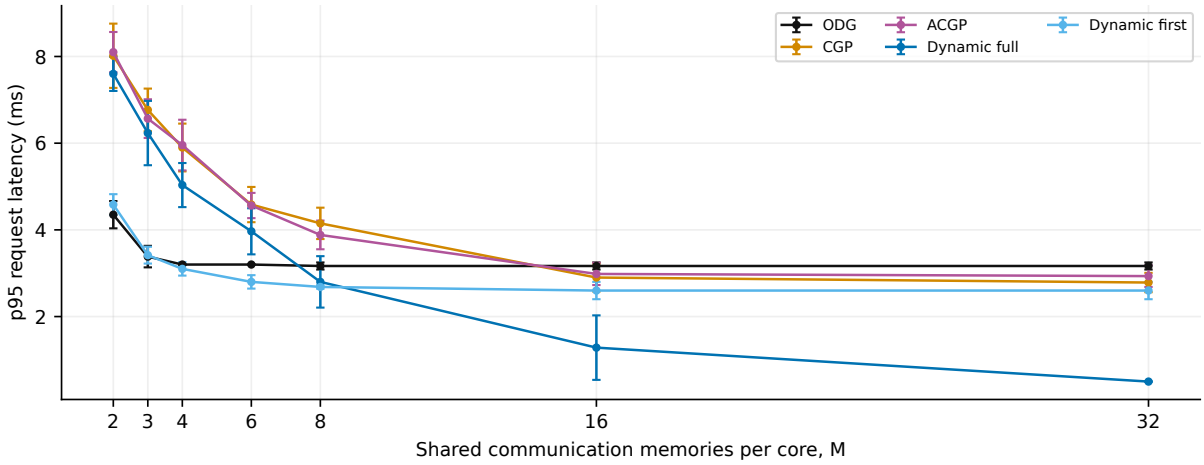


Figure 3.144: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	4.350 ± 0.315	8.017 ± 0.741	8.100 ± 0.465	7.600 ± 0.395	4.583 ± 0.240
3	3.383 ± 0.248	6.767 ± 0.493	6.567 ± 0.446	6.233 ± 0.742	3.417 ± 0.194
4	3.200 ± 0.000	5.900 ± 0.551	5.956 ± 0.585	5.033 ± 0.509	3.100 ± 0.155
6	3.200 ± 0.000	4.584 ± 0.407	4.562 ± 0.291	3.967 ± 0.532	2.800 ± 0.155
8	3.167 ± 0.082	4.150 ± 0.362	3.883 ± 0.331	2.800 ± 0.593	2.683 ± 0.041
16	3.167 ± 0.082	2.900 ± 0.322	2.983 ± 0.256	1.283 ± 0.744	2.600 ± 0.200
32	3.167 ± 0.082	2.785 ± 0.223	2.933 ± 0.250	0.5000 ± 0.0000	2.600 ± 0.200

Table 3.144: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.
Exact CSV values and sample counts

Maximum request latency

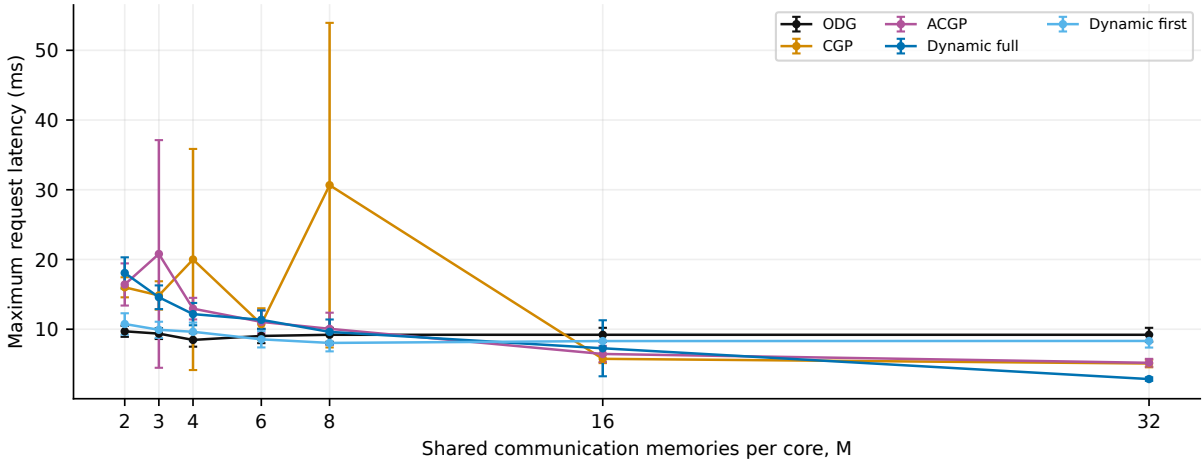


Figure 3.145: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	9.700 ± 0.795	16.011 ± 1.439	16.417 ± 3.024	18.067 ± 2.242	10.750 ± 1.537
3	9.367 ± 0.774	14.845 ± 2.030	20.793 ± 16.325	14.584 ± 1.699	9.917 ± 1.155
4	8.467 ± 0.973	19.999 ± 15.855	12.950 ± 1.549	12.167 ± 1.598	9.634 ± 1.322
6	9.034 ± 1.033	10.734 ± 2.270	11.049 ± 1.642	11.350 ± 1.358	8.550 ± 1.164
8	9.200 ± 1.000	30.659 ± 23.276	10.061 ± 2.307	9.617 ± 1.777	8.034 ± 1.211
16	9.200 ± 1.000	5.752 ± 0.612	6.450 ± 1.154	7.267 ± 4.016	8.300 ± 0.959
32	9.200 ± 1.000	5.083 ± 0.546	5.183 ± 0.564	2.850 ± 0.251	8.317 ± 0.947

Table 3.145: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.
Exact CSV values and sample counts

Communication makespan

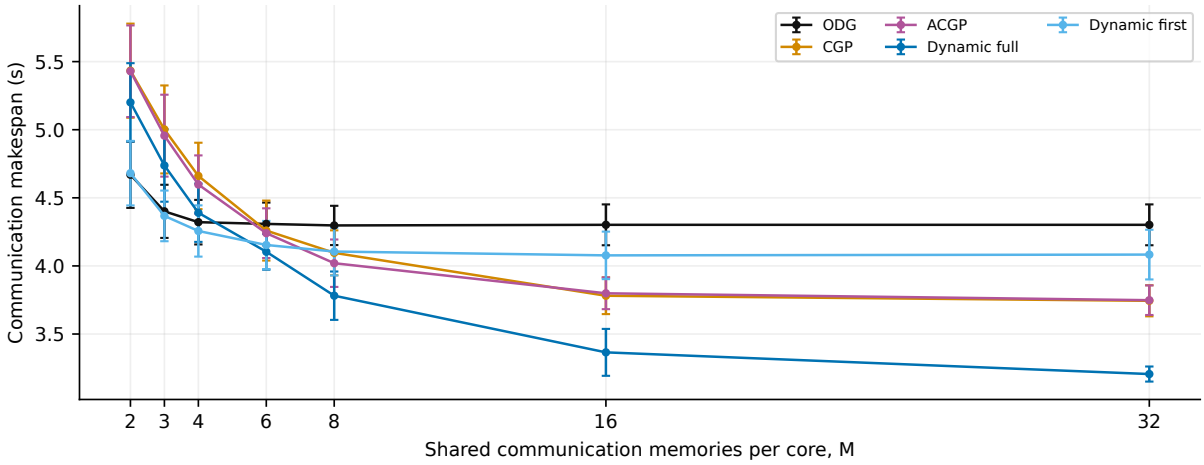


Figure 3.146: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	4.670 ± 0.244	5.434 ± 0.345	5.429 ± 0.336	5.201 ± 0.288	4.681 ± 0.237
3	4.401 ± 0.195	5.002 ± 0.323	4.956 ± 0.301	4.737 ± 0.266	4.367 ± 0.186
4	4.321 ± 0.164	4.661 ± 0.244	4.598 ± 0.214	4.390 ± 0.214	4.256 ± 0.188
6	4.308 ± 0.157	4.260 ± 0.220	4.240 ± 0.183	4.104 ± 0.132	4.154 ± 0.177
8	4.297 ± 0.144	4.096 ± 0.165	4.020 ± 0.174	3.781 ± 0.178	4.106 ± 0.175
16	4.302 ± 0.150	3.781 ± 0.135	3.799 ± 0.117	3.365 ± 0.172	4.077 ± 0.174
32	4.302 ± 0.150	3.744 ± 0.114	3.748 ± 0.109	3.206 ± 0.055	4.083 ± 0.182

Table 3.146: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.
Exact CSV values and sample counts

Mean admission wait

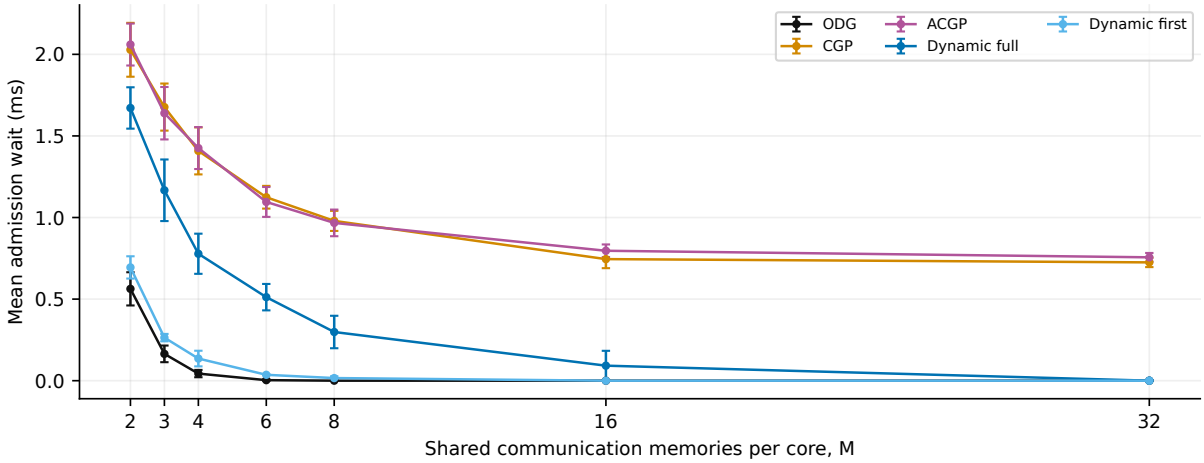


Figure 3.147: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.5628 ± 0.1018	2.028 ± 0.165	2.060 ± 0.129	1.671 ± 0.127	0.6942 ± 0.0683
3	0.1644 ± 0.0510	1.677 ± 0.144	1.639 ± 0.161	1.167 ± 0.189	0.2639 ± 0.0227
4	0.0435 ± 0.0225	1.408 ± 0.144	1.426 ± 0.129	0.7779 ± 0.1230	0.1357 ± 0.0479
6	0.0033 ± 0.0041	1.124 ± 0.070	1.095 ± 0.092	0.5119 ± 0.0809	0.0361 ± 0.0031
8	0.0001 ± 0.0002	0.9793 ± 0.0615	0.9670 ± 0.0816	0.2984 ± 0.0995	0.0161 ± 0.0108
16	0.0000 ± 0.0000	0.7450 ± 0.0555	0.7962 ± 0.0387	0.0921 ± 0.0910	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.7251 ± 0.0290	0.7561 ± 0.0267	0.0001 ± 0.0002	0.0000 ± 0.0000

Table 3.147: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.
Exact CSV values and sample counts

Delivered EPR fidelity

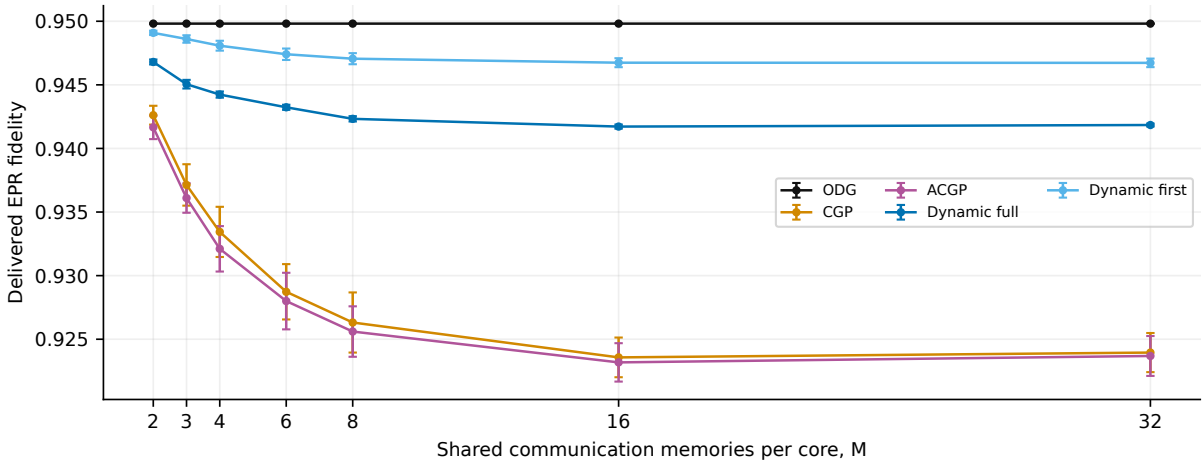


Figure 3.148: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.9498 ± 0.0000	0.9426 ± 0.0007	0.9417 ± 0.0009	0.9468 ± 0.0002	0.9491 ± 0.0002
3	0.9498 ± 0.0000	0.9371 ± 0.0016	0.9361 ± 0.0012	0.9451 ± 0.0003	0.9486 ± 0.0003
4	0.9498 ± 0.0000	0.9334 ± 0.0020	0.9321 ± 0.0018	0.9442 ± 0.0002	0.9481 ± 0.0004
6	0.9498 ± 0.0000	0.9287 ± 0.0022	0.9280 ± 0.0022	0.9432 ± 0.0002	0.9474 ± 0.0004
8	0.9498 ± 0.0000	0.9263 ± 0.0024	0.9256 ± 0.0020	0.9423 ± 0.0002	0.9471 ± 0.0004
16	0.9498 ± 0.0000	0.9236 ± 0.0016	0.9232 ± 0.0015	0.9417 ± 0.0002	0.9467 ± 0.0004
32	0.9498 ± 0.0000	0.9240 ± 0.0015	0.9237 ± 0.0016	0.9418 ± 0.0001	0.9467 ± 0.0003

Table 3.148: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler readiness fraction

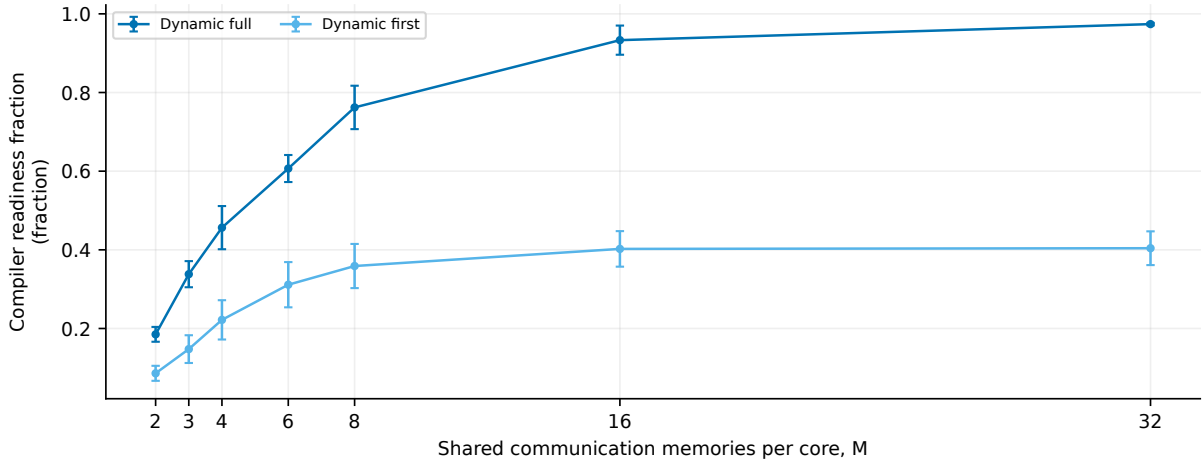


Figure 3.149: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.1851 ± 0.0189	0.0860 ± 0.0191
3	n/a	n/a	n/a	0.3381 ± 0.0332	0.1475 ± 0.0353
4	n/a	n/a	n/a	0.4564 ± 0.0549	0.2219 ± 0.0499
6	n/a	n/a	n/a	0.6067 ± 0.0344	0.3113 ± 0.0575
8	n/a	n/a	n/a	0.7621 ± 0.0552	0.3588 ± 0.0561
16	n/a	n/a	n/a	0.9331 ± 0.0371	0.4024 ± 0.0452
32	n/a	n/a	n/a	0.9739 ± 0.0032	0.4041 ± 0.0429

Table 3.149: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit fraction

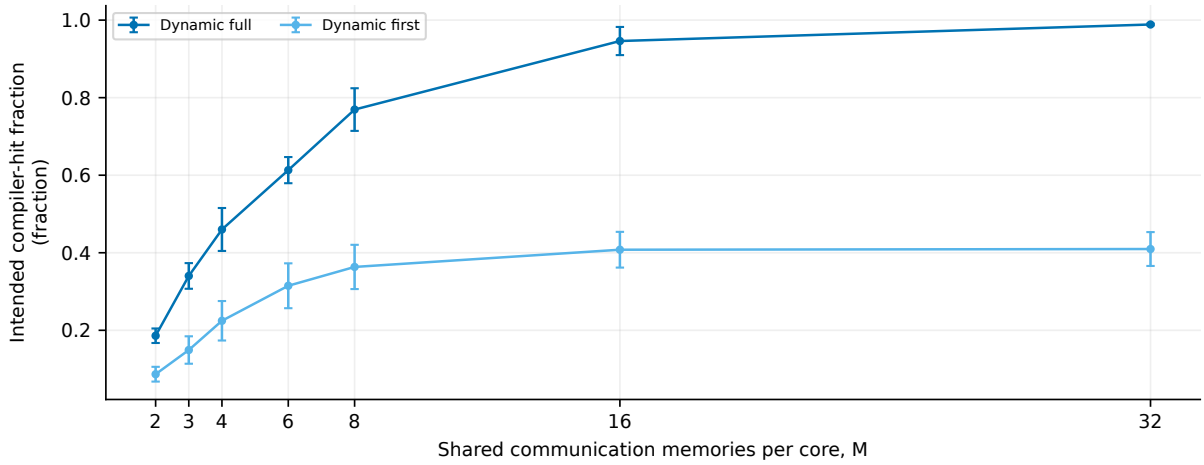


Figure 3.150: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.1860 ± 0.0187	0.0868 ± 0.0190
3	n/a	n/a	n/a	0.3402 ± 0.0331	0.1491 ± 0.0354
4	n/a	n/a	n/a	0.4600 ± 0.0554	0.2246 ± 0.0509
6	n/a	n/a	n/a	0.6131 ± 0.0337	0.3149 ± 0.0579
8	n/a	n/a	n/a	0.7693 ± 0.0550	0.3634 ± 0.0571
16	n/a	n/a	n/a	0.9461 ± 0.0363	0.4078 ± 0.0461
32	n/a	n/a	n/a	0.9887 ± 0.0022	0.4096 ± 0.0437

Table 3.150: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback fraction

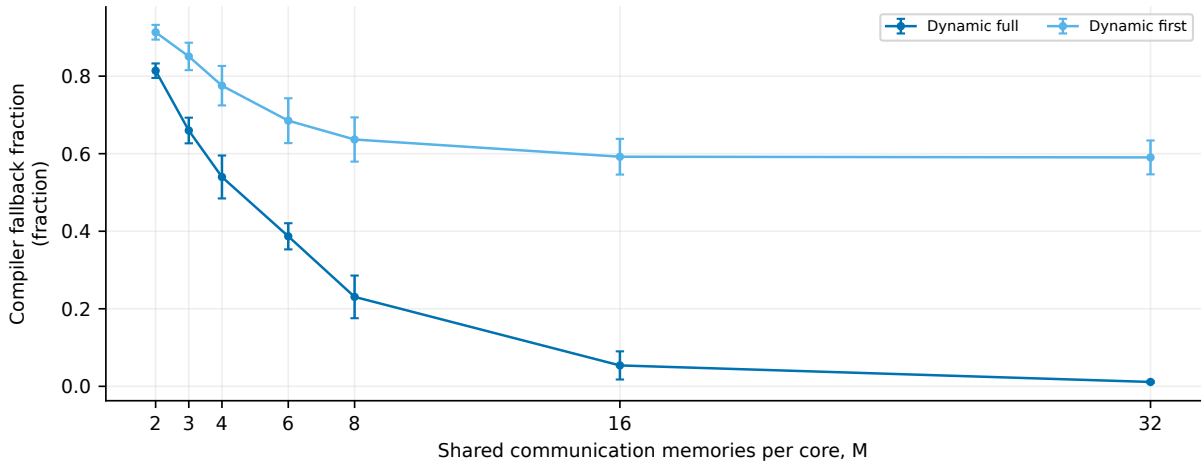


Figure 3.151: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.8140 ± 0.0187	0.9132 ± 0.0190
3	n/a	n/a	n/a	0.6598 ± 0.0331	0.8509 ± 0.0354
4	n/a	n/a	n/a	0.5400 ± 0.0554	0.7754 ± 0.0509
6	n/a	n/a	n/a	0.3869 ± 0.0337	0.6851 ± 0.0579
8	n/a	n/a	n/a	0.2307 ± 0.0550	0.6366 ± 0.0571
16	n/a	n/a	n/a	0.0539 ± 0.0363	0.5922 ± 0.0461
32	n/a	n/a	n/a	0.0113 ± 0.0022	0.5904 ± 0.0437

Table 3.151: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-cache waste

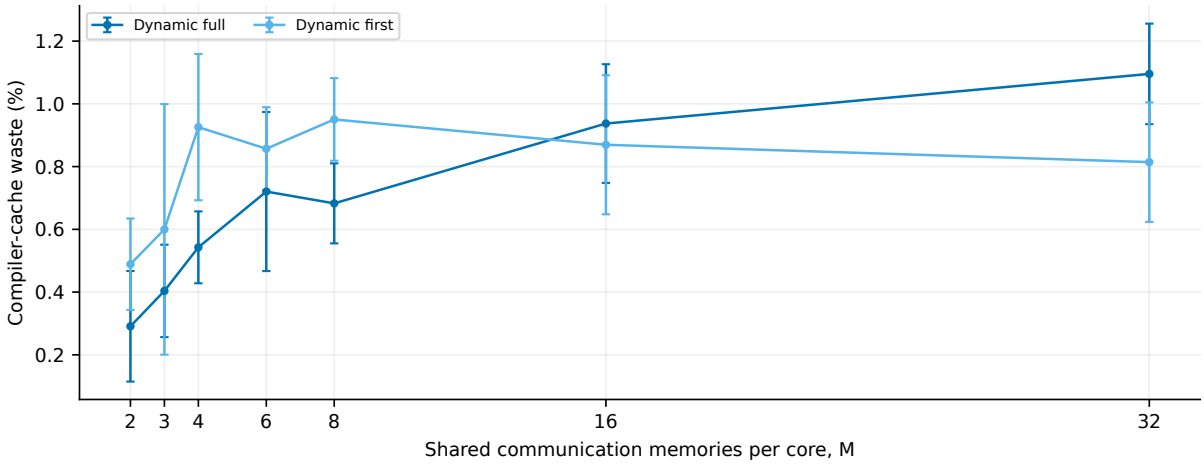


Figure 3.152: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2909 ± 0.1762	0.4889 ± 0.1457
3	n/a	n/a	n/a	0.4037 ± 0.1473	0.5999 ± 0.3993
4	n/a	n/a	n/a	0.5427 ± 0.1146	0.9258 ± 0.2332
6	n/a	n/a	n/a	0.7204 ± 0.2535	0.8570 ± 0.1323
8	n/a	n/a	n/a	0.6827 ± 0.1275	0.9503 ± 0.1316
16	n/a	n/a	n/a	0.9372 ± 0.1892	0.8696 ± 0.2216
32	n/a	n/a	n/a	1.095 ± 0.160	0.8142 ± 0.1904

Table 3.152: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol waste

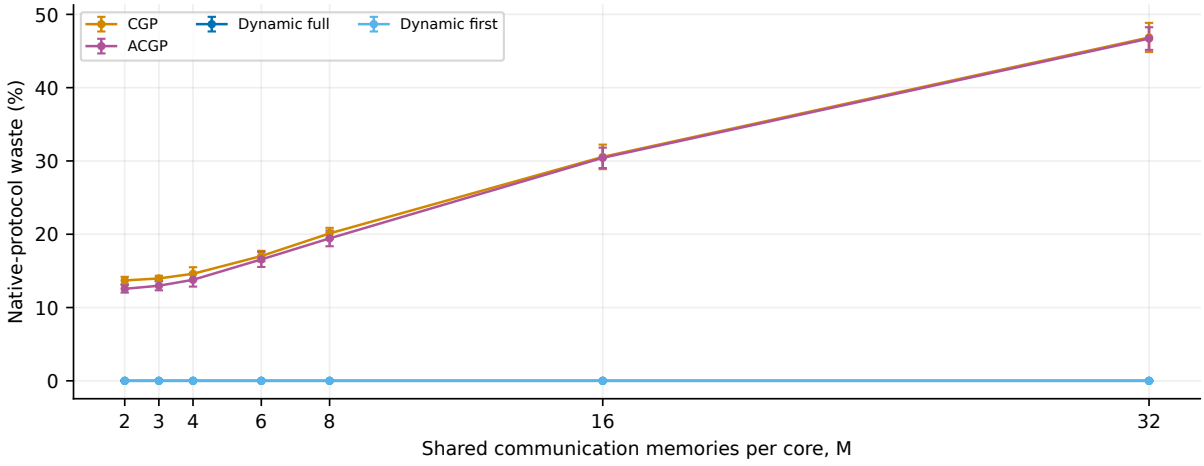


Figure 3.153: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	13.698 ± 0.495	12.552 ± 0.516	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	13.968 ± 0.363	12.973 ± 0.624	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	14.604 ± 0.896	13.783 ± 0.928	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	17.023 ± 0.719	16.565 ± 1.026	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	20.113 ± 0.761	19.435 ± 1.077	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	30.555 ± 1.675	30.424 ± 1.394	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	46.848 ± 1.994	46.700 ± 1.545	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.153: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-pair expiry

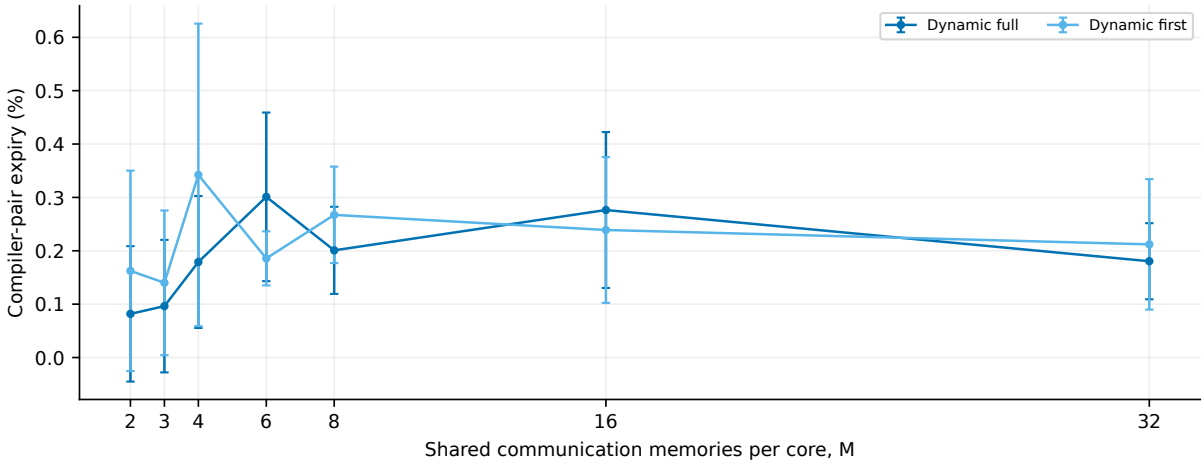


Figure 3.154: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.0818 ± 0.1269	0.1624 ± 0.1878
3	n/a	n/a	n/a	0.0963 ± 0.1242	0.1400 ± 0.1356
4	n/a	n/a	n/a	0.1790 ± 0.1236	0.3422 ± 0.2835
6	n/a	n/a	n/a	0.3011 ± 0.1580	0.1857 ± 0.0507
8	n/a	n/a	n/a	0.2008 ± 0.0816	0.2673 ± 0.0904
16	n/a	n/a	n/a	0.2764 ± 0.1461	0.2390 ± 0.1365
32	n/a	n/a	n/a	0.1804 ± 0.0713	0.2120 ± 0.1222

Table 3.154: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler-pair storage time

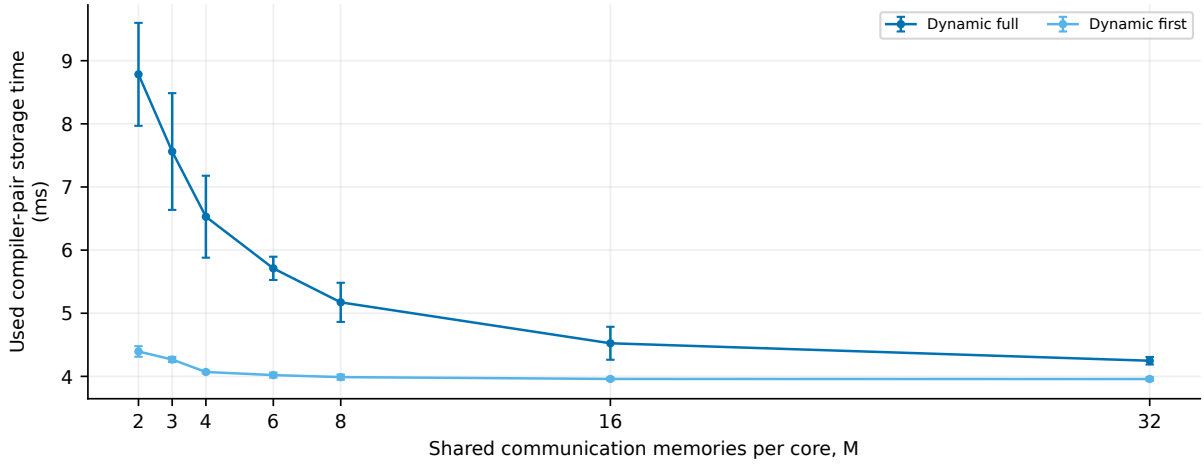


Figure 3.155: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	8.784 ± 0.815	4.394 ± 0.084
3	n/a	n/a	n/a	7.562 ± 0.925	4.267 ± 0.040
4	n/a	n/a	n/a	6.529 ± 0.649	4.070 ± 0.019
6	n/a	n/a	n/a	5.711 ± 0.184	4.020 ± 0.039
8	n/a	n/a	n/a	5.173 ± 0.310	3.988 ± 0.041
16	n/a	n/a	n/a	4.524 ± 0.261	3.960 ± 0.022
32	n/a	n/a	n/a	4.248 ± 0.060	3.958 ± 0.028

Table 3.155: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Delivered-hop throughput

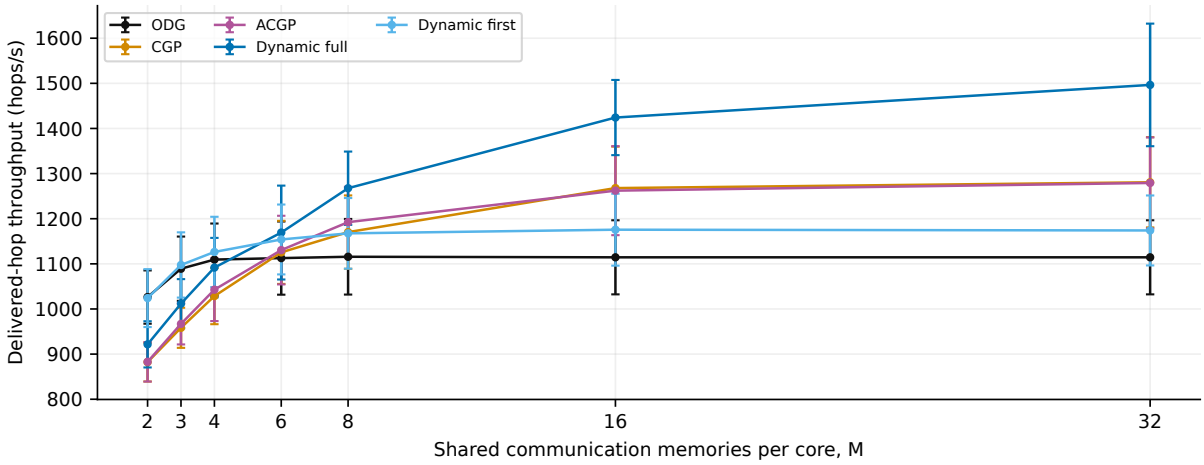


Figure 3.156: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1026.40 ± 59.04	882.23 ± 42.95	882.87 ± 43.75	921.62 ± 51.21	1024.08 ± 64.18
3	1089.23 ± 71.23	958.29 ± 44.43	966.97 ± 45.54	1011.72 ± 54.42	1097.52 ± 72.30
4	1109.46 ± 79.89	1028.55 ± 62.26	1042.77 ± 69.56	1091.69 ± 65.83	1126.37 ± 77.93
6	1112.74 ± 81.07	1125.43 ± 69.89	1130.48 ± 76.05	1169.36 ± 104.01	1154.02 ± 77.43
8	1115.70 ± 83.77	1170.31 ± 81.32	1192.37 ± 78.33	1267.63 ± 81.19	1167.56 ± 78.27
16	1114.48 ± 82.08	1267.89 ± 91.86	1262.18 ± 98.63	1424.19 ± 83.30	1175.67 ± 79.68
32	1114.48 ± 82.08	1280.75 ± 100.02	1279.23 ± 100.88	1496.50 ± 135.82	1174.00 ± 77.54

Table 3.156: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Completion fraction

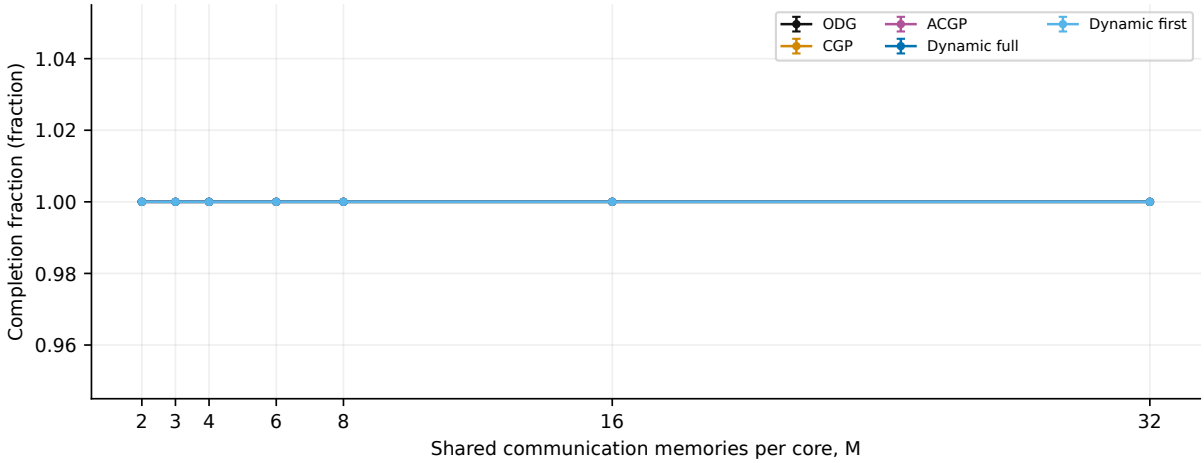


Figure 3.157: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
3	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
4	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
6	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
8	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
16	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
32	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000

Table 3.157: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum admission wait

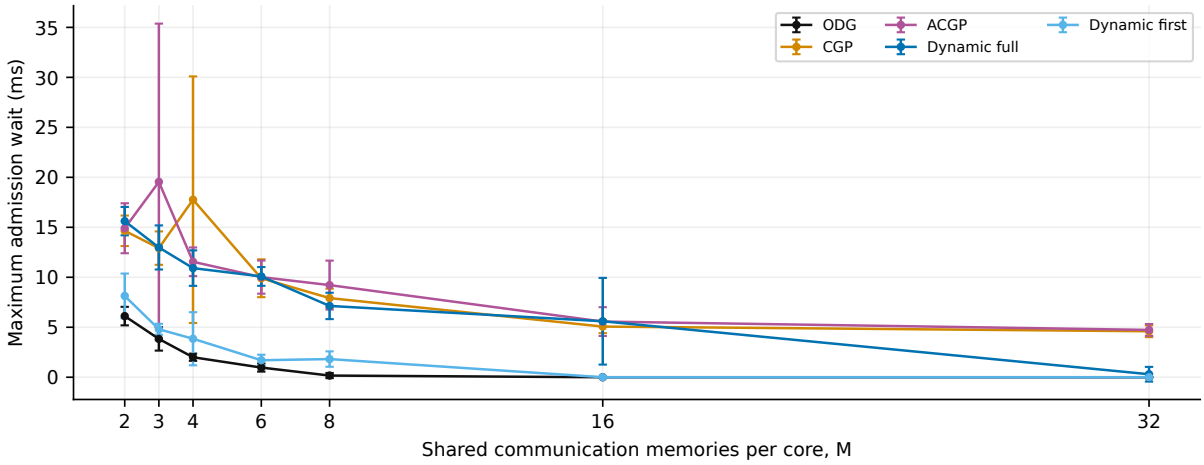


Figure 3.158: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	6.117 ± 0.926	14.649 ± 1.527	14.904 ± 2.499	15.617 ± 1.419	8.134 ± 2.239
3	3.833 ± 1.171	12.917 ± 1.671	19.542 ± 15.834	12.984 ± 2.205	4.800 ± 0.544
4	2.000 ± 0.363	17.760 ± 12.335	11.550 ± 1.432	10.917 ± 1.775	3.850 ± 2.657
6	0.9667 ± 0.4033	9.900 ± 1.891	10.017 ± 1.657	10.084 ± 0.937	1.700 ± 0.551
8	0.1667 ± 0.2582	7.917 ± 0.941	9.217 ± 2.448	7.134 ± 1.320	1.817 ± 0.771
16	0.0000 ± 0.0000	5.067 ± 0.656	5.567 ± 1.439	5.600 ± 4.337	0.0000 ± 0.0000
32	0.0000 ± 0.0000	4.600 ± 0.590	4.733 ± 0.589	0.3000 ± 0.7349	0.0000 ± 0.0000

Table 3.158: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with admission wait

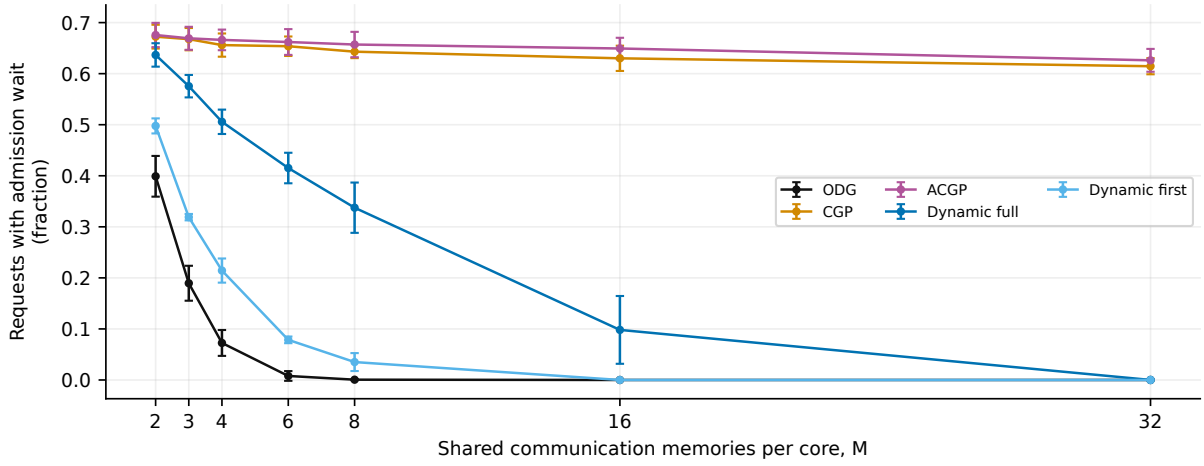


Figure 3.159: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.3990 ± 0.0399	0.6725 ± 0.0233	0.6757 ± 0.0238	0.6367 ± 0.0229	0.4977 ± 0.0147
3	0.1895 ± 0.0342	0.6676 ± 0.0218	0.6692 ± 0.0225	0.5755 ± 0.0220	0.3189 ± 0.0063
4	0.0726 ± 0.0253	0.6560 ± 0.0227	0.6661 ± 0.0202	0.5057 ± 0.0239	0.2143 ± 0.0237
6	0.0079 ± 0.0095	0.6537 ± 0.0191	0.6620 ± 0.0253	0.4152 ± 0.0299	0.0786 ± 0.0065
8	0.0006 ± 0.0010	0.6431 ± 0.0126	0.6571 ± 0.0248	0.3375 ± 0.0493	0.0351 ± 0.0176
16	0.0000 ± 0.0000	0.6300 ± 0.0247	0.6493 ± 0.0210	0.0981 ± 0.0664	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.6146 ± 0.0158	0.6261 ± 0.0224	0.0001 ± 0.0002	0.0000 ± 0.0000

Table 3.159: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded reservation-setup counter

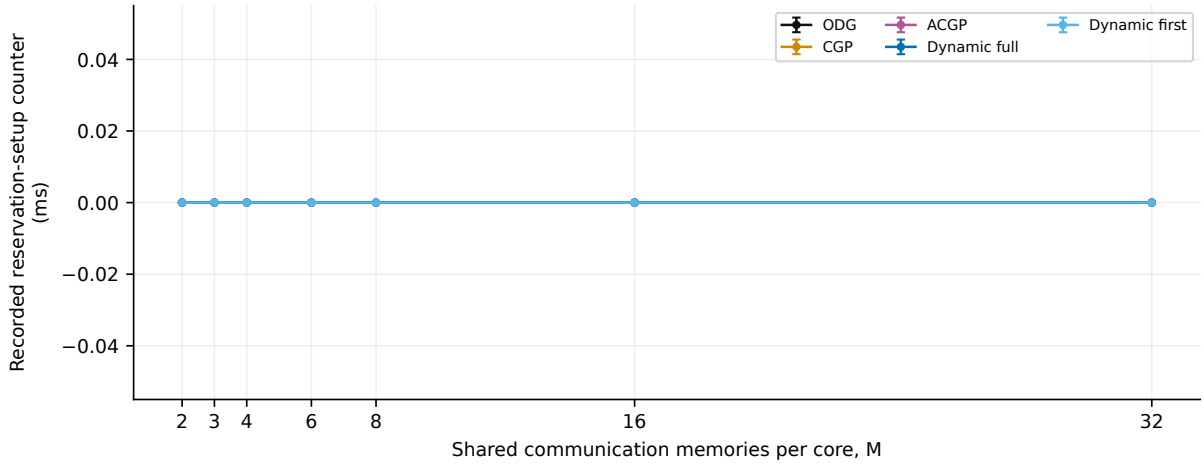


Figure 3.160: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.160: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean generation/service time

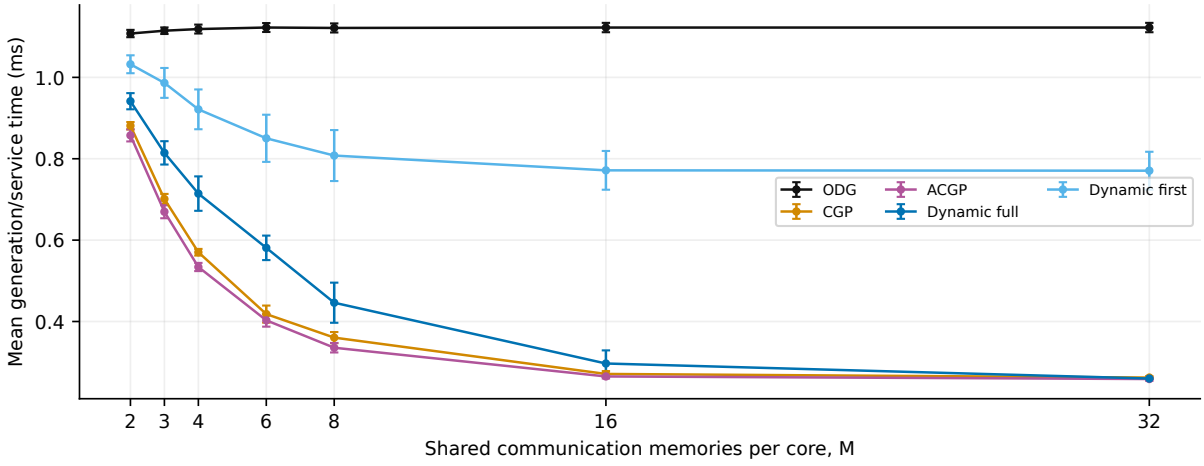


Figure 3.161: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.108 ± 0.009	0.8811 ± 0.0091	0.8574 ± 0.0149	0.9414 ± 0.0199	1.032 ± 0.022
3	1.115 ± 0.008	0.7011 ± 0.0124	0.6697 ± 0.0160	0.8145 ± 0.0287	0.9864 ± 0.0367
4	1.119 ± 0.011	0.5702 ± 0.0081	0.5339 ± 0.0101	0.7144 ± 0.0423	0.9214 ± 0.0489
6	1.122 ± 0.011	0.4182 ± 0.0210	0.4029 ± 0.0156	0.5810 ± 0.0301	0.8502 ± 0.0579
8	1.121 ± 0.011	0.3604 ± 0.0137	0.3355 ± 0.0116	0.4462 ± 0.0493	0.8078 ± 0.0626
16	1.122 ± 0.012	0.2711 ± 0.0070	0.2649 ± 0.0050	0.2968 ± 0.0322	0.7715 ± 0.0476
32	1.122 ± 0.012	0.2622 ± 0.0035	0.2586 ± 0.0044	0.2598 ± 0.0009	0.7706 ± 0.0465

Table 3.161: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded retry-wait time

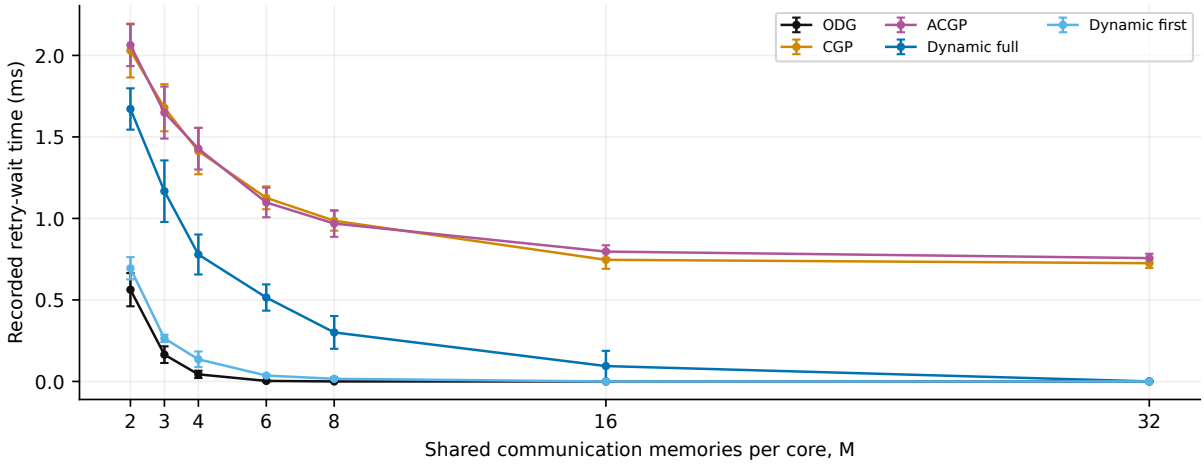


Figure 3.162: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.5628 ± 0.1018	2.030 ± 0.165	2.063 ± 0.128	1.671 ± 0.127	0.6942 ± 0.0683
3	0.1644 ± 0.0510	1.679 ± 0.145	1.649 ± 0.159	1.167 ± 0.189	0.2641 ± 0.0227
4	0.0435 ± 0.0225	1.413 ± 0.142	1.428 ± 0.128	0.7787 ± 0.1226	0.1358 ± 0.0479
6	0.0033 ± 0.0041	1.126 ± 0.070	1.098 ± 0.091	0.5148 ± 0.0806	0.0362 ± 0.0031
8	0.0001 ± 0.0002	0.9859 ± 0.0611	0.9685 ± 0.0814	0.3007 ± 0.1004	0.0162 ± 0.0110
16	0.0000 ± 0.0000	0.7461 ± 0.0552	0.7966 ± 0.0388	0.0944 ± 0.0934	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.7254 ± 0.0289	0.7565 ± 0.0270	0.0001 ± 0.0002	0.0000 ± 0.0000

Table 3.162: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Request retries

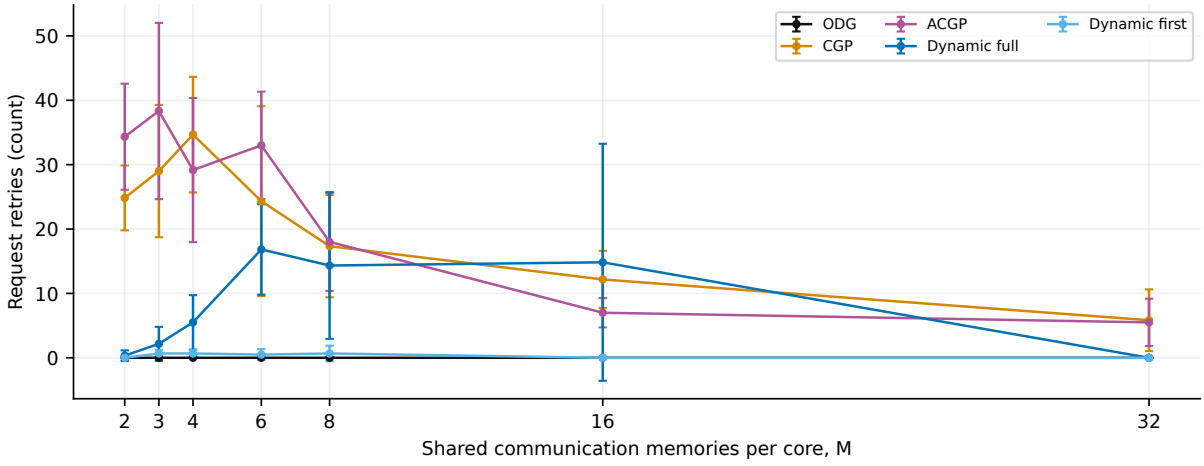


Figure 3.163: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	24.833 ± 5.037	34.333 ± 8.238	0.3333 ± 0.8165	0.0000 ± 0.0000
3	0.0000 ± 0.0000	29.000 ± 10.276	38.333 ± 13.692	2.167 ± 2.639	0.6667 ± 0.5164
4	0.0000 ± 0.0000	34.667 ± 8.981	29.167 ± 11.197	5.500 ± 4.231	0.6667 ± 0.5164
6	0.0000 ± 0.0000	24.333 ± 14.747	33.000 ± 8.343	16.833 ± 7.026	0.5000 ± 0.8367
8	0.0000 ± 0.0000	17.333 ± 7.941	18.000 ± 7.616	14.333 ± 11.396	0.6667 ± 1.2111
16	0.0000 ± 0.0000	12.167 ± 4.446	7.000 ± 2.280	14.833 ± 18.411	0.0000 ± 0.0000
32	0.0000 ± 0.0000	5.833 ± 4.792	5.500 ± 3.674	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.163: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with retries

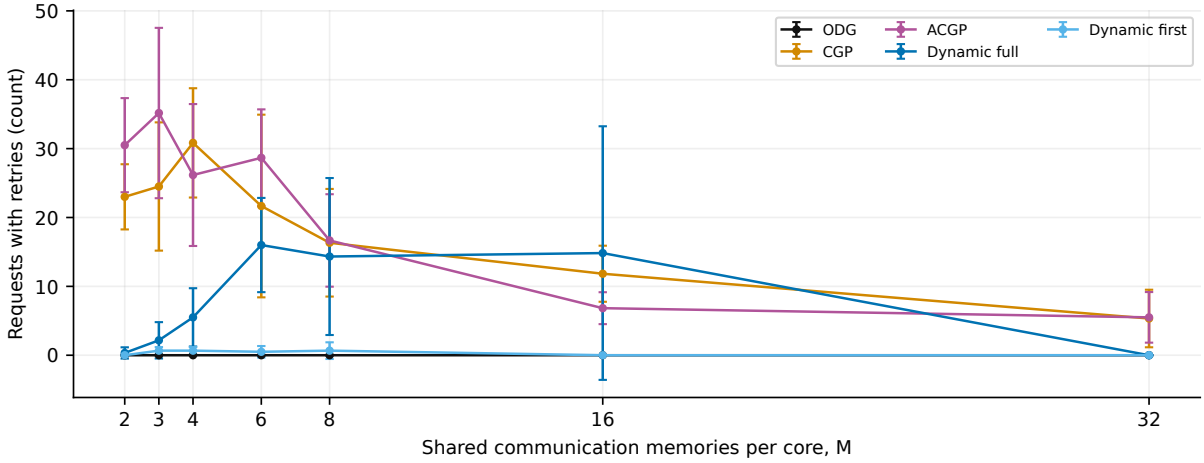


Figure 3.164: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	23.000 ± 4.733	30.500 ± 6.834	0.3333 ± 0.8165	0.0000 ± 0.0000
3	0.0000 ± 0.0000	24.500 ± 9.311	35.167 ± 12.368	2.167 ± 2.639	0.6667 ± 0.5164
4	0.0000 ± 0.0000	30.833 ± 7.935	26.167 ± 10.304	5.500 ± 4.231	0.6667 ± 0.5164
6	0.0000 ± 0.0000	21.667 ± 13.261	28.667 ± 7.033	16.000 ± 6.841	0.5000 ± 0.8367
8	0.0000 ± 0.0000	16.333 ± 7.815	16.667 ± 6.713	14.333 ± 11.396	0.6667 ± 1.2111
16	0.0000 ± 0.0000	11.833 ± 4.070	6.833 ± 2.317	14.833 ± 18.411	0.0000 ± 0.0000
32	0.0000 ± 0.0000	5.333 ± 4.179	5.500 ± 3.674	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.164: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol generated-pair counter

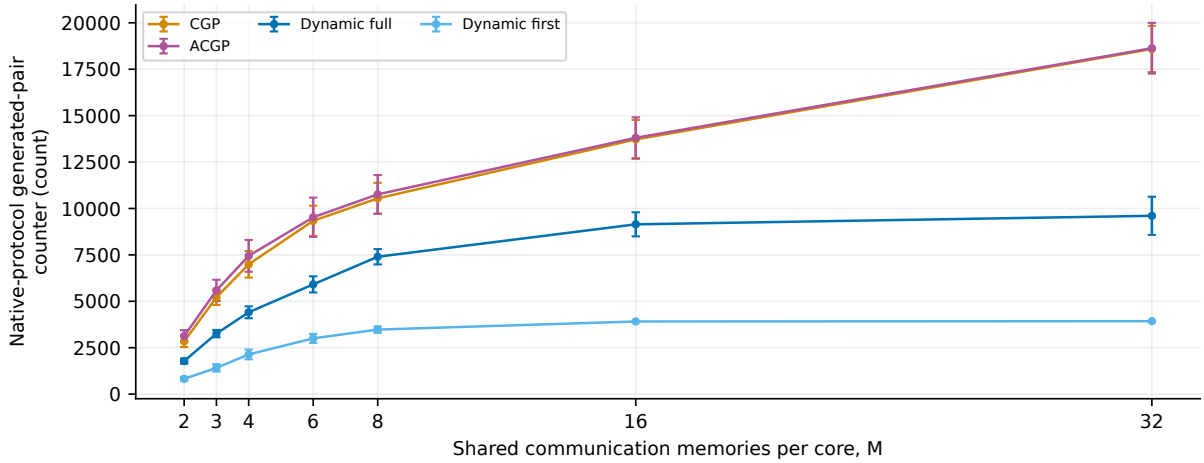


Figure 3.165: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	2842.00 ± 307.94	3124.67 ± 322.02	1781.00 ± 139.31	824.00 ± 107.34
3	n/a	5211.67 ± 407.39	5587.00 ± 574.65	3259.00 ± 197.48	1415.00 ± 198.65
4	n/a	6991.67 ± 714.96	7446.00 ± 856.72	4407.33 ± 320.29	2137.00 ± 262.01
6	n/a	9335.00 ± 814.32	9526.33 ± 1058.00	5911.00 ± 434.10	3003.67 ± 240.88
8	n/a	10544.67 ± 836.13	10759.33 ± 1040.82	7400.33 ± 412.53	3476.33 ± 174.27
16	n/a	13720.00 ± 1047.76	13807.33 ± 1103.02	9145.33 ± 648.48	3912.67 ± 26.85
32	n/a	18591.67 ± 1242.86	18631.33 ± 1365.72	9604.33 ± 1028.20	3930.00 ± 0.00

Table 3.165: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol used-pair counter

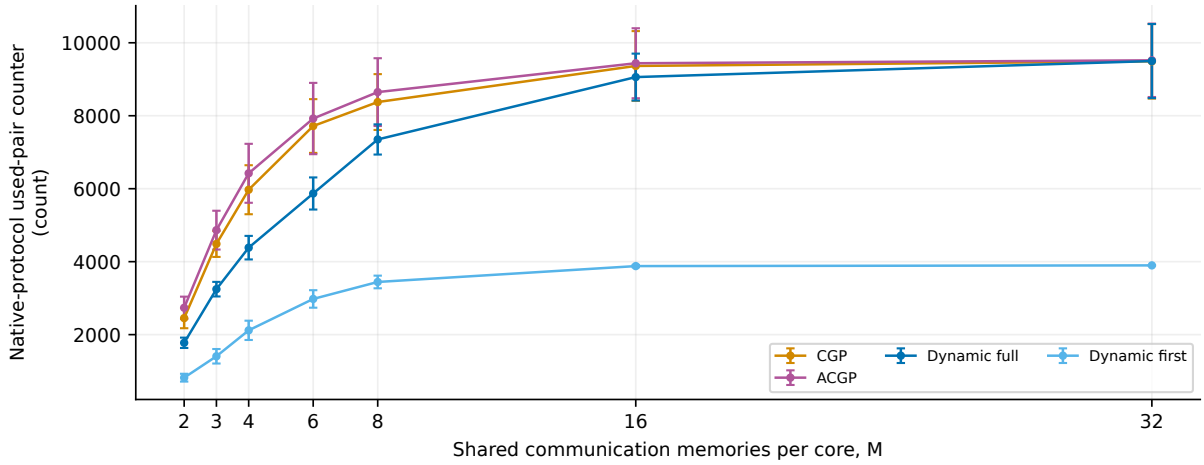


Figure 3.166: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	2452.67 ± 277.59	2736.67 ± 304.14	1776.00 ± 141.64	820.00 ± 107.06
3	n/a	4487.00 ± 356.85	4864.00 ± 531.77	3246.00 ± 199.74	1406.67 ± 198.69
4	n/a	5971.67 ± 671.66	6422.00 ± 808.09	4383.67 ± 322.68	2117.67 ± 264.39
6	n/a	7718.00 ± 736.63	7923.33 ± 977.25	5869.00 ± 439.91	2978.00 ± 240.03
8	n/a	8375.33 ± 765.19	8647.67 ± 928.99	7350.00 ± 413.76	3443.33 ± 173.60
16	n/a	9365.00 ± 954.88	9439.00 ± 959.38	9059.67 ± 642.97	3878.67 ± 31.66
32	n/a	9492.00 ± 1021.95	9519.00 ± 1006.04	9499.00 ± 1014.96	3898.00 ± 7.48

Table 3.166: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol unused-pair counter

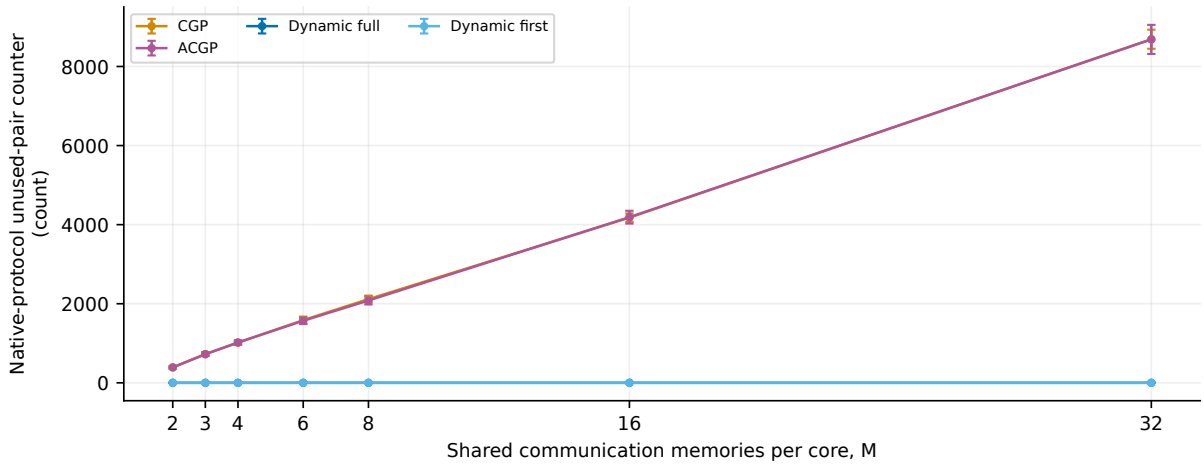


Figure 3.167: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	388.33 ± 33.19	391.00 ± 26.80	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	727.33 ± 50.42	722.00 ± 42.82	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	1016.00 ± 47.85	1020.00 ± 55.37	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	1585.00 ± 88.75	1569.33 ± 83.17	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	2115.67 ± 89.80	2082.33 ± 100.87	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	4178.00 ± 107.12	4188.67 ± 162.00	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	8690.00 ± 241.49	8684.00 ± 368.55	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.167: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Scheduled compiler preparations

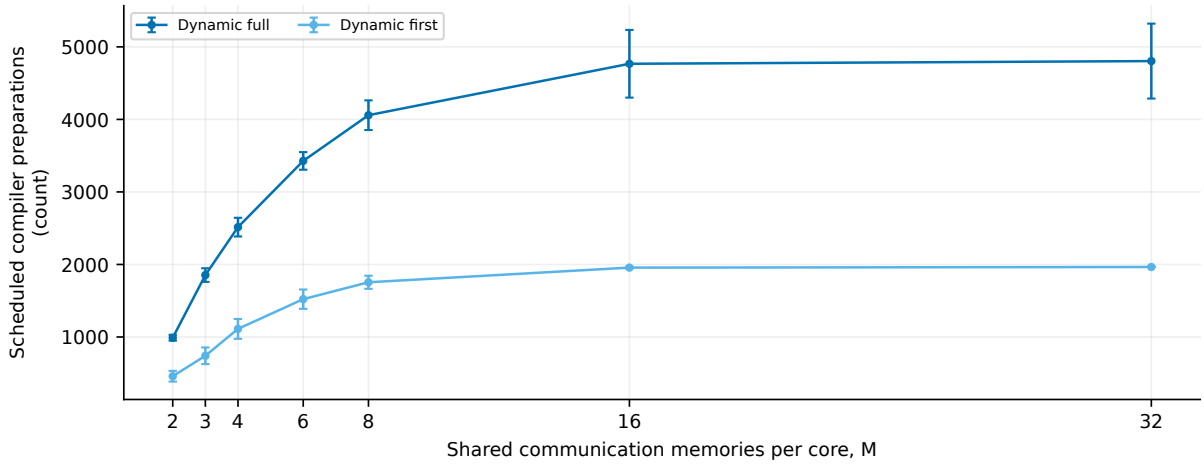


Figure 3.168: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	989.33 ± 40.32	459.00 ± 73.91
3	n/a	n/a	n/a	1853.67 ± 93.98	740.67 ± 114.71
4	n/a	n/a	n/a	2514.67 ± 128.78	1111.67 ± 136.75
6	n/a	n/a	n/a	3427.67 ± 121.31	1521.33 ± 133.30
8	n/a	n/a	n/a	4058.00 ± 204.64	1754.33 ± 90.12
16	n/a	n/a	n/a	4767.00 ± 466.48	1956.33 ± 13.43
32	n/a	n/a	n/a	4804.00 ± 516.61	1965.00 ± 0.00

Table 3.168: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner-blocked preparations

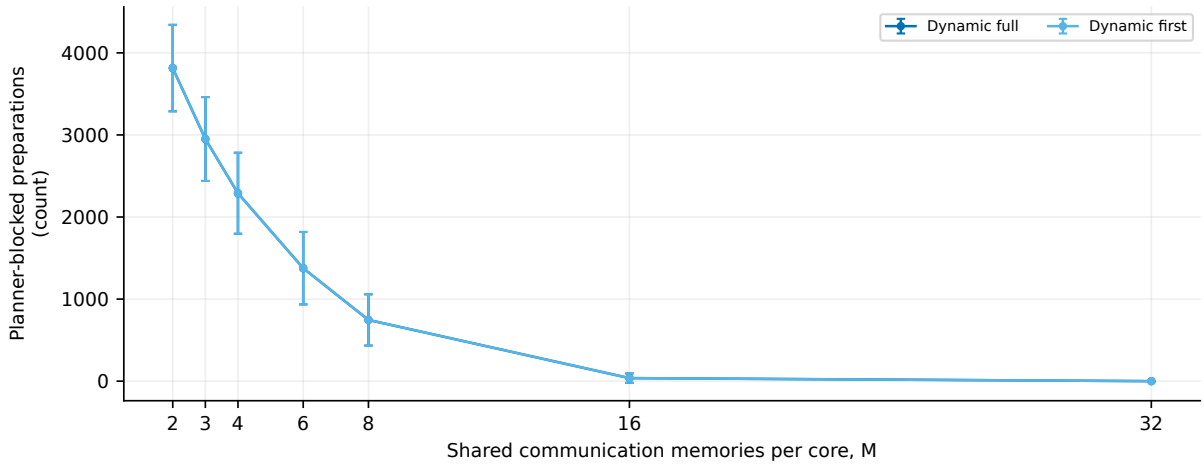


Figure 3.169: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	3814.67 ± 526.61	3814.67 ± 526.61
3	n/a	n/a	n/a	2950.33 ± 511.09	2950.33 ± 511.09
4	n/a	n/a	n/a	2289.33 ± 493.48	2289.33 ± 493.48
6	n/a	n/a	n/a	1376.33 ± 441.29	1376.33 ± 441.29
8	n/a	n/a	n/a	746.00 ± 312.22	746.00 ± 312.22
16	n/a	n/a	n/a	37.000 ± 57.320	37.000 ± 57.320
32	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.169: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner peak compiler memory

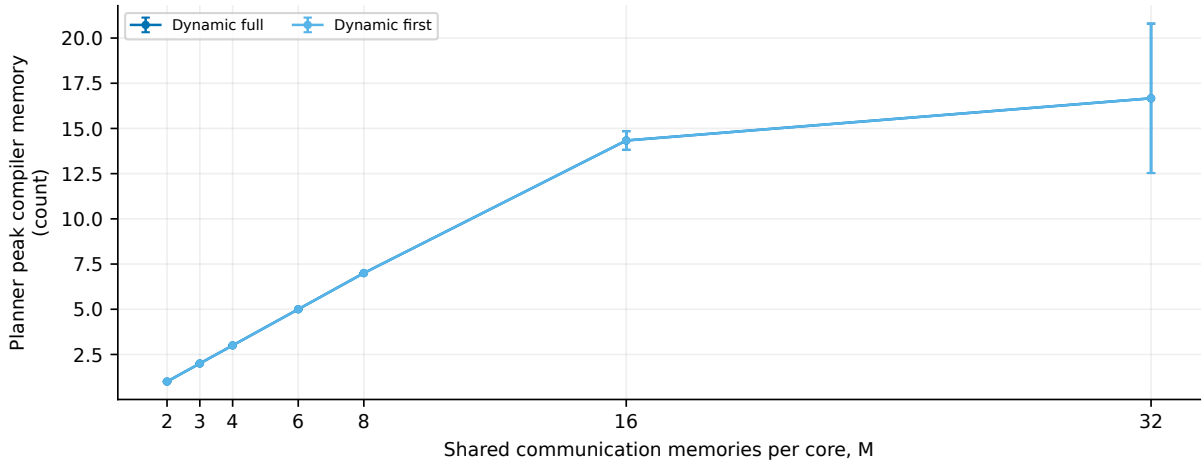


Figure 3.170: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1.000 ± 0.000	1.000 ± 0.000
3	n/a	n/a	n/a	2.000 ± 0.000	2.000 ± 0.000
4	n/a	n/a	n/a	3.000 ± 0.000	3.000 ± 0.000
6	n/a	n/a	n/a	5.000 ± 0.000	5.000 ± 0.000
8	n/a	n/a	n/a	7.000 ± 0.000	7.000 ± 0.000
16	n/a	n/a	n/a	14.333 ± 0.516	14.333 ± 0.516
32	n/a	n/a	n/a	16.667 ± 4.131	16.667 ± 4.131

Table 3.170: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler preparation admission attempts

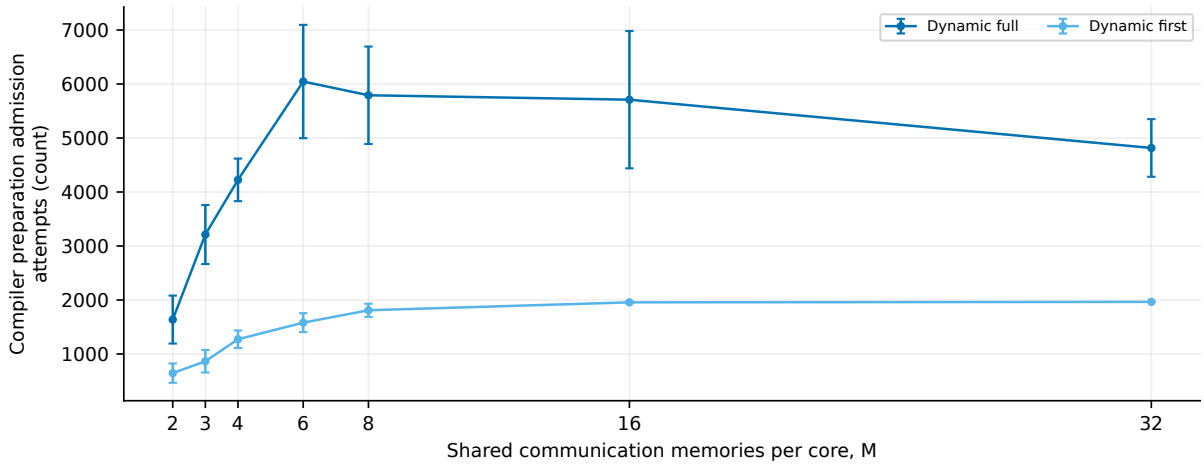


Figure 3.171: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1637.17 ± 444.13	645.33 ± 179.47
3	n/a	n/a	n/a	3211.83 ± 545.75	865.33 ± 208.75
4	n/a	n/a	n/a	4224.67 ± 394.72	1272.67 ± 162.88
6	n/a	n/a	n/a	6046.33 ± 1049.48	1580.17 ± 175.32
8	n/a	n/a	n/a	5792.00 ± 902.29	1809.67 ± 121.38
16	n/a	n/a	n/a	5709.83 ± 1271.16	1956.33 ± 13.43
32	n/a	n/a	n/a	4816.00 ± 533.66	1965.00 ± 0.00

Table 3.171: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Launched compiler preparations

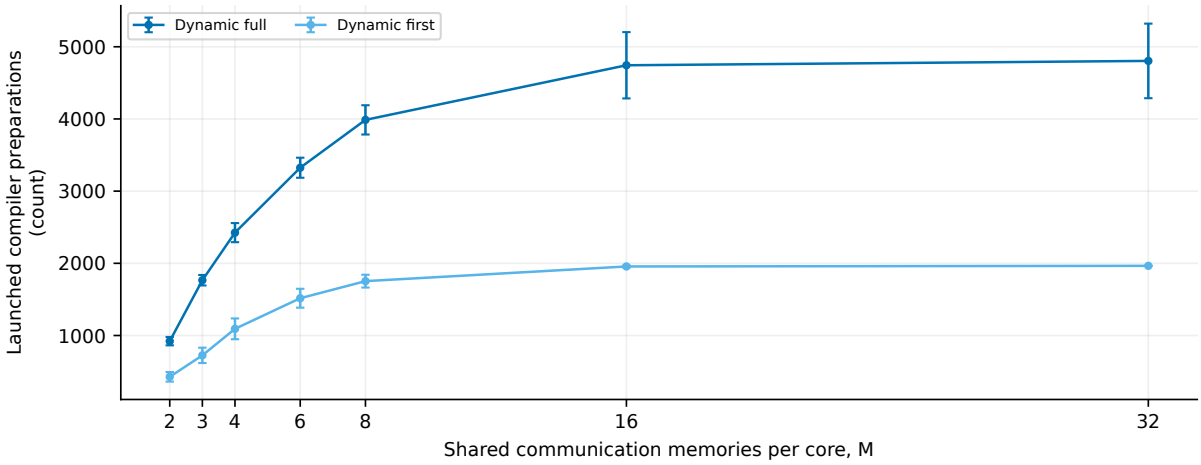


Figure 3.172: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	921.67 ± 58.13	427.67 ± 66.07
3	n/a	n/a	n/a	1765.83 ± 72.51	724.83 ± 106.59
4	n/a	n/a	n/a	2425.00 ± 132.21	1092.33 ± 144.19
6	n/a	n/a	n/a	3324.17 ± 138.93	1516.17 ± 130.90
8	n/a	n/a	n/a	3987.17 ± 202.64	1753.00 ± 88.67
16	n/a	n/a	n/a	4743.67 ± 459.23	1956.33 ± 13.43
32	n/a	n/a	n/a	4804.00 ± 516.61	1965.00 ± 0.00

Table 3.172: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Accepted compiler preparations

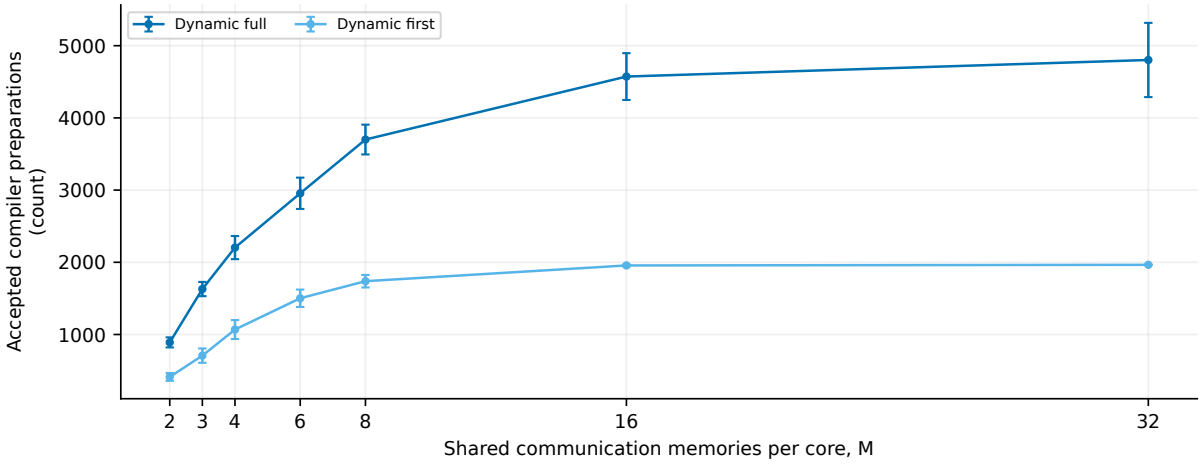


Figure 3.173: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	890.50 ± 69.65	412.00 ± 53.67
3	n/a	n/a	n/a	1629.50 ± 98.74	707.50 ± 99.32
4	n/a	n/a	n/a	2203.67 ± 160.15	1068.50 ± 131.00
6	n/a	n/a	n/a	2955.50 ± 217.05	1501.83 ± 120.44
8	n/a	n/a	n/a	3700.17 ± 206.27	1738.17 ± 87.14
16	n/a	n/a	n/a	4572.67 ± 324.24	1956.33 ± 13.43
32	n/a	n/a	n/a	4802.17 ± 514.10	1965.00 ± 0.00

Table 3.173: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Rejected compiler preparations

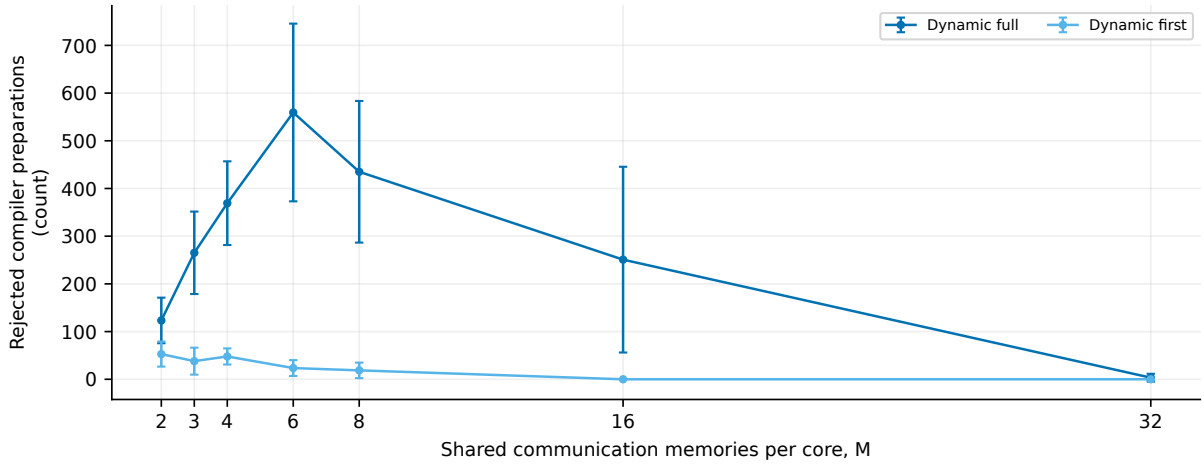


Figure 3.174: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	123.33 ± 47.77	52.833 ± 26.279
3	n/a	n/a	n/a	265.17 ± 86.44	38.000 ± 28.270
4	n/a	n/a	n/a	369.17 ± 87.73	47.833 ± 16.928
6	n/a	n/a	n/a	559.33 ± 186.30	23.500 ± 16.670
8	n/a	n/a	n/a	435.00 ± 148.47	18.667 ± 16.269
16	n/a	n/a	n/a	250.83 ± 194.71	0.0000 ± 0.0000
32	n/a	n/a	n/a	3.333 ± 8.165	0.0000 ± 0.0000

Table 3.174: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-ready request count

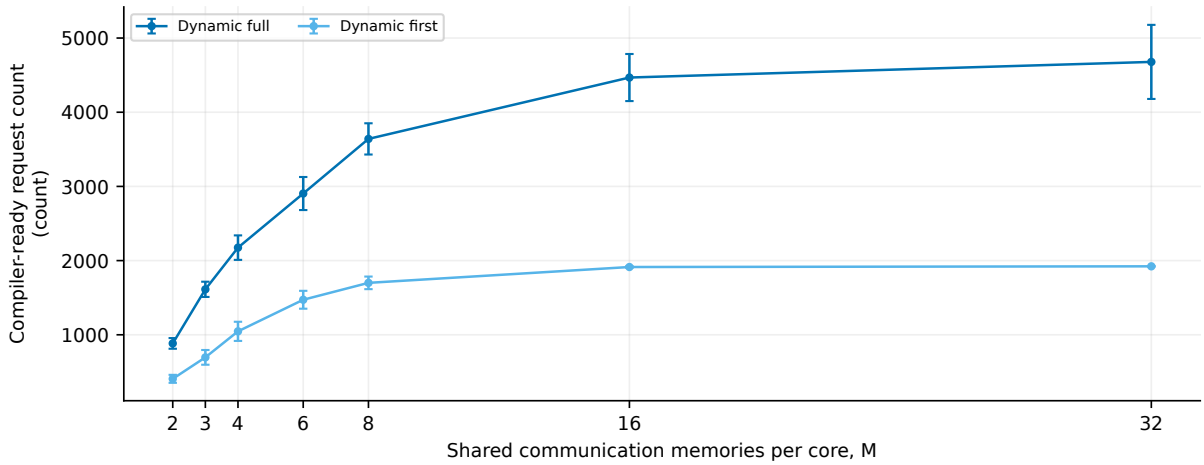


Figure 3.175: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	883.83 ± 71.90	406.33 ± 53.81
3	n/a	n/a	n/a	1612.83 ± 102.72	695.67 ± 99.26
4	n/a	n/a	n/a	2174.83 ± 165.06	1046.50 ± 129.10
6	n/a	n/a	n/a	2904.17 ± 222.73	1472.17 ± 120.51
8	n/a	n/a	n/a	3640.50 ± 210.55	1700.00 ± 84.87
16	n/a	n/a	n/a	4467.67 ± 317.29	1913.50 ± 11.74
32	n/a	n/a	n/a	4678.33 ± 499.33	1922.83 ± 4.88

Table 3.175: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit count

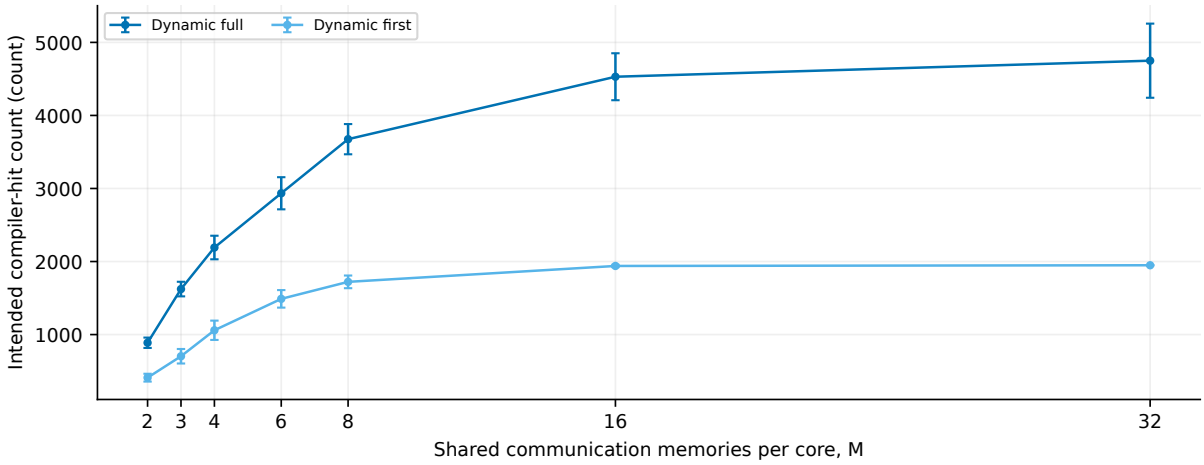


Figure 3.176: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	888.00 ± 70.82	410.00 ± 53.53
3	n/a	n/a	n/a	1623.00 ± 99.87	703.33 ± 99.35
4	n/a	n/a	n/a	2191.83 ± 161.34	1058.83 ± 132.19
6	n/a	n/a	n/a	2934.50 ± 219.96	1489.00 ± 120.01
8	n/a	n/a	n/a	3675.00 ± 206.88	1721.67 ± 86.80
16	n/a	n/a	n/a	4529.83 ± 321.49	1939.33 ± 15.83
32	n/a	n/a	n/a	4749.50 ± 507.48	1949.00 ± 3.74

Table 3.176: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-not-ready request count

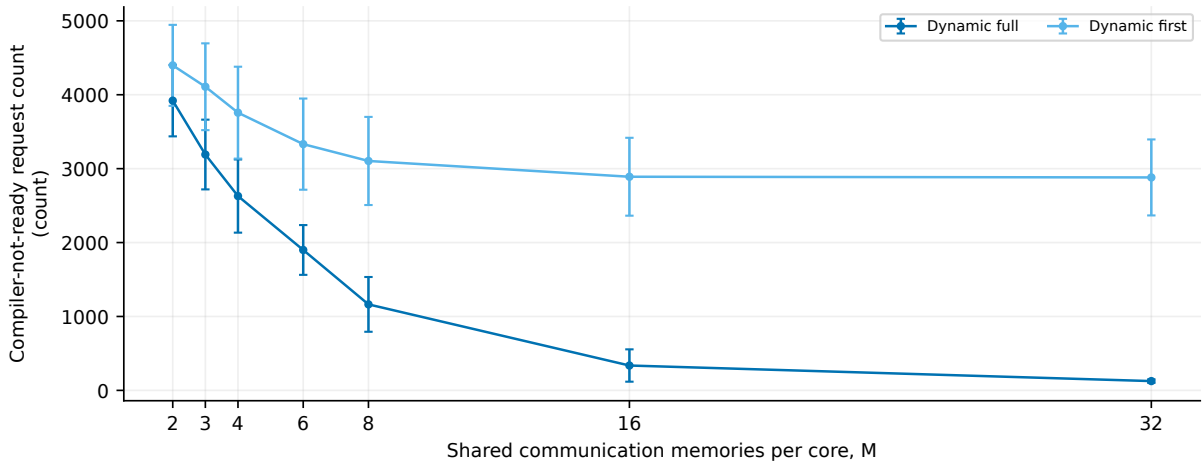


Figure 3.177: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	3920.17 ± 483.16	4397.67 ± 547.88
3	n/a	n/a	n/a	3191.17 ± 471.80	4108.33 ± 587.20
4	n/a	n/a	n/a	2629.17 ± 495.18	3757.50 ± 621.78
6	n/a	n/a	n/a	1899.83 ± 336.84	3331.83 ± 616.83
8	n/a	n/a	n/a	1163.50 ± 370.53	3104.00 ± 596.23
16	n/a	n/a	n/a	336.33 ± 218.81	2890.50 ± 526.92
32	n/a	n/a	n/a	125.67 ± 23.46	2881.17 ± 514.07

Table 3.177: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Late compiler-pair uses

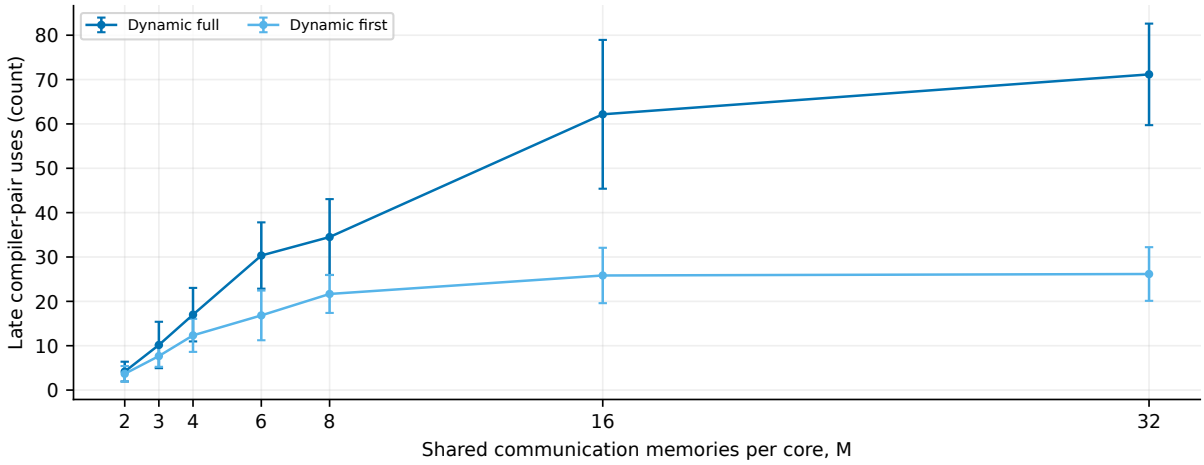


Figure 3.178: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	4.167 ± 2.229	3.667 ± 1.751
3	n/a	n/a	n/a	10.167 ± 5.231	7.667 ± 2.422
4	n/a	n/a	n/a	17.000 ± 6.033	12.333 ± 3.724
6	n/a	n/a	n/a	30.333 ± 7.474	16.833 ± 5.601
8	n/a	n/a	n/a	34.500 ± 8.550	21.667 ± 4.274
16	n/a	n/a	n/a	62.167 ± 16.774	25.833 ± 6.242
32	n/a	n/a	n/a	71.167 ± 11.444	26.167 ± 6.047

Table 3.178: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback count

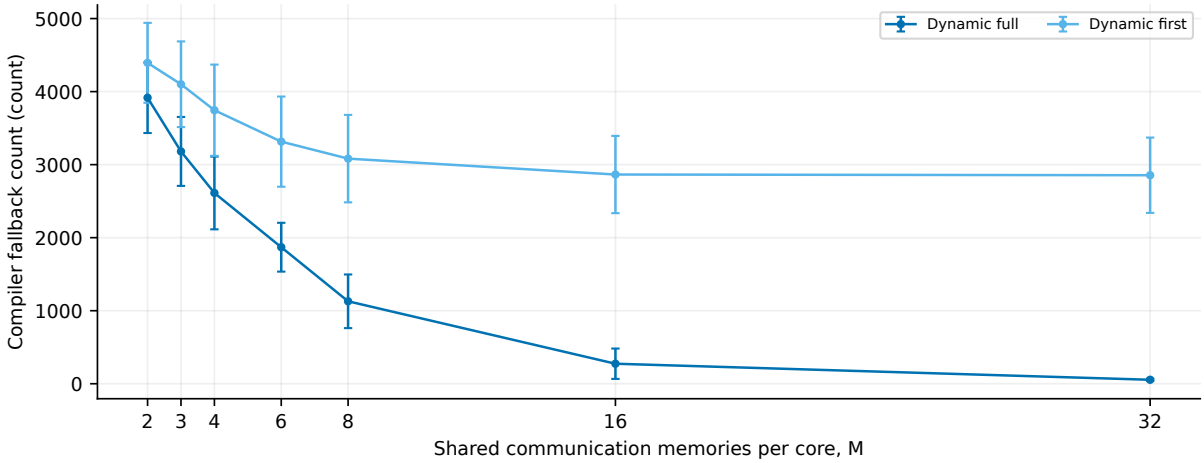


Figure 3.179: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	3916.00 ± 483.09	4394.00 ± 547.21
3	n/a	n/a	n/a	3181.00 ± 472.11	4100.67 ± 586.59
4	n/a	n/a	n/a	2612.17 ± 497.82	3745.17 ± 624.79
6	n/a	n/a	n/a	1869.50 ± 334.25	3315.00 ± 617.38
8	n/a	n/a	n/a	1129.00 ± 367.35	3082.33 ± 598.72
16	n/a	n/a	n/a	274.17 ± 207.89	2864.67 ± 529.00
32	n/a	n/a	n/a	54.500 ± 14.419	2855.00 ± 515.63

Table 3.179: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Generated compiler pairs

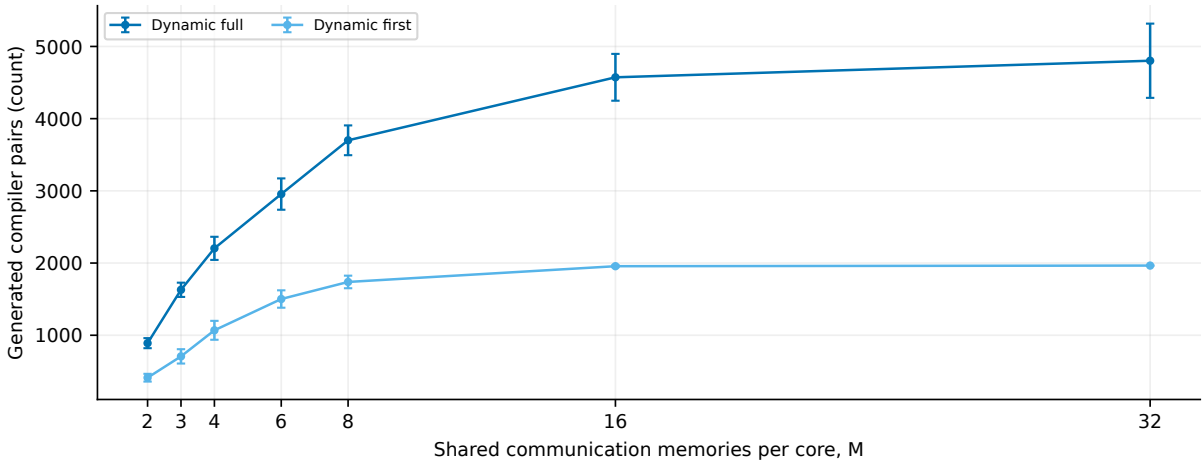


Figure 3.180: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	890.50 ± 69.65	412.00 ± 53.67
3	n/a	n/a	n/a	1629.50 ± 98.74	707.50 ± 99.32
4	n/a	n/a	n/a	2203.67 ± 160.15	1068.50 ± 131.00
6	n/a	n/a	n/a	2955.50 ± 217.05	1501.83 ± 120.44
8	n/a	n/a	n/a	3700.17 ± 206.27	1738.17 ± 87.14
16	n/a	n/a	n/a	4572.67 ± 324.24	1956.33 ± 13.43
32	n/a	n/a	n/a	4802.17 ± 514.10	1965.00 ± 0.00

Table 3.180: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler pairs

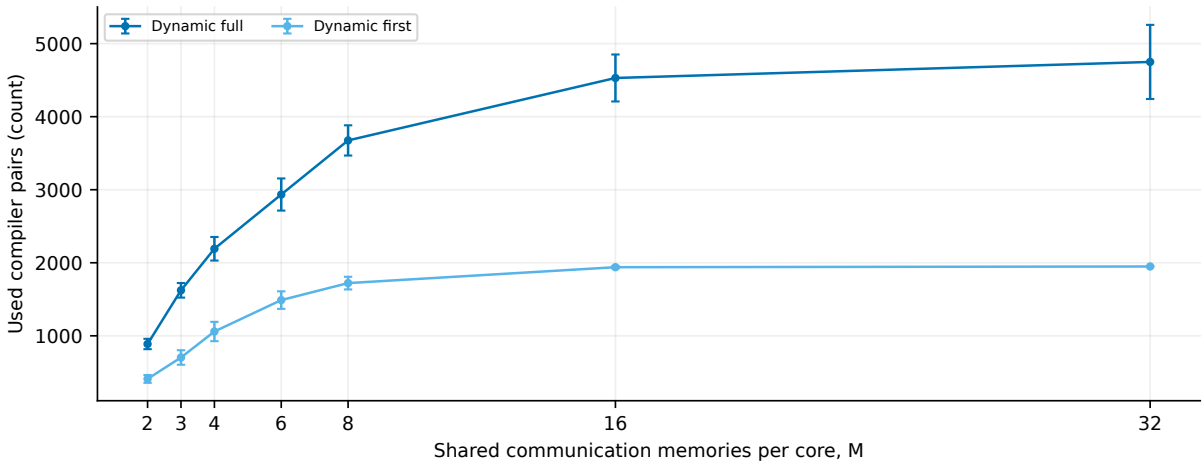


Figure 3.181: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	888.00 ± 70.82	410.00 ± 53.53
3	n/a	n/a	n/a	1623.00 ± 99.87	703.33 ± 99.35
4	n/a	n/a	n/a	2191.83 ± 161.34	1058.83 ± 132.19
6	n/a	n/a	n/a	2934.50 ± 219.96	1489.00 ± 120.01
8	n/a	n/a	n/a	3675.00 ± 206.88	1721.67 ± 86.80
16	n/a	n/a	n/a	4529.83 ± 321.49	1939.33 ± 15.83
32	n/a	n/a	n/a	4749.50 ± 507.48	1949.00 ± 3.74

Table 3.181: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Expired compiler pairs

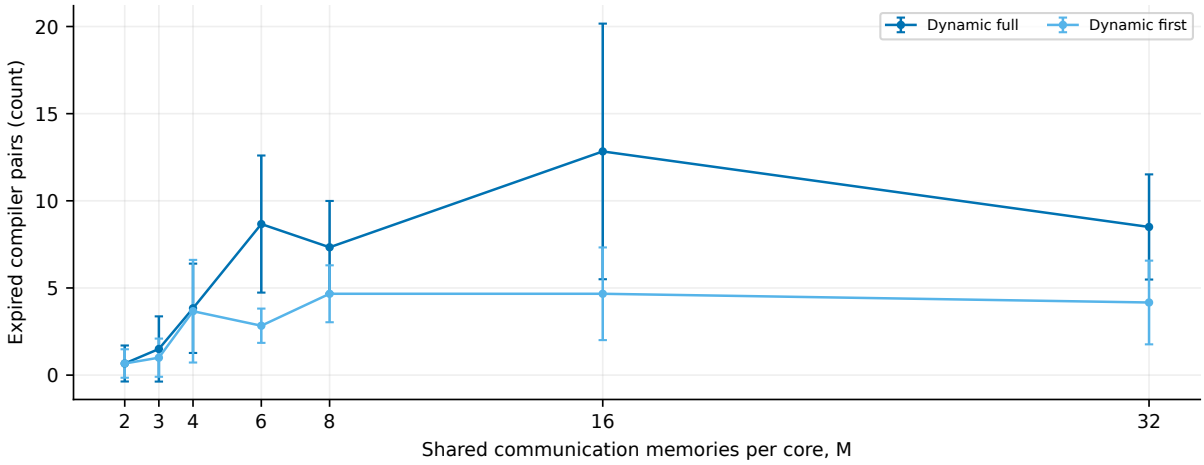


Figure 3.182: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.6667 ± 1.0328	0.6667 ± 0.8165
3	n/a	n/a	n/a	1.500 ± 1.871	1.000 ± 1.095
4	n/a	n/a	n/a	3.833 ± 2.563	3.667 ± 2.944
6	n/a	n/a	n/a	8.667 ± 3.933	2.833 ± 0.983
8	n/a	n/a	n/a	7.333 ± 2.658	4.667 ± 1.633
16	n/a	n/a	n/a	12.833 ± 7.333	4.667 ± 2.658
32	n/a	n/a	n/a	8.500 ± 3.017	4.167 ± 2.401

Table 3.182: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Remaining compiler pairs

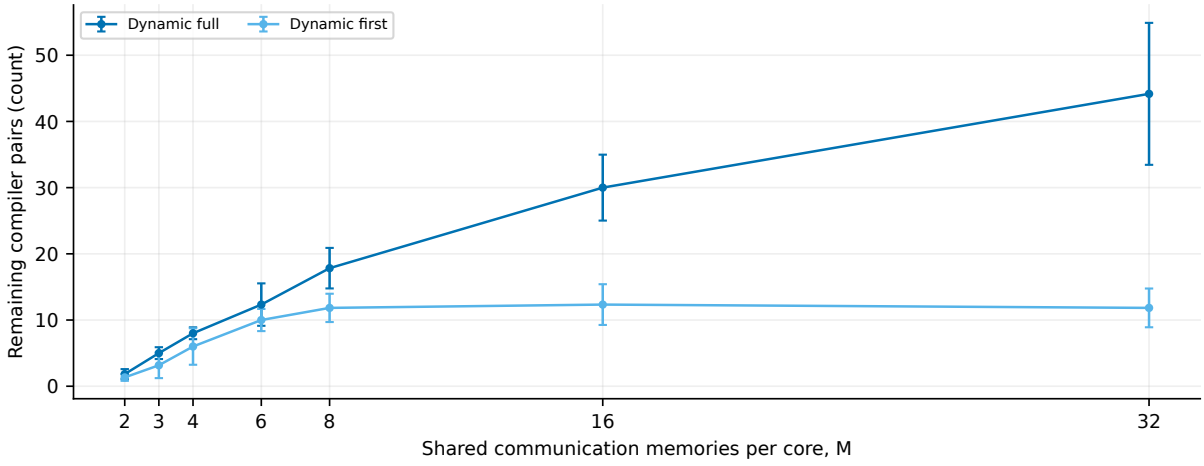


Figure 3.183: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1.833 ± 0.753	1.333 ± 0.516
3	n/a	n/a	n/a	5.000 ± 0.894	3.167 ± 1.941
4	n/a	n/a	n/a	8.000 ± 0.894	6.000 ± 2.757
6	n/a	n/a	n/a	12.333 ± 3.204	10.000 ± 1.673
8	n/a	n/a	n/a	17.833 ± 3.061	11.833 ± 2.137
16	n/a	n/a	n/a	30.000 ± 4.980	12.333 ± 3.077
32	n/a	n/a	n/a	44.167 ± 10.722	11.833 ± 2.927

Table 3.183: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at creation

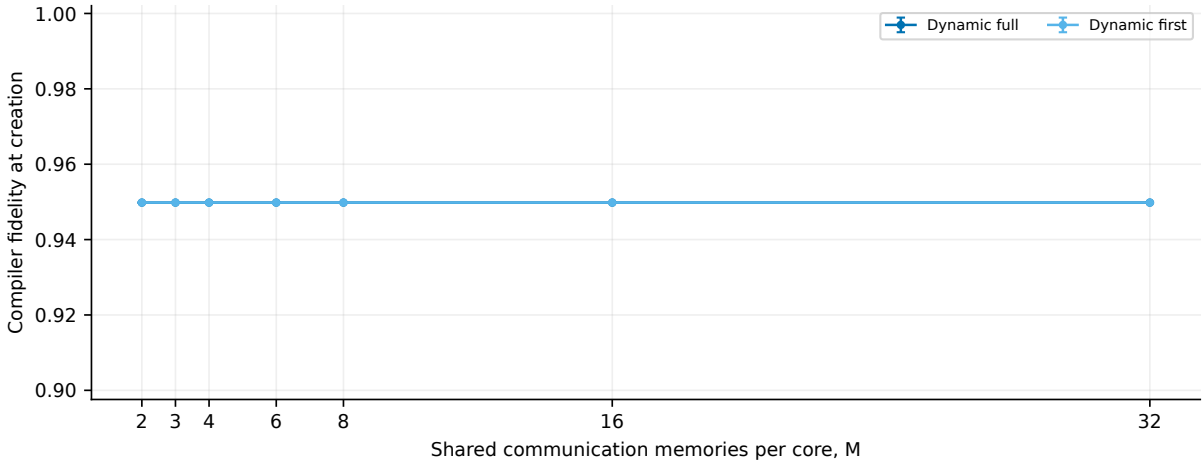


Figure 3.184: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
3	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
4	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
6	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
8	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
16	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
32	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000

Table 3.184: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at use

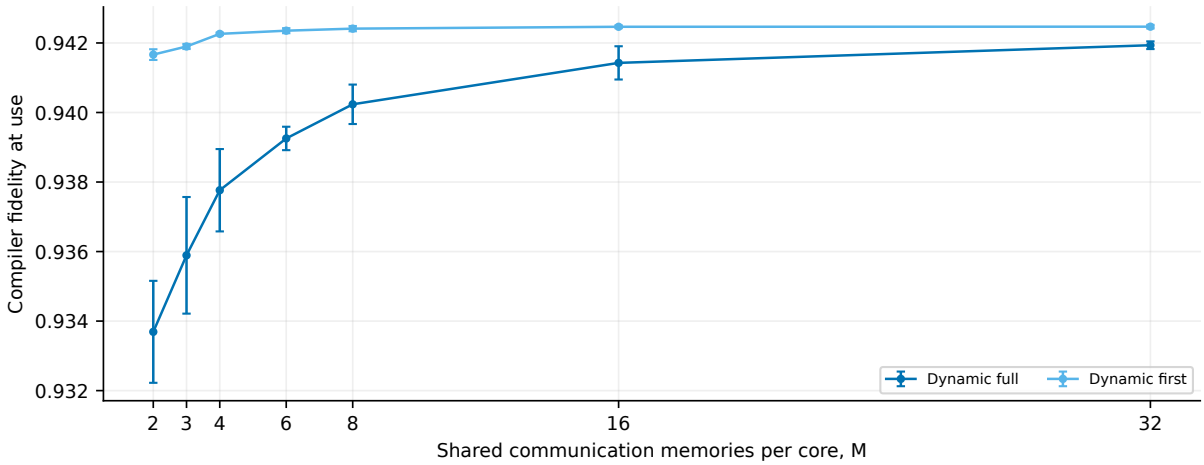


Figure 3.185: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9337 ± 0.0015	0.9417 ± 0.0002
3	n/a	n/a	n/a	0.9359 ± 0.0017	0.9419 ± 0.0001
4	n/a	n/a	n/a	0.9378 ± 0.0012	0.9423 ± 0.0000
6	n/a	n/a	n/a	0.9393 ± 0.0003	0.9424 ± 0.0001
8	n/a	n/a	n/a	0.9402 ± 0.0006	0.9424 ± 0.0001
16	n/a	n/a	n/a	0.9414 ± 0.0005	0.9425 ± 0.0000
32	n/a	n/a	n/a	0.9419 ± 0.0001	0.9425 ± 0.0001

Table 3.185: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean layer latency

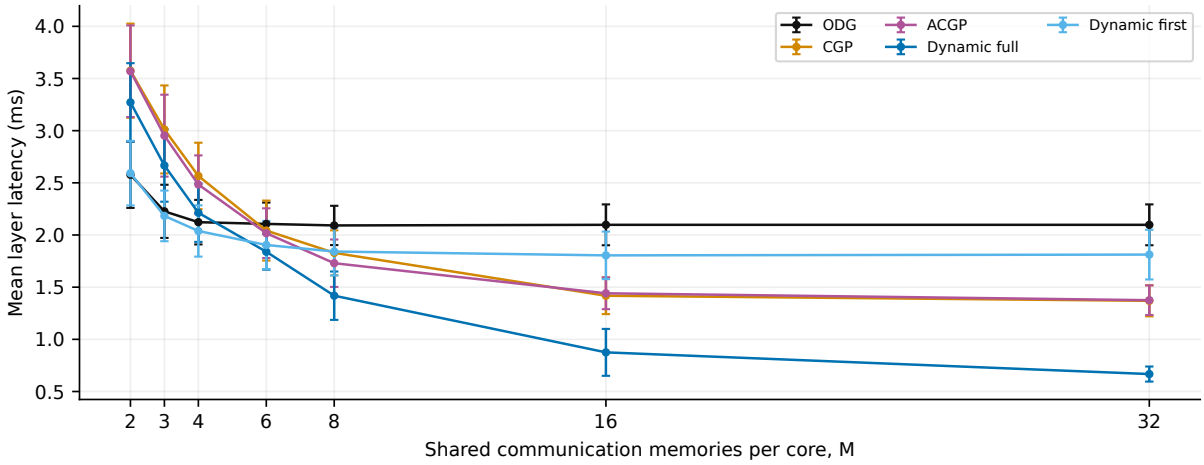


Figure 3.186: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	2.578 ± 0.318	3.575 ± 0.451	3.570 ± 0.439	3.271 ± 0.376	2.593 ± 0.309
3	2.227 ± 0.255	3.012 ± 0.422	2.952 ± 0.393	2.666 ± 0.347	2.183 ± 0.243
4	2.123 ± 0.213	2.566 ± 0.318	2.484 ± 0.279	2.213 ± 0.279	2.038 ± 0.246
6	2.106 ± 0.204	2.043 ± 0.288	2.017 ± 0.238	1.839 ± 0.172	1.904 ± 0.231
8	2.092 ± 0.188	1.829 ± 0.215	1.730 ± 0.227	1.418 ± 0.232	1.842 ± 0.229
16	2.098 ± 0.196	1.418 ± 0.176	1.441 ± 0.152	0.8752 ± 0.2248	1.805 ± 0.228
32	2.098 ± 0.196	1.369 ± 0.149	1.375 ± 0.142	0.6673 ± 0.0722	1.812 ± 0.238

Table 3.186: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum layer latency

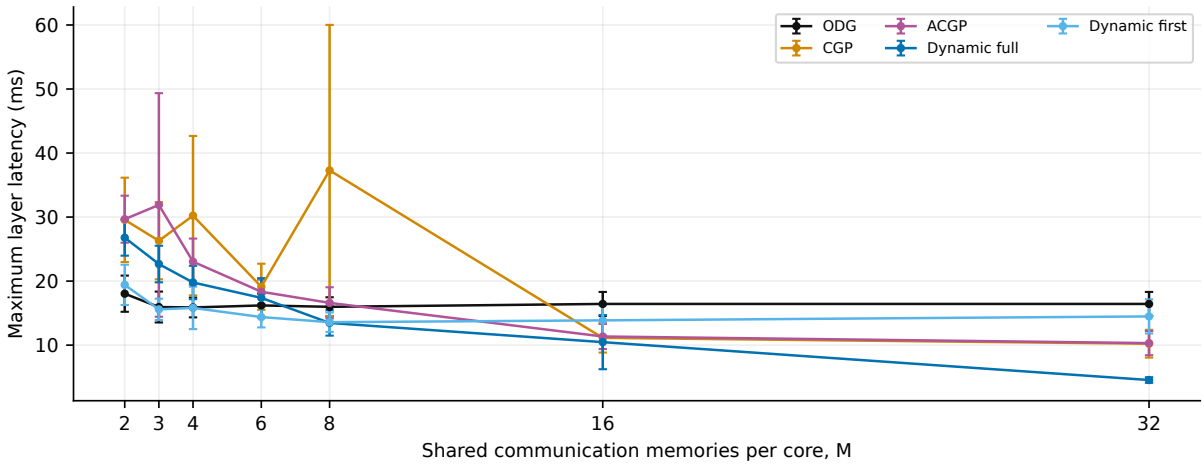


Figure 3.187: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	18.034 ± 2.826	29.567 ± 6.586	29.667 ± 3.669	26.784 ± 2.811	19.417 ± 3.142
3	15.950 ± 2.414	26.301 ± 6.023	31.895 ± 17.457	22.667 ± 2.853	15.584 ± 1.665
4	15.884 ± 1.548	30.222 ± 12.448	23.034 ± 3.606	19.784 ± 2.604	15.817 ± 3.316
6	16.200 ± 1.842	19.117 ± 3.601	18.338 ± 1.888	17.384 ± 3.077	14.384 ± 1.618
8	15.984 ± 1.491	37.292 ± 22.728	16.600 ± 2.436	13.467 ± 1.984	13.584 ± 1.517
16	16.434 ± 1.876	11.133 ± 2.296	11.349 ± 1.960	10.467 ± 4.229	13.867 ± 2.381
32	16.434 ± 1.876	10.223 ± 2.170	10.317 ± 1.891	4.550 ± 0.437	14.484 ± 2.666

Table 3.187: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Minimum layer latency

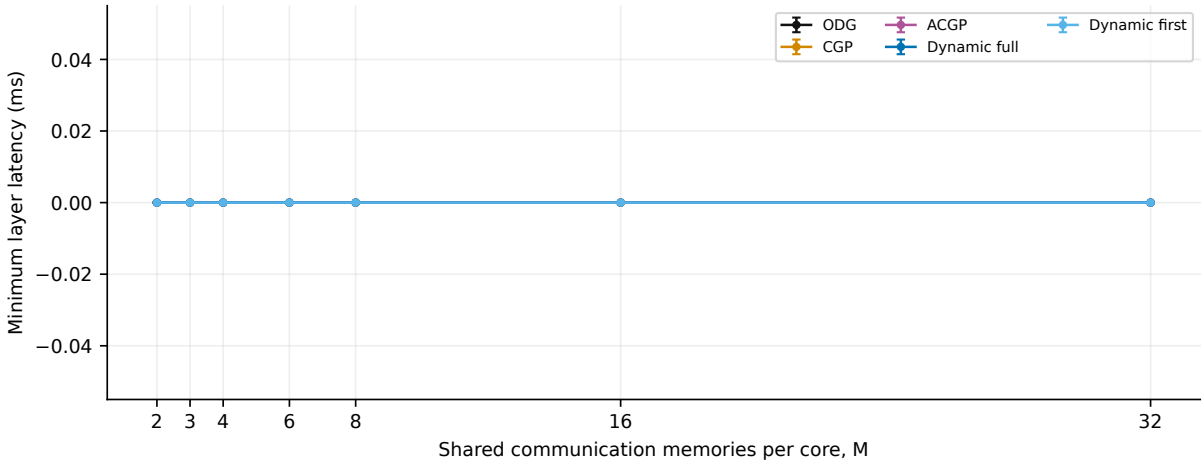


Figure 3.188: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 3.188: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Chapter 4

Torus: Dijkstra memory and policy results

Torus results follow the same metric order, memory slice and policy colours as mesh. Dijkstra is the sole evaluated torus route. The route oracle uses shortest-hop distance with its documented reliability tie-break; the three seeded request traces can therefore differ even when shortest-hop lengths agree.

Torus wraparound adjacency is explicitly checked, including edges absent from a mesh. The placement is held fixed, while the graph, topology configuration and routes change. Torus Dijkstra produces 3,186 adjacent-hop requests; shortest mesh routes produce 3,876. An observed latency or makespan difference therefore includes this changed hop workload and the configured network effects, rather than a single isolated link effect.

4.1 Dijkstra

Mean request latency

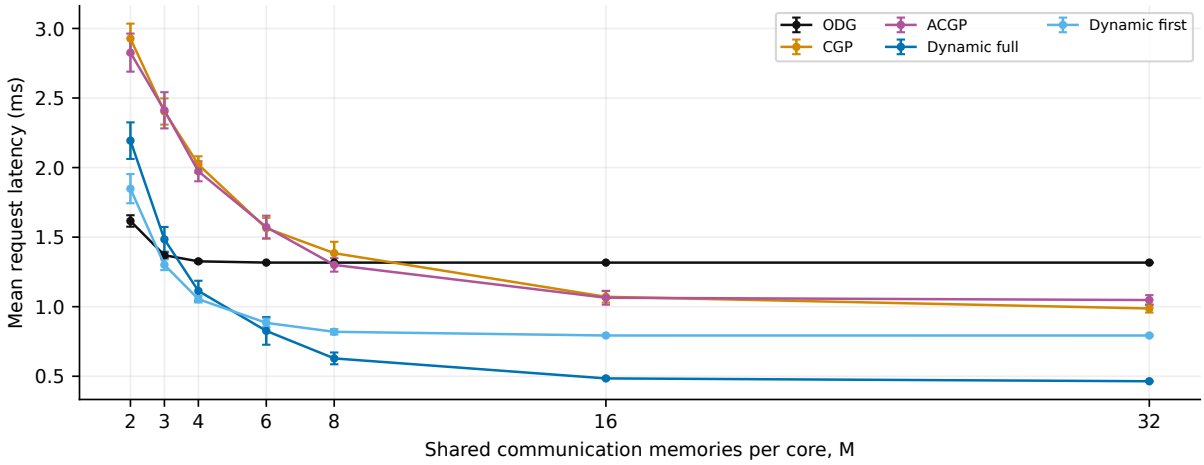


Figure 4.1: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.616 ± 0.041	2.927 ± 0.108	2.826 ± 0.137	2.194 ± 0.131	1.848 ± 0.105
3	1.370 ± 0.021	2.403 ± 0.094	2.412 ± 0.130	1.484 ± 0.089	1.301 ± 0.038
4	1.326 ± 0.008	2.022 ± 0.059	1.973 ± 0.072	1.113 ± 0.073	1.054 ± 0.024
6	1.317 ± 0.003	1.564 ± 0.074	1.572 ± 0.082	0.8259 ± 0.0993	0.8837 ± 0.0307
8	1.317 ± 0.003	1.385 ± 0.082	1.300 ± 0.048	0.6283 ± 0.0424	0.8194 ± 0.0191
16	1.317 ± 0.003	1.071 ± 0.041	1.064 ± 0.050	0.4844 ± 0.0056	0.7930 ± 0.0051
32	1.317 ± 0.003	0.9872 ± 0.0292	1.048 ± 0.035	0.4640 ± 0.0023	0.7928 ± 0.0050

Table 4.1: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Median request latency

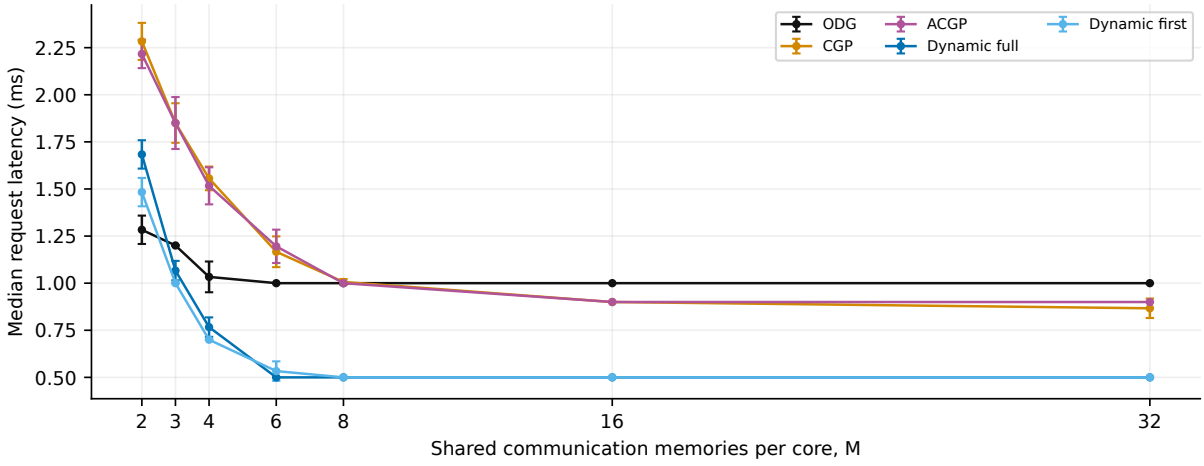


Figure 4.2: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.283 ± 0.075	2.283 ± 0.098	2.217 ± 0.075	1.683 ± 0.075	1.483 ± 0.075
3	1.200 ± 0.000	1.850 ± 0.105	1.850 ± 0.138	1.067 ± 0.052	1.000 ± 0.000
4	1.033 ± 0.082	1.556 ± 0.063	1.517 ± 0.098	0.7667 ± 0.0516	0.7000 ± 0.0000
6	1.000 ± 0.000	1.167 ± 0.082	1.196 ± 0.088	0.5000 ± 0.0000	0.5333 ± 0.0516
8	1.000 ± 0.000	1.006 ± 0.016	1.000 ± 0.000	0.5000 ± 0.0000	0.5000 ± 0.0000
16	1.000 ± 0.000	0.9000 ± 0.0000	0.9000 ± 0.0000	0.5000 ± 0.0000	0.5000 ± 0.0000
32	1.000 ± 0.000	0.8667 ± 0.0516	0.9000 ± 0.0000	0.5000 ± 0.0000	0.5000 ± 0.0000

Table 4.2: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

p95 request latency

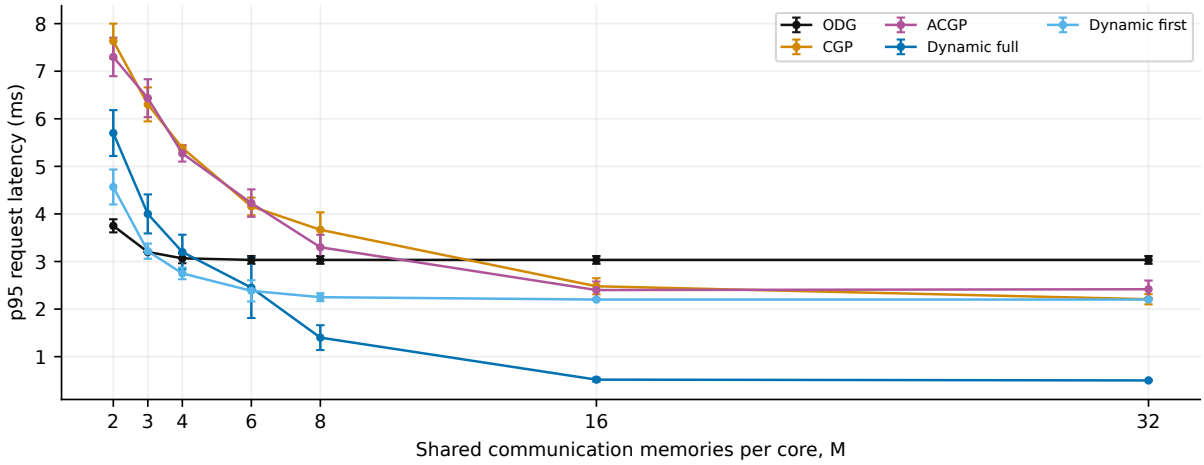


Figure 4.3: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	3.750 ± 0.138	7.634 ± 0.367	7.300 ± 0.405	5.700 ± 0.482	4.567 ± 0.367
3	3.200 ± 0.000	6.302 ± 0.357	6.433 ± 0.398	4.000 ± 0.410	3.217 ± 0.160
4	3.067 ± 0.103	5.388 ± 0.045	5.273 ± 0.173	3.200 ± 0.363	2.750 ± 0.122
6	3.033 ± 0.082	4.158 ± 0.185	4.228 ± 0.289	2.450 ± 0.638	2.383 ± 0.223
8	3.033 ± 0.082	3.667 ± 0.367	3.300 ± 0.261	1.400 ± 0.261	2.250 ± 0.084
16	3.033 ± 0.082	2.479 ± 0.169	2.400 ± 0.179	0.5167 ± 0.0408	2.200 ± 0.000
32	3.033 ± 0.082	2.207 ± 0.107	2.417 ± 0.183	0.5000 ± 0.0000	2.200 ± 0.000

Table 4.3: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum request latency

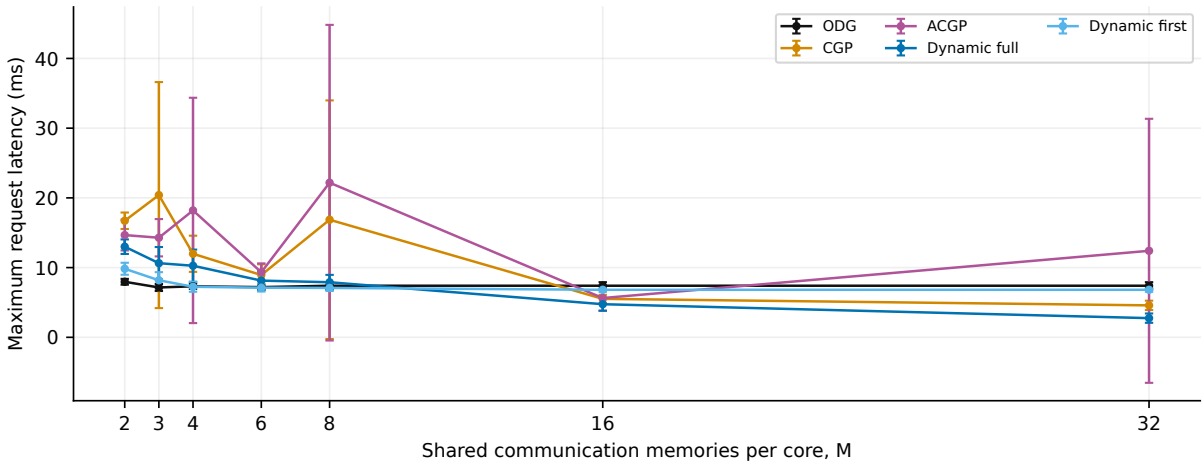


Figure 4.4: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	7.967 ± 0.418	16.717 ± 1.182	14.666 ± 2.211	13.000 ± 1.043	9.834 ± 0.859
3	7.150 ± 0.505	20.400 ± 16.209	14.284 ± 2.676	10.634 ± 2.318	8.184 ± 1.160
4	7.317 ± 0.376	11.984 ± 2.593	18.200 ± 16.160	10.267 ± 2.315	7.250 ± 0.718
6	7.200 ± 0.341	8.934 ± 1.540	9.334 ± 1.271	8.134 ± 1.382	7.117 ± 0.549
8	7.400 ± 0.510	16.867 ± 17.116	22.179 ± 22.637	7.900 ± 1.056	7.084 ± 0.440
16	7.400 ± 0.510	5.517 ± 0.581	5.633 ± 1.815	4.750 ± 0.938	6.817 ± 0.286
32	7.400 ± 0.510	4.583 ± 0.671	12.408 ± 18.935	2.750 ± 0.669	6.817 ± 0.286

Table 4.4: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Communication makespan

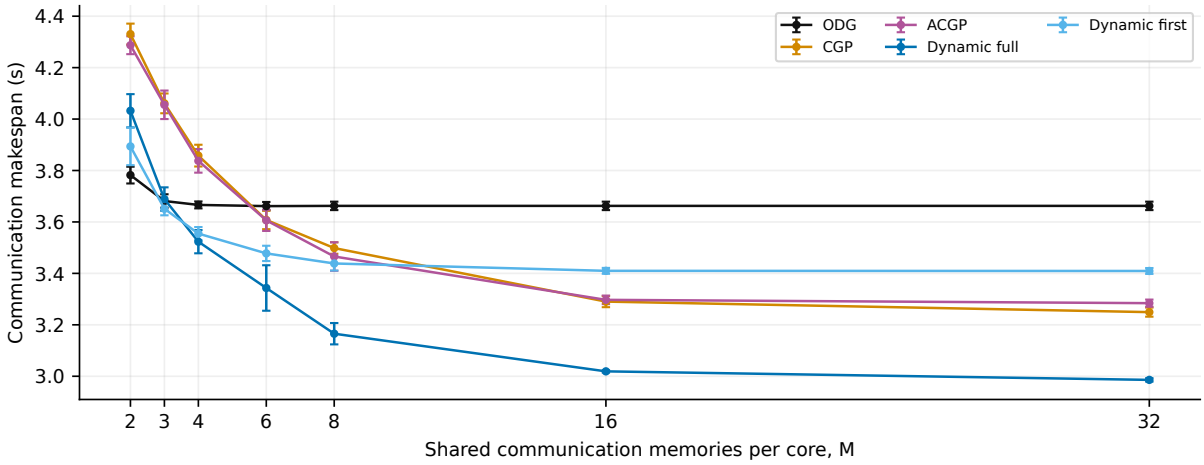


Figure 4.5: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	3.782 ± 0.033	4.330 ± 0.041	4.287 ± 0.035	4.032 ± 0.065	3.894 ± 0.073
3	3.681 ± 0.026	4.061 ± 0.038	4.055 ± 0.055	3.689 ± 0.046	3.651 ± 0.025
4	3.666 ± 0.014	3.858 ± 0.042	3.837 ± 0.046	3.523 ± 0.045	3.555 ± 0.025
6	3.662 ± 0.016	3.608 ± 0.036	3.606 ± 0.041	3.343 ± 0.088	3.478 ± 0.030
8	3.662 ± 0.016	3.498 ± 0.022	3.466 ± 0.055	3.165 ± 0.042	3.439 ± 0.028
16	3.662 ± 0.016	3.290 ± 0.022	3.297 ± 0.017	3.019 ± 0.004	3.410 ± 0.011
32	3.662 ± 0.016	3.249 ± 0.018	3.284 ± 0.014	2.986 ± 0.007	3.409 ± 0.011

Table 4.5: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean admission wait

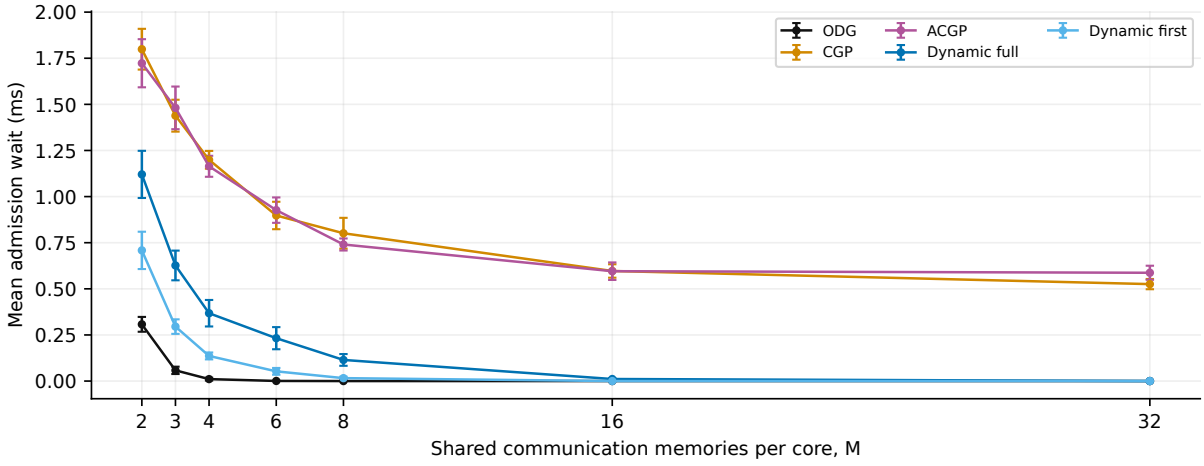


Figure 4.6: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.3075 ± 0.0402	1.799 ± 0.110	1.723 ± 0.130	1.120 ± 0.128	0.7084 ± 0.1012
3	0.0581 ± 0.0199	1.439 ± 0.086	1.481 ± 0.116	0.6267 ± 0.0805	0.2952 ± 0.0394
4	0.0106 ± 0.0073	1.199 ± 0.048	1.164 ± 0.057	0.3678 ± 0.0718	0.1362 ± 0.0187
6	0.0006 ± 0.0007	0.8976 ± 0.0744	0.9266 ± 0.0688	0.2324 ± 0.0600	0.0527 ± 0.0183
8	0.0000 ± 0.0000	0.8013 ± 0.0835	0.7403 ± 0.0326	0.1146 ± 0.0318	0.0158 ± 0.0079
16	0.0000 ± 0.0000	0.5967 ± 0.0364	0.5956 ± 0.0475	0.0111 ± 0.0048	0.0001 ± 0.0002
32	0.0000 ± 0.0000	0.5255 ± 0.0278	0.5871 ± 0.0382	0.0001 ± 0.0004	0.0000 ± 0.0000

Table 4.6: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Delivered EPR fidelity

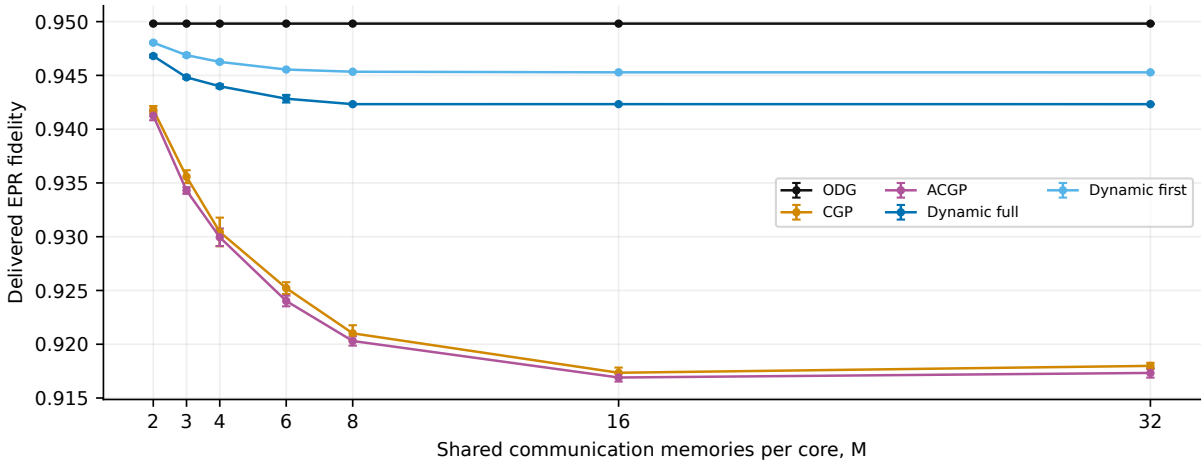


Figure 4.7: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.9498 ± 0.0000	0.9418 ± 0.0003	0.9413 ± 0.0004	0.9468 ± 0.0001	0.9480 ± 0.0001
3	0.9498 ± 0.0000	0.9356 ± 0.0006	0.9343 ± 0.0003	0.9448 ± 0.0001	0.9469 ± 0.0002
4	0.9498 ± 0.0000	0.9304 ± 0.0013	0.9299 ± 0.0008	0.9440 ± 0.0002	0.9463 ± 0.0001
6	0.9498 ± 0.0000	0.9252 ± 0.0005	0.9240 ± 0.0005	0.9428 ± 0.0004	0.9455 ± 0.0001
8	0.9498 ± 0.0000	0.9210 ± 0.0008	0.9203 ± 0.0004	0.9423 ± 0.0000	0.9453 ± 0.0000
16	0.9498 ± 0.0000	0.9173 ± 0.0005	0.9169 ± 0.0004	0.9423 ± 0.0000	0.9453 ± 0.0000
32	0.9498 ± 0.0000	0.9180 ± 0.0003	0.9173 ± 0.0004	0.9423 ± 0.0000	0.9453 ± 0.0000

Table 4.7: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler readiness fraction

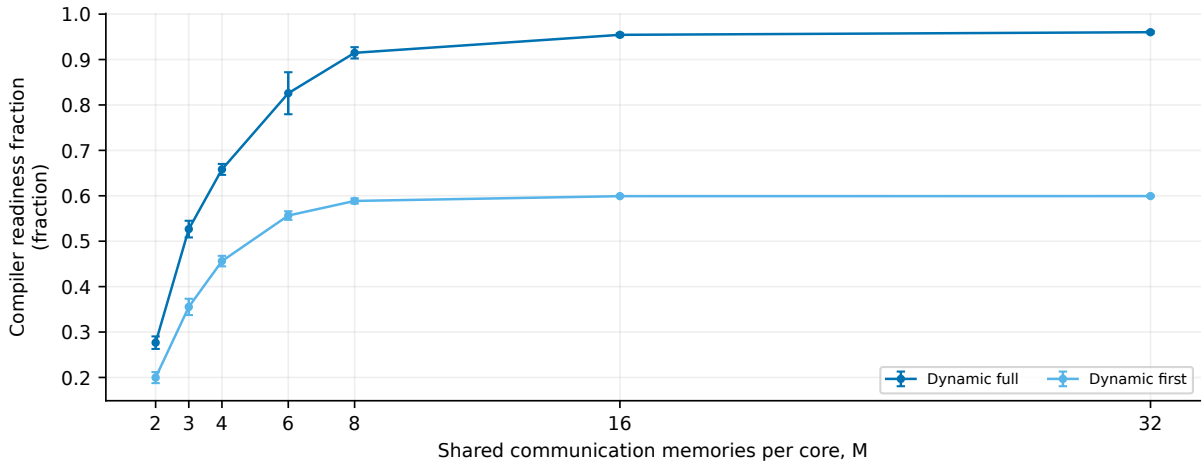


Figure 4.8: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2766 ± 0.0138	0.1997 ± 0.0122
3	n/a	n/a	n/a	0.5266 ± 0.0184	0.3553 ± 0.0179
4	n/a	n/a	n/a	0.6581 ± 0.0120	0.4562 ± 0.0116
6	n/a	n/a	n/a	0.8258 ± 0.0462	0.5565 ± 0.0094
8	n/a	n/a	n/a	0.9148 ± 0.0124	0.5886 ± 0.0057
16	n/a	n/a	n/a	0.9544 ± 0.0032	0.5992 ± 0.0017
32	n/a	n/a	n/a	0.9602 ± 0.0025	0.5993 ± 0.0017

Table 4.8: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit fraction

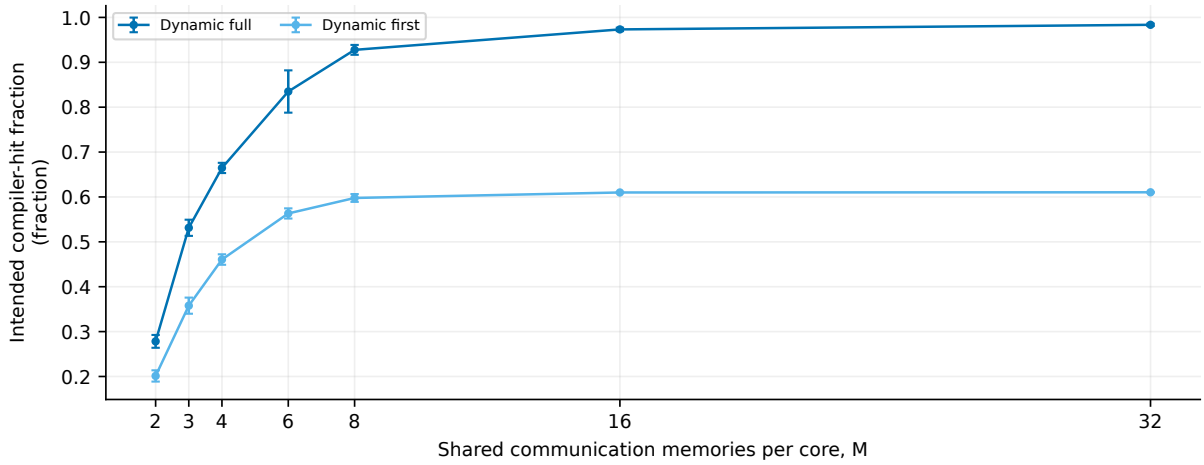


Figure 4.9: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.2782 ± 0.0143	0.2012 ± 0.0125
3	n/a	n/a	n/a	0.5313 ± 0.0180	0.3578 ± 0.0180
4	n/a	n/a	n/a	0.6646 ± 0.0114	0.4606 ± 0.0117
6	n/a	n/a	n/a	0.8349 ± 0.0471	0.5632 ± 0.0113
8	n/a	n/a	n/a	0.9277 ± 0.0110	0.5977 ± 0.0087
16	n/a	n/a	n/a	0.9733 ± 0.0038	0.6100 ± 0.0012
32	n/a	n/a	n/a	0.9835 ± 0.0026	0.6104 ± 0.0008

Table 4.9: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback fraction

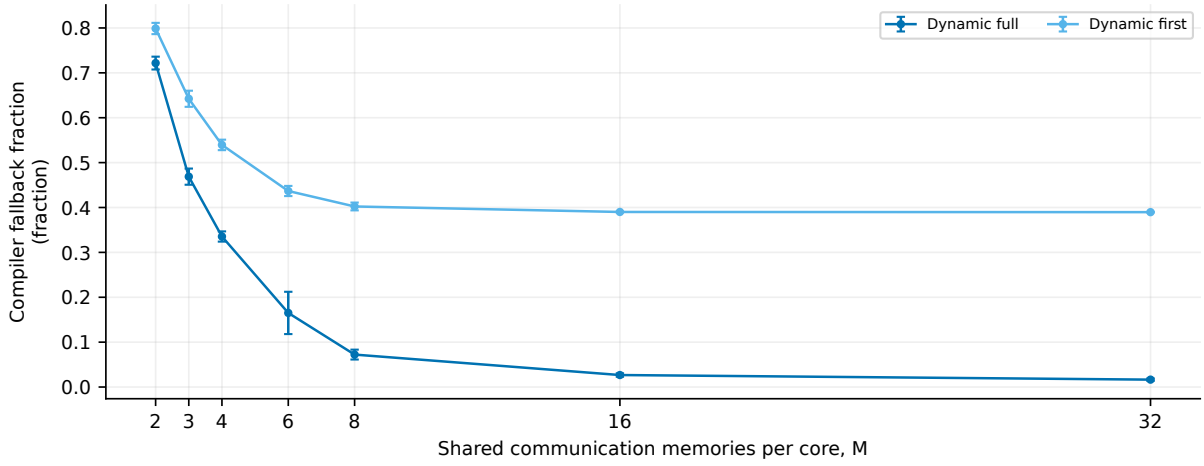


Figure 4.10: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.7218 ± 0.0143	0.7988 ± 0.0125
3	n/a	n/a	n/a	0.4687 ± 0.0180	0.6422 ± 0.0180
4	n/a	n/a	n/a	0.3354 ± 0.0114	0.5394 ± 0.0117
6	n/a	n/a	n/a	0.1651 ± 0.0471	0.4368 ± 0.0113
8	n/a	n/a	n/a	0.0723 ± 0.0110	0.4023 ± 0.0087
16	n/a	n/a	n/a	0.0267 ± 0.0038	0.3900 ± 0.0012
32	n/a	n/a	n/a	0.0165 ± 0.0026	0.3896 ± 0.0008

Table 4.10: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-cache waste

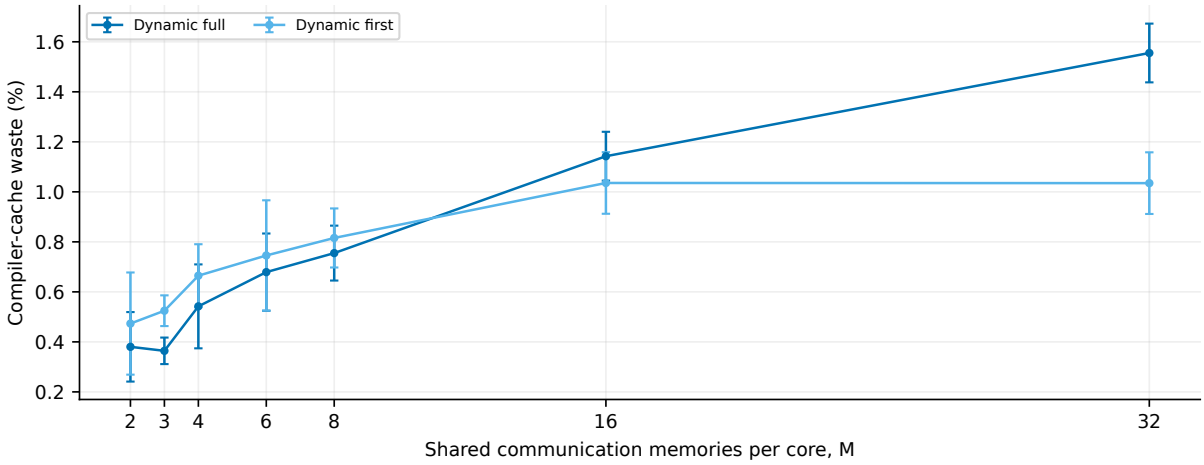


Figure 4.11: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.3802 ± 0.1390	0.4732 ± 0.2043
3	n/a	n/a	n/a	0.3642 ± 0.0530	0.5246 ± 0.0614
4	n/a	n/a	n/a	0.5420 ± 0.1678	0.6647 ± 0.1258
6	n/a	n/a	n/a	0.6789 ± 0.1544	0.7455 ± 0.2207
8	n/a	n/a	n/a	0.7550 ± 0.1098	0.8155 ± 0.1181
16	n/a	n/a	n/a	1.142 ± 0.098	1.035 ± 0.123
32	n/a	n/a	n/a	1.555 ± 0.117	1.035 ± 0.123

Table 4.11: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol waste

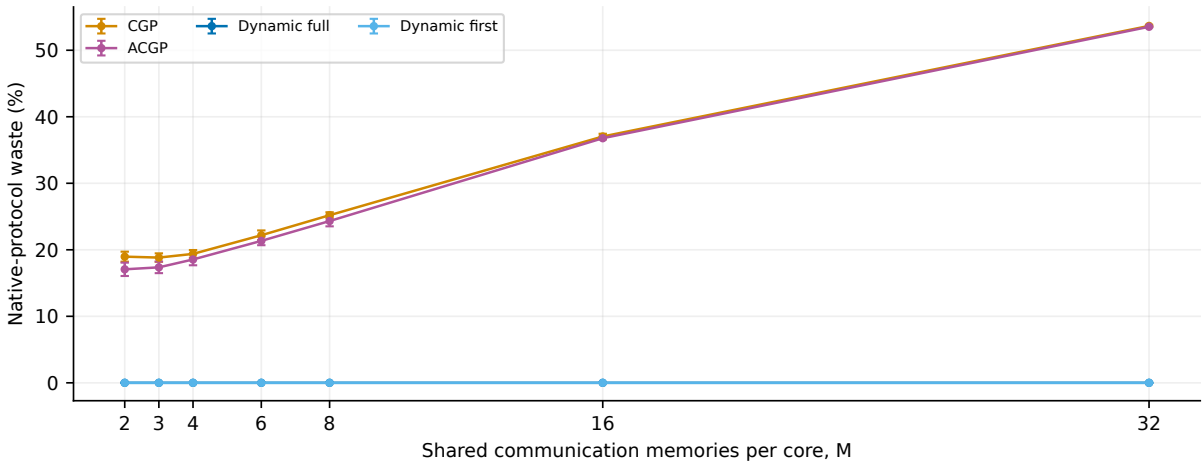


Figure 4.12: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	18.968 ± 0.748	17.064 ± 1.004	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	18.830 ± 0.635	17.361 ± 0.872	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	19.381 ± 0.582	18.545 ± 0.873	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	22.186 ± 0.725	21.339 ± 0.651	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	25.199 ± 0.444	24.321 ± 0.795	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	37.033 ± 0.412	36.773 ± 0.158	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	53.657 ± 0.159	53.528 ± 0.075	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 4.12: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-pair expiry

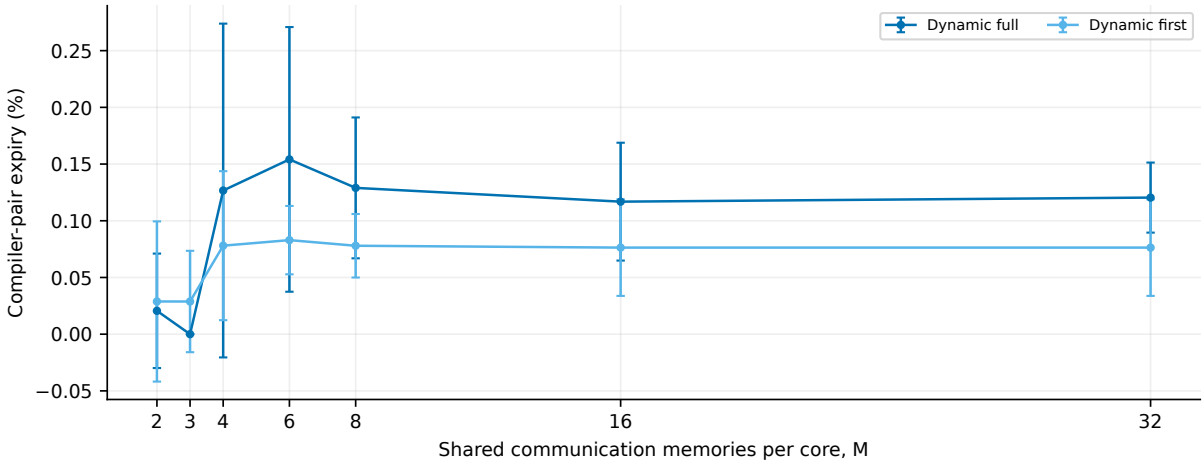


Figure 4.13: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.0206 ± 0.0505	0.0288 ± 0.0706
3	n/a	n/a	n/a	0.0000 ± 0.0000	0.0288 ± 0.0447
4	n/a	n/a	n/a	0.1267 ± 0.1472	0.0780 ± 0.0657
6	n/a	n/a	n/a	0.1541 ± 0.1167	0.0829 ± 0.0301
8	n/a	n/a	n/a	0.1290 ± 0.0621	0.0780 ± 0.0280
16	n/a	n/a	n/a	0.1169 ± 0.0520	0.0763 ± 0.0426
32	n/a	n/a	n/a	0.1204 ± 0.0309	0.0763 ± 0.0426

Table 4.13: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler-pair storage time

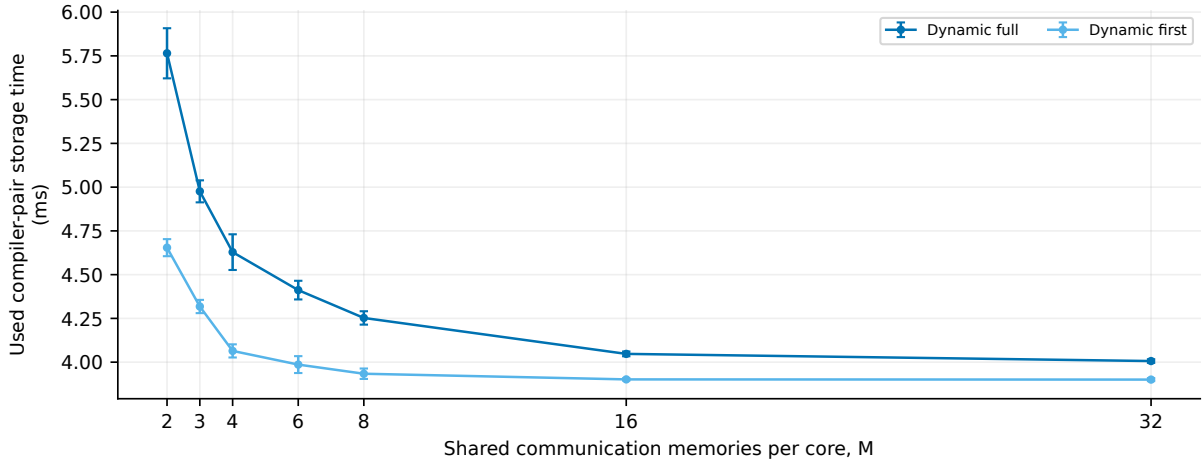


Figure 4.14: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	5.765 ± 0.143	4.654 ± 0.049
3	n/a	n/a	n/a	4.976 ± 0.063	4.318 ± 0.038
4	n/a	n/a	n/a	4.629 ± 0.102	4.064 ± 0.038
6	n/a	n/a	n/a	4.412 ± 0.053	3.986 ± 0.048
8	n/a	n/a	n/a	4.253 ± 0.038	3.934 ± 0.030
16	n/a	n/a	n/a	4.047 ± 0.014	3.902 ± 0.007
32	n/a	n/a	n/a	4.006 ± 0.010	3.900 ± 0.008

Table 4.14: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Delivered-hop throughput

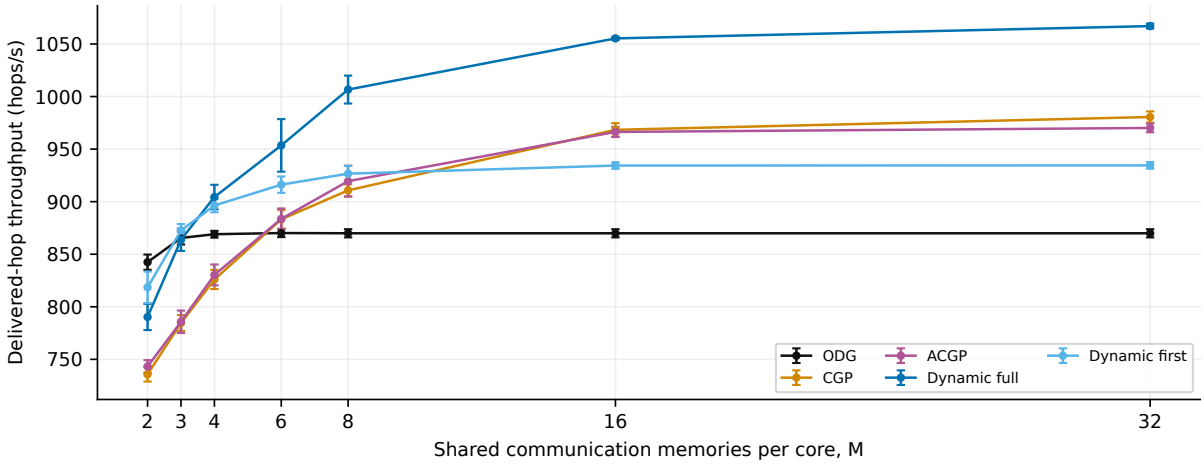


Figure 4.15: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	842.43 ± 7.25	735.80 ± 6.96	743.19 ± 6.05	790.29 ± 12.46	818.48 ± 15.00
3	865.48 ± 6.19	784.59 ± 7.50	785.73 ± 10.68	863.76 ± 10.61	872.61 ± 6.12
4	869.03 ± 3.21	825.94 ± 9.10	830.33 ± 9.93	904.41 ± 11.66	896.32 ± 6.42
6	870.14 ± 3.84	883.17 ± 8.80	883.58 ± 9.94	953.54 ± 25.00	916.18 ± 7.78
8	869.92 ± 3.90	910.73 ± 5.76	919.51 ± 14.73	1006.64 ± 13.29	926.61 ± 7.45
16	869.92 ± 3.90	968.34 ± 6.37	966.33 ± 4.87	1055.31 ± 1.55	934.35 ± 3.12
32	869.92 ± 3.90	980.54 ± 5.34	970.12 ± 4.12	1067.02 ± 2.35	934.50 ± 3.12

Table 4.15: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Completion fraction

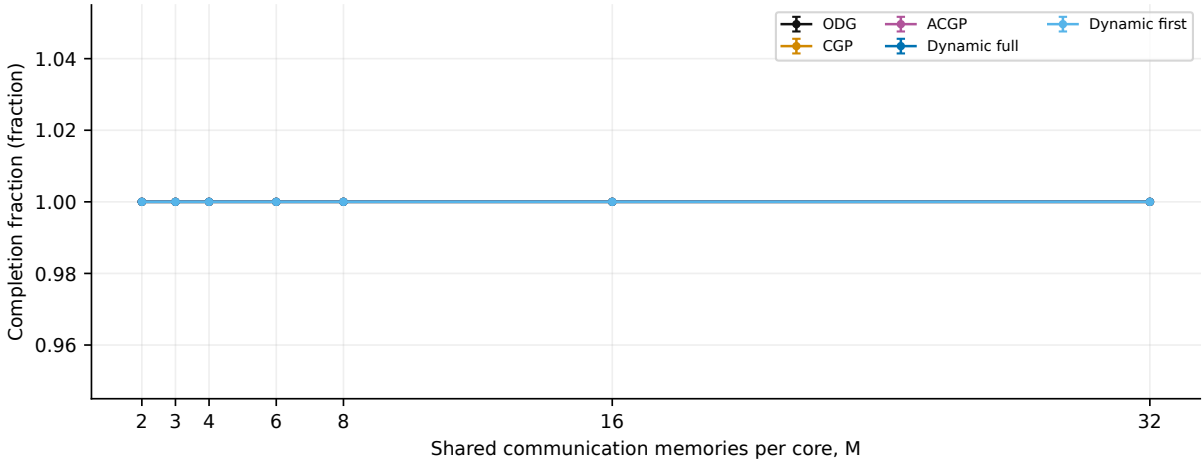


Figure 4.16: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
3	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
4	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
6	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
8	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
16	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000
32	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000	1.000 ± 0.000

Table 4.16: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum admission wait

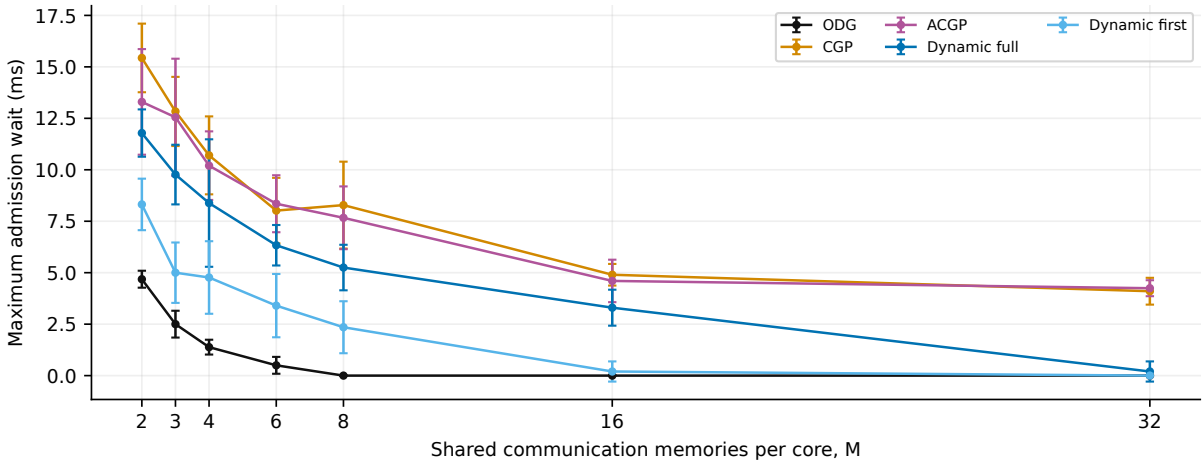


Figure 4.17: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	4.683 ± 0.412	15.434 ± 1.667	13.298 ± 2.565	11.784 ± 1.150	8.317 ± 1.251
3	2.500 ± 0.651	12.834 ± 1.680	12.550 ± 2.846	9.767 ± 1.449	5.000 ± 1.467
4	1.383 ± 0.360	10.700 ± 1.893	10.200 ± 1.666	8.384 ± 3.097	4.767 ± 1.763
6	0.5000 ± 0.4099	8.017 ± 1.592	8.350 ± 1.384	6.333 ± 0.983	3.400 ± 1.538
8	0.0000 ± 0.0000	8.284 ± 2.110	7.667 ± 1.525	5.250 ± 1.106	2.350 ± 1.263
16	0.0000 ± 0.0000	4.900 ± 0.525	4.600 ± 1.032	3.300 ± 0.874	0.2000 ± 0.4899
32	0.0000 ± 0.0000	4.100 ± 0.651	4.246 ± 0.388	0.2000 ± 0.4899	0.0000 ± 0.0000

Table 4.17: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with admission wait

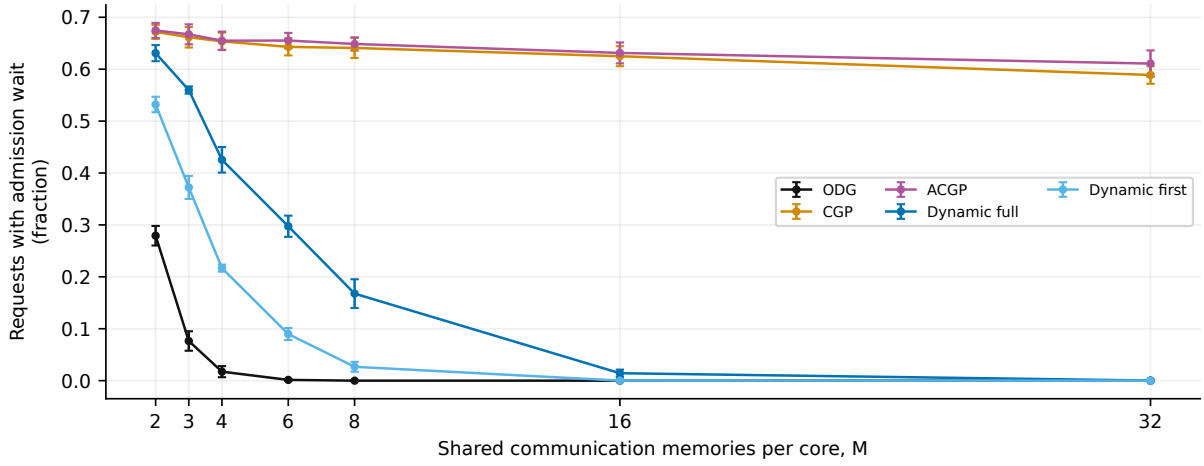


Figure 4.18: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.2792 ± 0.0188	0.6719 ± 0.0135	0.6747 ± 0.0145	0.6309 ± 0.0155	0.5320 ± 0.0149
3	0.0764 ± 0.0188	0.6615 ± 0.0198	0.6671 ± 0.0193	0.5598 ± 0.0069	0.3723 ± 0.0222
4	0.0173 ± 0.0107	0.6536 ± 0.0168	0.6549 ± 0.0176	0.4255 ± 0.0247	0.2168 ± 0.0068
6	0.0015 ± 0.0015	0.6430 ± 0.0164	0.6552 ± 0.0148	0.2974 ± 0.0204	0.0898 ± 0.0116
8	0.0000 ± 0.0000	0.6409 ± 0.0193	0.6486 ± 0.0127	0.1677 ± 0.0277	0.0267 ± 0.0095
16	0.0000 ± 0.0000	0.6250 ± 0.0193	0.6313 ± 0.0202	0.0143 ± 0.0070	0.0001 ± 0.0003
32	0.0000 ± 0.0000	0.5888 ± 0.0169	0.6108 ± 0.0253	0.0002 ± 0.0005	0.0000 ± 0.0000

Table 4.18: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded reservation-setup counter

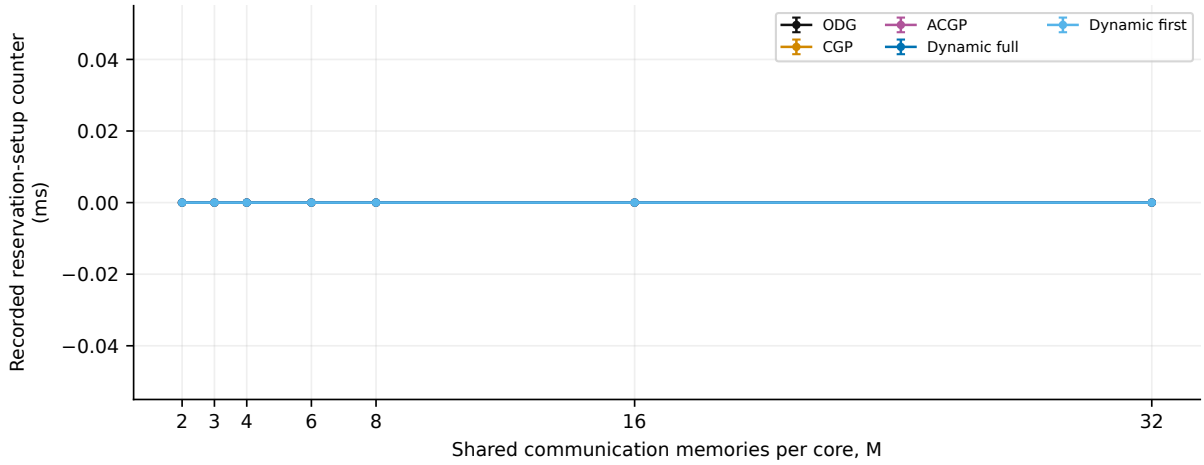


Figure 4.19: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 4.19: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean generation/service time

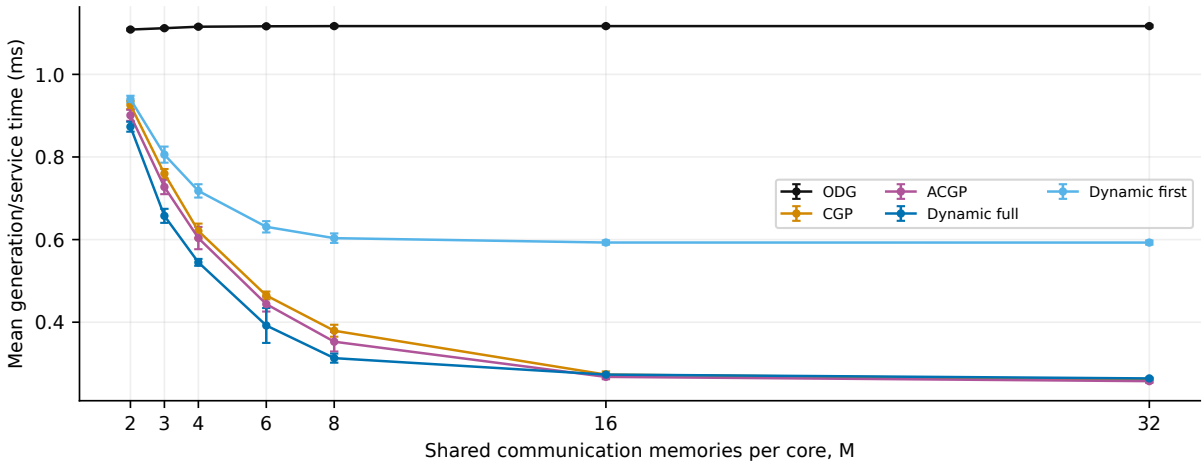


Figure 4.20: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.109 ± 0.002	0.9258 ± 0.0098	0.9008 ± 0.0134	0.8732 ± 0.0120	0.9398 ± 0.0083
3	1.112 ± 0.002	0.7595 ± 0.0113	0.7274 ± 0.0175	0.6575 ± 0.0170	0.8057 ± 0.0195
4	1.115 ± 0.003	0.6209 ± 0.0178	0.6037 ± 0.0270	0.5449 ± 0.0083	0.7179 ± 0.0161
6	1.116 ± 0.003	0.4647 ± 0.0095	0.4438 ± 0.0180	0.3920 ± 0.0422	0.6309 ± 0.0137
8	1.117 ± 0.003	0.3794 ± 0.0145	0.3528 ± 0.0236	0.3130 ± 0.0110	0.6035 ± 0.0115
16	1.117 ± 0.003	0.2731 ± 0.0078	0.2676 ± 0.0056	0.2731 ± 0.0017	0.5929 ± 0.0051
32	1.117 ± 0.003	0.2609 ± 0.0041	0.2573 ± 0.0040	0.2639 ± 0.0020	0.5928 ± 0.0050

Table 4.20: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Recorded retry-wait time

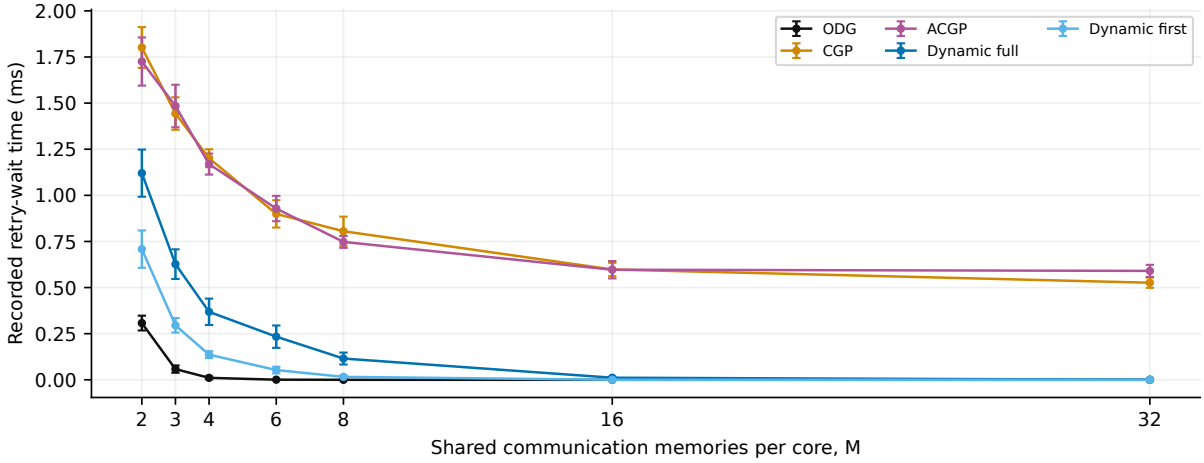


Figure 4.21: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.3075 ± 0.0402	1.801 ± 0.111	1.725 ± 0.131	1.120 ± 0.128	0.7084 ± 0.1012
3	0.0581 ± 0.0199	1.443 ± 0.088	1.484 ± 0.115	0.6269 ± 0.0805	0.2953 ± 0.0394
4	0.0106 ± 0.0073	1.201 ± 0.049	1.170 ± 0.057	0.3686 ± 0.0716	0.1364 ± 0.0186
6	0.0006 ± 0.0007	0.8995 ± 0.0741	0.9284 ± 0.0687	0.2339 ± 0.0607	0.0528 ± 0.0182
8	0.0000 ± 0.0000	0.8054 ± 0.0791	0.7476 ± 0.0324	0.1153 ± 0.0323	0.0159 ± 0.0079
16	0.0000 ± 0.0000	0.5980 ± 0.0365	0.5966 ± 0.0471	0.0113 ± 0.0051	0.0001 ± 0.0002
32	0.0000 ± 0.0000	0.5263 ± 0.0277	0.5905 ± 0.0329	0.0001 ± 0.0004	0.0000 ± 0.0000

Table 4.21: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Request retries

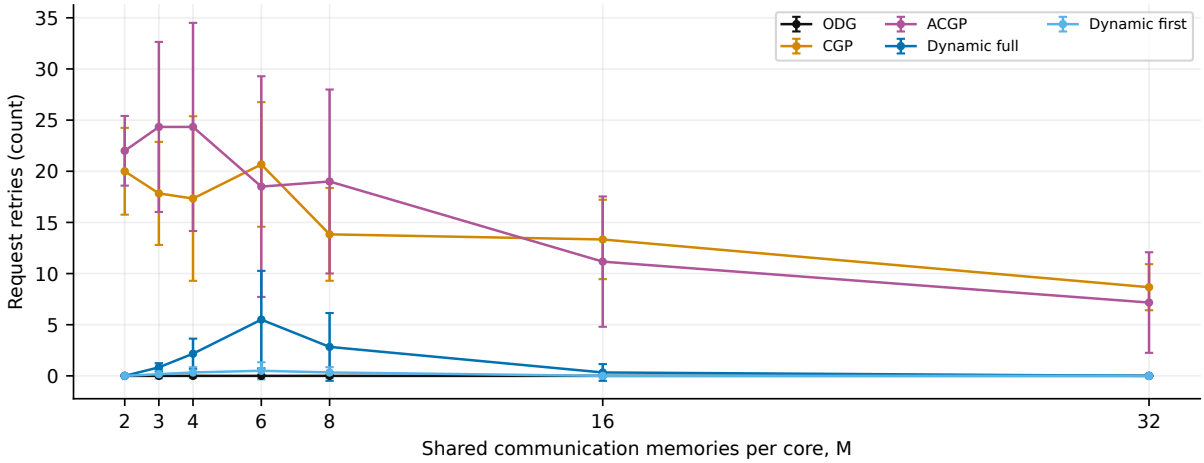


Figure 4.22: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	20.000 ± 4.243	22.000 ± 3.406	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	17.833 ± 5.037	24.333 ± 8.311	0.8333 ± 0.4082	0.1667 ± 0.4082
4	0.0000 ± 0.0000	17.333 ± 8.042	24.333 ± 10.172	2.167 ± 1.472	0.3333 ± 0.5164
6	0.0000 ± 0.0000	20.667 ± 6.088	18.500 ± 10.784	5.500 ± 4.764	0.5000 ± 0.8367
8	0.0000 ± 0.0000	13.833 ± 4.535	19.000 ± 8.989	2.833 ± 3.312	0.3333 ± 0.5164
16	0.0000 ± 0.0000	13.333 ± 3.882	11.167 ± 6.369	0.3333 ± 0.8165	0.0000 ± 0.0000
32	0.0000 ± 0.0000	8.667 ± 2.251	7.167 ± 4.916	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 4.22: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Requests with retries

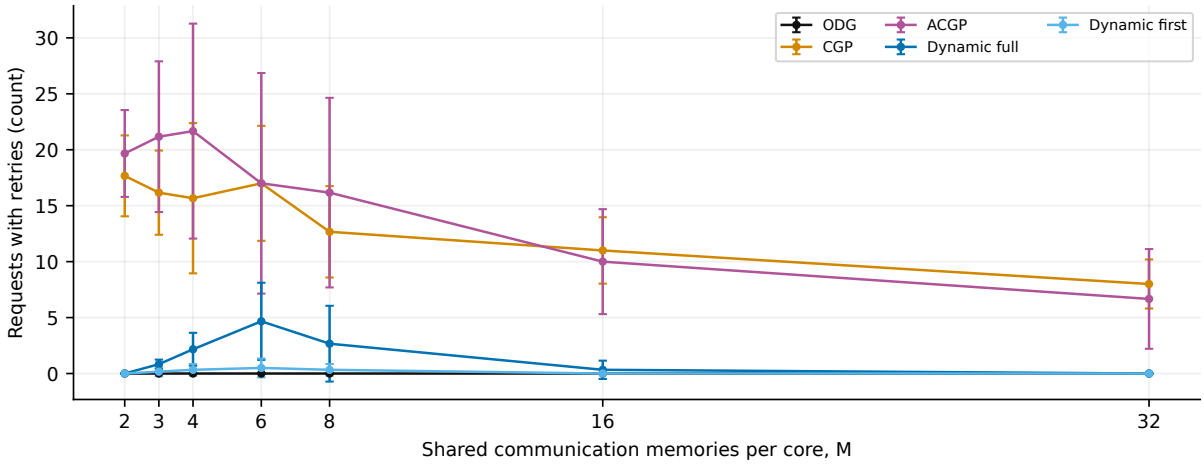


Figure 4.23: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	17.667 ± 3.615	19.667 ± 3.882	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	16.167 ± 3.764	21.167 ± 6.735	0.8333 ± 0.4082	0.1667 ± 0.4082
4	0.0000 ± 0.0000	15.667 ± 6.713	21.667 ± 9.606	2.167 ± 1.472	0.3333 ± 0.5164
6	0.0000 ± 0.0000	17.000 ± 5.138	17.000 ± 9.859	4.667 ± 3.445	0.5000 ± 0.8367
8	0.0000 ± 0.0000	12.667 ± 4.082	16.167 ± 8.472	2.667 ± 3.386	0.3333 ± 0.5164
16	0.0000 ± 0.0000	11.000 ± 2.966	10.000 ± 4.690	0.3333 ± 0.8165	0.0000 ± 0.0000
32	0.0000 ± 0.0000	8.000 ± 2.191	6.667 ± 4.457	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 4.23: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol generated-pair counter

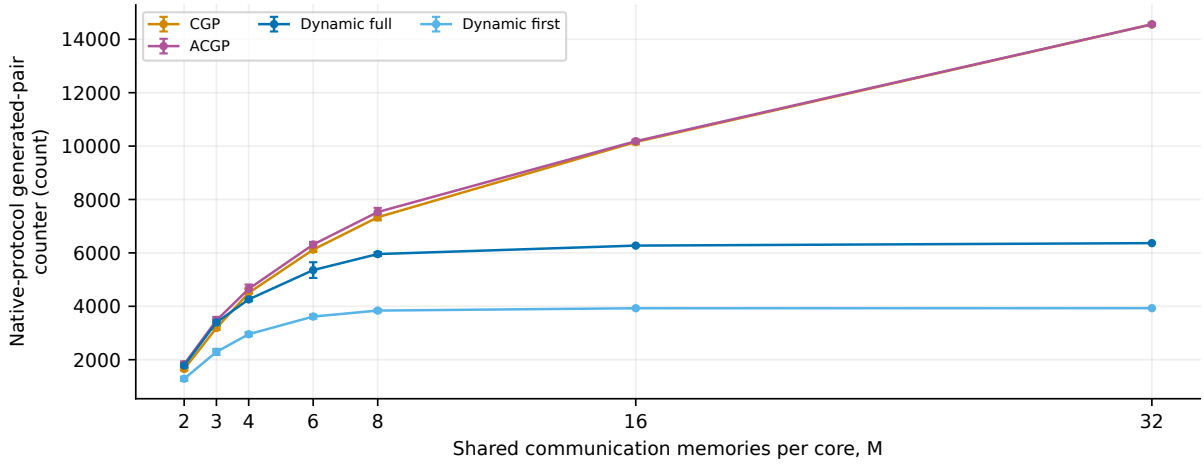


Figure 4.24: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	1652.00 ± 60.97	1829.67 ± 107.13	1779.67 ± 89.20	1288.00 ± 78.61
3	n/a	3188.00 ± 75.06	3470.67 ± 132.90	3397.67 ± 113.75	2291.67 ± 114.52
4	n/a	4501.33 ± 157.77	4652.00 ± 162.69	4258.00 ± 66.86	2954.33 ± 76.20
6	n/a	6123.67 ± 88.89	6312.67 ± 99.87	5356.00 ± 294.69	3616.00 ± 74.66
8	n/a	7334.00 ± 115.54	7529.67 ± 156.25	5956.33 ± 73.28	3840.00 ± 57.09
16	n/a	10153.00 ± 91.28	10183.33 ± 43.50	6273.33 ± 22.97	3927.33 ± 6.53
32	n/a	14558.00 ± 57.06	14560.00 ± 36.60	6366.00 ± 10.58	3930.00 ± 0.00

Table 4.24: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol used-pair counter

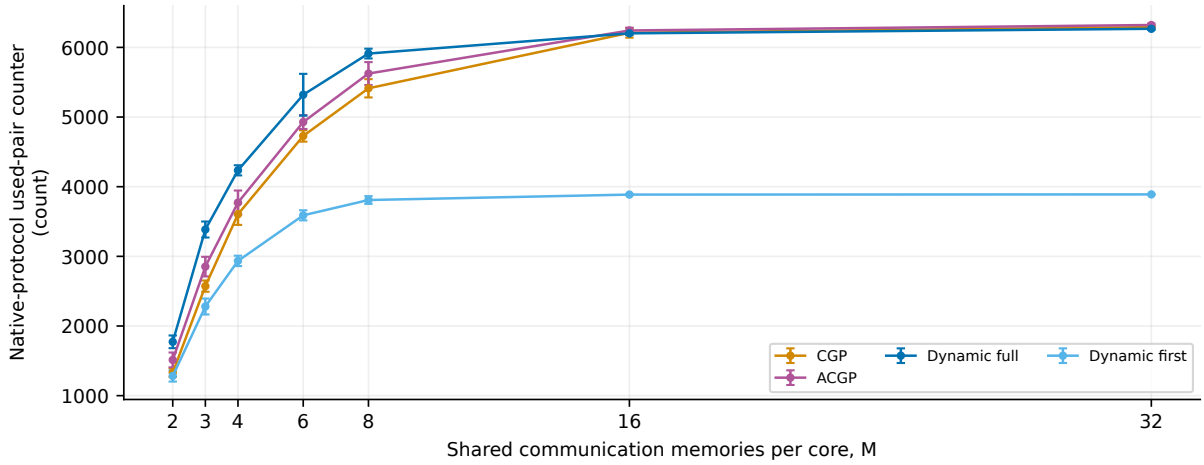


Figure 4.25: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	1331.33 ± 61.20	1513.00 ± 106.33	1773.00 ± 91.14	1282.00 ± 79.96
3	n/a	2572.33 ± 80.27	2852.67 ± 140.61	3385.33 ± 114.81	2279.67 ± 114.47
4	n/a	3605.00 ± 153.37	3772.00 ± 173.13	4235.00 ± 72.58	2934.67 ± 74.44
6	n/a	4728.33 ± 81.39	4928.00 ± 99.67	5320.00 ± 300.26	3589.00 ± 72.19
8	n/a	5412.67 ± 130.97	5624.33 ± 164.39	5911.33 ± 70.13	3808.67 ± 55.48
16	n/a	6209.33 ± 69.28	6243.00 ± 39.61	6201.67 ± 24.05	3886.67 ± 7.87
32	n/a	6291.00 ± 23.07	6321.33 ± 19.95	6267.00 ± 16.82	3889.33 ± 4.84

Table 4.25: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Native-protocol unused-pair counter

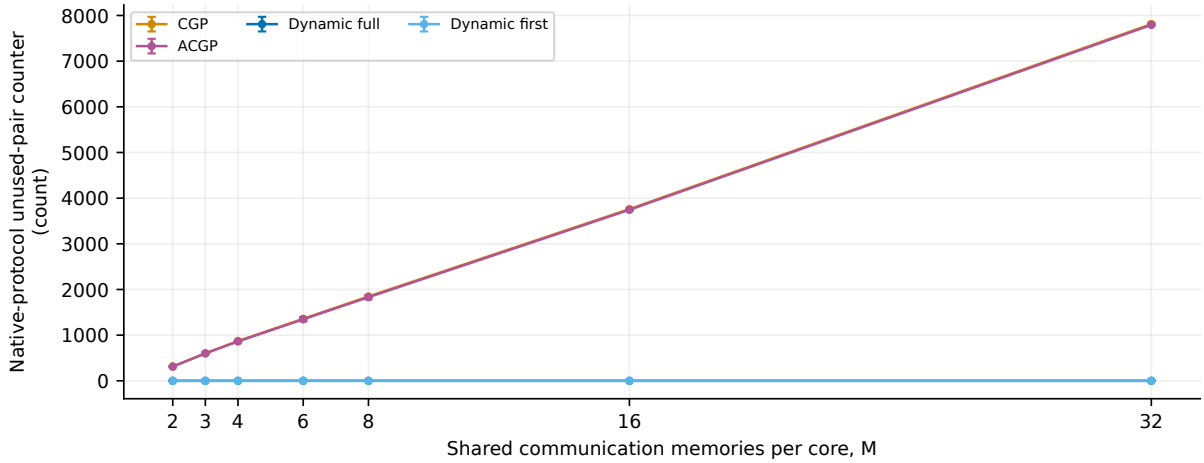


Figure 4.26: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	313.00 ± 4.69	311.33 ± 3.01	0.0000 ± 0.0000	0.0000 ± 0.0000
3	n/a	600.00 ± 13.62	601.67 ± 14.11	0.0000 ± 0.0000	0.0000 ± 0.0000
4	n/a	871.67 ± 5.85	861.67 ± 21.22	0.0000 ± 0.0000	0.0000 ± 0.0000
6	n/a	1358.33 ± 39.10	1347.00 ± 43.43	0.0000 ± 0.0000	0.0000 ± 0.0000
8	n/a	1847.67 ± 9.42	1830.67 ± 46.66	0.0000 ± 0.0000	0.0000 ± 0.0000
16	n/a	3759.67 ± 12.16	3744.67 ± 14.07	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	7811.33 ± 26.97	7793.67 ± 11.48	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 4.26: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Scheduled compiler preparations

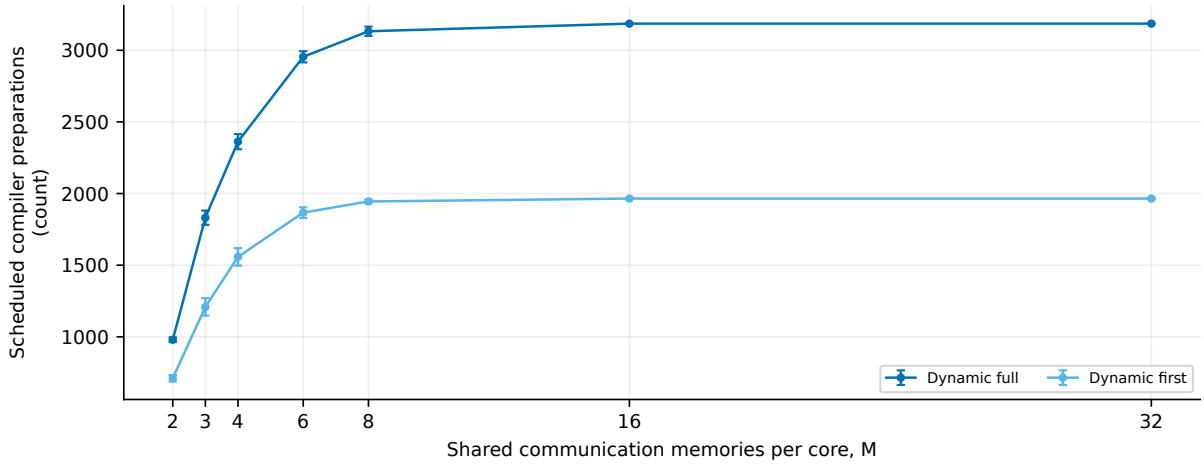


Figure 4.27: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	979.67 ± 16.26	710.33 ± 22.74
3	n/a	n/a	n/a	1831.33 ± 49.77	1208.67 ± 61.19
4	n/a	n/a	n/a	2362.00 ± 53.04	1558.00 ± 60.90
6	n/a	n/a	n/a	2954.33 ± 38.91	1867.00 ± 37.19
8	n/a	n/a	n/a	3132.67 ± 32.62	1944.67 ± 13.89
16	n/a	n/a	n/a	3186.00 ± 0.00	1965.00 ± 0.00
32	n/a	n/a	n/a	3186.00 ± 0.00	1965.00 ± 0.00

Table 4.27: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner-blocked preparations

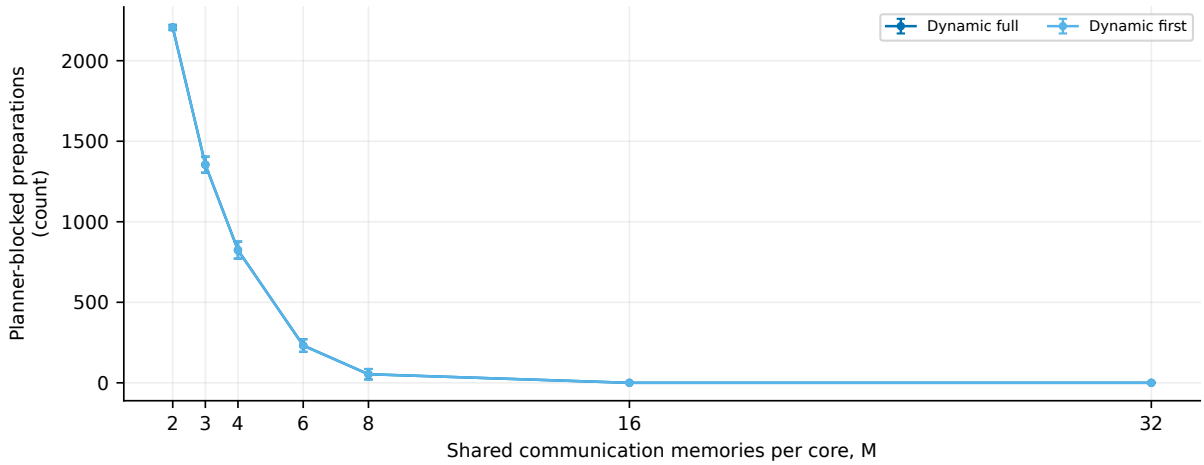


Figure 4.28: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2206.33 ± 16.26	2206.33 ± 16.26
3	n/a	n/a	n/a	1354.67 ± 49.77	1354.67 ± 49.77
4	n/a	n/a	n/a	824.00 ± 53.04	824.00 ± 53.04
6	n/a	n/a	n/a	231.67 ± 38.91	231.67 ± 38.91
8	n/a	n/a	n/a	53.333 ± 32.623	53.333 ± 32.623
16	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000
32	n/a	n/a	n/a	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 4.28: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Planner peak compiler memory

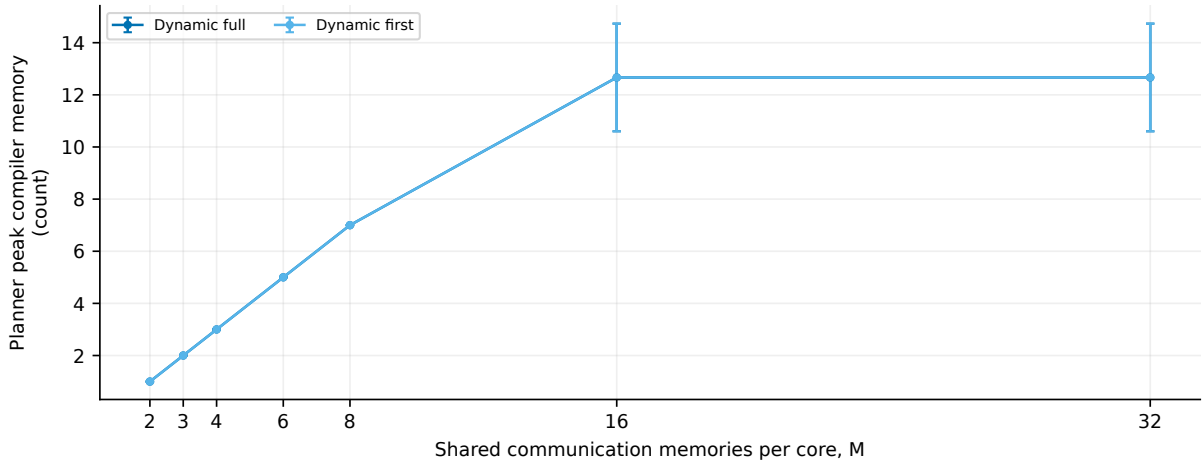


Figure 4.29: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1.000 ± 0.000	1.000 ± 0.000
3	n/a	n/a	n/a	2.000 ± 0.000	2.000 ± 0.000
4	n/a	n/a	n/a	3.000 ± 0.000	3.000 ± 0.000
6	n/a	n/a	n/a	5.000 ± 0.000	5.000 ± 0.000
8	n/a	n/a	n/a	7.000 ± 0.000	7.000 ± 0.000
16	n/a	n/a	n/a	12.667 ± 2.066	12.667 ± 2.066
32	n/a	n/a	n/a	12.667 ± 2.066	12.667 ± 2.066

Table 4.29: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler preparation admission attempts

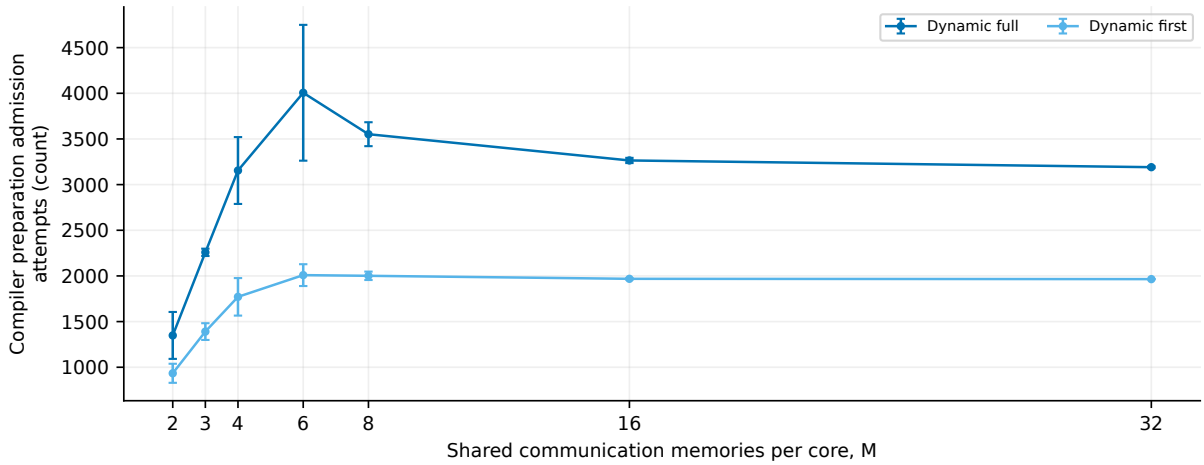


Figure 4.30: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	1348.50 ± 256.88	933.83 ± 104.36
3	n/a	n/a	n/a	2258.33 ± 40.18	1390.67 ± 91.59
4	n/a	n/a	n/a	3154.33 ± 366.09	1771.00 ± 205.41
6	n/a	n/a	n/a	4005.67 ± 743.63	2008.83 ± 119.46
8	n/a	n/a	n/a	3552.00 ± 131.03	2001.33 ± 46.02
16	n/a	n/a	n/a	3264.50 ± 28.47	1968.33 ± 8.16
32	n/a	n/a	n/a	3190.83 ± 10.01	1965.00 ± 0.00

Table 4.30: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Launched compiler preparations

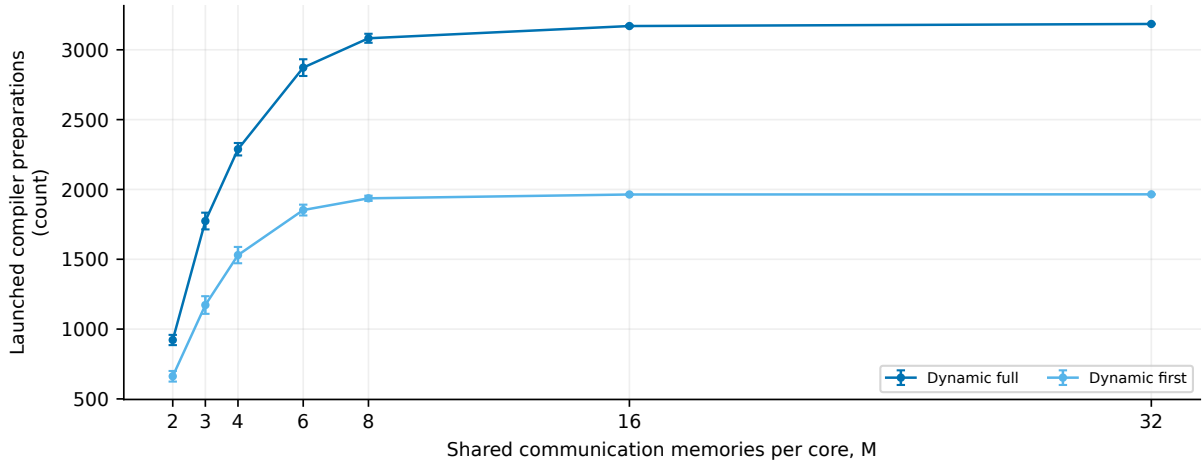


Figure 4.31: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	921.83 ± 36.65	662.00 ± 37.94
3	n/a	n/a	n/a	1773.67 ± 59.89	1172.33 ± 63.16
4	n/a	n/a	n/a	2288.00 ± 44.57	1529.83 ± 58.47
6	n/a	n/a	n/a	2872.33 ± 59.85	1852.33 ± 38.70
8	n/a	n/a	n/a	3082.50 ± 32.20	1936.50 ± 18.74
16	n/a	n/a	n/a	3170.17 ± 5.12	1963.83 ± 2.86
32	n/a	n/a	n/a	3185.00 ± 2.45	1965.00 ± 0.00

Table 4.31: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Accepted compiler preparations

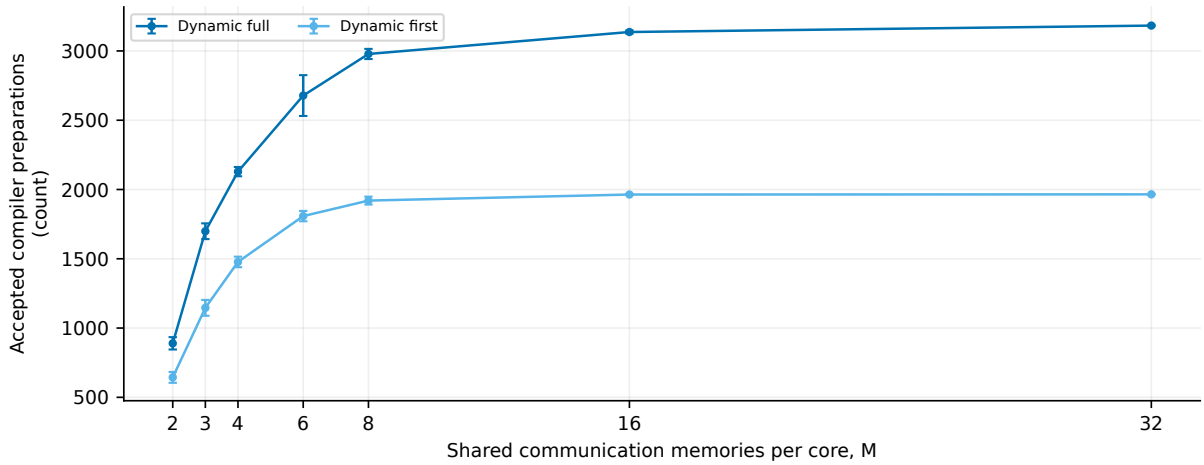


Figure 4.32: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	889.83 ± 44.60	644.00 ± 39.30
3	n/a	n/a	n/a	1698.83 ± 56.88	1145.83 ± 57.26
4	n/a	n/a	n/a	2129.00 ± 33.43	1477.17 ± 38.10
6	n/a	n/a	n/a	2678.00 ± 147.34	1808.00 ± 37.33
8	n/a	n/a	n/a	2978.17 ± 36.64	1920.00 ± 28.54
16	n/a	n/a	n/a	3136.67 ± 11.48	1963.67 ± 3.27
32	n/a	n/a	n/a	3183.00 ± 5.29	1965.00 ± 0.00

Table 4.32: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Rejected compiler preparations

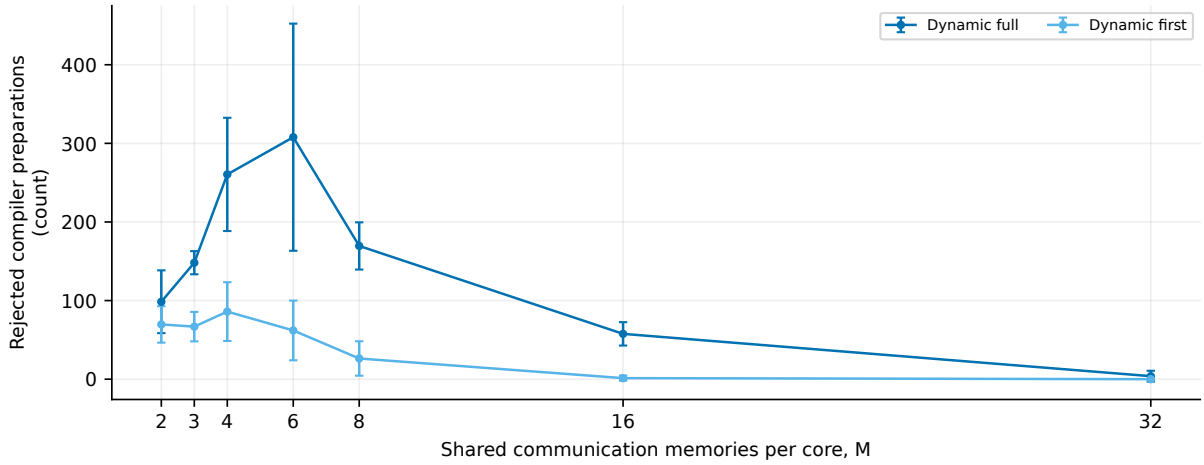


Figure 4.33: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	98.500 ± 39.934	69.667 ± 23.157
3	n/a	n/a	n/a	148.17 ± 14.74	66.833 ± 18.734
4	n/a	n/a	n/a	260.50 ± 72.02	86.000 ± 37.358
6	n/a	n/a	n/a	307.83 ± 144.49	62.000 ± 37.968
8	n/a	n/a	n/a	169.50 ± 30.02	26.333 ± 21.915
16	n/a	n/a	n/a	57.667 ± 14.882	1.333 ± 3.266
32	n/a	n/a	n/a	3.833 ± 6.882	0.0000 ± 0.0000

Table 4.33: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-ready request count

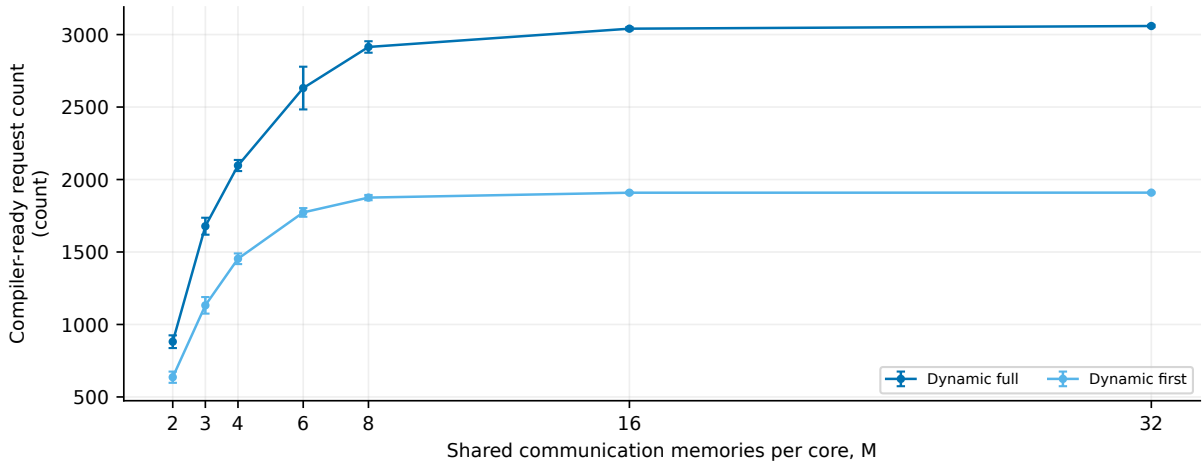


Figure 4.34: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	881.17 ± 43.91	636.17 ± 38.72
3	n/a	n/a	n/a	1677.83 ± 58.49	1132.00 ± 57.16
4	n/a	n/a	n/a	2096.67 ± 38.32	1453.33 ± 36.83
6	n/a	n/a	n/a	2631.00 ± 147.33	1773.00 ± 29.91
8	n/a	n/a	n/a	2914.50 ± 39.54	1875.33 ± 18.15
16	n/a	n/a	n/a	3040.67 ± 10.15	1909.00 ± 5.51
32	n/a	n/a	n/a	3059.17 ± 7.86	1909.50 ± 5.54

Table 4.34: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Intended compiler-hit count

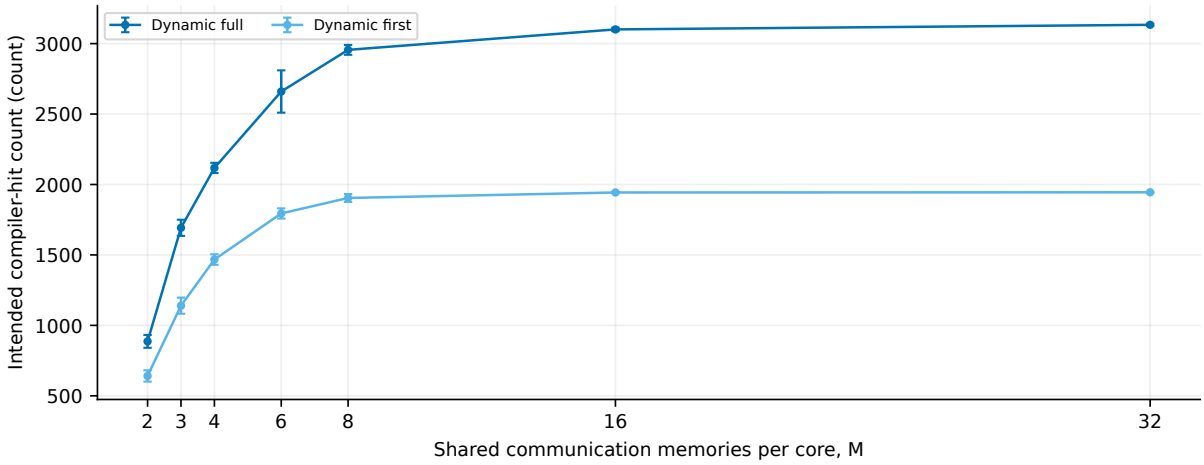


Figure 4.35: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	886.50 ± 45.57	641.00 ± 39.98
3	n/a	n/a	n/a	1692.67 ± 57.41	1139.83 ± 57.23
4	n/a	n/a	n/a	2117.50 ± 36.29	1467.33 ± 37.22
6	n/a	n/a	n/a	2660.00 ± 150.13	1794.50 ± 36.09
8	n/a	n/a	n/a	2955.67 ± 35.06	1904.33 ± 27.74
16	n/a	n/a	n/a	3100.83 ± 12.02	1943.33 ± 3.93
32	n/a	n/a	n/a	3133.50 ± 8.41	1944.67 ± 2.42

Table 4.35: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler-not-ready request count

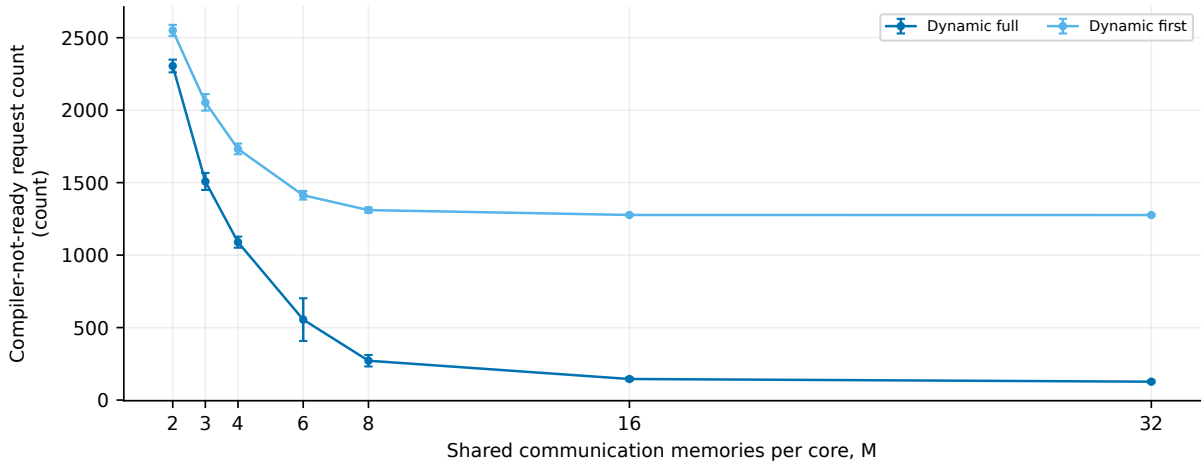


Figure 4.36: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2304.83 ± 43.91	2549.83 ± 38.72
3	n/a	n/a	n/a	1508.17 ± 58.49	2054.00 ± 57.16
4	n/a	n/a	n/a	1089.33 ± 38.32	1732.67 ± 36.83
6	n/a	n/a	n/a	555.00 ± 147.33	1413.00 ± 29.91
8	n/a	n/a	n/a	271.50 ± 39.54	1310.67 ± 18.15
16	n/a	n/a	n/a	145.33 ± 10.15	1277.00 ± 5.51
32	n/a	n/a	n/a	126.83 ± 7.86	1276.50 ± 5.54

Table 4.36: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Late compiler-pair uses

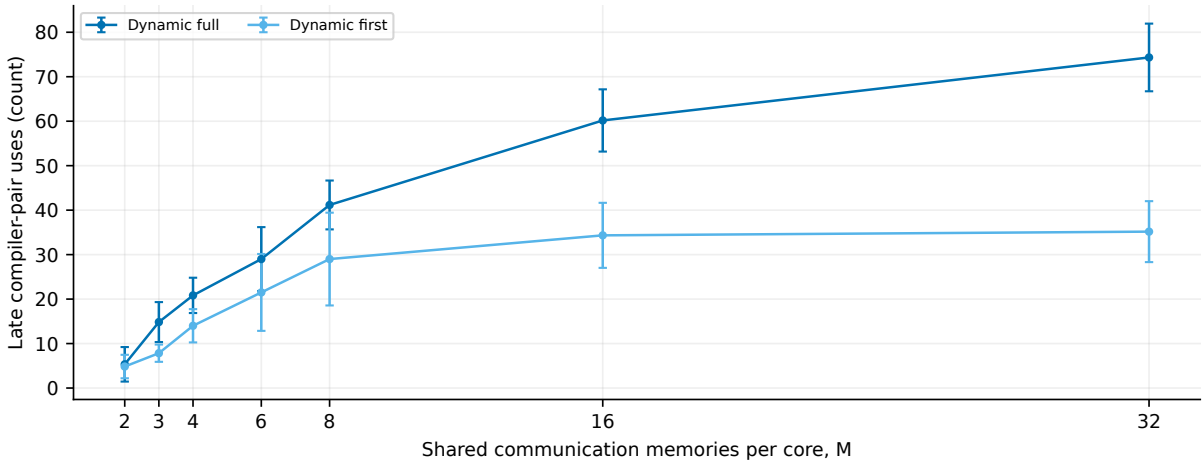


Figure 4.37: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	5.333 ± 3.882	4.833 ± 2.639
3	n/a	n/a	n/a	14.833 ± 4.491	7.833 ± 1.941
4	n/a	n/a	n/a	20.833 ± 3.971	14.000 ± 3.742
6	n/a	n/a	n/a	29.000 ± 7.183	21.500 ± 8.643
8	n/a	n/a	n/a	41.167 ± 5.492	29.000 ± 10.431
16	n/a	n/a	n/a	60.167 ± 6.998	34.333 ± 7.312
32	n/a	n/a	n/a	74.333 ± 7.607	35.167 ± 6.853

Table 4.37: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fallback count

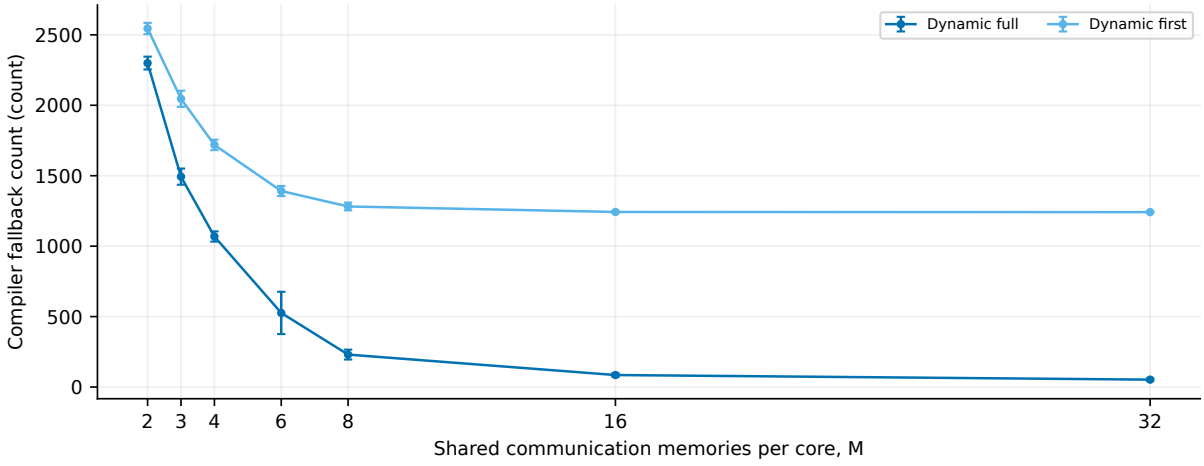


Figure 4.38: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	2299.50 ± 45.57	2545.00 ± 39.98
3	n/a	n/a	n/a	1493.33 ± 57.41	2046.17 ± 57.23
4	n/a	n/a	n/a	1068.50 ± 36.29	1718.67 ± 37.22
6	n/a	n/a	n/a	526.00 ± 150.13	1391.50 ± 36.09
8	n/a	n/a	n/a	230.33 ± 35.06	1281.67 ± 27.74
16	n/a	n/a	n/a	85.167 ± 12.024	1242.67 ± 3.93
32	n/a	n/a	n/a	52.500 ± 8.408	1241.33 ± 2.42

Table 4.38: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Generated compiler pairs

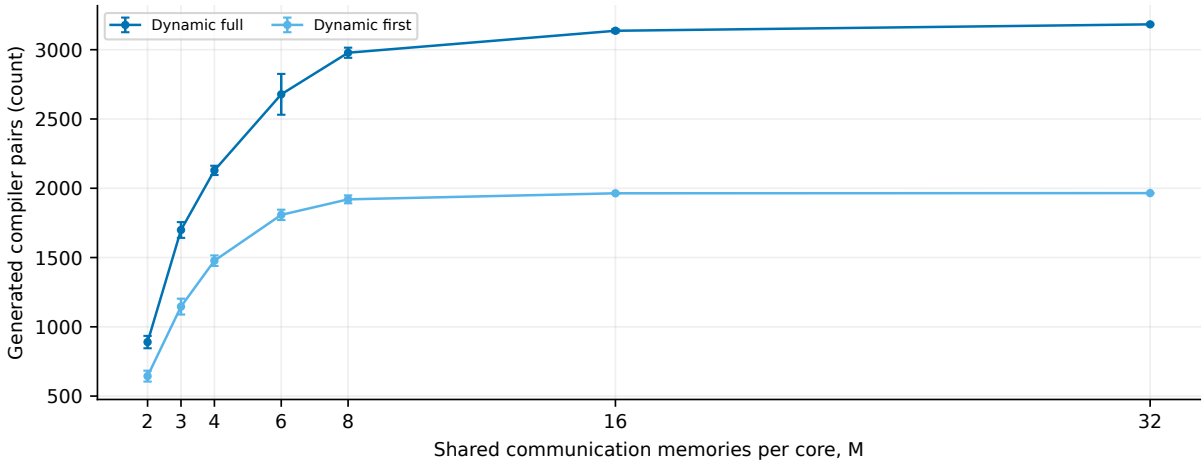


Figure 4.39: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	889.83 ± 44.60	644.00 ± 39.30
3	n/a	n/a	n/a	1698.83 ± 56.88	1145.83 ± 57.26
4	n/a	n/a	n/a	2129.00 ± 33.43	1477.17 ± 38.10
6	n/a	n/a	n/a	2678.00 ± 147.34	1808.00 ± 37.33
8	n/a	n/a	n/a	2978.17 ± 36.64	1920.00 ± 28.54
16	n/a	n/a	n/a	3136.67 ± 11.48	1963.67 ± 3.27
32	n/a	n/a	n/a	3183.00 ± 5.29	1965.00 ± 0.00

Table 4.39: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Used compiler pairs

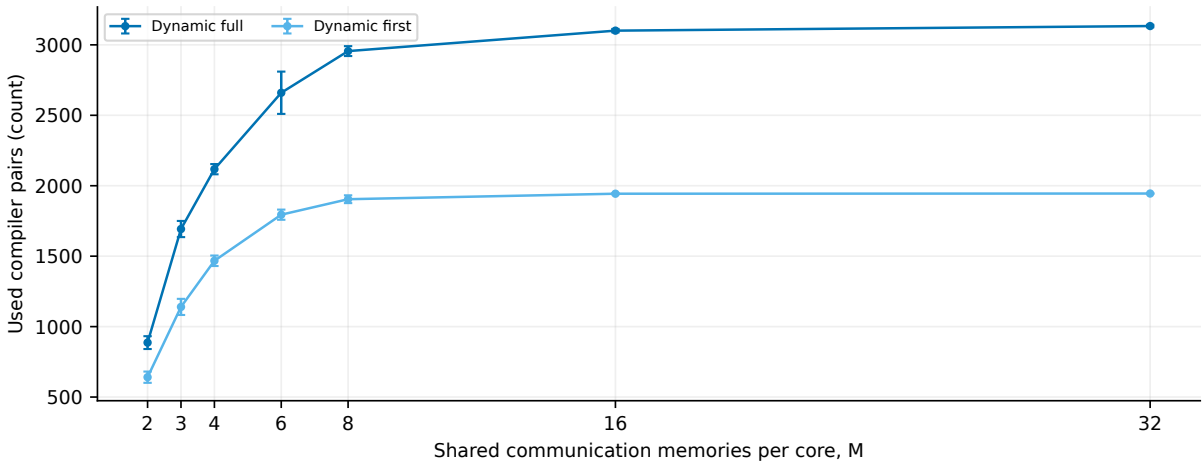


Figure 4.40: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	886.50 ± 45.57	641.00 ± 39.98
3	n/a	n/a	n/a	1692.67 ± 57.41	1139.83 ± 57.23
4	n/a	n/a	n/a	2117.50 ± 36.29	1467.33 ± 37.22
6	n/a	n/a	n/a	2660.00 ± 150.13	1794.50 ± 36.09
8	n/a	n/a	n/a	2955.67 ± 35.06	1904.33 ± 27.74
16	n/a	n/a	n/a	3100.83 ± 12.02	1943.33 ± 3.93
32	n/a	n/a	n/a	3133.50 ± 8.41	1944.67 ± 2.42

Table 4.40: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Expired compiler pairs

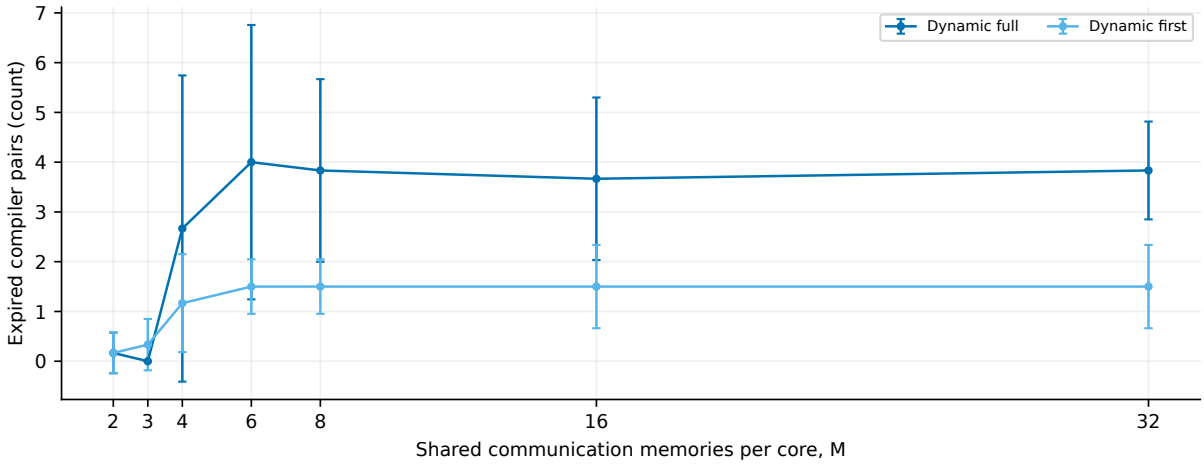


Figure 4.41: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.1667 ± 0.4082	0.1667 ± 0.4082
3	n/a	n/a	n/a	0.0000 ± 0.0000	0.3333 ± 0.5164
4	n/a	n/a	n/a	2.667 ± 3.077	1.167 ± 0.983
6	n/a	n/a	n/a	4.000 ± 2.757	1.500 ± 0.548
8	n/a	n/a	n/a	3.833 ± 1.835	1.500 ± 0.548
16	n/a	n/a	n/a	3.667 ± 1.633	1.500 ± 0.837
32	n/a	n/a	n/a	3.833 ± 0.983	1.500 ± 0.837

Table 4.41: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Remaining compiler pairs

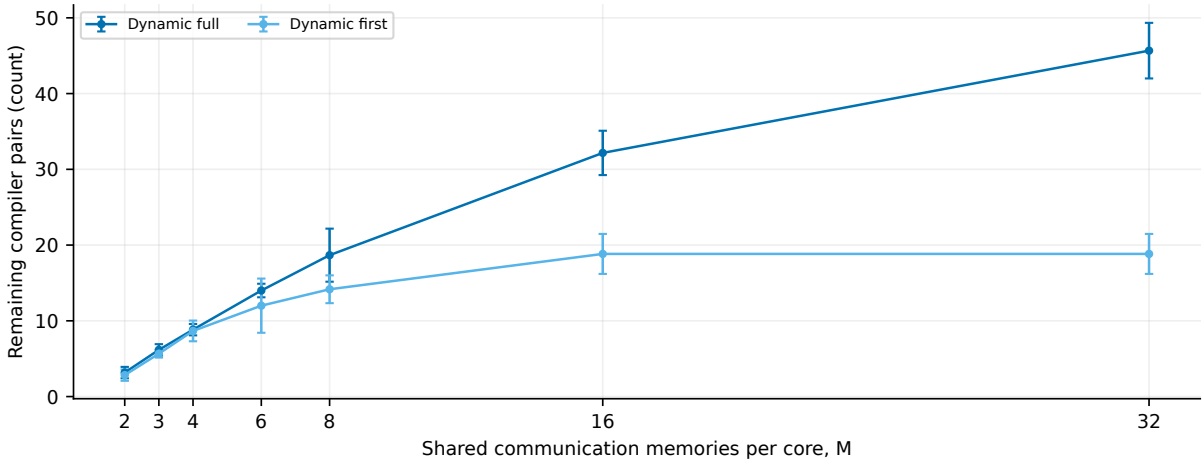


Figure 4.42: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	3.167 ± 0.753	2.833 ± 0.753
3	n/a	n/a	n/a	6.167 ± 0.753	5.667 ± 0.516
4	n/a	n/a	n/a	8.833 ± 0.753	8.667 ± 1.366
6	n/a	n/a	n/a	14.000 ± 0.894	12.000 ± 3.578
8	n/a	n/a	n/a	18.667 ± 3.502	14.167 ± 1.835
16	n/a	n/a	n/a	32.167 ± 2.927	18.833 ± 2.639
32	n/a	n/a	n/a	45.667 ± 3.670	18.833 ± 2.639

Table 4.42: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at creation

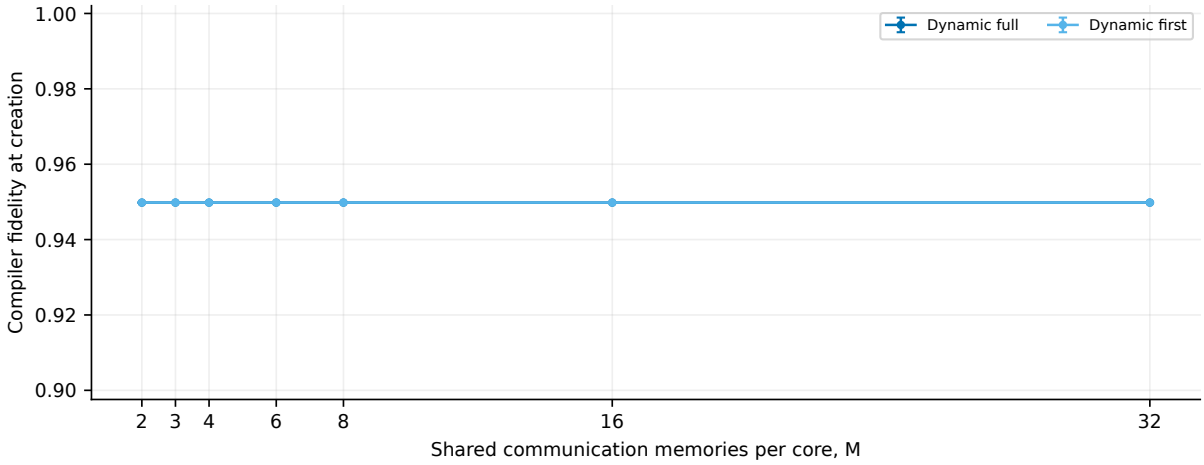


Figure 4.43: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
3	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
4	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
6	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
8	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
16	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000
32	n/a	n/a	n/a	0.9498 ± 0.0000	0.9498 ± 0.0000

Table 4.43: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Compiler fidelity at use

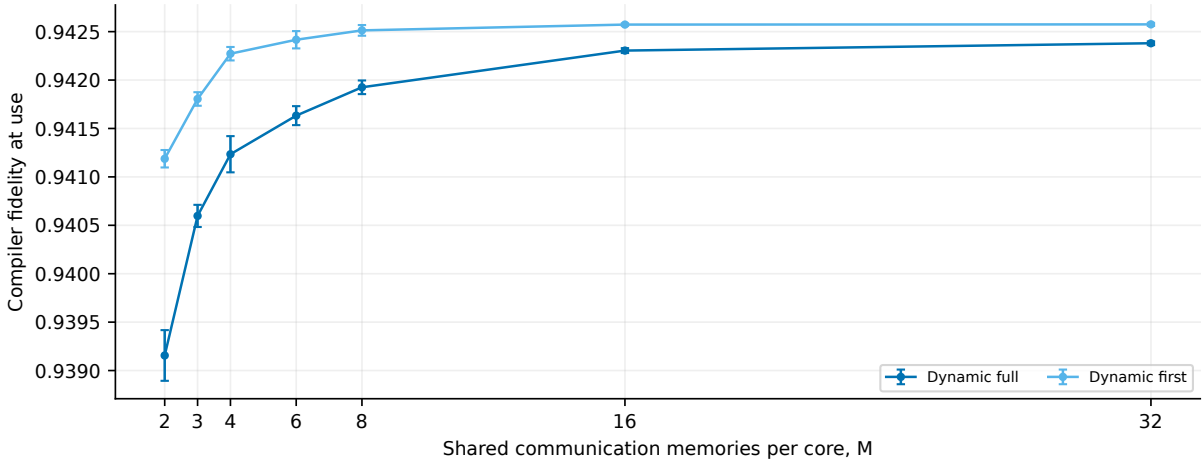


Figure 4.44: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	n/a	n/a	n/a	0.9392 ± 0.0003	0.9412 ± 0.0001
3	n/a	n/a	n/a	0.9406 ± 0.0001	0.9418 ± 0.0001
4	n/a	n/a	n/a	0.9412 ± 0.0002	0.9423 ± 0.0001
6	n/a	n/a	n/a	0.9416 ± 0.0001	0.9424 ± 0.0001
8	n/a	n/a	n/a	0.9419 ± 0.0001	0.9425 ± 0.0001
16	n/a	n/a	n/a	0.9423 ± 0.0000	0.9426 ± 0.0000
32	n/a	n/a	n/a	0.9424 ± 0.0000	0.9426 ± 0.0000

Table 4.44: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Mean layer latency

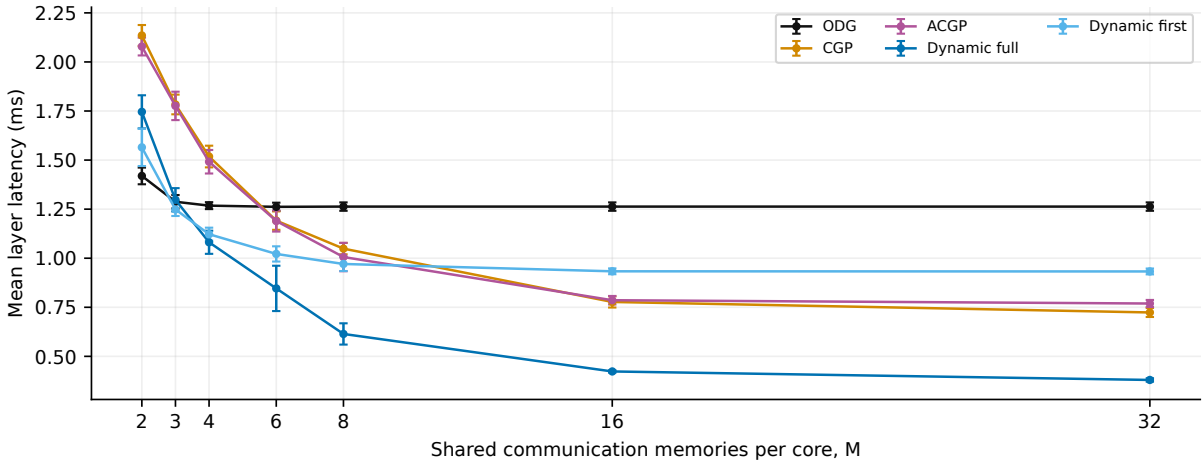


Figure 4.45: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	1.419 ± 0.043	2.135 ± 0.053	2.079 ± 0.045	1.746 ± 0.084	1.565 ± 0.095
3	1.288 ± 0.034	1.783 ± 0.050	1.776 ± 0.072	1.298 ± 0.059	1.248 ± 0.033
4	1.268 ± 0.018	1.518 ± 0.055	1.492 ± 0.060	1.081 ± 0.059	1.122 ± 0.033
6	1.262 ± 0.021	1.192 ± 0.047	1.189 ± 0.054	0.8462 ± 0.1154	1.022 ± 0.039
8	1.263 ± 0.021	1.049 ± 0.029	1.006 ± 0.072	0.6142 ± 0.0542	0.9706 ± 0.0360
16	1.263 ± 0.021	0.7771 ± 0.0284	0.7860 ± 0.0217	0.4230 ± 0.0058	0.9333 ± 0.0149
32	1.263 ± 0.021	0.7237 ± 0.0231	0.7692 ± 0.0182	0.3797 ± 0.0086	0.9326 ± 0.0149

Table 4.45: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Maximum layer latency

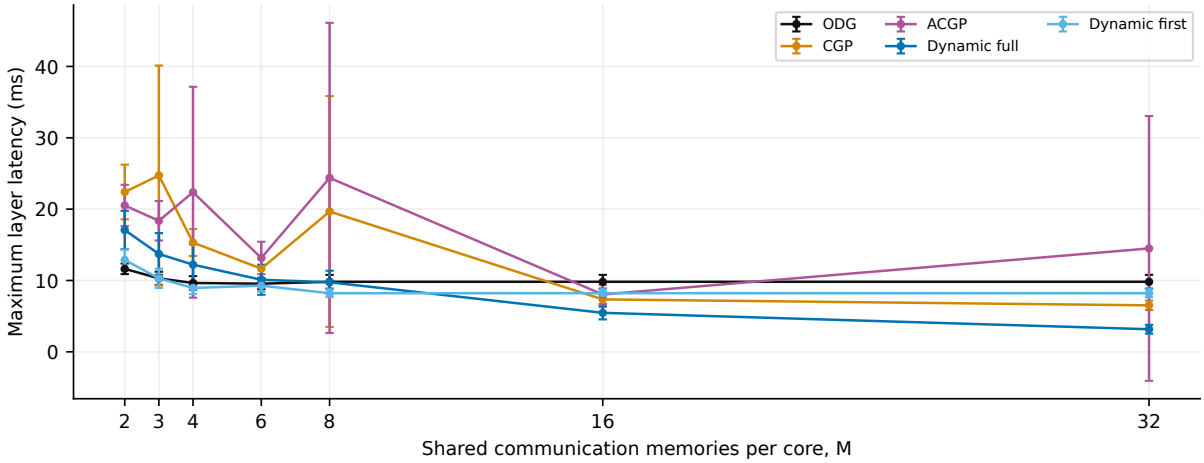


Figure 4.46: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	11.634 ± 0.739	22.401 ± 3.830	20.515 ± 2.894	17.067 ± 2.692	12.884 ± 1.441
3	10.300 ± 0.927	24.717 ± 15.411	18.367 ± 2.764	13.717 ± 2.925	10.300 ± 1.345
4	9.650 ± 0.954	15.317 ± 1.887	22.366 ± 14.776	12.217 ± 2.865	8.950 ± 0.864
6	9.550 ± 0.779	11.651 ± 1.485	13.150 ± 2.276	10.100 ± 2.105	9.267 ± 0.852
8	9.817 ± 0.968	19.667 ± 16.176	24.379 ± 21.728	9.750 ± 1.615	8.217 ± 0.560
16	9.817 ± 0.968	7.346 ± 1.045	8.036 ± 1.338	5.467 ± 0.922	8.217 ± 0.560
32	9.817 ± 0.968	6.517 ± 0.662	14.492 ± 18.554	3.167 ± 0.615	8.217 ± 0.560

Table 4.46: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Minimum layer latency

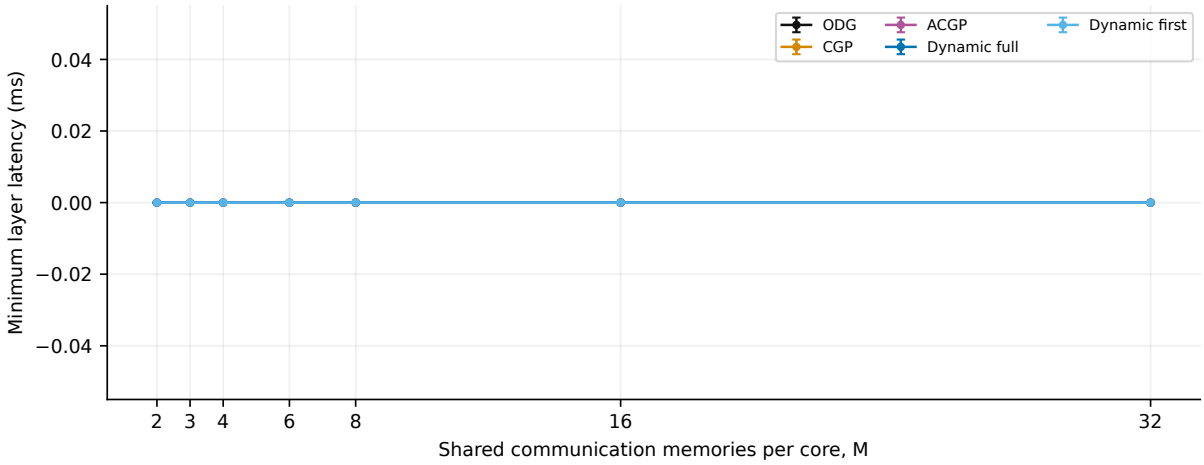


Figure 4.47: Run-level mean and sample SD. Shared trace aliases are counted once.

M	ODG	CGP	ACGP	Dynamic full	Dynamic first
2	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
3	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
4	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
6	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
8	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
16	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000
32	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000	0.0000 ± 0.0000

Table 4.47: Mean ± sample SD; n/a denotes a metric outside that policy's instrumentation.

Exact CSV values and sample counts

Chapter 5

Every cache allocation at fixed total memory

The main memory curves specify a single declared allocation rule. This chapter exposes the full allocation experiment: $C = 0, \ldots, M - 1$ for all seven M values, every route and all cached policies. ODG is shown as the fixed $C = 0$ reference. Its horizontal line is repeated for visual comparison, not independent ODG experiments at fictitious cache allocations.

Each allocation graph and table shows fair mean latency. Its linked CSV includes *all 47 outcomes and diagnostics* for every policy and allocation, including p95, makespan, fidelity, readiness and waste. The complete allocation cube is also available in the full metric CSV. No allocation is selected after observing the evaluation seeds and presented as an independently validated optimum.

5.1 Mesh / xy

M=2: every cache allowance

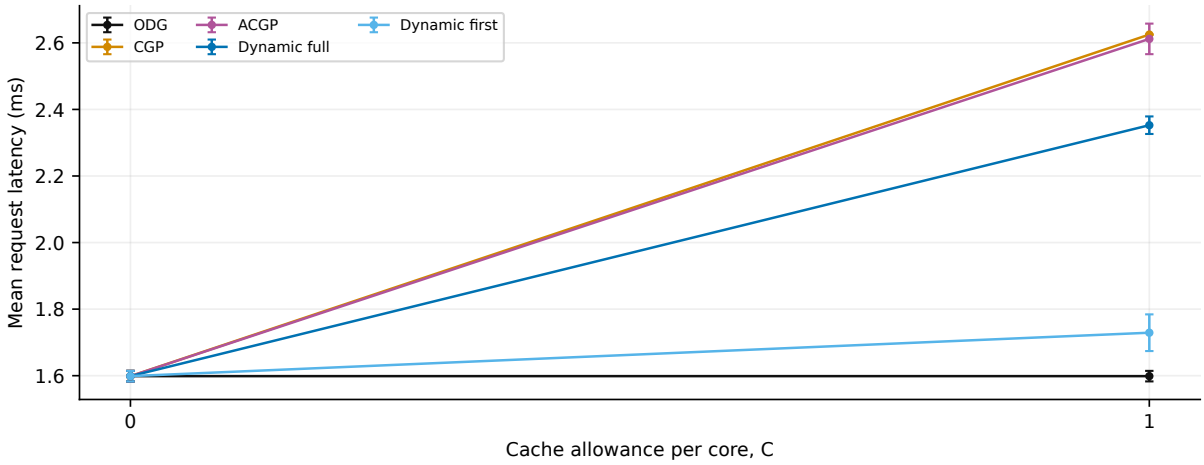


Figure 5.1: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.599 ± 0.016	1.598 ± 0.016	1.598 ± 0.016	1.599 ± 0.016	1.599 ± 0.016
1	1.599 ± 0.016	2.625 ± 0.000	2.612 ± 0.046	2.353 ± 0.026	1.729 ± 0.055

Table 5.1: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=3: every cache allowance

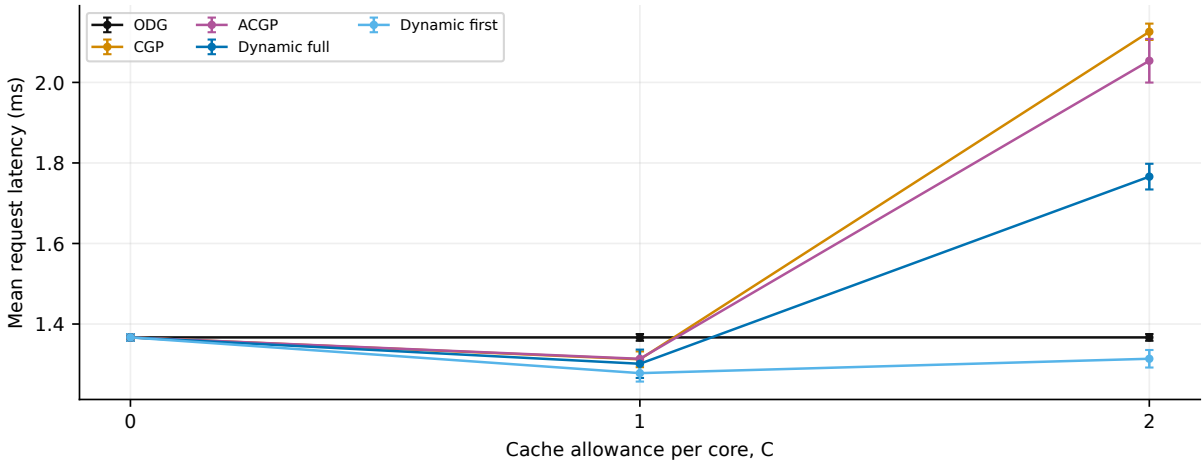


Figure 5.2: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.367 ± 0.008	1.367 ± 0.007	1.367 ± 0.007	1.367 ± 0.008	1.367 ± 0.008
1	1.367 ± 0.008	1.312 ± 0.020	1.314 ± 0.000	1.301 ± 0.035	1.278 ± 0.021
2	1.367 ± 0.008	2.126 ± 0.020	2.054 ± 0.054	1.766 ± 0.032	1.314 ± 0.022

Table 5.2: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=4: every cache allowance

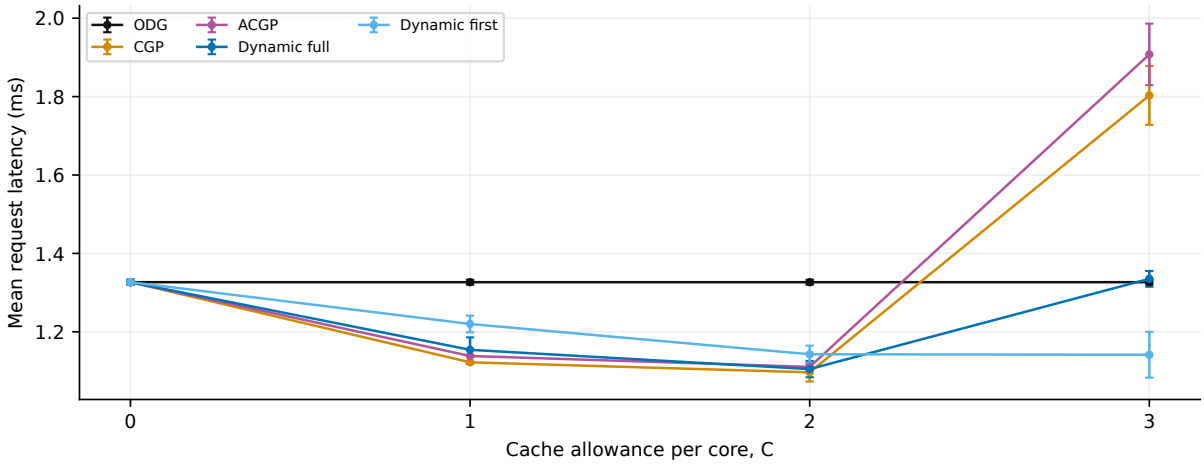


Figure 5.3: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.327 ± 0.006	1.327 ± 0.006	1.327 ± 0.006	1.327 ± 0.006	1.327 ± 0.006
1	1.327 ± 0.006	1.122 ± 0.004	1.138 ± 0.002	1.154 ± 0.032	1.220 ± 0.021
2	1.327 ± 0.006	1.097 ± 0.024	1.110 ± 0.007	1.105 ± 0.021	1.143 ± 0.022
3	1.327 ± 0.006	1.803 ± 0.075	1.908 ± 0.079	1.335 ± 0.020	1.141 ± 0.058

Table 5.3: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=6: every cache allowance

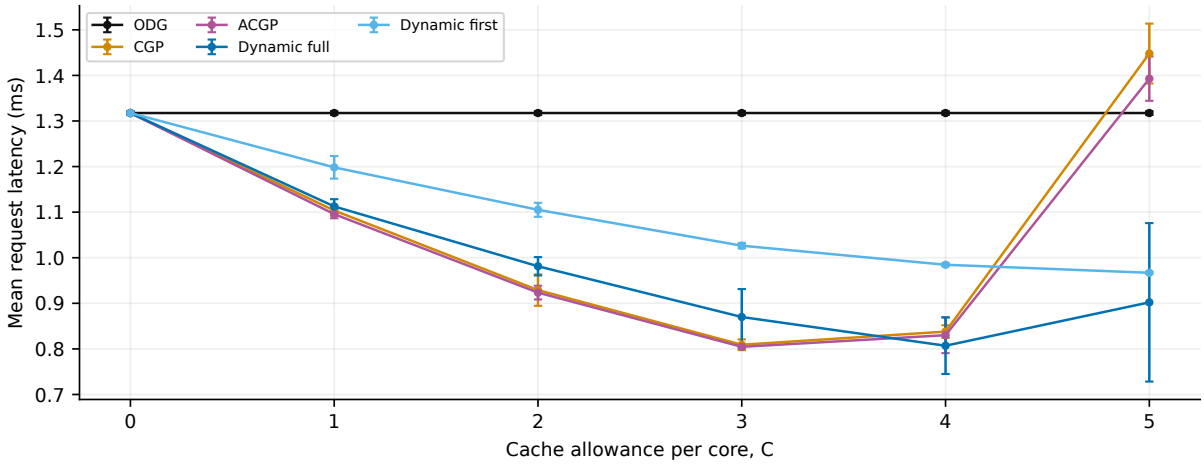


Figure 5.4: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.317 ± 0.004	1.318 ± 0.004	1.318 ± 0.004	1.317 ± 0.004	1.317 ± 0.004
1	1.317 ± 0.004	1.104 ± 0.011	1.096 ± 0.009	1.113 ± 0.016	1.198 ± 0.025
2	1.317 ± 0.004	0.9290 ± 0.0345	0.9234 ± 0.0151	0.9813 ± 0.0201	1.105 ± 0.015
3	1.317 ± 0.004	0.8091 ± 0.0118	0.8045 ± 0.0028	0.8700 ± 0.0613	1.026 ± 0.006
4	1.317 ± 0.004	0.8379 ± 0.0139	0.8301 ± 0.0394	0.8070 ± 0.0620	0.9846 ± 0.0032
5	1.317 ± 0.004	1.448 ± 0.066	1.393 ± 0.049	0.9021 ± 0.1738	0.9670 ± 0.0025

Table 5.4: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=8: every cache allowance

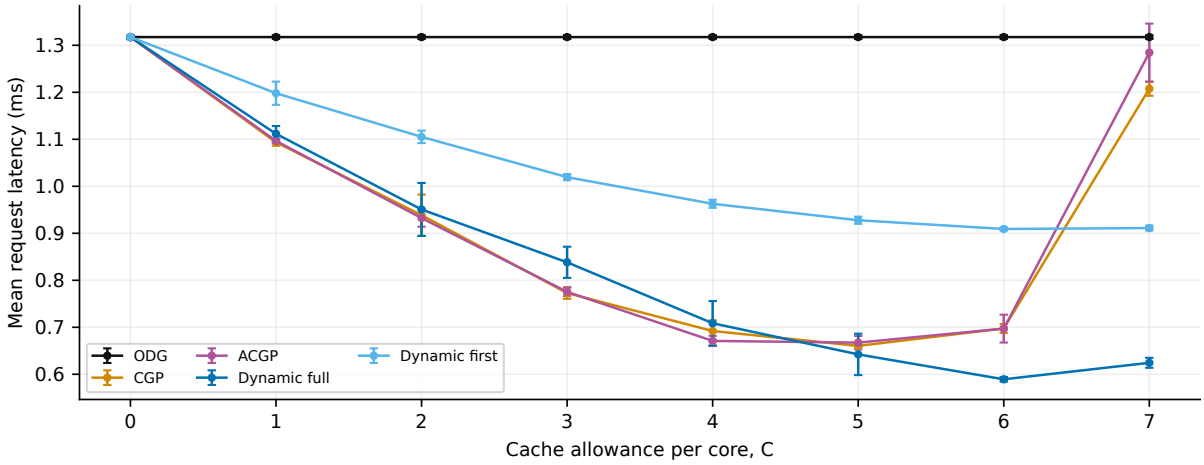


Figure 5.5: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.317 ± 0.004	1.318 ± 0.004	1.318 ± 0.004	1.317 ± 0.004	1.317 ± 0.004
1	1.317 ± 0.004	1.094 ± 0.007	1.097 ± 0.005	1.112 ± 0.017	1.198 ± 0.025
2	1.317 ± 0.004	0.9386 ± 0.0438	0.9324 ± 0.0183	0.9507 ± 0.0564	1.105 ± 0.013
3	1.317 ± 0.004	0.7729 ± 0.0124	0.7754 ± 0.0091	0.8382 ± 0.0332	1.019 ± 0.006
4	1.317 ± 0.004	0.6921 ± 0.0226	0.6710 ± 0.0108	0.7086 ± 0.0472	0.9628 ± 0.0086
5	1.317 ± 0.004	0.6604 ± 0.0015	0.6674 ± 0.0142	0.6423 ± 0.0441	0.9278 ± 0.0076
6	1.317 ± 0.004	0.6975 ± 0.0095	0.6972 ± 0.0297	0.5893 ± 0.0049	0.9092 ± 0.0032
7	1.317 ± 0.004	1.208 ± 0.015	1.284 ± 0.062	0.6244 ± 0.0106	0.9111 ± 0.0051

Table 5.5: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=16: every cache allowance

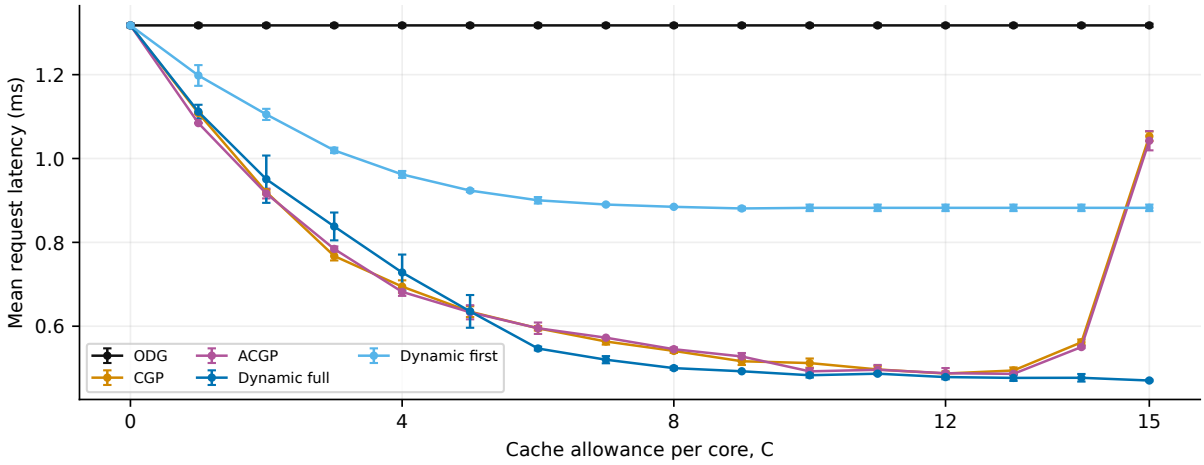


Figure 5.6: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.317 ± 0.004	1.318 ± 0.004	1.318 ± 0.004	1.317 ± 0.004	1.317 ± 0.004
1	1.317 ± 0.004	1.108 ± 0.001	1.084 ± 0.000	1.112 ± 0.017	1.198 ± 0.025
2	1.317 ± 0.004	0.9202 ± 0.0057	0.9164 ± 0.0116	0.9507 ± 0.0564	1.105 ± 0.013
3	1.317 ± 0.004	0.7674 ± 0.0106	0.7843 ± 0.0060	0.8380 ± 0.0332	1.019 ± 0.006
4	1.317 ± 0.004	0.6945 ± 0.0149	0.6819 ± 0.0096	0.7281 ± 0.0428	0.9620 ± 0.0082
5	1.317 ± 0.004	0.6347 ± 0.0129	0.6332 ± 0.0168	0.6353 ± 0.0391	0.9236 ± 0.0035
6	1.317 ± 0.004	0.5950 ± 0.0053	0.5952 ± 0.0136	0.5468 ± 0.0045	0.9003 ± 0.0077
7	1.317 ± 0.004	0.5636 ± 0.0074	0.5726 ± 0.0003	0.5201 ± 0.0086	0.8902 ± 0.0020
8	1.317 ± 0.004	0.5411 ± 0.0049	0.5452 ± 0.0043	0.5000 ± 0.0037	0.8847 ± 0.0017
9	1.317 ± 0.004	0.5164 ± 0.0089	0.5279 ± 0.0082	0.4925 ± 0.0005	0.8809 ± 0.0041
10	1.317 ± 0.004	0.5121 ± 0.0109	0.4923 ± 0.0073	0.4831 ± 0.0054	0.8823 ± 0.0078
11	1.317 ± 0.004	0.4969 ± 0.0074	0.4961 ± 0.0115	0.4868 ± 0.0017	0.8823 ± 0.0078
12	1.317 ± 0.004	0.4872 ± 0.0051	0.4879 ± 0.0123	0.4787 ± 0.0053	0.8823 ± 0.0078
13	1.317 ± 0.004	0.4944 ± 0.0073	0.4864 ± 0.0013	0.4767 ± 0.0072	0.8823 ± 0.0078
14	1.317 ± 0.004	0.5616 ± 0.0067	0.5503 ± 0.0027	0.4770 ± 0.0090	0.8823 ± 0.0078
15	1.317 ± 0.004	1.053 ± 0.011	1.042 ± 0.023	0.4705 ± 0.0020	0.8823 ± 0.0078

Table 5.6: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=32: every cache allowance

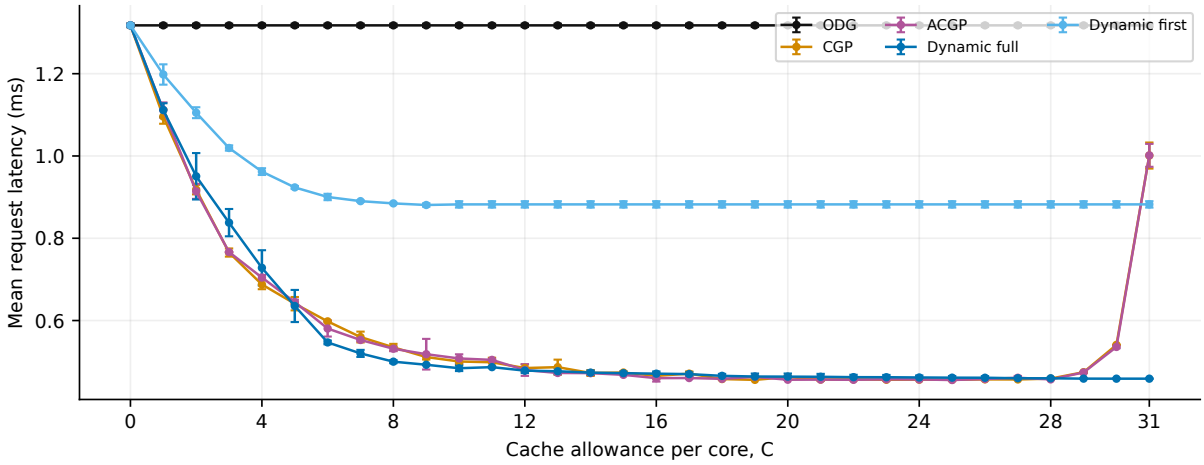


Figure 5.7: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.317 ± 0.004	1.318 ± 0.004	1.318 ± 0.004	1.317 ± 0.004	1.317 ± 0.004
1	1.317 ± 0.004	1.096 ± 0.017	1.112 ± 0.018	1.112 ± 0.017	1.198 ± 0.025
2	1.317 ± 0.004	0.9183 ± 0.0116	0.9139 ± 0.0182	0.9507 ± 0.0564	1.105 ± 0.013
3	1.317 ± 0.004	0.7653 ± 0.0099	0.7664 ± 0.0002	0.8380 ± 0.0332	1.019 ± 0.006
4	1.317 ± 0.004	0.6877 ± 0.0116	0.7045 ± 0.0063	0.7281 ± 0.0428	0.9620 ± 0.0082
5	1.317 ± 0.004	0.6410 ± 0.0163	0.6450 ± 0.0057	0.6353 ± 0.0391	0.9236 ± 0.0035
6	1.317 ± 0.004	0.5980 ± 0.0017	0.5806 ± 0.0195	0.5468 ± 0.0045	0.9003 ± 0.0077
7	1.317 ± 0.004	0.5599 ± 0.0131	0.5527 ± 0.0028	0.5201 ± 0.0086	0.8902 ± 0.0020
8	1.317 ± 0.004	0.5349 ± 0.0084	0.5315 ± 0.0060	0.5000 ± 0.0037	0.8847 ± 0.0017
9	1.317 ± 0.004	0.5113 ± 0.0059	0.5182 ± 0.0373	0.4925 ± 0.0005	0.8809 ± 0.0041
10	1.317 ± 0.004	0.5005 ± 0.0064	0.5078 ± 0.0101	0.4841 ± 0.0069	0.8823 ± 0.0078
11	1.317 ± 0.004	0.4986 ± 0.0110	0.5044 ± 0.0005	0.4868 ± 0.0017	0.8823 ± 0.0078
12	1.317 ± 0.004	0.4845 ± 0.0088	0.4797 ± 0.0142	0.4782 ± 0.0059	0.8823 ± 0.0078
13	1.317 ± 0.004	0.4867 ± 0.0183	0.4726 ± 0.0001	0.4767 ± 0.0072	0.8823 ± 0.0078
14	1.317 ± 0.004	0.4725 ± 0.0072	0.4722 ± 0.0039	0.4734 ± 0.0051	0.8823 ± 0.0078
15	1.317 ± 0.004	0.4736 ± 0.0019	0.4680 ± 0.0003	0.4720 ± 0.0043	0.8823 ± 0.0078
16	1.317 ± 0.004	0.4656 ± 0.0072	0.4600 ± 0.0084	0.4709 ± 0.0053	0.8823 ± 0.0078
17	1.317 ± 0.004	0.4709 ± 0.0052	0.4602 ± 0.0018	0.4698 ± 0.0051	0.8823 ± 0.0078
18	1.317 ± 0.004	0.4578 ± 0.0020	0.4583 ± 0.0019	0.4656 ± 0.0048	0.8823 ± 0.0078
19	1.317 ± 0.004	0.4558 ± 0.0001	0.4630 ± 0.0010	0.4639 ± 0.0073	0.8823 ± 0.0078
20	1.317 ± 0.004	0.4627 ± 0.0028	0.4561 ± 0.0003	0.4636 ± 0.0076	0.8823 ± 0.0078
21	1.317 ± 0.004	0.4566 ± 0.0030	0.4564 ± 0.0016	0.4633 ± 0.0071	0.8823 ± 0.0078
22	1.317 ± 0.004	0.4570 ± 0.0026	0.4560 ± 0.0001	0.4624 ± 0.0058	0.8823 ± 0.0078
23	1.317 ± 0.004	0.4561 ± 0.0001	0.4571 ± 0.0037	0.4622 ± 0.0056	0.8823 ± 0.0078
24	1.317 ± 0.004	0.4563 ± 0.0008	0.4568 ± 0.0009	0.4616 ± 0.0047	0.8823 ± 0.0078
25	1.317 ± 0.004	0.4560 ± 0.0020	0.4555 ± 0.0021	0.4611 ± 0.0041	0.8823 ± 0.0078
26	1.317 ± 0.004	0.4570 ± 0.0021	0.4578 ± 0.0016	0.4610 ± 0.0038	0.8823 ± 0.0078
27	1.317 ± 0.004	0.4568 ± 0.0004	0.4609 ± 0.0044	0.4597 ± 0.0021	0.8823 ± 0.0078
28	1.317 ± 0.004	0.4589 ± 0.0001	0.4569 ± 0.0012	0.4596 ± 0.0019	0.8823 ± 0.0078
29	1.317 ± 0.004	0.4744 ± 0.0008	0.4738 ± 0.0007	0.4588 ± 0.0007	0.8823 ± 0.0078
30	1.317 ± 0.004	0.5408 ± 0.0002	0.5358 ± 0.0031	0.4587 ± 0.0006	0.8823 ± 0.0078
31	1.317 ± 0.004	1.001 ± 0.032	1.002 ± 0.028	0.4587 ± 0.0006	0.8823 ± 0.0078

Table 5.7: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

5.2 Mesh / yx

M=2: every cache allowance

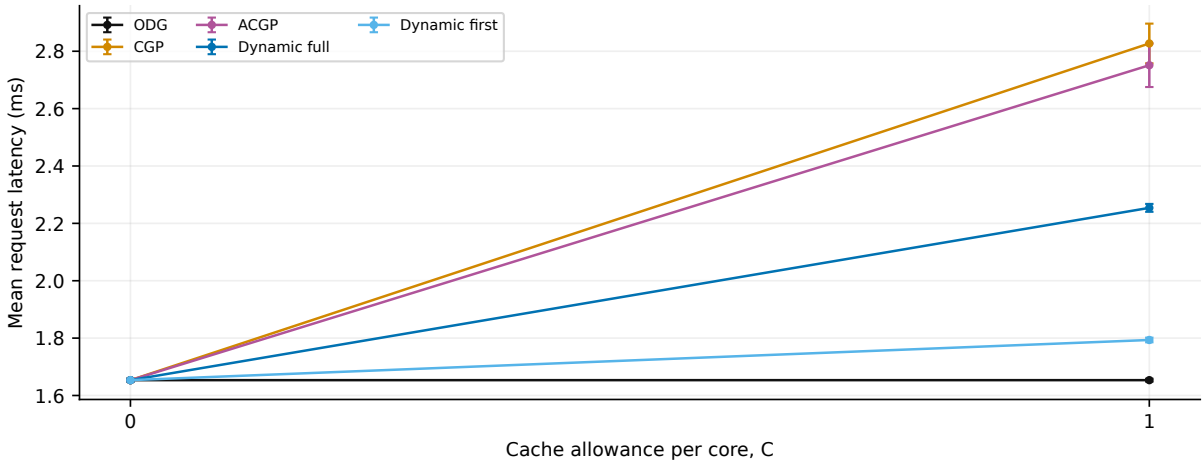


Figure 5.8: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.653 ± 0.005	1.653 ± 0.005	1.653 ± 0.005	1.653 ± 0.005	1.653 ± 0.005
1	1.653 ± 0.005	2.827 ± 0.069	2.751 ± 0.076	2.254 ± 0.014	1.793 ± 0.008

Table 5.8: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=3: every cache allowance

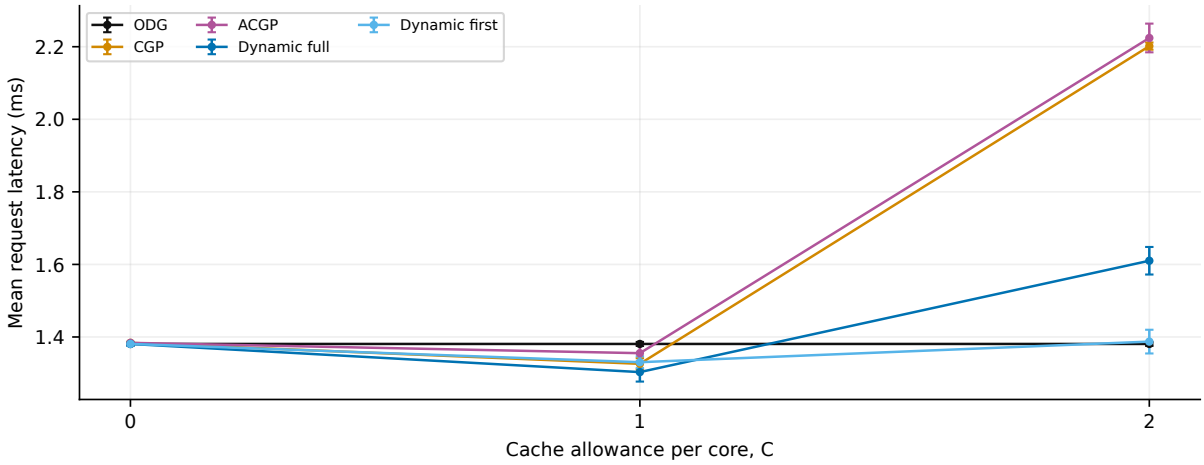


Figure 5.9: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.381 ± 0.005	1.384 ± 0.001	1.384 ± 0.001	1.381 ± 0.005	1.381 ± 0.005
1	1.381 ± 0.005	1.326 ± 0.015	1.355 ± 0.023	1.303 ± 0.026	1.330 ± 0.016
2	1.381 ± 0.005	2.202 ± 0.010	2.224 ± 0.040	1.610 ± 0.038	1.387 ± 0.033

Table 5.9: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=4: every cache allowance

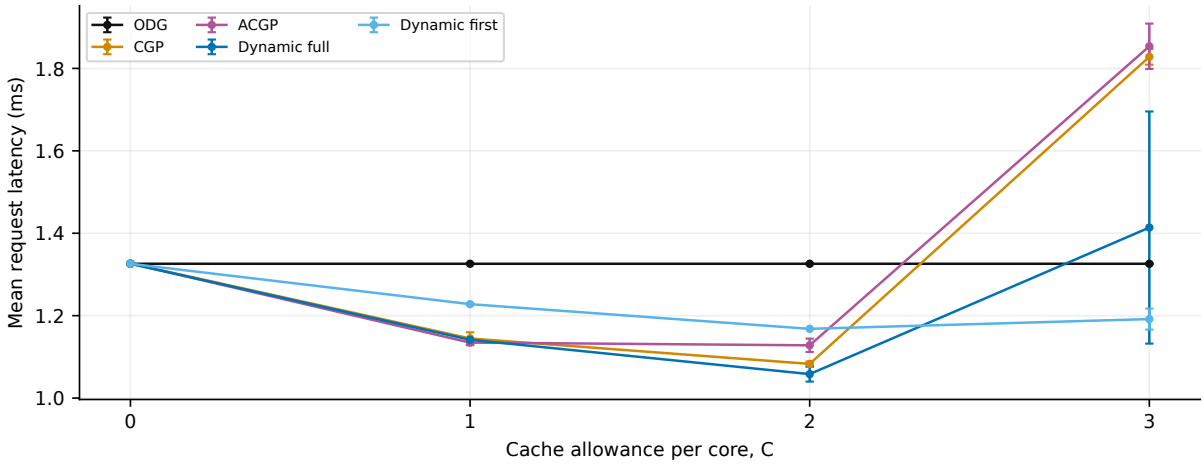


Figure 5.10: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.326 ± 0.001	1.327 ± 0.002	1.327 ± 0.002	1.326 ± 0.001	1.326 ± 0.001
1	1.326 ± 0.001	1.145 ± 0.015	1.135 ± 0.006	1.142 ± 0.001	1.228 ± 0.002
2	1.326 ± 0.001	1.083 ± 0.006	1.128 ± 0.016	1.058 ± 0.018	1.168 ± 0.000
3	1.326 ± 0.001	1.828 ± 0.019	1.854 ± 0.055	1.414 ± 0.282	1.192 ± 0.025

Table 5.10: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=6: every cache allowance

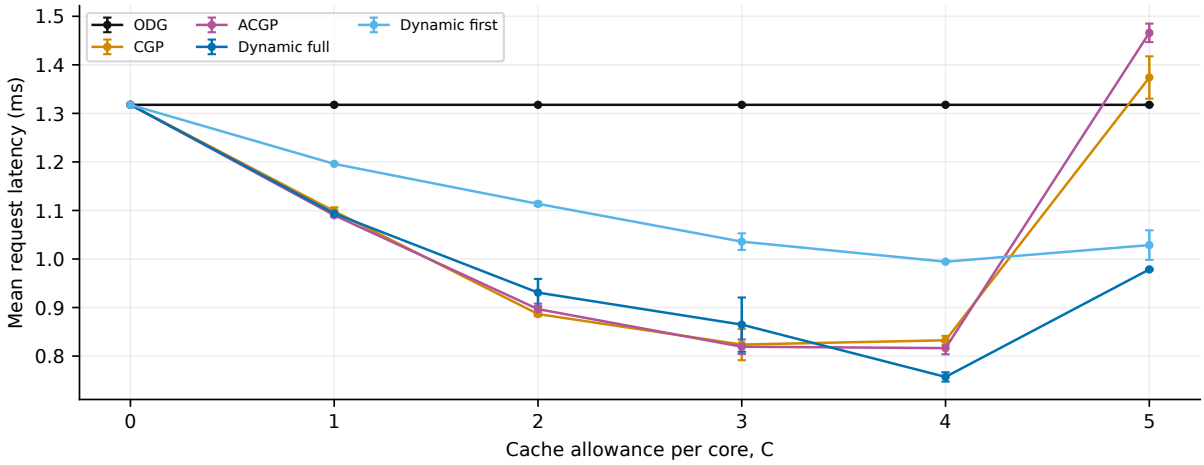


Figure 5.11: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000
1	1.318 ± 0.000	1.099 ± 0.008	1.090 ± 0.003	1.094 ± 0.002	1.196 ± 0.001
2	1.318 ± 0.000	0.8866 ± 0.0043	0.8968 ± 0.0113	0.9308 ± 0.0282	1.114 ± 0.004
3	1.318 ± 0.000	0.8238 ± 0.0322	0.8193 ± 0.0149	0.8648 ± 0.0558	1.036 ± 0.017
4	1.318 ± 0.000	0.8325 ± 0.0092	0.8164 ± 0.0127	0.7570 ± 0.0096	0.9944 ± 0.0010
5	1.318 ± 0.000	1.374 ± 0.044	1.466 ± 0.019	0.9785 ± 0.0017	1.029 ± 0.030

Table 5.11: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=8: every cache allowance

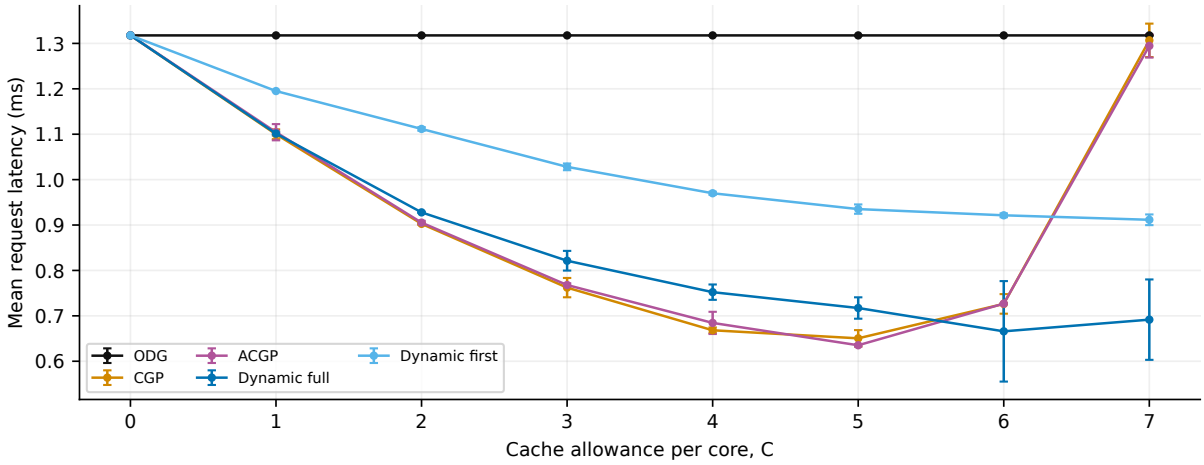


Figure 5.12: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000
1	1.318 ± 0.000	1.100 ± 0.011	1.104 ± 0.018	1.101 ± 0.004	1.195 ± 0.000
2	1.318 ± 0.000	0.9026 ± 0.0018	0.9053 ± 0.0040	0.9279 ± 0.0012	1.112 ± 0.004
3	1.318 ± 0.000	0.7621 ± 0.0213	0.7679 ± 0.0038	0.8214 ± 0.0217	1.028 ± 0.007
4	1.318 ± 0.000	0.6682 ± 0.0062	0.6844 ± 0.0245	0.7522 ± 0.0169	0.9700 ± 0.0034
5	1.318 ± 0.000	0.6505 ± 0.0181	0.6352 ± 0.0025	0.7172 ± 0.0236	0.9351 ± 0.0103
6	1.318 ± 0.000	0.7263 ± 0.0216	0.7268 ± 0.0009	0.6659 ± 0.1106	0.9214 ± 0.0042
7	1.318 ± 0.000	1.307 ± 0.037	1.295 ± 0.026	0.6916 ± 0.0885	0.9115 ± 0.0118

Table 5.12: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=16: every cache allowance

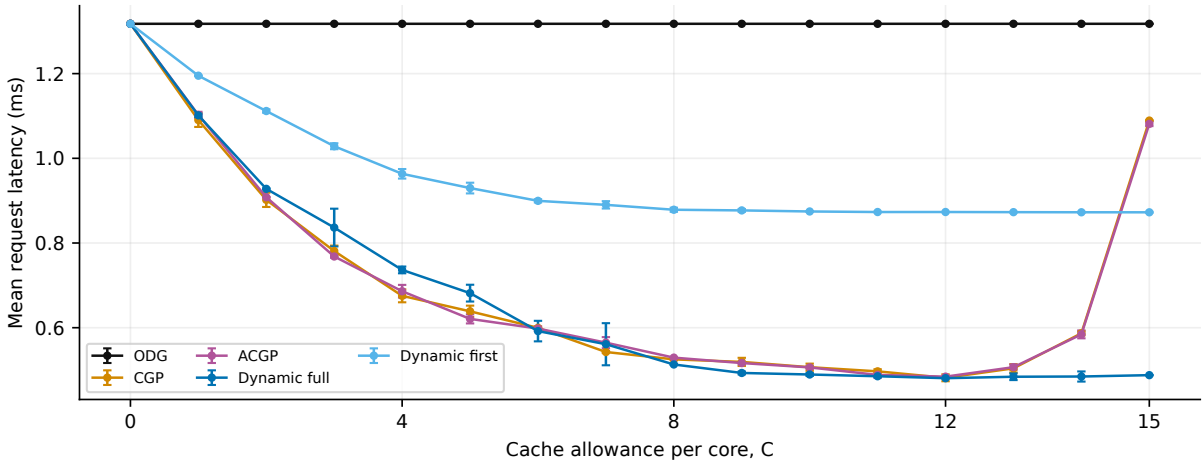


Figure 5.13: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000
1	1.318 ± 0.000	1.090 ± 0.016	1.102 ± 0.007	1.101 ± 0.004	1.195 ± 0.000
2	1.318 ± 0.000	0.9019 ± 0.0168	0.9082 ± 0.0005	0.9279 ± 0.0012	1.112 ± 0.004
3	1.318 ± 0.000	0.7810 ± 0.0129	0.7682 ± 0.0030	0.8365 ± 0.0446	1.029 ± 0.007
4	1.318 ± 0.000	0.6753 ± 0.0153	0.6861 ± 0.0150	0.7365 ± 0.0080	0.9634 ± 0.0113
5	1.318 ± 0.000	0.6387 ± 0.0134	0.6208 ± 0.0107	0.6816 ± 0.0198	0.9298 ± 0.0126
6	1.318 ± 0.000	0.5997 ± 0.0003	0.5979 ± 0.0054	0.5920 ± 0.0242	0.8996 ± 0.0037
7	1.318 ± 0.000	0.5426 ± 0.0023	0.5647 ± 0.0131	0.5610 ± 0.0497	0.8901 ± 0.0087
8	1.318 ± 0.000	0.5252 ± 0.0016	0.5293 ± 0.0002	0.5132 ± 0.0012	0.8786 ± 0.0048
9	1.318 ± 0.000	0.5192 ± 0.0097	0.5165 ± 0.0026	0.4932 ± 0.0033	0.8770 ± 0.0033
10	1.318 ± 0.000	0.5067 ± 0.0085	0.5063 ± 0.0033	0.4895 ± 0.0034	0.8745 ± 0.0009
11	1.318 ± 0.000	0.4970 ± 0.0049	0.4885 ± 0.0069	0.4854 ± 0.0022	0.8732 ± 0.0006
12	1.318 ± 0.000	0.4817 ± 0.0082	0.4844 ± 0.0006	0.4808 ± 0.0007	0.8732 ± 0.0002
13	1.318 ± 0.000	0.5041 ± 0.0099	0.5068 ± 0.0062	0.4842 ± 0.0079	0.8729 ± 0.0007
14	1.318 ± 0.000	0.5869 ± 0.0048	0.5843 ± 0.0094	0.4848 ± 0.0120	0.8726 ± 0.0011
15	1.318 ± 0.000	1.089 ± 0.001	1.081 ± 0.005	0.4880 ± 0.0003	0.8725 ± 0.0012

Table 5.13: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=32: every cache allowance

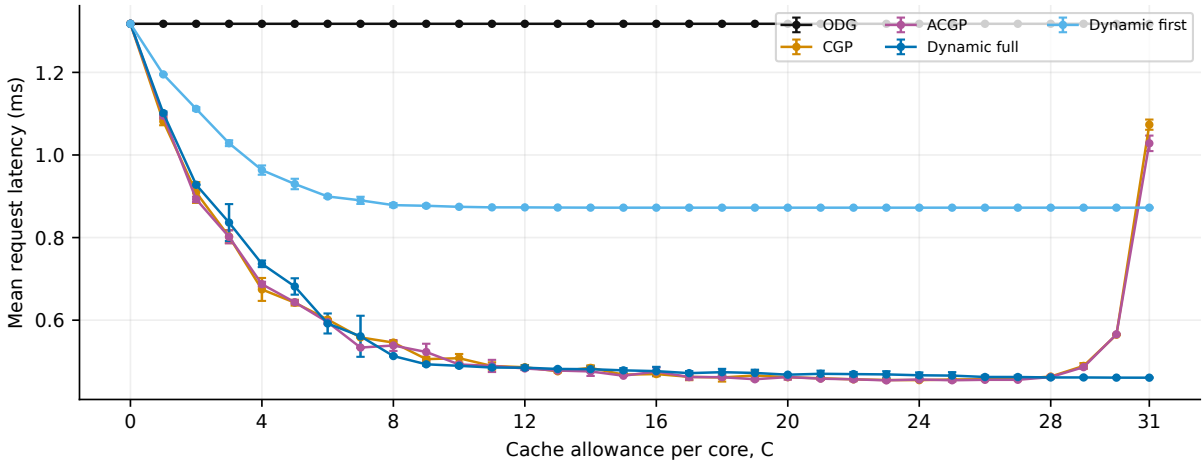


Figure 5.14: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000	1.318 ± 0.000
1	1.318 ± 0.000	1.081 ± 0.009	1.095 ± 0.007	1.101 ± 0.004	1.195 ± 0.000
2	1.318 ± 0.000	0.9092 ± 0.0253	0.8927 ± 0.0064	0.9279 ± 0.0012	1.112 ± 0.004
3	1.318 ± 0.000	0.8024 ± 0.0157	0.8018 ± 0.0156	0.8365 ± 0.0446	1.029 ± 0.007
4	1.318 ± 0.000	0.6744 ± 0.0278	0.6871 ± 0.0058	0.7365 ± 0.0080	0.9634 ± 0.0113
5	1.318 ± 0.000	0.6424 ± 0.0071	0.6434 ± 0.0044	0.6816 ± 0.0198	0.9298 ± 0.0126
6	1.318 ± 0.000	0.6016 ± 0.0009	0.5952 ± 0.0048	0.5920 ± 0.0242	0.8996 ± 0.0037
7	1.318 ± 0.000	0.5582 ± 0.0009	0.5337 ± 0.0010	0.5610 ± 0.0497	0.8901 ± 0.0087
8	1.318 ± 0.000	0.5457 ± 0.0031	0.5387 ± 0.0132	0.5132 ± 0.0012	0.8786 ± 0.0048
9	1.318 ± 0.000	0.5057 ± 0.0058	0.5230 ± 0.0200	0.4932 ± 0.0033	0.8770 ± 0.0033
10	1.318 ± 0.000	0.5079 ± 0.0102	0.4927 ± 0.0009	0.4895 ± 0.0034	0.8745 ± 0.0009
11	1.318 ± 0.000	0.4891 ± 0.0089	0.4892 ± 0.0147	0.4853 ± 0.0023	0.8732 ± 0.0006
12	1.318 ± 0.000	0.4861 ± 0.0053	0.4831 ± 0.0036	0.4850 ± 0.0057	0.8731 ± 0.0001
13	1.318 ± 0.000	0.4762 ± 0.0027	0.4781 ± 0.0005	0.4819 ± 0.0025	0.8728 ± 0.0006
14	1.318 ± 0.000	0.4845 ± 0.0061	0.4759 ± 0.0109	0.4814 ± 0.0070	0.8725 ± 0.0009
15	1.318 ± 0.000	0.4682 ± 0.0024	0.4655 ± 0.0005	0.4785 ± 0.0054	0.8724 ± 0.0011
16	1.318 ± 0.000	0.4695 ± 0.0053	0.4755 ± 0.0099	0.4766 ± 0.0104	0.8724 ± 0.0011
17	1.318 ± 0.000	0.4628 ± 0.0081	0.4623 ± 0.0065	0.4718 ± 0.0049	0.8724 ± 0.0011
18	1.318 ± 0.000	0.4613 ± 0.0099	0.4619 ± 0.0031	0.4741 ± 0.0081	0.8724 ± 0.0011
19	1.318 ± 0.000	0.4661 ± 0.0117	0.4570 ± 0.0022	0.4722 ± 0.0079	0.8724 ± 0.0011
20	1.318 ± 0.000	0.4619 ± 0.0001	0.4622 ± 0.0064	0.4680 ± 0.0017	0.8724 ± 0.0011
21	1.318 ± 0.000	0.4594 ± 0.0036	0.4583 ± 0.0026	0.4702 ± 0.0076	0.8724 ± 0.0011
22	1.318 ± 0.000	0.4567 ± 0.0025	0.4568 ± 0.0046	0.4694 ± 0.0051	0.8724 ± 0.0011
23	1.318 ± 0.000	0.4552 ± 0.0011	0.4543 ± 0.0028	0.4687 ± 0.0078	0.8724 ± 0.0011
24	1.318 ± 0.000	0.4548 ± 0.0015	0.4564 ± 0.0022	0.4666 ± 0.0069	0.8724 ± 0.0011
25	1.318 ± 0.000	0.4563 ± 0.0043	0.4545 ± 0.0030	0.4658 ± 0.0084	0.8724 ± 0.0011
26	1.318 ± 0.000	0.4571 ± 0.0027	0.4557 ± 0.0009	0.4625 ± 0.0036	0.8724 ± 0.0011
27	1.318 ± 0.000	0.4579 ± 0.0001	0.4557 ± 0.0015	0.4624 ± 0.0036	0.8724 ± 0.0011
28	1.318 ± 0.000	0.4634 ± 0.0014	0.4623 ± 0.0036	0.4613 ± 0.0020	0.8724 ± 0.0011
29	1.318 ± 0.000	0.4893 ± 0.0069	0.4863 ± 0.0033	0.4613 ± 0.0020	0.8724 ± 0.0011
30	1.318 ± 0.000	0.5648 ± 0.0012	0.5658 ± 0.0014	0.4609 ± 0.0014	0.8724 ± 0.0011
31	1.318 ± 0.000	1.073 ± 0.012	1.028 ± 0.019	0.4607 ± 0.0012	0.8724 ± 0.0011

Table 5.14: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

5.3 Mesh / shortest_reliable

M=2: every cache allowance

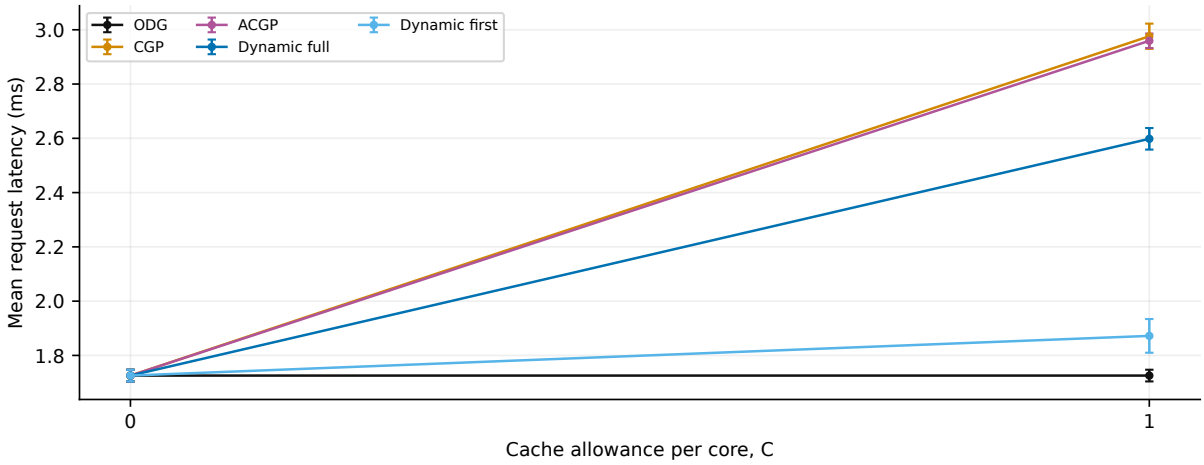


Figure 5.15: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.726 ± 0.022	1.726 ± 0.022	1.726 ± 0.022	1.726 ± 0.022	1.726 ± 0.022
1	1.726 ± 0.022	2.976 ± 0.047	2.959 ± 0.027	2.598 ± 0.040	1.872 ± 0.062

Table 5.15: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=3: every cache allowance

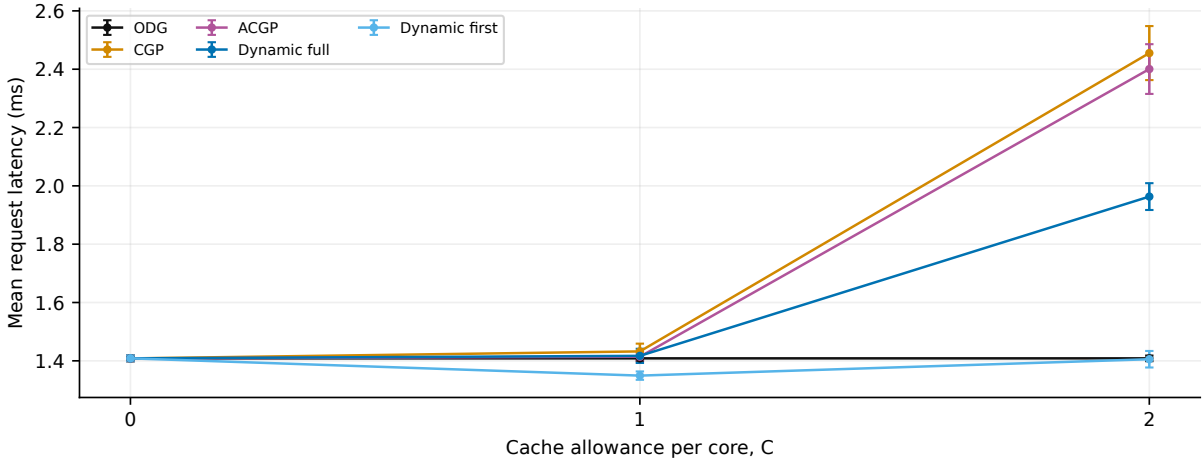


Figure 5.16: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.408 ± 0.010	1.408 ± 0.010	1.408 ± 0.010	1.408 ± 0.010	1.408 ± 0.010
1	1.408 ± 0.010	1.432 ± 0.027	1.414 ± 0.012	1.417 ± 0.024	1.349 ± 0.014
2	1.408 ± 0.010	2.455 ± 0.093	2.401 ± 0.085	1.963 ± 0.046	1.405 ± 0.028

Table 5.16: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=4: every cache allowance

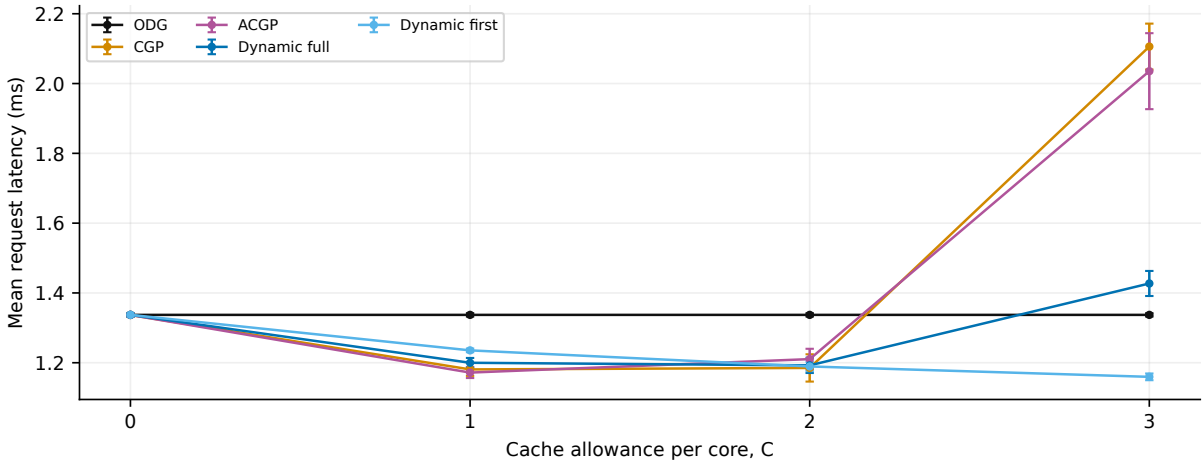


Figure 5.17: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.337 ± 0.005	1.337 ± 0.005	1.337 ± 0.005	1.337 ± 0.005	1.337 ± 0.005
1	1.337 ± 0.005	1.181 ± 0.019	1.172 ± 0.016	1.200 ± 0.014	1.235 ± 0.005
2	1.337 ± 0.005	1.185 ± 0.039	1.210 ± 0.030	1.192 ± 0.022	1.189 ± 0.013
3	1.337 ± 0.005	2.106 ± 0.066	2.035 ± 0.109	1.427 ± 0.036	1.160 ± 0.010

Table 5.17: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=6: every cache allowance

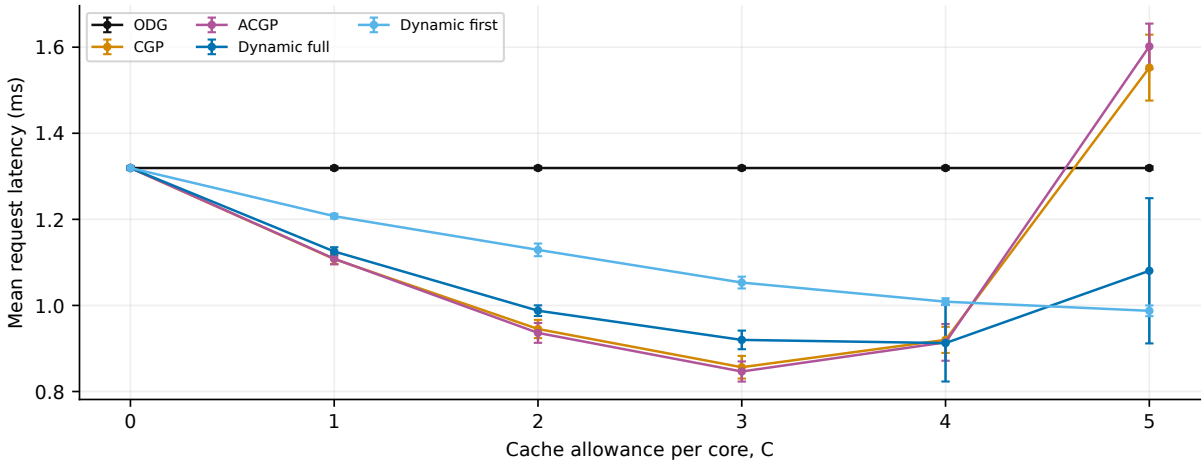


Figure 5.18: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.319 ± 0.004	1.319 ± 0.004	1.319 ± 0.004	1.319 ± 0.004	1.319 ± 0.004
1	1.319 ± 0.004	1.108 ± 0.012	1.109 ± 0.013	1.125 ± 0.010	1.207 ± 0.006
2	1.319 ± 0.004	0.9452 ± 0.0212	0.9362 ± 0.0231	0.9878 ± 0.0124	1.129 ± 0.015
3	1.319 ± 0.004	0.8564 ± 0.0263	0.8465 ± 0.0234	0.9199 ± 0.0217	1.053 ± 0.014
4	1.319 ± 0.004	0.9200 ± 0.0303	0.9142 ± 0.0427	0.9125 ± 0.0893	1.009 ± 0.008
5	1.319 ± 0.004	1.553 ± 0.077	1.602 ± 0.053	1.080 ± 0.169	0.9875 ± 0.0125

Table 5.18: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=8: every cache allowance

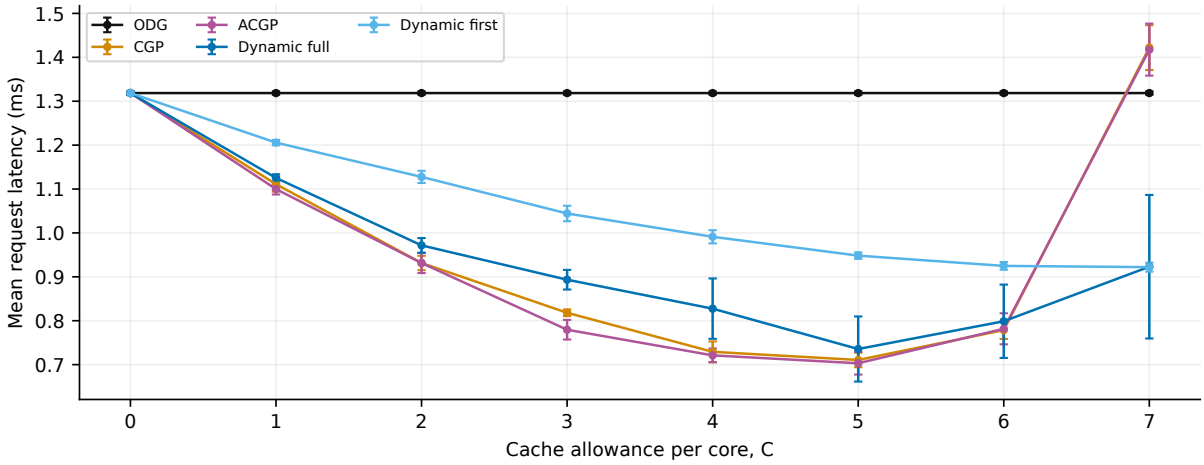


Figure 5.19: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.319 ± 0.004	1.319 ± 0.004	1.319 ± 0.004	1.319 ± 0.004	1.319 ± 0.004
1	1.319 ± 0.004	1.111 ± 0.017	1.100 ± 0.012	1.125 ± 0.008	1.206 ± 0.006
2	1.319 ± 0.004	0.9315 ± 0.0164	0.9314 ± 0.0229	0.9716 ± 0.0166	1.128 ± 0.014
3	1.319 ± 0.004	0.8181 ± 0.0076	0.7795 ± 0.0224	0.8935 ± 0.0224	1.044 ± 0.018
4	1.319 ± 0.004	0.7292 ± 0.0236	0.7211 ± 0.0157	0.8275 ± 0.0688	0.9912 ± 0.0150
5	1.319 ± 0.004	0.7106 ± 0.0165	0.7031 ± 0.0258	0.7356 ± 0.0742	0.9483 ± 0.0074
6	1.319 ± 0.004	0.7786 ± 0.0201	0.7816 ± 0.0353	0.7988 ± 0.0835	0.9249 ± 0.0088
7	1.319 ± 0.004	1.422 ± 0.051	1.417 ± 0.059	0.9230 ± 0.1635	0.9220 ± 0.0102

Table 5.19: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=16: every cache allowance

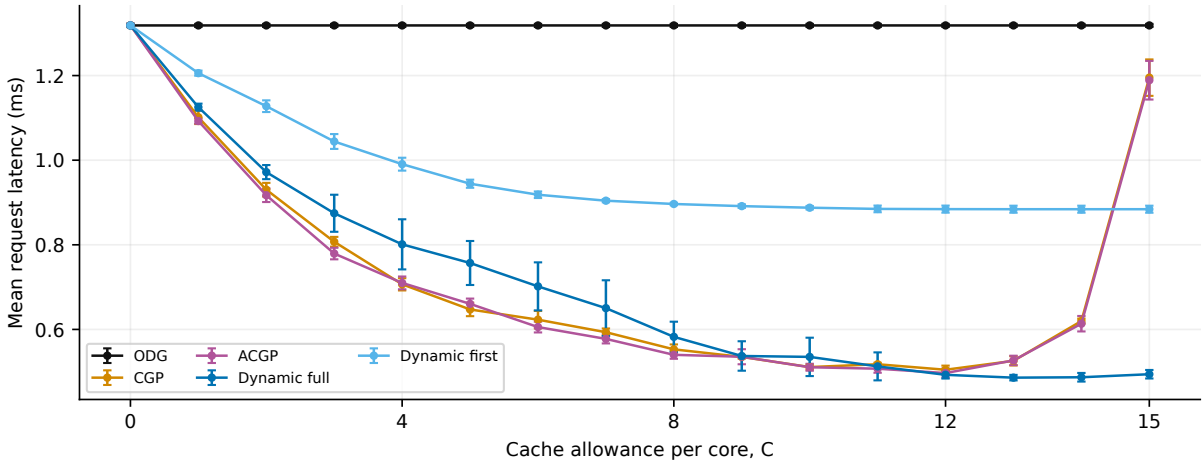


Figure 5.20: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.318 ± 0.004	1.319 ± 0.004	1.319 ± 0.004	1.318 ± 0.004	1.318 ± 0.004
1	1.318 ± 0.004	1.101 ± 0.016	1.093 ± 0.006	1.125 ± 0.008	1.206 ± 0.006
2	1.318 ± 0.004	0.9303 ± 0.0161	0.9171 ± 0.0160	0.9718 ± 0.0167	1.128 ± 0.014
3	1.318 ± 0.004	0.8072 ± 0.0116	0.7793 ± 0.0137	0.8746 ± 0.0438	1.044 ± 0.018
4	1.318 ± 0.004	0.7066 ± 0.0145	0.7099 ± 0.0151	0.8011 ± 0.0592	0.9906 ± 0.0152
5	1.318 ± 0.004	0.6472 ± 0.0159	0.6604 ± 0.0124	0.7570 ± 0.0520	0.9444 ± 0.0096
6	1.318 ± 0.004	0.6230 ± 0.0207	0.6056 ± 0.0127	0.7017 ± 0.0568	0.9184 ± 0.0077
7	1.318 ± 0.004	0.5934 ± 0.0089	0.5776 ± 0.0107	0.6502 ± 0.0659	0.9043 ± 0.0037
8	1.318 ± 0.004	0.5529 ± 0.0116	0.5400 ± 0.0094	0.5825 ± 0.0358	0.8965 ± 0.0027
9	1.318 ± 0.004	0.5350 ± 0.0038	0.5355 ± 0.0178	0.5372 ± 0.0348	0.8914 ± 0.0042
10	1.318 ± 0.004	0.5110 ± 0.0057	0.5106 ± 0.0082	0.5351 ± 0.0453	0.8877 ± 0.0040
11	1.318 ± 0.004	0.5177 ± 0.0035	0.5072 ± 0.0096	0.5127 ± 0.0331	0.8848 ± 0.0079
12	1.318 ± 0.004	0.5047 ± 0.0098	0.4969 ± 0.0108	0.4927 ± 0.0088	0.8843 ± 0.0084
13	1.318 ± 0.004	0.5257 ± 0.0109	0.5268 ± 0.0111	0.4860 ± 0.0065	0.8841 ± 0.0083
14	1.318 ± 0.004	0.6198 ± 0.0058	0.6135 ± 0.0183	0.4869 ± 0.0102	0.8841 ± 0.0083
15	1.318 ± 0.004	1.195 ± 0.043	1.189 ± 0.046	0.4941 ± 0.0101	0.8841 ± 0.0083

Table 5.20: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=32: every cache allowance

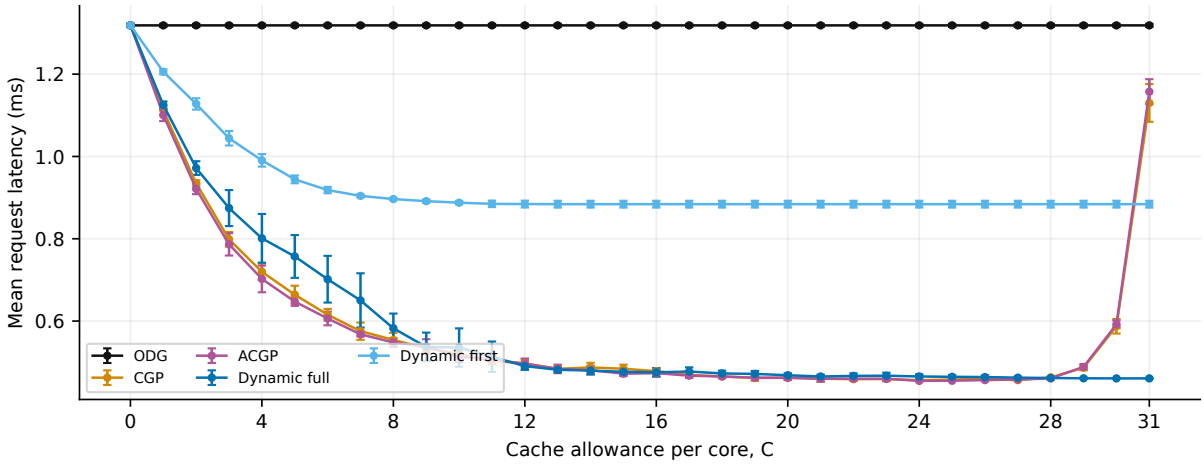


Figure 5.21: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.318 ± 0.004	1.319 ± 0.004	1.319 ± 0.004	1.318 ± 0.004	1.318 ± 0.004
1	1.318 ± 0.004	1.112 ± 0.011	1.101 ± 0.015	1.125 ± 0.008	1.206 ± 0.006
2	1.318 ± 0.004	0.9347 ± 0.0073	0.9211 ± 0.0127	0.9718 ± 0.0167	1.128 ± 0.014
3	1.318 ± 0.004	0.7987 ± 0.0176	0.7865 ± 0.0272	0.8746 ± 0.0438	1.044 ± 0.018
4	1.318 ± 0.004	0.7198 ± 0.0203	0.7025 ± 0.0325	0.8011 ± 0.0592	0.9906 ± 0.0152
5	1.318 ± 0.004	0.6642 ± 0.0218	0.6474 ± 0.0104	0.7570 ± 0.0520	0.9444 ± 0.0096
6	1.318 ± 0.004	0.6155 ± 0.0140	0.6063 ± 0.0166	0.7017 ± 0.0568	0.9184 ± 0.0077
7	1.318 ± 0.004	0.5755 ± 0.0210	0.5679 ± 0.0053	0.6502 ± 0.0659	0.9043 ± 0.0037
8	1.318 ± 0.004	0.5543 ± 0.0170	0.5481 ± 0.0107	0.5825 ± 0.0358	0.8965 ± 0.0027
9	1.318 ± 0.004	0.5342 ± 0.0094	0.5383 ± 0.0177	0.5372 ± 0.0348	0.8914 ± 0.0042
10	1.318 ± 0.004	0.5201 ± 0.0131	0.5141 ± 0.0142	0.5356 ± 0.0467	0.8877 ± 0.0040
11	1.318 ± 0.004	0.5035 ± 0.0086	0.5064 ± 0.0058	0.5134 ± 0.0370	0.8848 ± 0.0079
12	1.318 ± 0.004	0.4971 ± 0.0080	0.4964 ± 0.0126	0.4906 ± 0.0092	0.8843 ± 0.0084
13	1.318 ± 0.004	0.4840 ± 0.0064	0.4838 ± 0.0104	0.4818 ± 0.0060	0.8841 ± 0.0083
14	1.318 ± 0.004	0.4873 ± 0.0112	0.4808 ± 0.0105	0.4796 ± 0.0091	0.8841 ± 0.0083
15	1.318 ± 0.004	0.4841 ± 0.0100	0.4722 ± 0.0059	0.4768 ± 0.0081	0.8841 ± 0.0083
16	1.318 ± 0.004	0.4784 ± 0.0058	0.4735 ± 0.0082	0.4755 ± 0.0103	0.8841 ± 0.0083
17	1.318 ± 0.004	0.4691 ± 0.0061	0.4674 ± 0.0055	0.4775 ± 0.0101	0.8841 ± 0.0083
18	1.318 ± 0.004	0.4656 ± 0.0045	0.4653 ± 0.0033	0.4727 ± 0.0069	0.8841 ± 0.0083
19	1.318 ± 0.004	0.4617 ± 0.0068	0.4625 ± 0.0049	0.4717 ± 0.0072	0.8841 ± 0.0083
20	1.318 ± 0.004	0.4626 ± 0.0060	0.4621 ± 0.0045	0.4684 ± 0.0046	0.8841 ± 0.0083
21	1.318 ± 0.004	0.4600 ± 0.0070	0.4599 ± 0.0069	0.4653 ± 0.0045	0.8841 ± 0.0083
22	1.318 ± 0.004	0.4589 ± 0.0043	0.4599 ± 0.0043	0.4668 ± 0.0062	0.8841 ± 0.0083
23	1.318 ± 0.004	0.4595 ± 0.0049	0.4597 ± 0.0055	0.4673 ± 0.0072	0.8841 ± 0.0083
24	1.318 ± 0.004	0.4562 ± 0.0020	0.4548 ± 0.0009	0.4654 ± 0.0053	0.8841 ± 0.0083
25	1.318 ± 0.004	0.4581 ± 0.0037	0.4550 ± 0.0011	0.4646 ± 0.0043	0.8841 ± 0.0083
26	1.318 ± 0.004	0.4592 ± 0.0042	0.4567 ± 0.0026	0.4639 ± 0.0042	0.8841 ± 0.0083
27	1.318 ± 0.004	0.4565 ± 0.0014	0.4581 ± 0.0026	0.4625 ± 0.0028	0.8841 ± 0.0083
28	1.318 ± 0.004	0.4632 ± 0.0018	0.4607 ± 0.0030	0.4617 ± 0.0025	0.8841 ± 0.0083
29	1.318 ± 0.004	0.4868 ± 0.0064	0.4887 ± 0.0068	0.4610 ± 0.0014	0.8841 ± 0.0083
30	1.318 ± 0.004	0.5873 ± 0.0176	0.5921 ± 0.0092	0.4607 ± 0.0011	0.8841 ± 0.0083
31	1.318 ± 0.004	1.130 ± 0.046	1.157 ± 0.030	0.4607 ± 0.0011	0.8841 ± 0.0083

Table 5.21: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

5.4 Mesh / max_reliability

M=2: every cache allowance

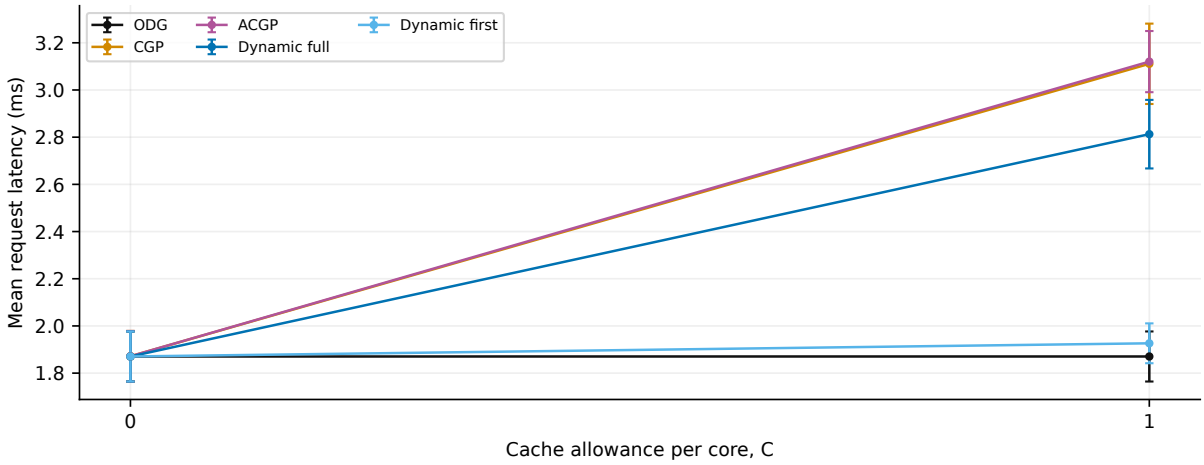


Figure 5.22: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.871 ± 0.106	1.872 ± 0.107	1.872 ± 0.107	1.871 ± 0.106	1.871 ± 0.106
1	1.871 ± 0.106	3.111 ± 0.170	3.120 ± 0.130	2.813 ± 0.145	1.926 ± 0.084

Table 5.22: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=3: every cache allowance

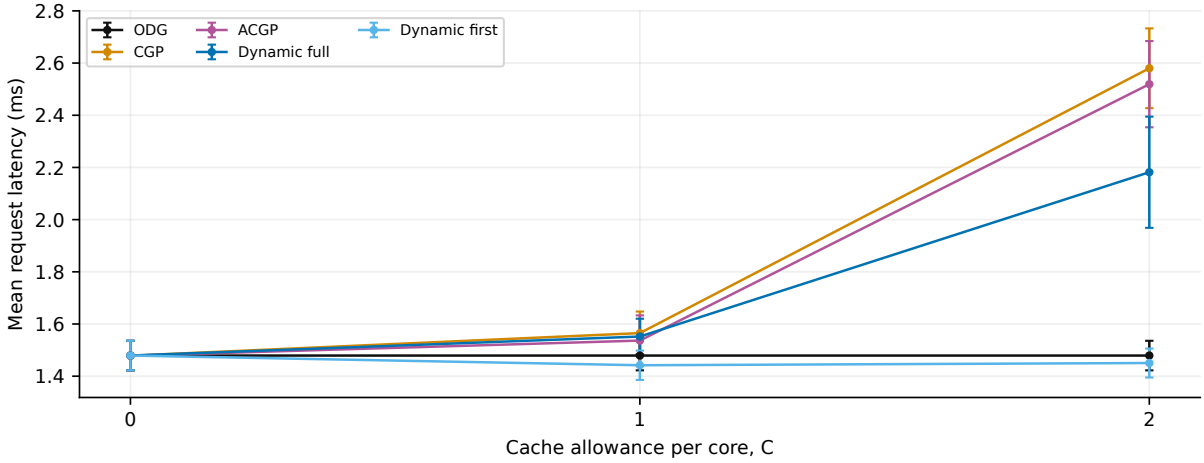


Figure 5.23: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.479 ± 0.057	1.479 ± 0.056	1.479 ± 0.056	1.479 ± 0.057	1.479 ± 0.057
1	1.479 ± 0.057	1.565 ± 0.083	1.536 ± 0.097	1.552 ± 0.068	1.442 ± 0.056
2	1.479 ± 0.057	2.580 ± 0.153	2.519 ± 0.165	2.182 ± 0.213	1.450 ± 0.056

Table 5.23: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=4: every cache allowance

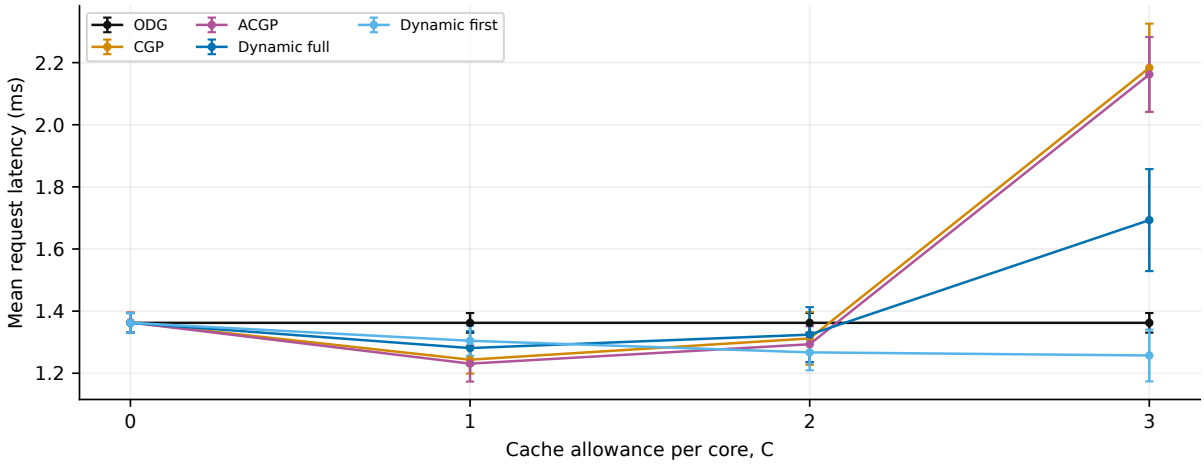


Figure 5.24: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.362 ± 0.032	1.363 ± 0.032	1.363 ± 0.032	1.362 ± 0.032	1.362 ± 0.032
1	1.362 ± 0.032	1.244 ± 0.045	1.231 ± 0.058	1.281 ± 0.054	1.305 ± 0.048
2	1.362 ± 0.032	1.312 ± 0.085	1.293 ± 0.058	1.324 ± 0.089	1.267 ± 0.058
3	1.362 ± 0.032	2.183 ± 0.142	2.162 ± 0.120	1.693 ± 0.164	1.257 ± 0.083

Table 5.24: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=6: every cache allowance

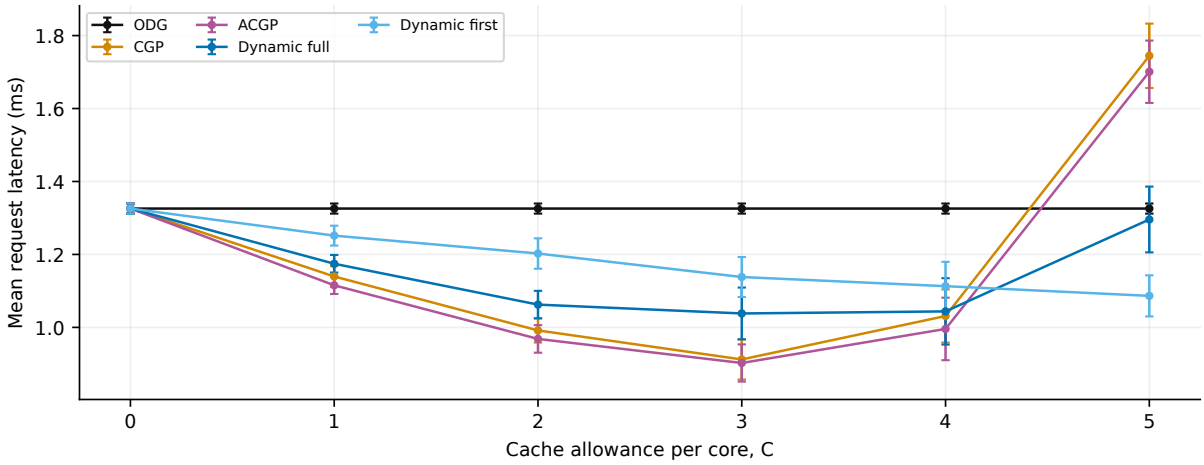


Figure 5.25: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.326 ± 0.014	1.326 ± 0.014	1.326 ± 0.014	1.326 ± 0.014	1.326 ± 0.014
1	1.326 ± 0.014	1.140 ± 0.028	1.115 ± 0.024	1.175 ± 0.024	1.252 ± 0.027
2	1.326 ± 0.014	0.9917 ± 0.0332	0.9684 ± 0.0378	1.062 ± 0.038	1.203 ± 0.042
3	1.326 ± 0.014	0.9121 ± 0.0551	0.9024 ± 0.0510	1.038 ± 0.071	1.138 ± 0.055
4	1.326 ± 0.014	1.031 ± 0.073	0.9958 ± 0.0857	1.044 ± 0.091	1.113 ± 0.067
5	1.326 ± 0.014	1.745 ± 0.088	1.701 ± 0.085	1.296 ± 0.090	1.086 ± 0.056

Table 5.25: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=8: every cache allowance

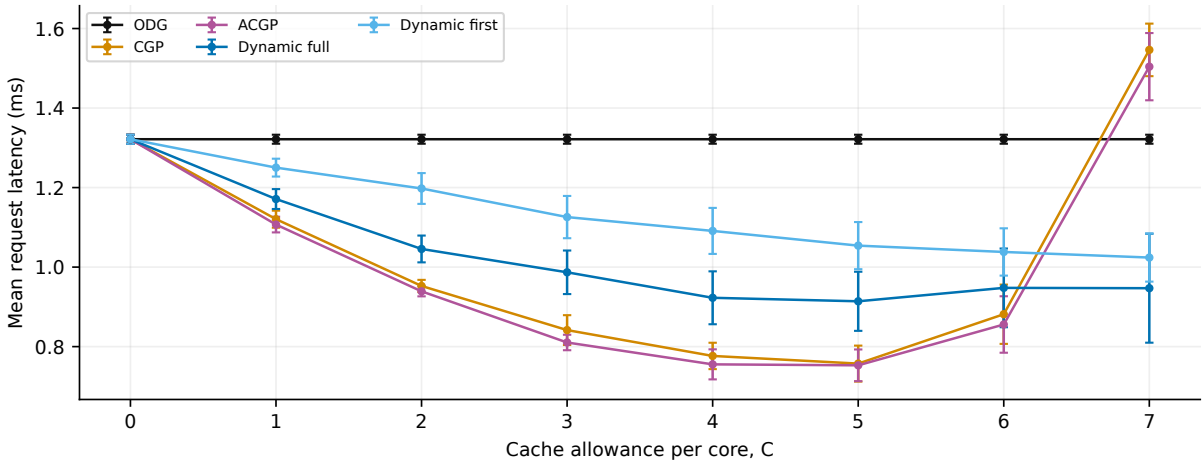


Figure 5.26: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.322 ± 0.011	1.322 ± 0.011	1.322 ± 0.011	1.322 ± 0.011	1.322 ± 0.011
1	1.322 ± 0.011	1.121 ± 0.021	1.107 ± 0.020	1.171 ± 0.025	1.250 ± 0.022
2	1.322 ± 0.011	0.9525 ± 0.0153	0.9390 ± 0.0126	1.046 ± 0.034	1.198 ± 0.039
3	1.322 ± 0.011	0.8416 ± 0.0375	0.8104 ± 0.0195	0.9869 ± 0.0548	1.126 ± 0.053
4	1.322 ± 0.011	0.7766 ± 0.0332	0.7554 ± 0.0378	0.9228 ± 0.0665	1.091 ± 0.058
5	1.322 ± 0.011	0.7573 ± 0.0452	0.7530 ± 0.0399	0.9140 ± 0.0743	1.054 ± 0.059
6	1.322 ± 0.011	0.8815 ± 0.0746	0.8556 ± 0.0710	0.9477 ± 0.0990	1.038 ± 0.059
7	1.322 ± 0.011	1.546 ± 0.066	1.504 ± 0.085	0.9469 ± 0.1370	1.024 ± 0.061

Table 5.26: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=16: every cache allowance

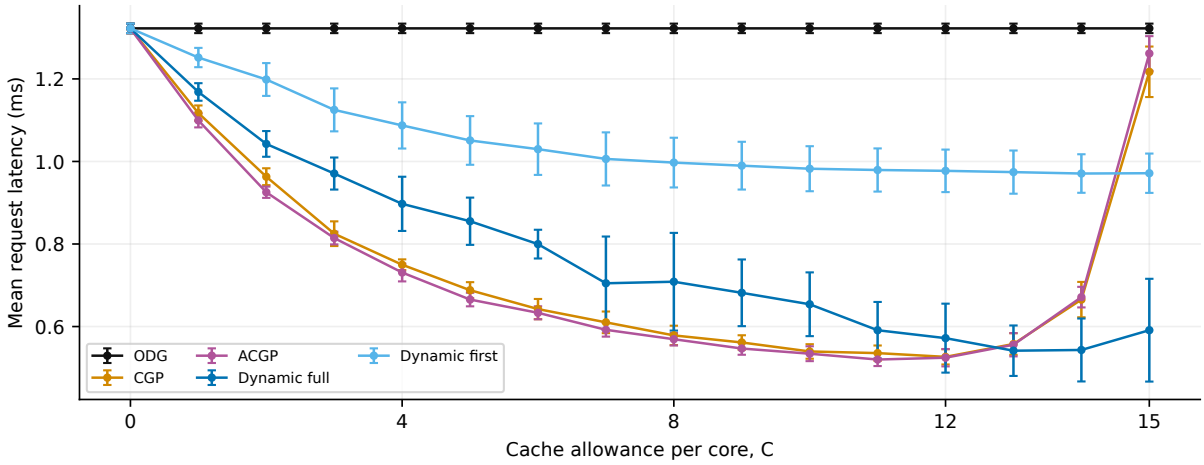


Figure 5.27: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.322 ± 0.012	1.322 ± 0.012	1.322 ± 0.012	1.322 ± 0.012	1.322 ± 0.012
1	1.322 ± 0.012	1.117 ± 0.018	1.099 ± 0.017	1.168 ± 0.021	1.252 ± 0.023
2	1.322 ± 0.012	0.9631 ± 0.0204	0.9254 ± 0.0137	1.043 ± 0.031	1.199 ± 0.040
3	1.322 ± 0.012	0.8250 ± 0.0299	0.8144 ± 0.0154	0.9707 ± 0.0388	1.125 ± 0.052
4	1.322 ± 0.012	0.7498 ± 0.0130	0.7309 ± 0.0215	0.8973 ± 0.0657	1.087 ± 0.056
5	1.322 ± 0.012	0.6881 ± 0.0195	0.6654 ± 0.0164	0.8552 ± 0.0573	1.051 ± 0.059
6	1.322 ± 0.012	0.6423 ± 0.0245	0.6333 ± 0.0158	0.7997 ± 0.0348	1.030 ± 0.062
7	1.322 ± 0.012	0.6102 ± 0.0262	0.5921 ± 0.0165	0.7048 ± 0.1133	1.006 ± 0.064
8	1.322 ± 0.012	0.5785 ± 0.0235	0.5693 ± 0.0152	0.7086 ± 0.1183	0.9972 ± 0.0602
9	1.322 ± 0.012	0.5614 ± 0.0175	0.5468 ± 0.0151	0.6817 ± 0.0808	0.9898 ± 0.0579
10	1.322 ± 0.012	0.5396 ± 0.0176	0.5342 ± 0.0180	0.6540 ± 0.0772	0.9824 ± 0.0545
11	1.322 ± 0.012	0.5356 ± 0.0184	0.5201 ± 0.0158	0.5911 ± 0.0685	0.9793 ± 0.0523
12	1.322 ± 0.012	0.5265 ± 0.0184	0.5245 ± 0.0211	0.5719 ± 0.0835	0.9773 ± 0.0515
13	1.322 ± 0.012	0.5577 ± 0.0261	0.5559 ± 0.0282	0.5415 ± 0.0611	0.9742 ± 0.0523
14	1.322 ± 0.012	0.6653 ± 0.0428	0.6713 ± 0.0249	0.5432 ± 0.0762	0.9708 ± 0.0467
15	1.322 ± 0.012	1.217 ± 0.061	1.262 ± 0.042	0.5912 ± 0.1245	0.9715 ± 0.0476

Table 5.27: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=32: every cache allowance

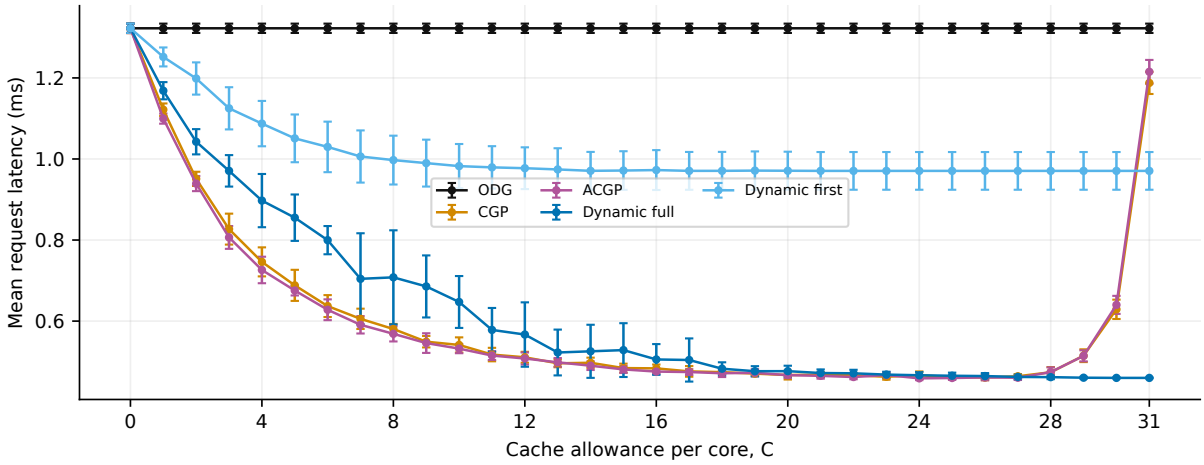


Figure 5.28: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.322 ± 0.012	1.322 ± 0.012	1.322 ± 0.012	1.322 ± 0.012	1.322 ± 0.012
1	1.322 ± 0.012	1.122 ± 0.015	1.100 ± 0.012	1.168 ± 0.021	1.252 ± 0.023
2	1.322 ± 0.012	0.9510 ± 0.0175	0.9393 ± 0.0186	1.043 ± 0.031	1.199 ± 0.040
3	1.322 ± 0.012	0.8269 ± 0.0382	0.8064 ± 0.0281	0.9707 ± 0.0388	1.125 ± 0.052
4	1.322 ± 0.012	0.7461 ± 0.0358	0.7262 ± 0.0327	0.8973 ± 0.0657	1.087 ± 0.056
5	1.322 ± 0.012	0.6882 ± 0.0383	0.6755 ± 0.0123	0.8552 ± 0.0573	1.051 ± 0.059
6	1.322 ± 0.012	0.6371 ± 0.0270	0.6280 ± 0.0257	0.7997 ± 0.0348	1.030 ± 0.062
7	1.322 ± 0.012	0.6056 ± 0.0250	0.5909 ± 0.0215	0.7043 ± 0.1124	1.006 ± 0.064
8	1.322 ± 0.012	0.5804 ± 0.0126	0.5687 ± 0.0189	0.7080 ± 0.1160	0.9972 ± 0.0602
9	1.322 ± 0.012	0.5492 ± 0.0141	0.5458 ± 0.0242	0.6855 ± 0.0765	0.9898 ± 0.0579
10	1.322 ± 0.012	0.5412 ± 0.0187	0.5321 ± 0.0113	0.6472 ± 0.0640	0.9824 ± 0.0545
11	1.322 ± 0.012	0.5174 ± 0.0166	0.5150 ± 0.0110	0.5783 ± 0.0542	0.9793 ± 0.0523
12	1.322 ± 0.012	0.5107 ± 0.0135	0.5077 ± 0.0148	0.5669 ± 0.0794	0.9772 ± 0.0515
13	1.322 ± 0.012	0.4959 ± 0.0097	0.4983 ± 0.0106	0.5226 ± 0.0565	0.9742 ± 0.0523
14	1.322 ± 0.012	0.4972 ± 0.0126	0.4900 ± 0.0106	0.5255 ± 0.0655	0.9708 ± 0.0467
15	1.322 ± 0.012	0.4840 ± 0.0109	0.4808 ± 0.0086	0.5285 ± 0.0664	0.9715 ± 0.0476
16	1.322 ± 0.012	0.4834 ± 0.0095	0.4755 ± 0.0056	0.5054 ± 0.0379	0.9727 ± 0.0492
17	1.322 ± 0.012	0.4759 ± 0.0131	0.4743 ± 0.0071	0.5040 ± 0.0532	0.9707 ± 0.0467
18	1.322 ± 0.012	0.4740 ± 0.0034	0.4714 ± 0.0094	0.4826 ± 0.0158	0.9707 ± 0.0468
19	1.322 ± 0.012	0.4705 ± 0.0044	0.4724 ± 0.0090	0.4764 ± 0.0124	0.9713 ± 0.0474
20	1.322 ± 0.012	0.4668 ± 0.0110	0.4667 ± 0.0072	0.4765 ± 0.0134	0.9710 ± 0.0470
21	1.322 ± 0.012	0.4681 ± 0.0061	0.4649 ± 0.0069	0.4719 ± 0.0089	0.9706 ± 0.0465
22	1.322 ± 0.012	0.4663 ± 0.0043	0.4621 ± 0.0056	0.4712 ± 0.0087	0.9706 ± 0.0465
23	1.322 ± 0.012	0.4627 ± 0.0073	0.4669 ± 0.0073	0.4680 ± 0.0071	0.9706 ± 0.0465
24	1.322 ± 0.012	0.4664 ± 0.0095	0.4588 ± 0.0044	0.4664 ± 0.0079	0.9706 ± 0.0465
25	1.322 ± 0.012	0.4619 ± 0.0040	0.4596 ± 0.0047	0.4652 ± 0.0077	0.9706 ± 0.0465
26	1.322 ± 0.012	0.4609 ± 0.0067	0.4610 ± 0.0070	0.4644 ± 0.0074	0.9706 ± 0.0465
27	1.322 ± 0.012	0.4639 ± 0.0053	0.4602 ± 0.0055	0.4623 ± 0.0056	0.9706 ± 0.0465
28	1.322 ± 0.012	0.4738 ± 0.0128	0.4742 ± 0.0116	0.4617 ± 0.0050	0.9706 ± 0.0465
29	1.322 ± 0.012	0.5146 ± 0.0158	0.5143 ± 0.0136	0.4604 ± 0.0022	0.9706 ± 0.0465
30	1.322 ± 0.012	0.6291 ± 0.0239	0.6400 ± 0.0223	0.4599 ± 0.0012	0.9706 ± 0.0465
31	1.322 ± 0.012	1.188 ± 0.027	1.215 ± 0.029	0.4599 ± 0.0011	0.9706 ± 0.0465

Table 5.28: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

5.5 Torus / dijkstra

M=2: every cache allowance

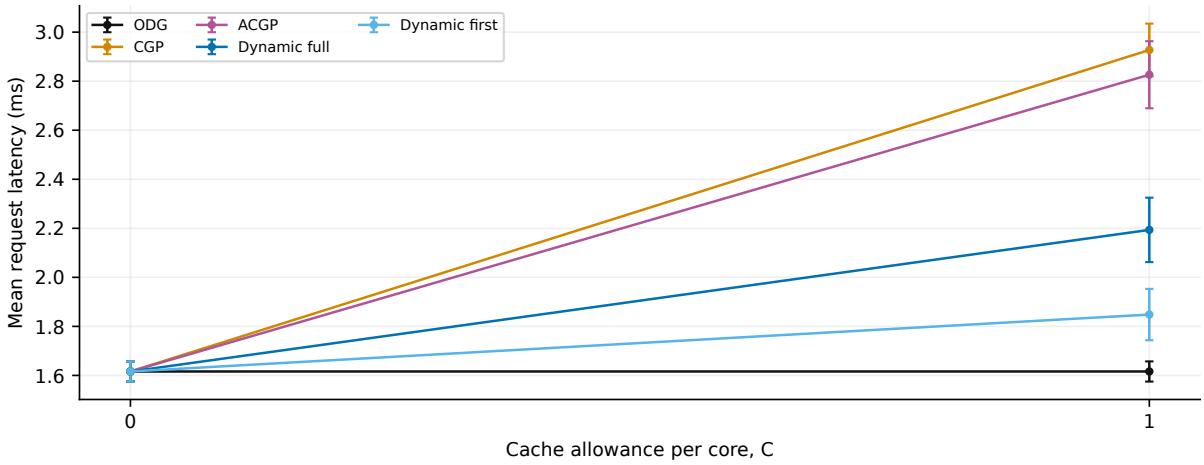


Figure 5.29: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.616 ± 0.041	1.616 ± 0.041	1.616 ± 0.041	1.616 ± 0.041	1.616 ± 0.041
1	1.616 ± 0.041	2.927 ± 0.108	2.826 ± 0.137	2.194 ± 0.131	1.848 ± 0.105

Table 5.29: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=3: every cache allowance

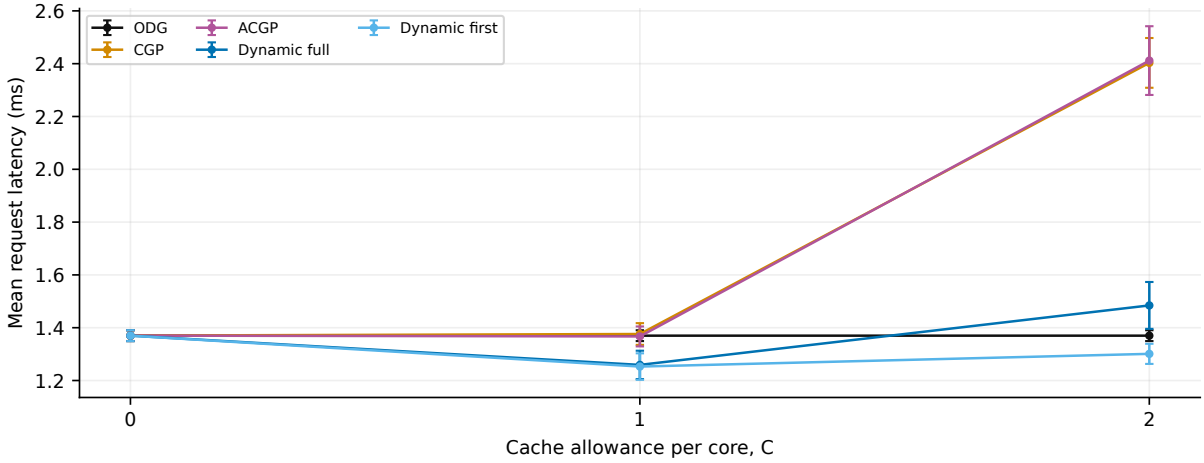


Figure 5.30: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.370 ± 0.021	1.370 ± 0.020	1.370 ± 0.020	1.370 ± 0.021	1.370 ± 0.021
1	1.370 ± 0.021	1.376 ± 0.041	1.367 ± 0.038	1.259 ± 0.054	1.253 ± 0.050
2	1.370 ± 0.021	2.403 ± 0.094	2.412 ± 0.130	1.484 ± 0.089	1.301 ± 0.038

Table 5.30: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=4: every cache allowance

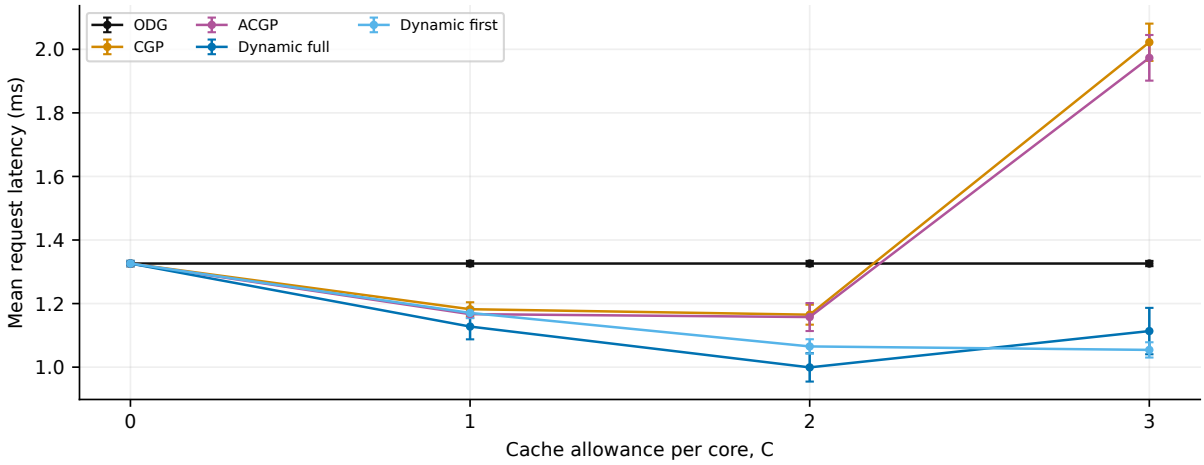


Figure 5.31: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.326 ± 0.008	1.326 ± 0.008	1.326 ± 0.008	1.326 ± 0.008	1.326 ± 0.008
1	1.326 ± 0.008	1.182 ± 0.022	1.167 ± 0.012	1.128 ± 0.040	1.171 ± 0.016
2	1.326 ± 0.008	1.165 ± 0.031	1.158 ± 0.044	0.9992 ± 0.0447	1.065 ± 0.023
3	1.326 ± 0.008	2.022 ± 0.059	1.973 ± 0.072	1.113 ± 0.073	1.054 ± 0.024

Table 5.31: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=6: every cache allowance

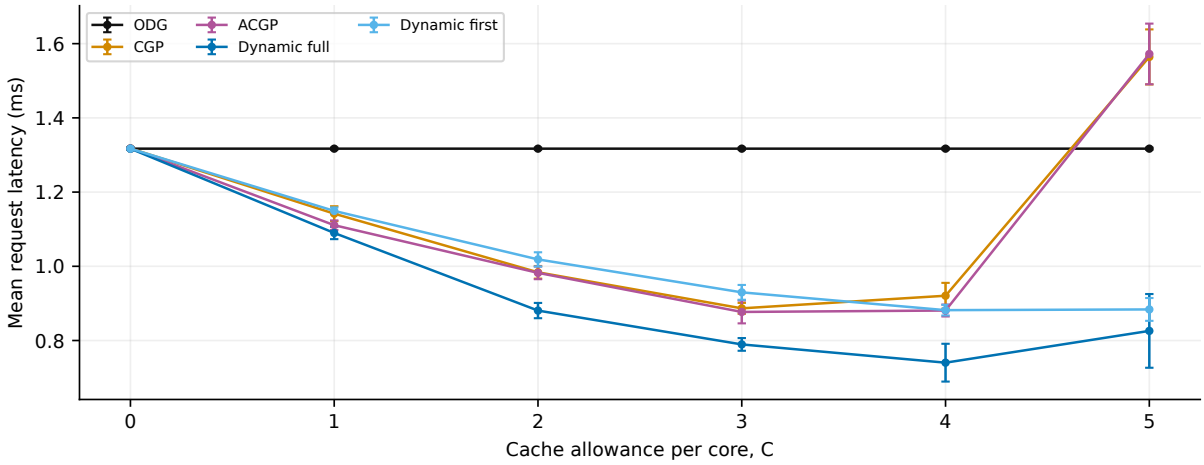


Figure 5.32: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.317 ± 0.003	1.318 ± 0.002	1.318 ± 0.002	1.317 ± 0.003	1.317 ± 0.003
1	1.317 ± 0.003	1.142 ± 0.020	1.111 ± 0.013	1.090 ± 0.017	1.149 ± 0.009
2	1.317 ± 0.003	0.9838 ± 0.0170	0.9823 ± 0.0171	0.8807 ± 0.0206	1.019 ± 0.019
3	1.317 ± 0.003	0.8867 ± 0.0147	0.8770 ± 0.0308	0.7895 ± 0.0171	0.9298 ± 0.0200
4	1.317 ± 0.003	0.9207 ± 0.0347	0.8808 ± 0.0160	0.7403 ± 0.0509	0.8818 ± 0.0143
5	1.317 ± 0.003	1.564 ± 0.074	1.572 ± 0.082	0.8259 ± 0.0993	0.8837 ± 0.0307

Table 5.32: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=8: every cache allowance

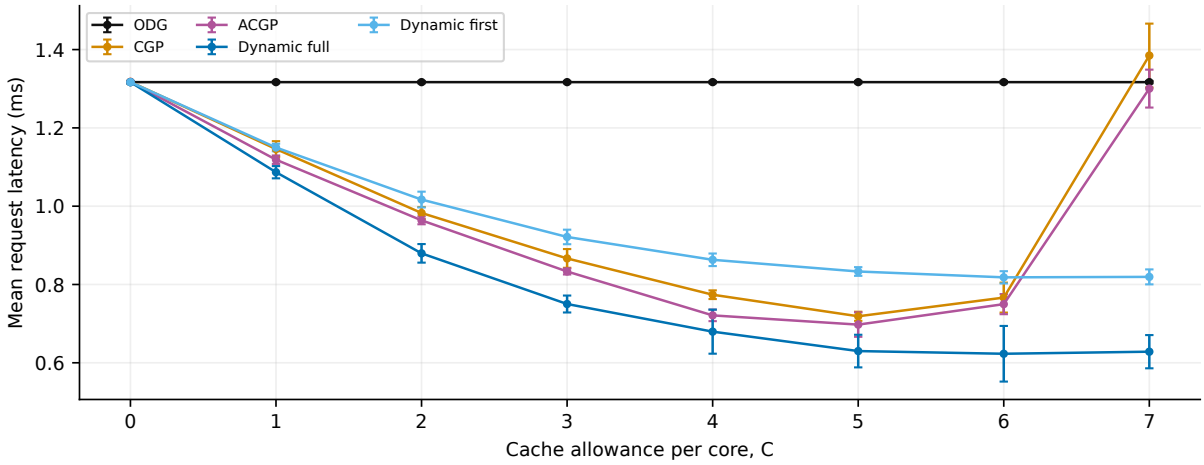


Figure 5.33: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.317 ± 0.003	1.318 ± 0.002	1.318 ± 0.002	1.317 ± 0.003	1.317 ± 0.003
1	1.317 ± 0.003	1.146 ± 0.020	1.119 ± 0.011	1.087 ± 0.016	1.150 ± 0.010
2	1.317 ± 0.003	0.9827 ± 0.0153	0.9639 ± 0.0101	0.8795 ± 0.0237	1.017 ± 0.020
3	1.317 ± 0.003	0.8666 ± 0.0239	0.8332 ± 0.0077	0.7501 ± 0.0216	0.9214 ± 0.0186
4	1.317 ± 0.003	0.7739 ± 0.0111	0.7211 ± 0.0147	0.6795 ± 0.0563	0.8631 ± 0.0160
5	1.317 ± 0.003	0.7188 ± 0.0116	0.6975 ± 0.0311	0.6299 ± 0.0417	0.8332 ± 0.0111
6	1.317 ± 0.003	0.7665 ± 0.0382	0.7498 ± 0.0257	0.6231 ± 0.0711	0.8182 ± 0.0157
7	1.317 ± 0.003	1.385 ± 0.082	1.300 ± 0.048	0.6283 ± 0.0424	0.8194 ± 0.0191

Table 5.33: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=16: every cache allowance

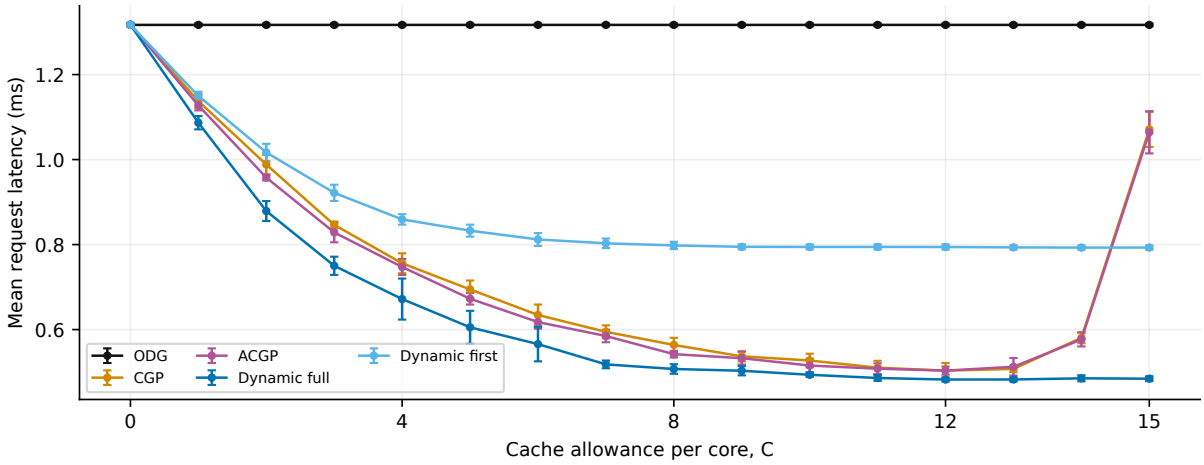


Figure 5.34: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.317 ± 0.003	1.318 ± 0.002	1.318 ± 0.002	1.317 ± 0.003	1.317 ± 0.003
1	1.317 ± 0.003	1.138 ± 0.017	1.127 ± 0.012	1.087 ± 0.016	1.150 ± 0.010
2	1.317 ± 0.003	0.9883 ± 0.0229	0.9575 ± 0.0066	0.8789 ± 0.0235	1.017 ± 0.020
3	1.317 ± 0.003	0.8464 ± 0.0077	0.8286 ± 0.0233	0.7501 ± 0.0215	0.9217 ± 0.0190
4	1.317 ± 0.003	0.7560 ± 0.0235	0.7473 ± 0.0188	0.6718 ± 0.0483	0.8592 ± 0.0123
5	1.317 ± 0.003	0.6945 ± 0.0210	0.6726 ± 0.0137	0.6054 ± 0.0388	0.8327 ± 0.0141
6	1.317 ± 0.003	0.6343 ± 0.0246	0.6177 ± 0.0155	0.5658 ± 0.0405	0.8120 ± 0.0151
7	1.317 ± 0.003	0.5947 ± 0.0153	0.5848 ± 0.0147	0.5181 ± 0.0091	0.8030 ± 0.0113
8	1.317 ± 0.003	0.5639 ± 0.0168	0.5421 ± 0.0079	0.5073 ± 0.0112	0.7980 ± 0.0087
9	1.317 ± 0.003	0.5370 ± 0.0121	0.5327 ± 0.0151	0.5031 ± 0.0109	0.7947 ± 0.0059
10	1.317 ± 0.003	0.5272 ± 0.0161	0.5153 ± 0.0160	0.4936 ± 0.0050	0.7944 ± 0.0058
11	1.317 ± 0.003	0.5103 ± 0.0162	0.5080 ± 0.0126	0.4861 ± 0.0067	0.7945 ± 0.0061
12	1.317 ± 0.003	0.5034 ± 0.0180	0.5035 ± 0.0096	0.4824 ± 0.0048	0.7943 ± 0.0061
13	1.317 ± 0.003	0.5074 ± 0.0076	0.5125 ± 0.0207	0.4826 ± 0.0049	0.7934 ± 0.0050
14	1.317 ± 0.003	0.5806 ± 0.0128	0.5767 ± 0.0165	0.4853 ± 0.0071	0.7929 ± 0.0050
15	1.317 ± 0.003	1.071 ± 0.041	1.064 ± 0.050	0.4844 ± 0.0056	0.7930 ± 0.0051

Table 5.34: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

M=32: every cache allowance

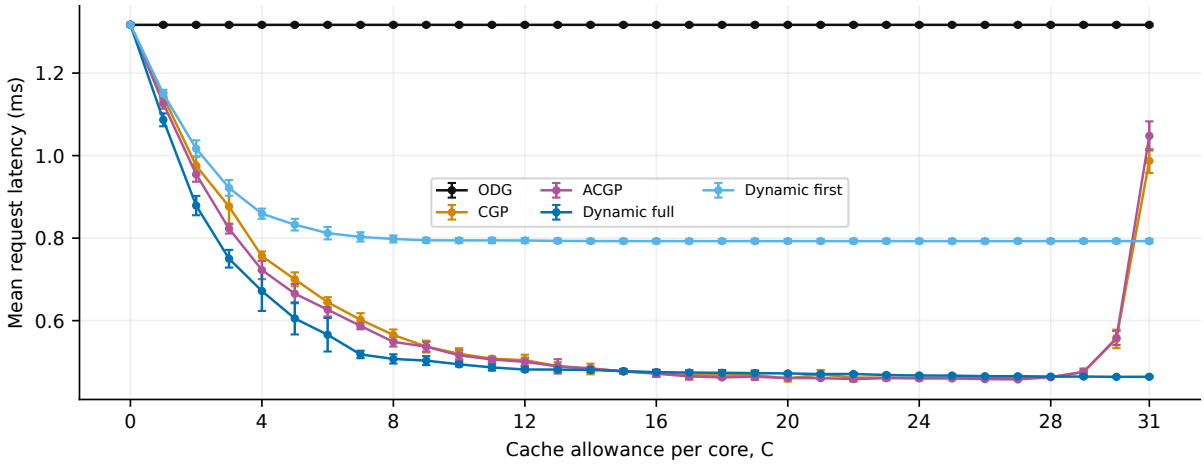


Figure 5.35: All legal C values; ODG's C=0 result is repeated as a horizontal reference, not rerun at C>0.

C	ODG	CGP	ACGP	Dynamic full	Dynamic first
0	1.317 ± 0.003	1.318 ± 0.002	1.318 ± 0.002	1.317 ± 0.003	1.317 ± 0.003
1	1.317 ± 0.003	1.143 ± 0.010	1.126 ± 0.012	1.087 ± 0.016	1.150 ± 0.010
2	1.317 ± 0.003	0.9755 ± 0.0225	0.9548 ± 0.0182	0.8789 ± 0.0235	1.017 ± 0.020
3	1.317 ± 0.003	0.8765 ± 0.0429	0.8230 ± 0.0119	0.7501 ± 0.0215	0.9217 ± 0.0190
4	1.317 ± 0.003	0.7565 ± 0.0113	0.7228 ± 0.0222	0.6718 ± 0.0483	0.8592 ± 0.0123
5	1.317 ± 0.003	0.7002 ± 0.0168	0.6655 ± 0.0234	0.6054 ± 0.0388	0.8327 ± 0.0141
6	1.317 ± 0.003	0.6448 ± 0.0121	0.6266 ± 0.0161	0.5658 ± 0.0405	0.8120 ± 0.0151
7	1.317 ± 0.003	0.6022 ± 0.0159	0.5873 ± 0.0083	0.5181 ± 0.0091	0.8030 ± 0.0113
8	1.317 ± 0.003	0.5653 ± 0.0133	0.5486 ± 0.0114	0.5073 ± 0.0112	0.7980 ± 0.0087
9	1.317 ± 0.003	0.5372 ± 0.0143	0.5369 ± 0.0116	0.5031 ± 0.0109	0.7947 ± 0.0059
10	1.317 ± 0.003	0.5198 ± 0.0134	0.5160 ± 0.0125	0.4942 ± 0.0052	0.7944 ± 0.0058
11	1.317 ± 0.003	0.5078 ± 0.0041	0.5059 ± 0.0069	0.4867 ± 0.0076	0.7945 ± 0.0061
12	1.317 ± 0.003	0.5043 ± 0.0132	0.5003 ± 0.0098	0.4816 ± 0.0044	0.7943 ± 0.0061
13	1.317 ± 0.003	0.4900 ± 0.0094	0.4892 ± 0.0174	0.4814 ± 0.0045	0.7934 ± 0.0050
14	1.317 ± 0.003	0.4828 ± 0.0129	0.4845 ± 0.0037	0.4805 ± 0.0058	0.7929 ± 0.0050
15	1.317 ± 0.003	0.4773 ± 0.0052	0.4770 ± 0.0062	0.4777 ± 0.0040	0.7928 ± 0.0050
16	1.317 ± 0.003	0.4730 ± 0.0079	0.4714 ± 0.0078	0.4752 ± 0.0058	0.7928 ± 0.0050
17	1.317 ± 0.003	0.4679 ± 0.0101	0.4649 ± 0.0076	0.4742 ± 0.0055	0.7928 ± 0.0050
18	1.317 ± 0.003	0.4680 ± 0.0059	0.4624 ± 0.0039	0.4736 ± 0.0067	0.7928 ± 0.0050
19	1.317 ± 0.003	0.4680 ± 0.0108	0.4641 ± 0.0072	0.4729 ± 0.0060	0.7928 ± 0.0050
20	1.317 ± 0.003	0.4601 ± 0.0075	0.4609 ± 0.0025	0.4721 ± 0.0023	0.7928 ± 0.0050
21	1.317 ± 0.003	0.4695 ± 0.0110	0.4607 ± 0.0025	0.4706 ± 0.0031	0.7928 ± 0.0050
22	1.317 ± 0.003	0.4620 ± 0.0097	0.4584 ± 0.0031	0.4707 ± 0.0025	0.7928 ± 0.0050
23	1.317 ± 0.003	0.4619 ± 0.0031	0.4607 ± 0.0052	0.4682 ± 0.0037	0.7928 ± 0.0050
24	1.317 ± 0.003	0.4606 ± 0.0034	0.4604 ± 0.0049	0.4671 ± 0.0025	0.7928 ± 0.0050
25	1.317 ± 0.003	0.4607 ± 0.0035	0.4601 ± 0.0029	0.4668 ± 0.0029	0.7928 ± 0.0050
26	1.317 ± 0.003	0.4619 ± 0.0037	0.4583 ± 0.0029	0.4654 ± 0.0021	0.7928 ± 0.0050
27	1.317 ± 0.003	0.4625 ± 0.0042	0.4576 ± 0.0021	0.4653 ± 0.0024	0.7928 ± 0.0050
28	1.317 ± 0.003	0.4631 ± 0.0015	0.4631 ± 0.0027	0.4645 ± 0.0020	0.7928 ± 0.0050
29	1.317 ± 0.003	0.4757 ± 0.0051	0.4757 ± 0.0082	0.4645 ± 0.0025	0.7928 ± 0.0050
30	1.317 ± 0.003	0.5558 ± 0.0225	0.5579 ± 0.0170	0.4638 ± 0.0019	0.7928 ± 0.0050
31	1.317 ± 0.003	0.9872 ± 0.0292	1.048 ± 0.035	0.4640 ± 0.0023	0.7928 ± 0.0050

Table 5.35: Mean hop latency (ms), mean ± SD. The linked CSV includes every recorded metric for every allocation.
Exact CSV values and sample counts

Chapter 6

Dynamic structural policies and launch sensitivities

This experiment fixes $M = 4$, $C = 3$ and generation capacity 3 and evaluates thirteen registered variants on every distinct route. It changes trigger timing and chain filtering; placement, routing and physical timing are otherwise the same. There are 143 jobs and 286 physics runs. Tables pool exact distinct trace/physics observations using the same rule as the base comparisons.

Layer-start launches preparations on activation of their planned generation layer. Predecessor-start launches a later-hop preparation when its preceding request begins; first hops follow the layer rule. First-hop-only retains just hop position zero of each same-qubit/same-layer chain. Two-hops predecessor-start retains the first two hop positions. Delay settings are timing sensitivities, not independent algorithm families.

Variant	Setting
baseline-layer-start	Full planned chain; layer trigger; no delay
layer-delay-1/2/3/4/6ms	Five separate full-chain layer-delay sensitivities
predecessor-start	Full planned chain; predecessor trigger
predecessor-start-first-delay-2/4ms	Two predecessor-trigger delay sensitivities
first-hop-only	Only the first hop prepared; zero delay
first-hop-only-delay-2/4ms	Two first-hop delay sensitivities
two-hops-predecessor-start	First two hops; predecessor trigger

Table 6.1: Thirteen evaluated launch configurations. The table groups delay values for readability; each appears separately in every result table.

The next pages plot sixteen principal performance and quality metrics, including all thirteen variants, with full tables. The linked complete variant CSV retains every recorded metric, including the additional planner/runtime diagnostics shown for base policies. Deeper chain caps $N = 3, 4$ and a separately trained congestion-threshold policy are not part of this completed campaign and are not presented as measured QFT-96 results.

6.1 Mesh / xy

Mean request latency

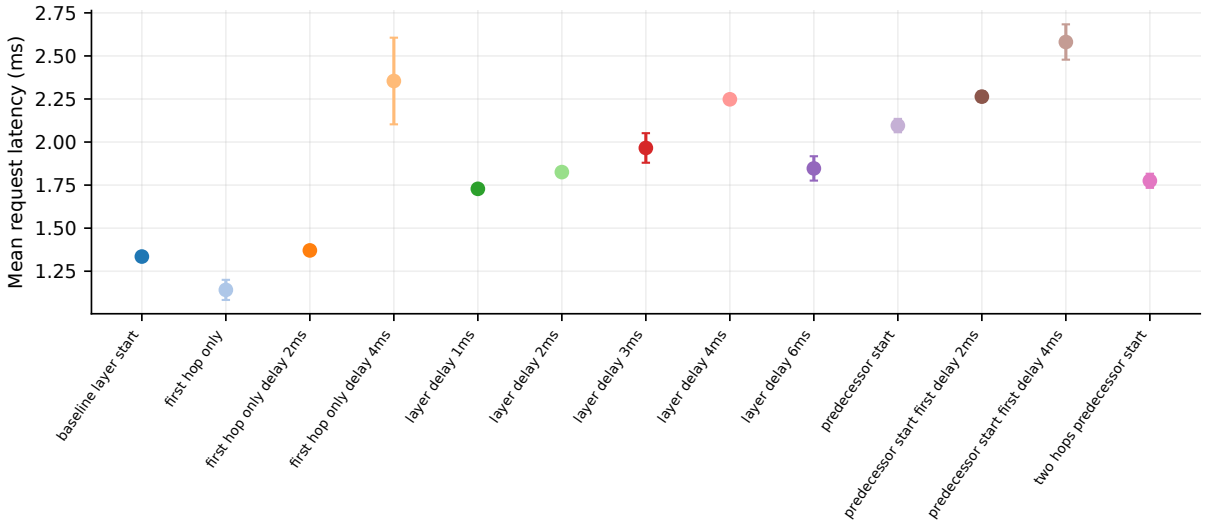


Figure 6.1: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.335 ± 0.020	2
first-hop-only	1.141 ± 0.058	2
first-hop-only-delay-2ms	1.371 ± 0.004	2
first-hop-only-delay-4ms	2.354 ± 0.252	2
layer-delay-1ms	1.728 ± 0.001	2
layer-delay-2ms	1.825 ± 0.005	2
layer-delay-3ms	1.966 ± 0.086	2
layer-delay-4ms	2.248 ± 0.025	2
layer-delay-6ms	1.847 ± 0.071	2
predecessor-start	2.096 ± 0.039	2
predecessor-start-first-delay-2ms	2.264 ± 0.030	2
predecessor-start-first-delay-4ms	2.581 ± 0.103	2
two-hops-predecessor-start	1.775 ± 0.041	2

Table 6.2: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Median request latency

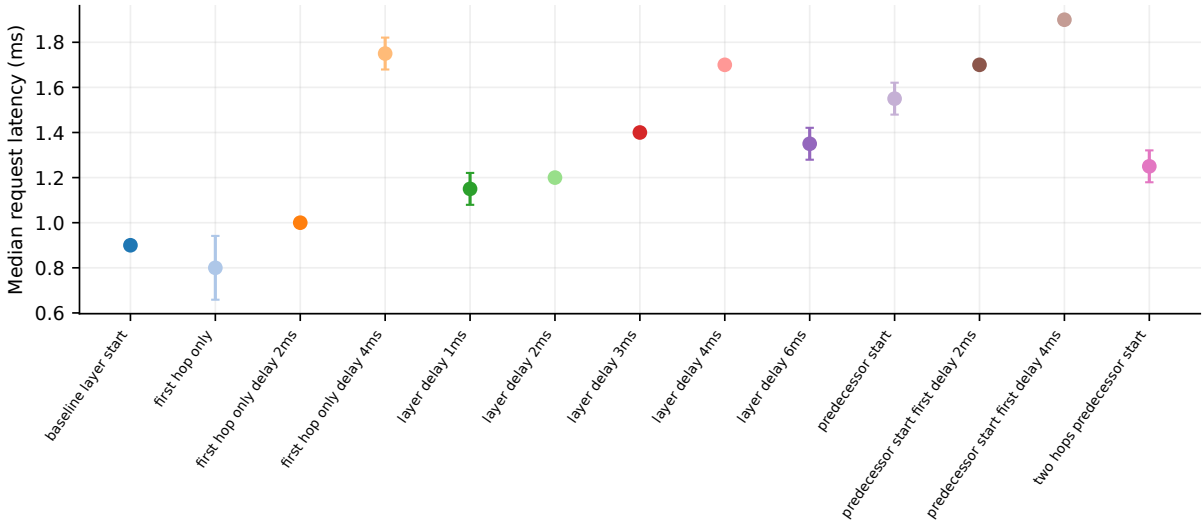


Figure 6.2: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.9000 ± 0.0000	2
first-hop-only	0.8000 ± 0.1414	2
first-hop-only-delay-2ms	1.000 ± 0.000	2
first-hop-only-delay-4ms	1.750 ± 0.071	2
layer-delay-1ms	1.150 ± 0.071	2
layer-delay-2ms	1.200 ± 0.000	2
layer-delay-3ms	1.400 ± 0.000	2
layer-delay-4ms	1.700 ± 0.000	2
layer-delay-6ms	1.350 ± 0.071	2
predecessor-start	1.550 ± 0.071	2
predecessor-start-first-delay-2ms	1.700 ± 0.000	2
predecessor-start-first-delay-4ms	1.900 ± 0.000	2
two-hops-predecessor-start	1.250 ± 0.071	2

Table 6.3: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

p95 request latency

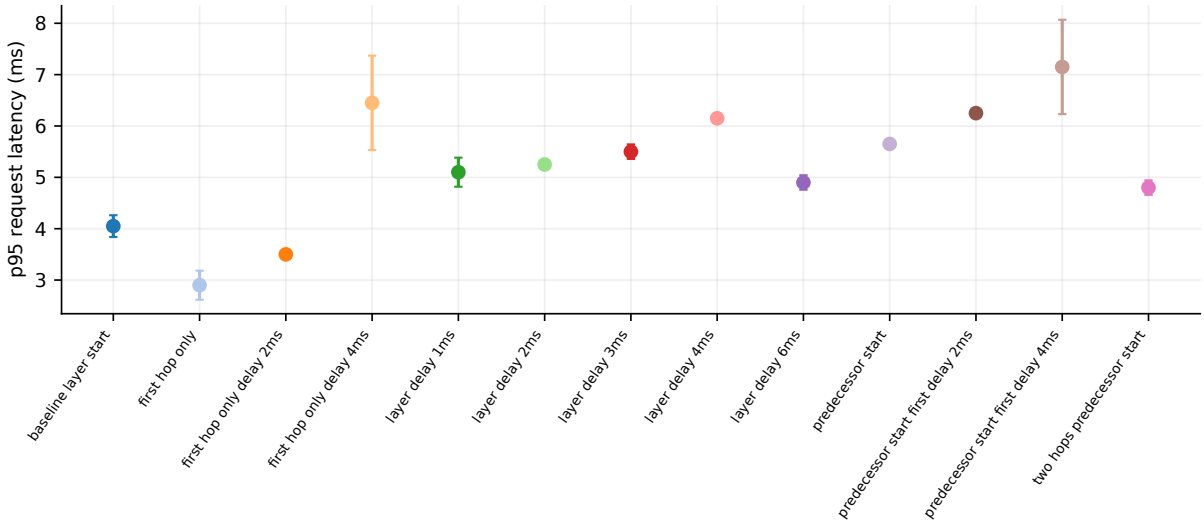


Figure 6.3: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	4.050 ± 0.212	2
first-hop-only	2.900 ± 0.283	2
first-hop-only-delay-2ms	3.500 ± 0.000	2
first-hop-only-delay-4ms	6.450 ± 0.919	2
layer-delay-1ms	5.100 ± 0.283	2
layer-delay-2ms	5.250 ± 0.071	2
layer-delay-3ms	5.500 ± 0.141	2
layer-delay-4ms	6.150 ± 0.071	2
layer-delay-6ms	4.900 ± 0.141	2
predecessor-start	5.650 ± 0.071	2
predecessor-start-first-delay-2ms	6.250 ± 0.071	2
predecessor-start-first-delay-4ms	7.150 ± 0.919	2
two-hops-predecessor-start	4.800 ± 0.141	2

Table 6.4: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Maximum request latency

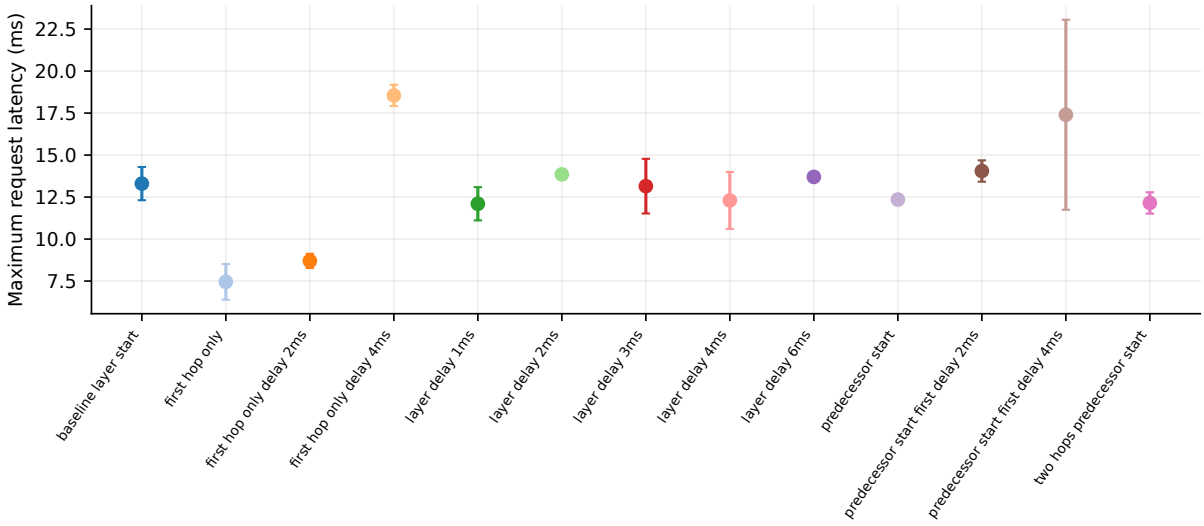


Figure 6.4: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	13.300 ± 0.990	2
first-hop-only	7.450 ± 1.061	2
first-hop-only-delay-2ms	8.700 ± 0.424	2
first-hop-only-delay-4ms	18.550 ± 0.636	2
layer-delay-1ms	12.100 ± 0.990	2
layer-delay-2ms	13.850 ± 0.071	2
layer-delay-3ms	13.150 ± 1.626	2
layer-delay-4ms	12.300 ± 1.697	2
layer-delay-6ms	13.700 ± 0.141	2
predecessor-start	12.350 ± 0.071	2
predecessor-start-first-delay-2ms	14.050 ± 0.636	2
predecessor-start-first-delay-4ms	17.400 ± 5.657	2
two-hops-predecessor-start	12.150 ± 0.636	2

Table 6.5: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Communication makespan

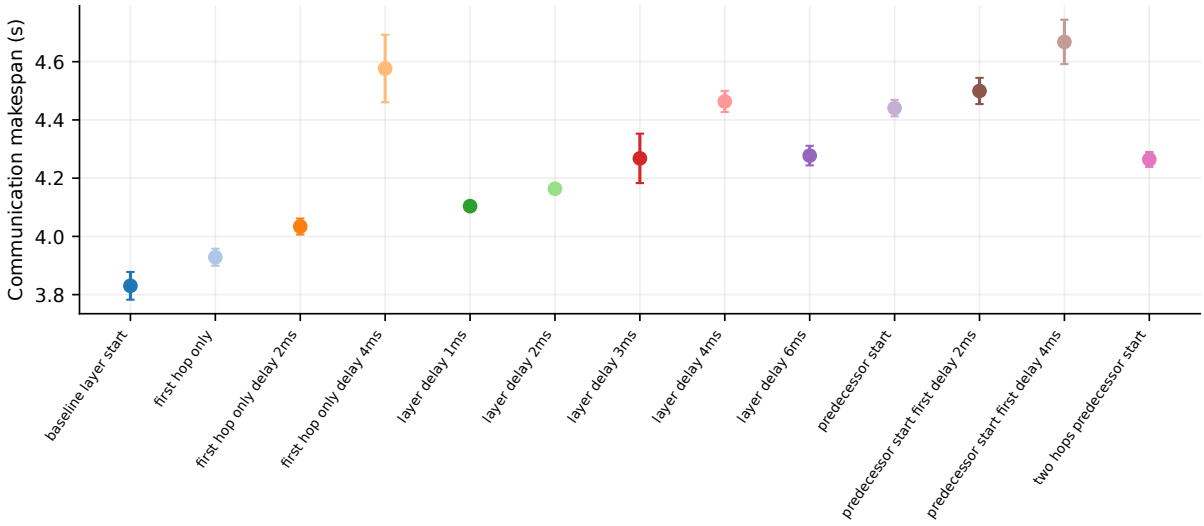


Figure 6.5: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	3.830 ± 0.048	2
first-hop-only	3.928 ± 0.029	2
first-hop-only-delay-2ms	4.034 ± 0.027	2
first-hop-only-delay-4ms	4.576 ± 0.116	2
layer-delay-1ms	4.104 ± 0.006	2
layer-delay-2ms	4.164 ± 0.003	2
layer-delay-3ms	4.268 ± 0.085	2
layer-delay-4ms	4.463 ± 0.036	2
layer-delay-6ms	4.277 ± 0.034	2
predecessor-start	4.441 ± 0.028	2
predecessor-start-first-delay-2ms	4.499 ± 0.045	2
predecessor-start-first-delay-4ms	4.668 ± 0.076	2
two-hops-predecessor-start	4.264 ± 0.026	2

Table 6.6: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Mean admission wait

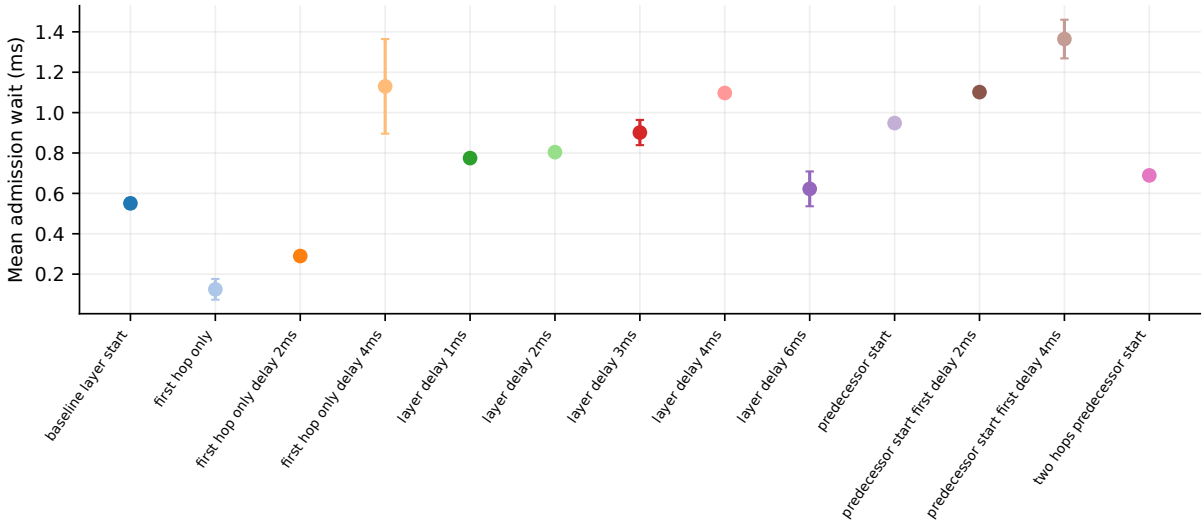


Figure 6.6: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5507 ± 0.0249	2
first-hop-only	0.1248 ± 0.0514	2
first-hop-only-delay-2ms	0.2897 ± 0.0040	2
first-hop-only-delay-4ms	1.130 ± 0.234	2
layer-delay-1ms	0.7748 ± 0.0117	2
layer-delay-2ms	0.8042 ± 0.0082	2
layer-delay-3ms	0.9014 ± 0.0624	2
layer-delay-4ms	1.097 ± 0.015	2
layer-delay-6ms	0.6224 ± 0.0862	2
predecessor-start	0.9482 ± 0.0228	2
predecessor-start-first-delay-2ms	1.102 ± 0.019	2
predecessor-start-first-delay-4ms	1.364 ± 0.096	2
two-hops-predecessor-start	0.6891 ± 0.0128	2

Table 6.7: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered EPR fidelity

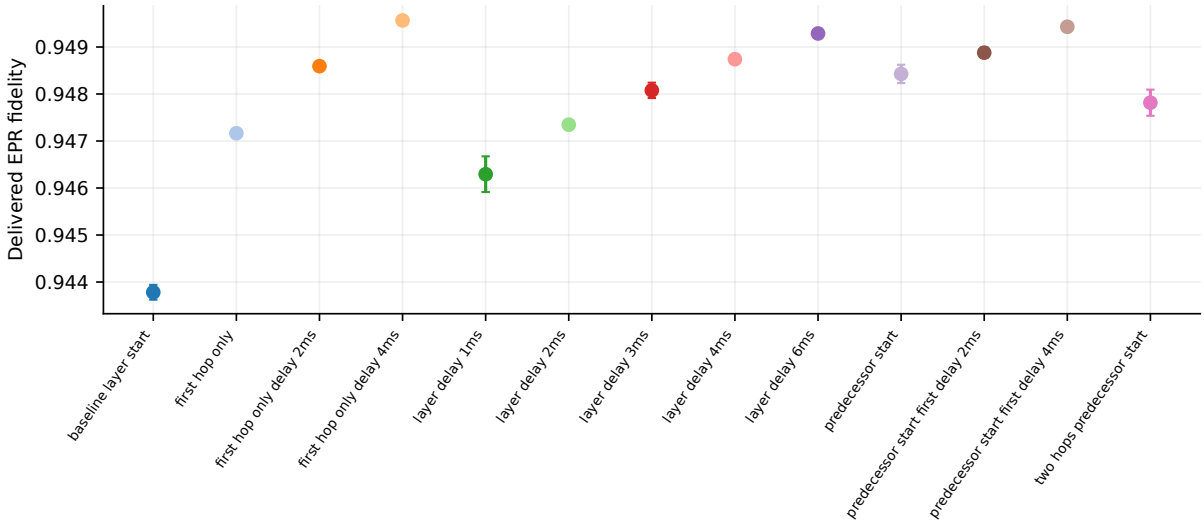


Figure 6.7: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.9438 ± 0.0002	2
first-hop-only	0.9472 ± 0.0000	2
first-hop-only-delay-2ms	0.9486 ± 0.0001	2
first-hop-only-delay-4ms	0.9496 ± 0.0000	2
layer-delay-1ms	0.9463 ± 0.0004	2
layer-delay-2ms	0.9473 ± 0.0000	2
layer-delay-3ms	0.9481 ± 0.0002	2
layer-delay-4ms	0.9487 ± 0.0000	2
layer-delay-6ms	0.9493 ± 0.0000	2
predecessor-start	0.9484 ± 0.0002	2
predecessor-start-first-delay-2ms	0.9489 ± 0.0001	2
predecessor-start-first-delay-4ms	0.9494 ± 0.0000	2
two-hops-predecessor-start	0.9478 ± 0.0003	2

Table 6.8: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler readiness fraction

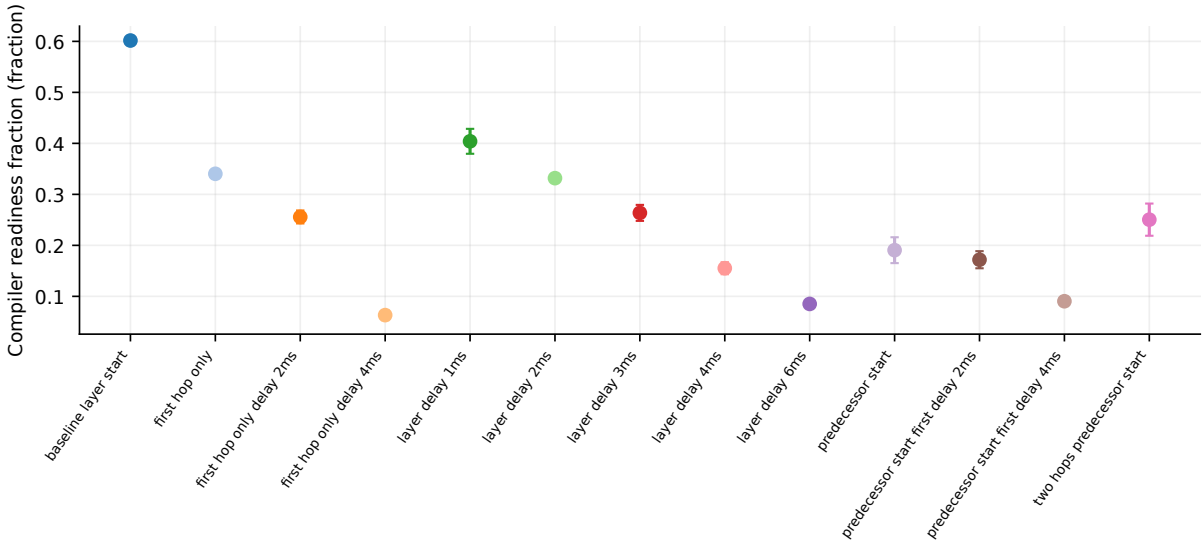


Figure 6.8: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.6017 ± 0.0007	2
first-hop-only	0.3403 ± 0.0044	2
first-hop-only-delay-2ms	0.2557 ± 0.0128	2
first-hop-only-delay-4ms	0.0632 ± 0.0099	2
layer-delay-1ms	0.4040 ± 0.0244	2
layer-delay-2ms	0.3318 ± 0.0015	2
layer-delay-3ms	0.2637 ± 0.0157	2
layer-delay-4ms	0.1552 ± 0.0119	2
layer-delay-6ms	0.0851 ± 0.0018	2
predecessor-start	0.1905 ± 0.0254	2
predecessor-start-first-delay-2ms	0.1718 ± 0.0168	2
predecessor-start-first-delay-4ms	0.0904 ± 0.0064	2
two-hops-predecessor-start	0.2504 ± 0.0316	2

Table 6.9: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Intended compiler-hit fraction

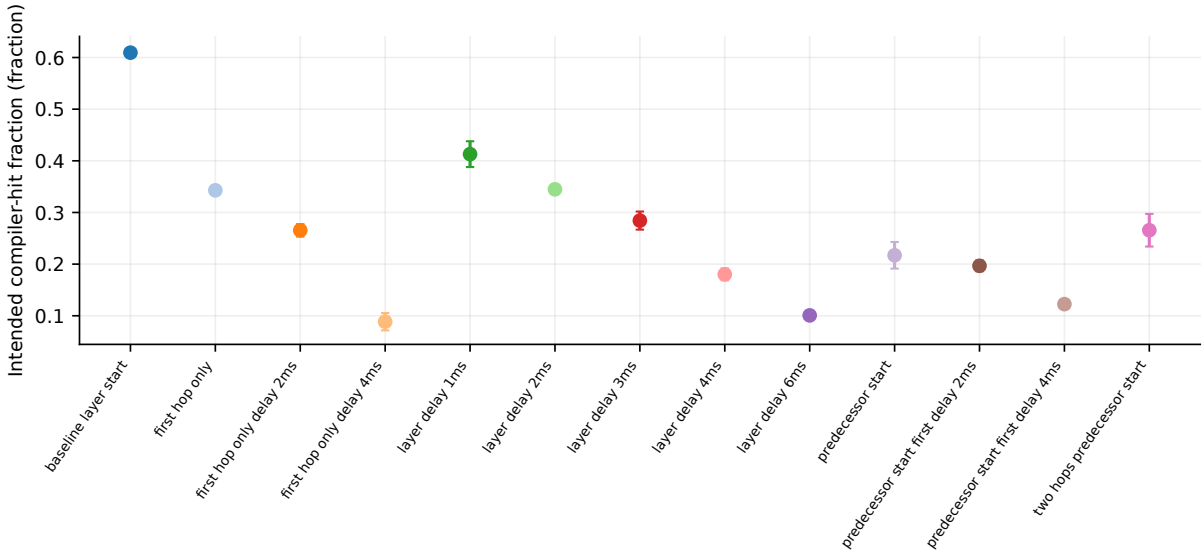


Figure 6.9: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.6094 ± 0.0044	2
first-hop-only	0.3429 ± 0.0033	2
first-hop-only-delay-2ms	0.2655 ± 0.0120	2
first-hop-only-delay-4ms	0.0885 ± 0.0168	2
layer-delay-1ms	0.4129 ± 0.0250	2
layer-delay-2ms	0.3448 ± 0.0009	2
layer-delay-3ms	0.2843 ± 0.0175	2
layer-delay-4ms	0.1802 ± 0.0115	2
layer-delay-6ms	0.1007 ± 0.0009	2
predecessor-start	0.2171 ± 0.0257	2
predecessor-start-first-delay-2ms	0.1967 ± 0.0104	2
predecessor-start-first-delay-4ms	0.1225 ± 0.0051	2
two-hops-predecessor-start	0.2656 ± 0.0316	2

Table 6.10: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler fallback fraction

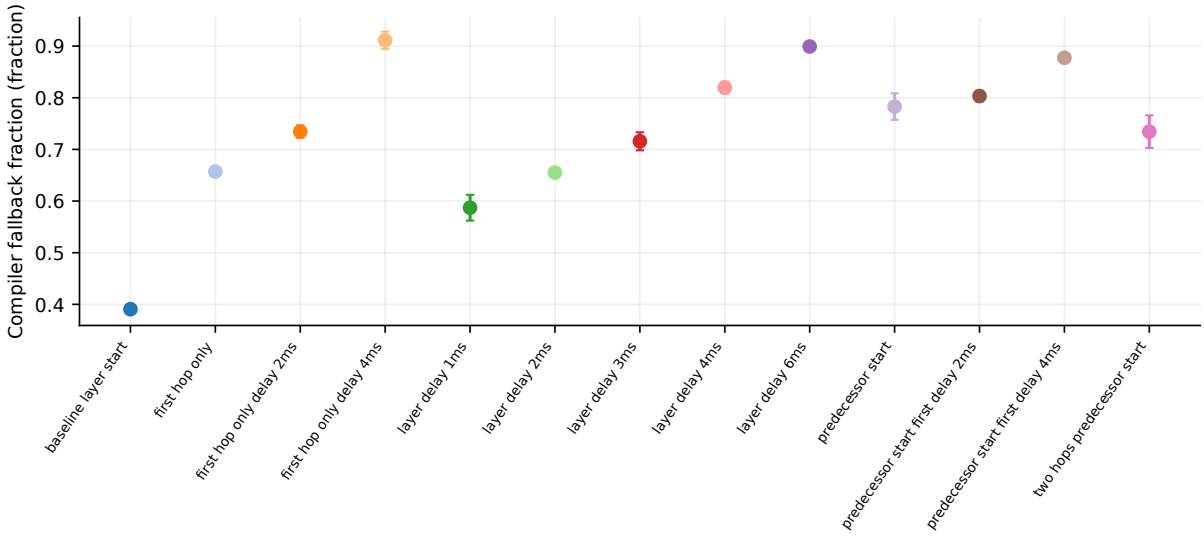


Figure 6.10: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.3906 ± 0.0044	2
first-hop-only	0.6571 ± 0.0033	2
first-hop-only-delay-2ms	0.7345 ± 0.0120	2
first-hop-only-delay-4ms	0.9115 ± 0.0168	2
layer-delay-1ms	0.5871 ± 0.0250	2
layer-delay-2ms	0.6552 ± 0.0009	2
layer-delay-3ms	0.7157 ± 0.0175	2
layer-delay-4ms	0.8198 ± 0.0115	2
layer-delay-6ms	0.8993 ± 0.0009	2
predecessor-start	0.7829 ± 0.0257	2
predecessor-start-first-delay-2ms	0.8033 ± 0.0104	2
predecessor-start-first-delay-4ms	0.8775 ± 0.0051	2
two-hops-predecessor-start	0.7344 ± 0.0316	2

Table 6.11: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-cache waste

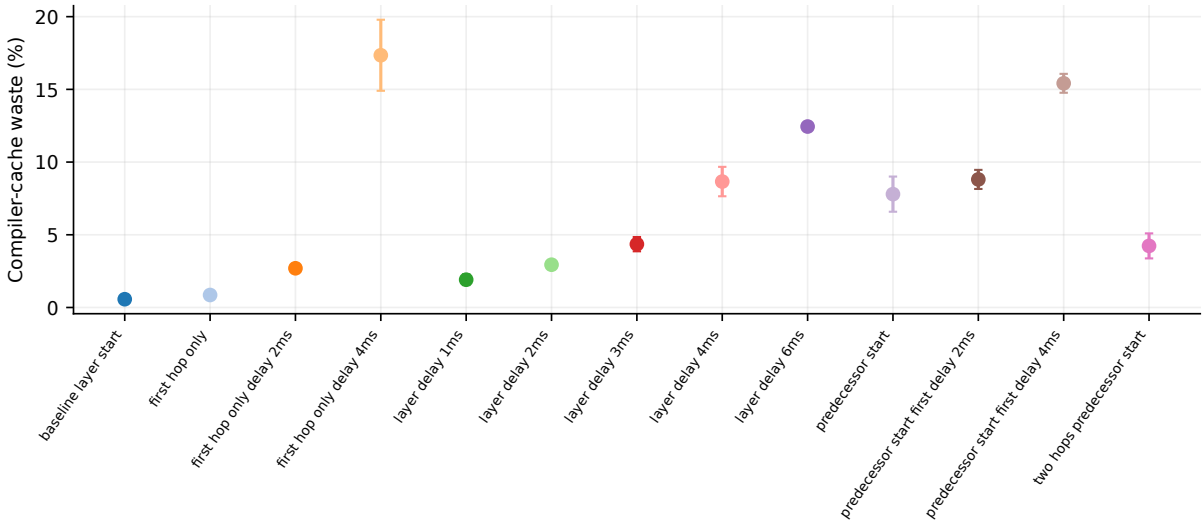


Figure 6.11: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5684 ± 0.0337	2
first-hop-only	0.8582 ± 0.0604	2
first-hop-only-delay-2ms	2.696 ± 0.054	2
first-hop-only-delay-4ms	17.346 ± 2.443	2
layer-delay-1ms	1.911 ± 0.369	2
layer-delay-2ms	2.941 ± 0.142	2
layer-delay-3ms	4.354 ± 0.491	2
layer-delay-4ms	8.660 ± 1.012	2
layer-delay-6ms	12.444 ± 0.040	2
predecessor-start	7.794 ± 1.210	2
predecessor-start-first-delay-2ms	8.807 ± 0.656	2
predecessor-start-first-delay-4ms	15.416 ± 0.650	2
two-hops-predecessor-start	4.235 ± 0.860	2

Table 6.12: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Native-protocol waste

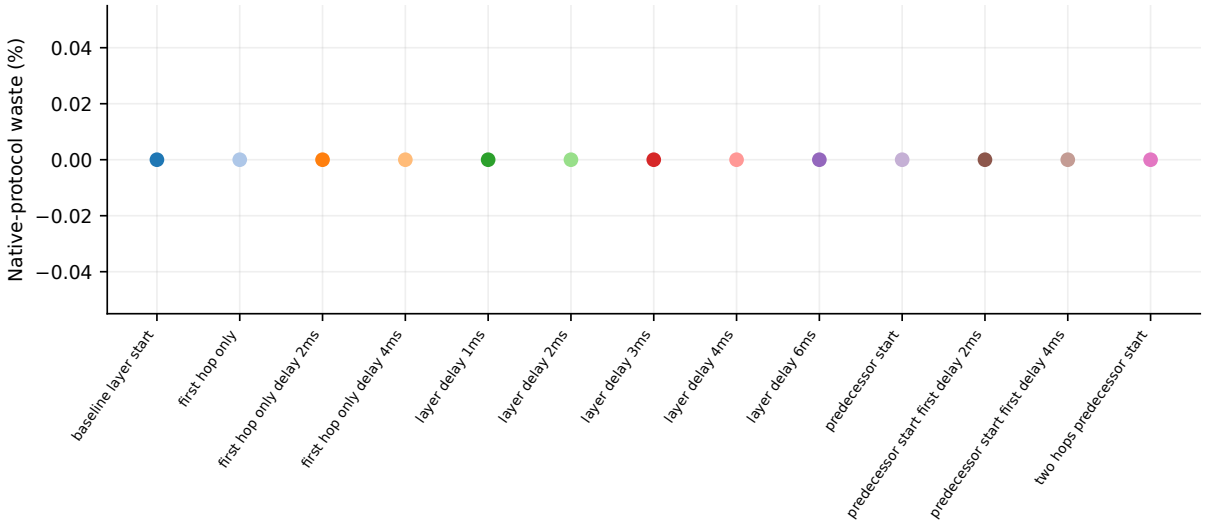


Figure 6.12: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.0000 ± 0.0000	2
first-hop-only	0.0000 ± 0.0000	2
first-hop-only-delay-2ms	0.0000 ± 0.0000	2
first-hop-only-delay-4ms	0.0000 ± 0.0000	2
layer-delay-1ms	0.0000 ± 0.0000	2
layer-delay-2ms	0.0000 ± 0.0000	2
layer-delay-3ms	0.0000 ± 0.0000	2
layer-delay-4ms	0.0000 ± 0.0000	2
layer-delay-6ms	0.0000 ± 0.0000	2
predecessor-start	0.0000 ± 0.0000	2
predecessor-start-first-delay-2ms	0.0000 ± 0.0000	2
predecessor-start-first-delay-4ms	0.0000 ± 0.0000	2
two-hops-predecessor-start	0.0000 ± 0.0000	2

Table 6.13: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-pair expiry

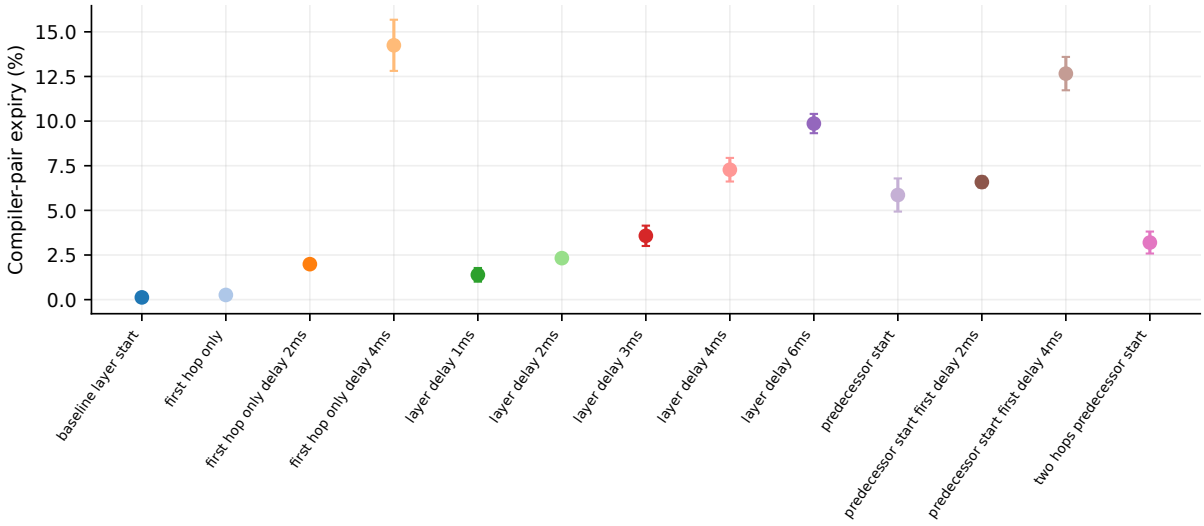


Figure 6.13: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.1263 ± 0.0009	2
first-hop-only	0.2623 ± 0.2661	2
first-hop-only-delay-2ms	1.988 ± 0.089	2
first-hop-only-delay-4ms	14.245 ± 1.433	2
layer-delay-1ms	1.390 ± 0.382	2
layer-delay-2ms	2.324 ± 0.112	2
layer-delay-3ms	3.575 ± 0.570	2
layer-delay-4ms	7.277 ± 0.661	2
layer-delay-6ms	9.863 ± 0.540	2
predecessor-start	5.860 ± 0.928	2
predecessor-start-first-delay-2ms	6.586 ± 0.301	2
predecessor-start-first-delay-4ms	12.661 ± 0.934	2
two-hops-predecessor-start	3.198 ± 0.615	2

Table 6.14: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Used compiler-pair storage time

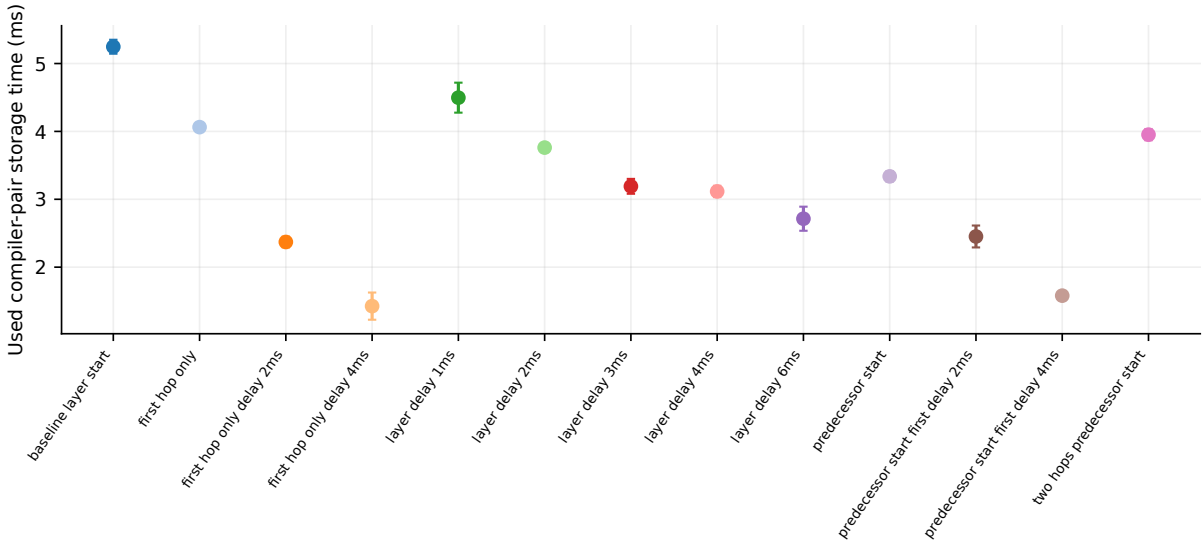


Figure 6.14: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	5.247 ± 0.103	2
first-hop-only	4.063 ± 0.041	2
first-hop-only-delay-2ms	2.371 ± 0.078	2
first-hop-only-delay-4ms	1.426 ± 0.200	2
layer-delay-1ms	4.497 ± 0.221	2
layer-delay-2ms	3.761 ± 0.056	2
layer-delay-3ms	3.191 ± 0.110	2
layer-delay-4ms	3.116 ± 0.084	2
layer-delay-6ms	2.714 ± 0.177	2
predecessor-start	3.338 ± 0.078	2
predecessor-start-first-delay-2ms	2.452 ± 0.161	2
predecessor-start-first-delay-4ms	1.580 ± 0.021	2
two-hops-predecessor-start	3.952 ± 0.083	2

Table 6.15: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered-hop throughput

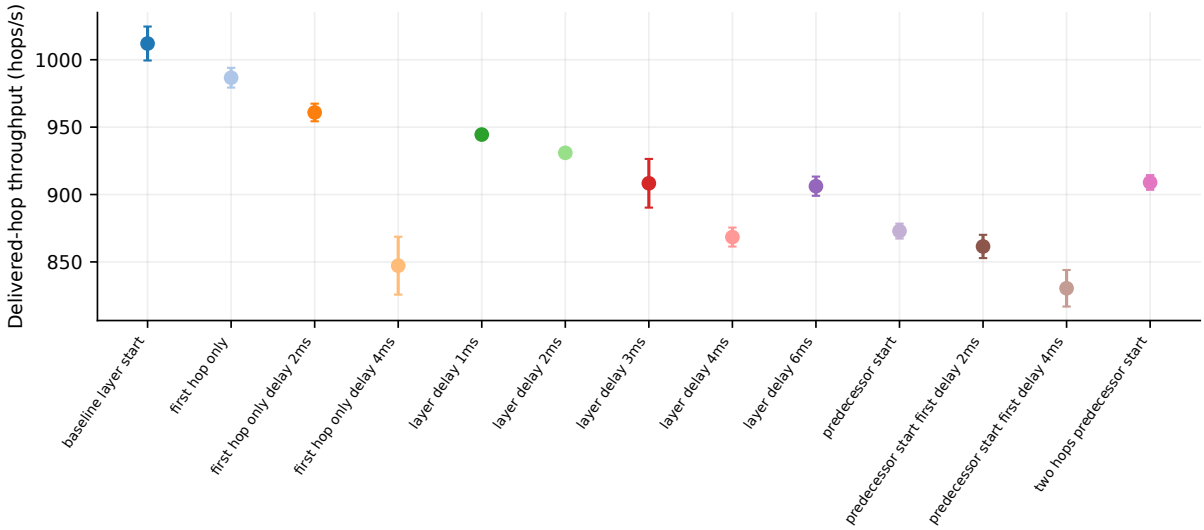


Figure 6.15: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1012.03 ± 12.59	2
first-hop-only	986.67 ± 7.33	2
first-hop-only-delay-2ms	960.87 ± 6.54	2
first-hop-only-delay-4ms	847.21 ± 21.46	2
layer-delay-1ms	944.48 ± 1.37	2
layer-delay-2ms	930.93 ± 0.77	2
layer-delay-3ms	908.35 ± 18.06	2
layer-delay-4ms	868.44 ± 7.04	2
layer-delay-6ms	906.18 ± 7.13	2
predecessor-start	872.87 ± 5.55	2
predecessor-start-first-delay-2ms	861.47 ± 8.63	2
predecessor-start-first-delay-4ms	830.45 ± 13.55	2
two-hops-predecessor-start	908.96 ± 5.44	2

Table 6.16: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Completion fraction

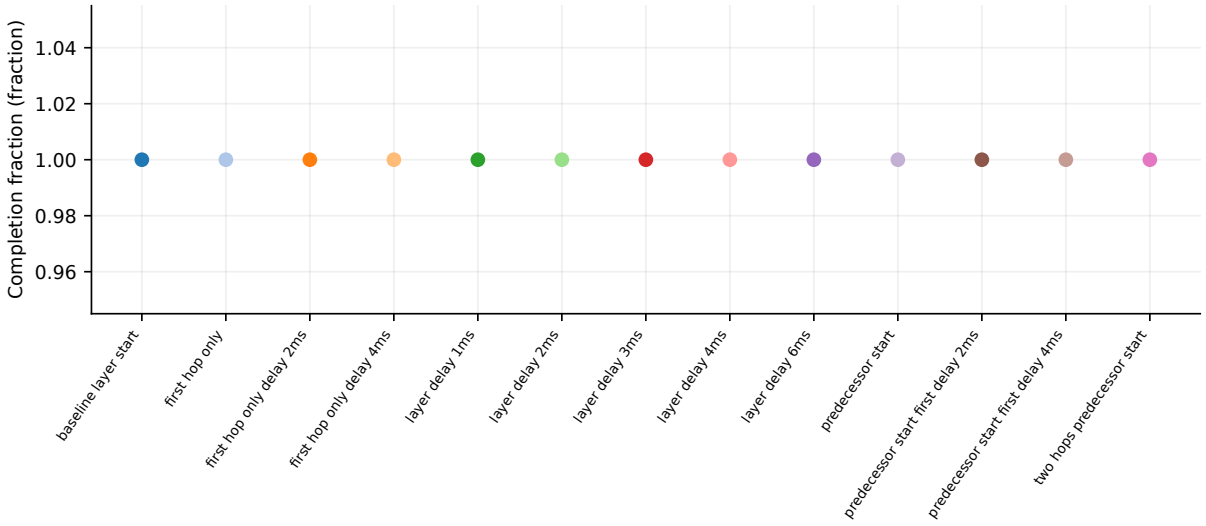


Figure 6.16: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.000 ± 0.000	2
first-hop-only	1.000 ± 0.000	2
first-hop-only-delay-2ms	1.000 ± 0.000	2
first-hop-only-delay-4ms	1.000 ± 0.000	2
layer-delay-1ms	1.000 ± 0.000	2
layer-delay-2ms	1.000 ± 0.000	2
layer-delay-3ms	1.000 ± 0.000	2
layer-delay-4ms	1.000 ± 0.000	2
layer-delay-6ms	1.000 ± 0.000	2
predecessor-start	1.000 ± 0.000	2
predecessor-start-first-delay-2ms	1.000 ± 0.000	2
predecessor-start-first-delay-4ms	1.000 ± 0.000	2
two-hops-predecessor-start	1.000 ± 0.000	2

Table 6.17: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

6.2 Mesh / yx

Mean request latency

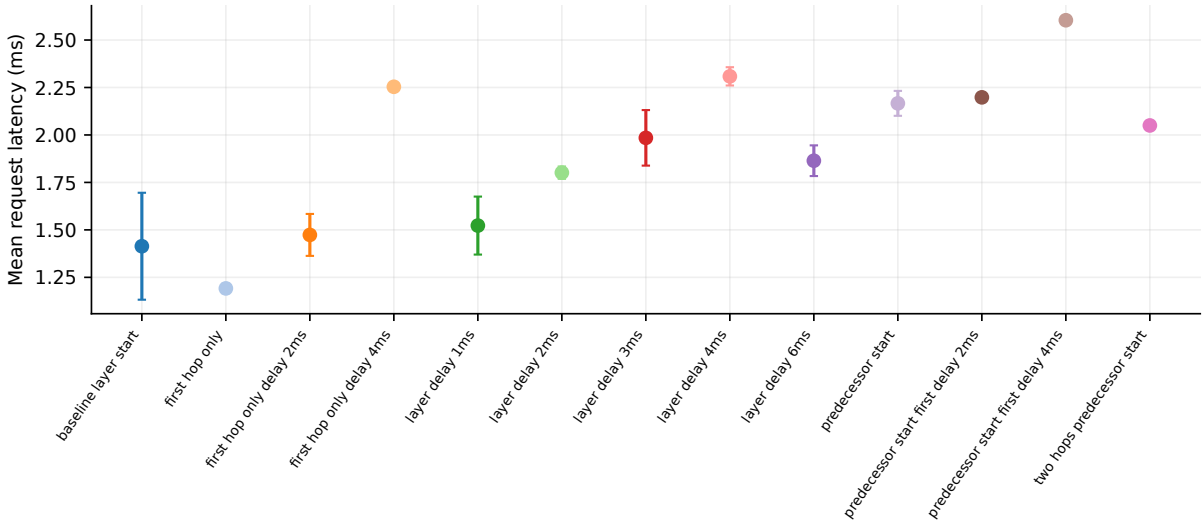


Figure 6.17: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.414 ± 0.282	2
first-hop-only	1.192 ± 0.025	2
first-hop-only-delay-2ms	1.474 ± 0.110	2
first-hop-only-delay-4ms	2.254 ± 0.016	2
layer-delay-1ms	1.523 ± 0.153	2
layer-delay-2ms	1.801 ± 0.033	2
layer-delay-3ms	1.985 ± 0.146	2
layer-delay-4ms	2.309 ± 0.048	2
layer-delay-6ms	1.864 ± 0.081	2
predecessor-start	2.166 ± 0.066	2
predecessor-start-first-delay-2ms	2.198 ± 0.011	2
predecessor-start-first-delay-4ms	2.604 ± 0.003	2
two-hops-predecessor-start	2.050 ± 0.002	2

Table 6.18: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Median request latency

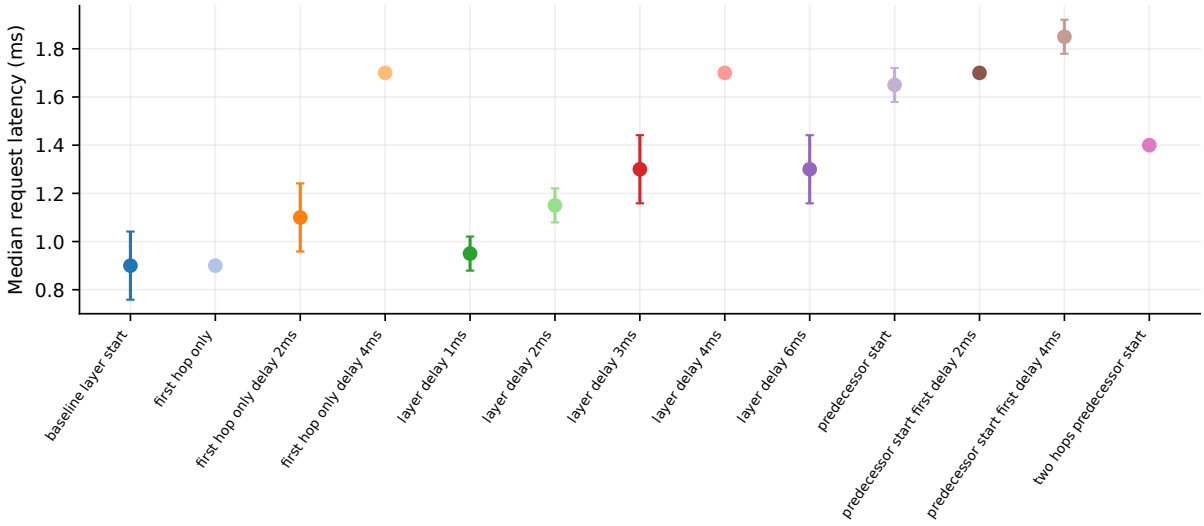


Figure 6.18: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.9000 ± 0.1414	2
first-hop-only	0.9000 ± 0.0000	2
first-hop-only-delay-2ms	1.100 ± 0.141	2
first-hop-only-delay-4ms	1.700 ± 0.000	2
layer-delay-1ms	0.9500 ± 0.0707	2
layer-delay-2ms	1.150 ± 0.071	2
layer-delay-3ms	1.300 ± 0.141	2
layer-delay-4ms	1.700 ± 0.000	2
layer-delay-6ms	1.300 ± 0.141	2
predecessor-start	1.650 ± 0.071	2
predecessor-start-first-delay-2ms	1.700 ± 0.000	2
predecessor-start-first-delay-4ms	1.850 ± 0.071	2
two-hops-predecessor-start	1.400 ± 0.000	2

Table 6.19: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

p95 request latency

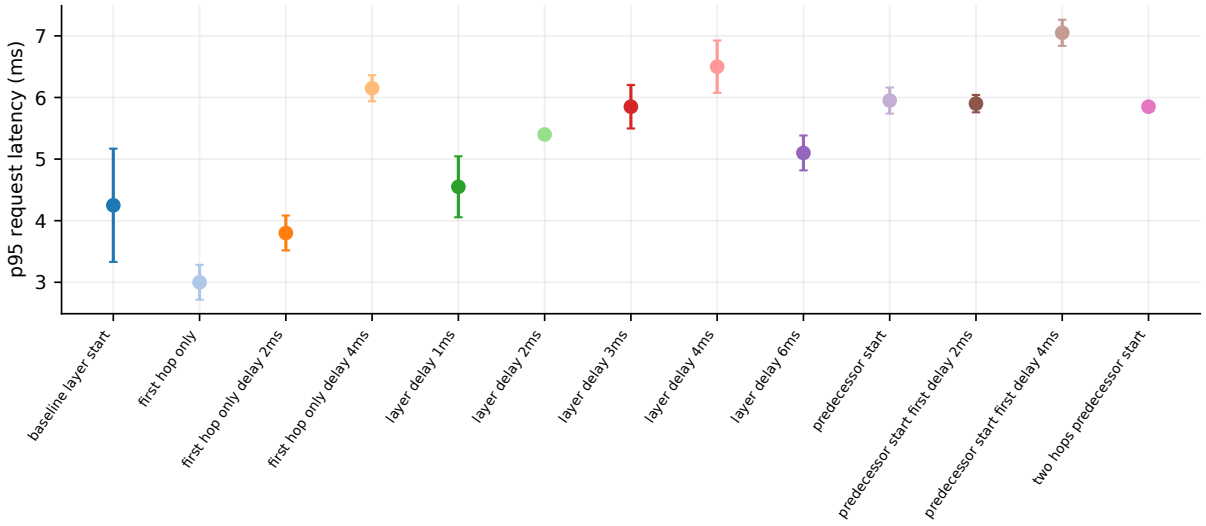


Figure 6.19: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	4.250 ± 0.919	2
first-hop-only	3.000 ± 0.283	2
first-hop-only-delay-2ms	3.800 ± 0.283	2
first-hop-only-delay-4ms	6.150 ± 0.212	2
layer-delay-1ms	4.550 ± 0.495	2
layer-delay-2ms	5.400 ± 0.000	2
layer-delay-3ms	5.850 ± 0.354	2
layer-delay-4ms	6.500 ± 0.424	2
layer-delay-6ms	5.100 ± 0.283	2
predecessor-start	5.950 ± 0.212	2
predecessor-start-first-delay-2ms	5.900 ± 0.141	2
predecessor-start-first-delay-4ms	7.050 ± 0.212	2
two-hops-predecessor-start	5.850 ± 0.071	2

Table 6.20: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Maximum request latency

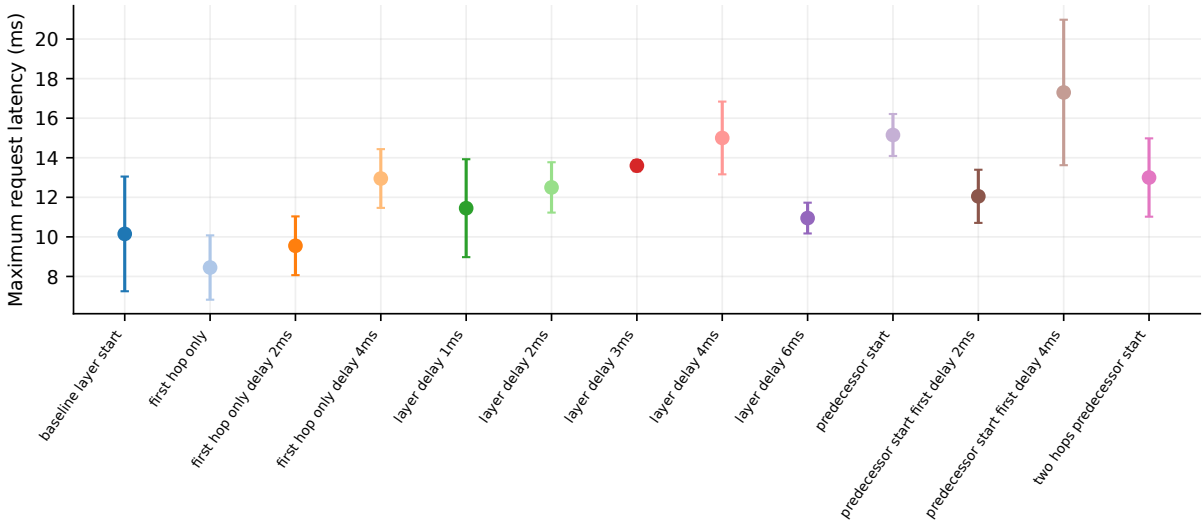


Figure 6.20: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	10.150 ± 2.899	2
first-hop-only	8.450 ± 1.626	2
first-hop-only-delay-2ms	9.550 ± 1.485	2
first-hop-only-delay-4ms	12.950 ± 1.485	2
layer-delay-1ms	11.450 ± 2.475	2
layer-delay-2ms	12.500 ± 1.273	2
layer-delay-3ms	13.600 ± 0.283	2
layer-delay-4ms	15.000 ± 1.839	2
layer-delay-6ms	10.950 ± 0.778	2
predecessor-start	15.150 ± 1.061	2
predecessor-start-first-delay-2ms	12.050 ± 1.344	2
predecessor-start-first-delay-4ms	17.300 ± 3.677	2
two-hops-predecessor-start	13.000 ± 1.980	2

Table 6.21: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Communication makespan

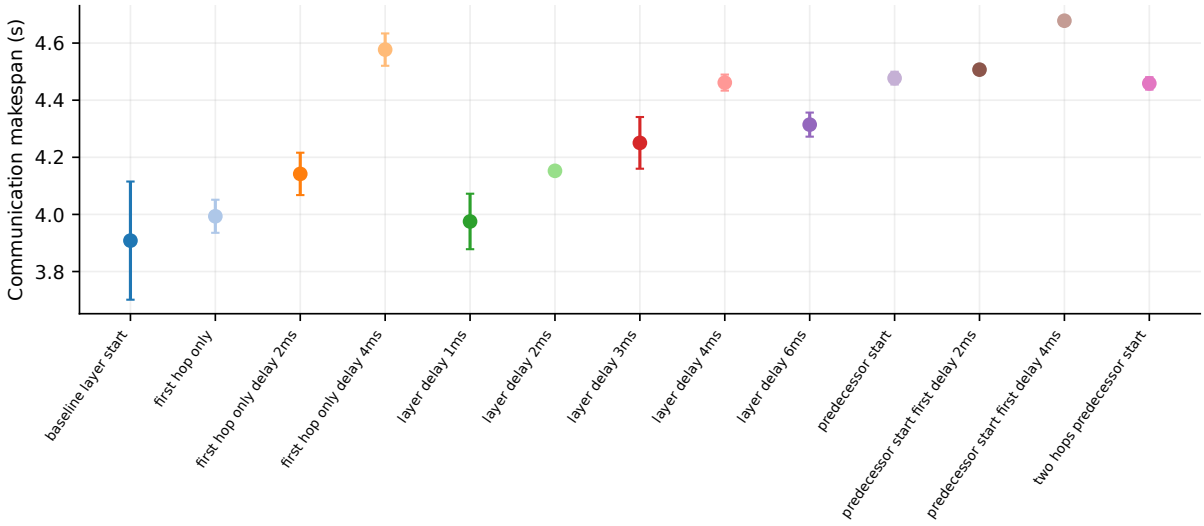


Figure 6.21: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	3.908 ± 0.207	2
first-hop-only	3.993 ± 0.058	2
first-hop-only-delay-2ms	4.142 ± 0.074	2
first-hop-only-delay-4ms	4.577 ± 0.057	2
layer-delay-1ms	3.975 ± 0.097	2
layer-delay-2ms	4.153 ± 0.014	2
layer-delay-3ms	4.251 ± 0.091	2
layer-delay-4ms	4.462 ± 0.028	2
layer-delay-6ms	4.314 ± 0.042	2
predecessor-start	4.477 ± 0.022	2
predecessor-start-first-delay-2ms	4.507 ± 0.003	2
predecessor-start-first-delay-4ms	4.678 ± 0.004	2
two-hops-predecessor-start	4.459 ± 0.022	2

Table 6.22: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Mean admission wait

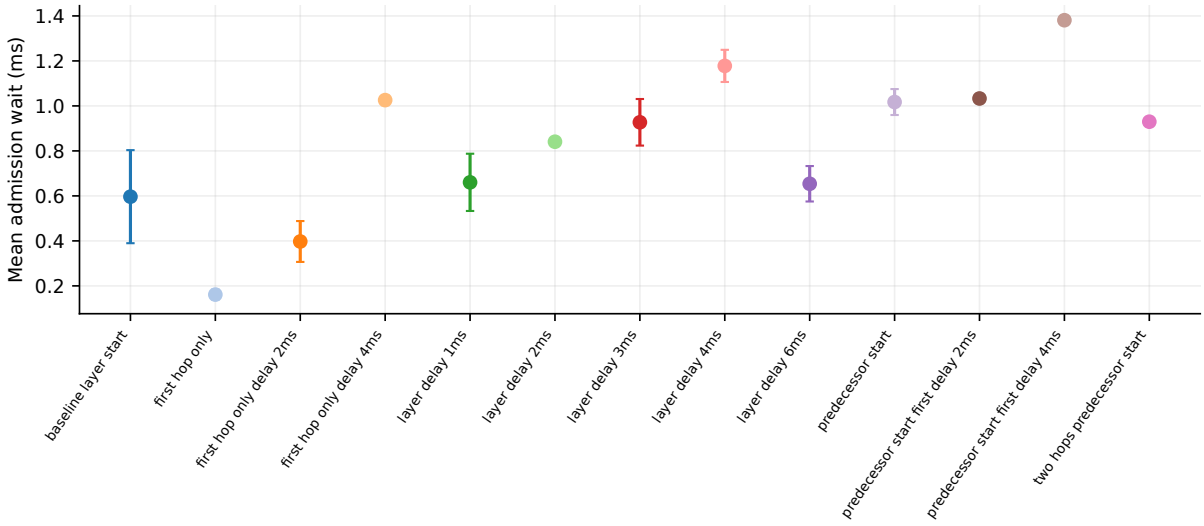


Figure 6.22: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5966 ± 0.2069	2
first-hop-only	0.1613 ± 0.0227	2
first-hop-only-delay-2ms	0.3974 ± 0.0908	2
first-hop-only-delay-4ms	1.026 ± 0.022	2
layer-delay-1ms	0.6602 ± 0.1273	2
layer-delay-2ms	0.8408 ± 0.0101	2
layer-delay-3ms	0.9272 ± 0.1035	2
layer-delay-4ms	1.178 ± 0.071	2
layer-delay-6ms	0.6539 ± 0.0788	2
predecessor-start	1.017 ± 0.058	2
predecessor-start-first-delay-2ms	1.033 ± 0.009	2
predecessor-start-first-delay-4ms	1.381 ± 0.002	2
two-hops-predecessor-start	0.9298 ± 0.0019	2

Table 6.23: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered EPR fidelity

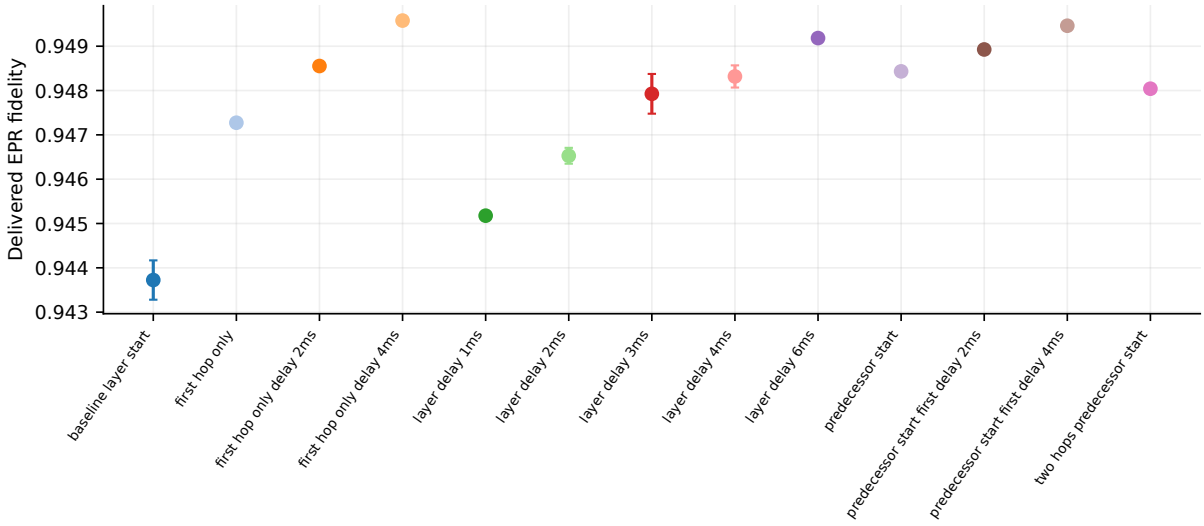


Figure 6.23: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.9437 ± 0.0004	2
first-hop-only	0.9473 ± 0.0000	2
first-hop-only-delay-2ms	0.9486 ± 0.0001	2
first-hop-only-delay-4ms	0.9496 ± 0.0000	2
layer-delay-1ms	0.9452 ± 0.0000	2
layer-delay-2ms	0.9465 ± 0.0002	2
layer-delay-3ms	0.9479 ± 0.0004	2
layer-delay-4ms	0.9483 ± 0.0003	2
layer-delay-6ms	0.9492 ± 0.0000	2
predecessor-start	0.9484 ± 0.0000	2
predecessor-start-first-delay-2ms	0.9489 ± 0.0000	2
predecessor-start-first-delay-4ms	0.9495 ± 0.0000	2
two-hops-predecessor-start	0.9480 ± 0.0000	2

Table 6.24: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler readiness fraction

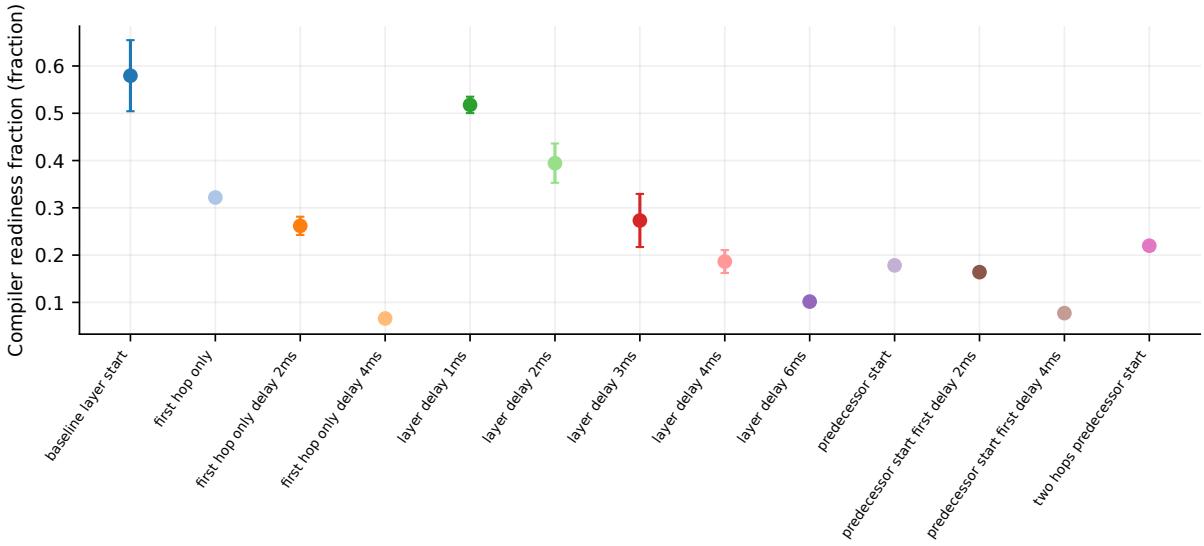


Figure 6.24: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5795 ± 0.0752	2
first-hop-only	0.3219 ± 0.0020	2
first-hop-only-delay-2ms	0.2619 ± 0.0193	2
first-hop-only-delay-4ms	0.0659 ± 0.0035	2
layer-delay-1ms	0.5177 ± 0.0173	2
layer-delay-2ms	0.3945 ± 0.0416	2
layer-delay-3ms	0.2732 ± 0.0562	2
layer-delay-4ms	0.1864 ± 0.0243	2
layer-delay-6ms	0.1017 ± 0.0044	2
predecessor-start	0.1783 ± 0.0036	2
predecessor-start-first-delay-2ms	0.1640 ± 0.0016	2
predecessor-start-first-delay-4ms	0.0773 ± 0.0009	2
two-hops-predecessor-start	0.2198 ± 0.0102	2

Table 6.25: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Intended compiler-hit fraction

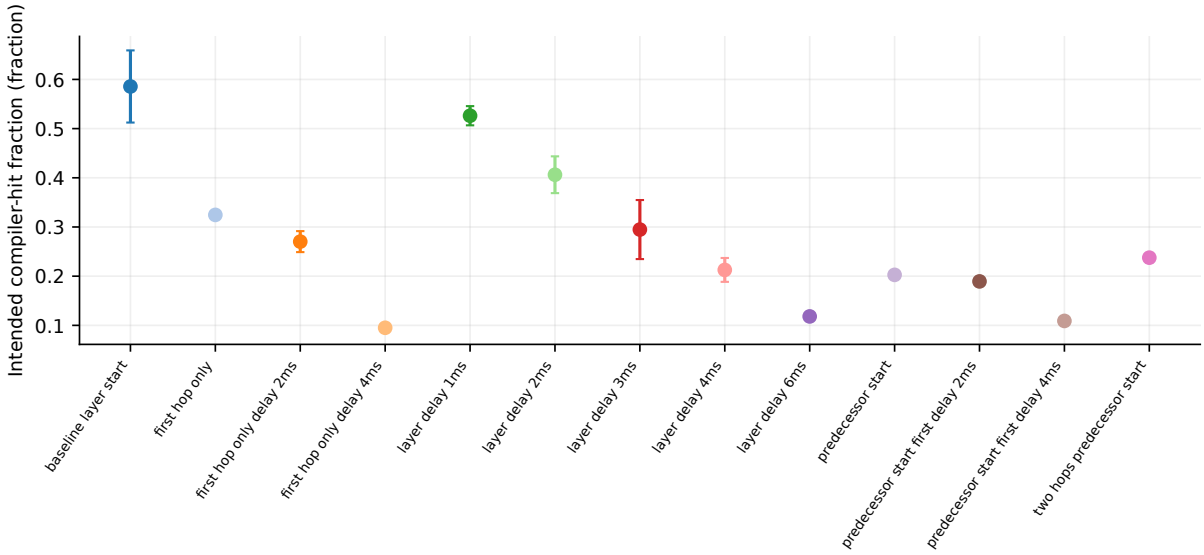


Figure 6.25: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5857 ± 0.0733	2
first-hop-only	0.3246 ± 0.0007	2
first-hop-only-delay-2ms	0.2703 ± 0.0213	2
first-hop-only-delay-4ms	0.0951 ± 0.0053	2
layer-delay-1ms	0.5262 ± 0.0195	2
layer-delay-2ms	0.4062 ± 0.0374	2
layer-delay-3ms	0.2948 ± 0.0600	2
layer-delay-4ms	0.2127 ± 0.0243	2
layer-delay-6ms	0.1182 ± 0.0029	2
predecessor-start	0.2027 ± 0.0057	2
predecessor-start-first-delay-2ms	0.1894 ± 0.0000	2
predecessor-start-first-delay-4ms	0.1090 ± 0.0024	2
two-hops-predecessor-start	0.2376 ± 0.0095	2

Table 6.26: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler fallback fraction

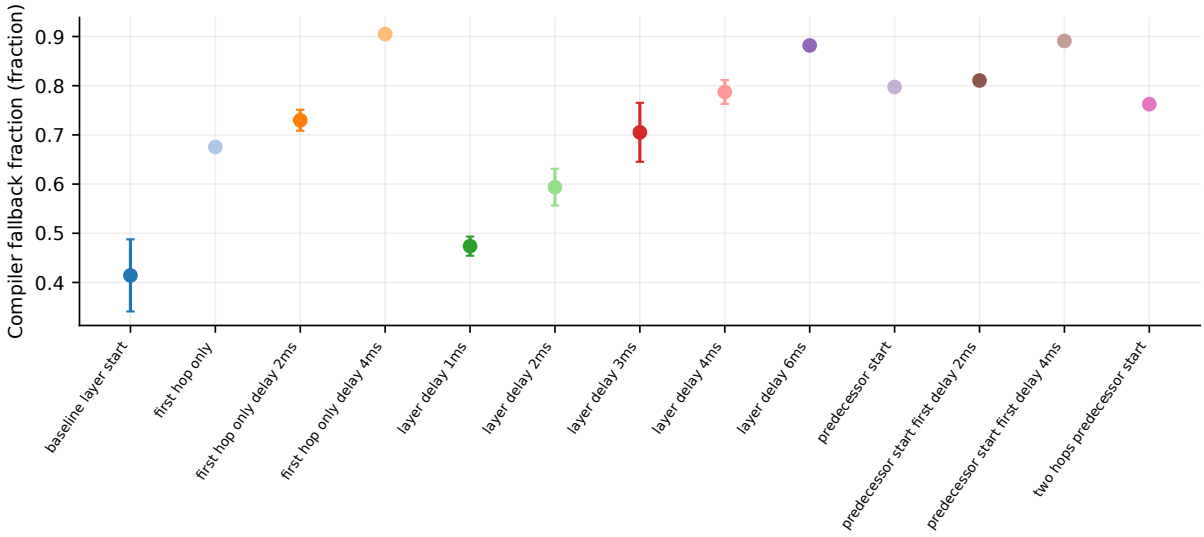


Figure 6.26: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.4143 ± 0.0733	2
first-hop-only	0.6754 ± 0.0007	2
first-hop-only-delay-2ms	0.7297 ± 0.0213	2
first-hop-only-delay-4ms	0.9049 ± 0.0053	2
layer-delay-1ms	0.4738 ± 0.0195	2
layer-delay-2ms	0.5938 ± 0.0374	2
layer-delay-3ms	0.7052 ± 0.0600	2
layer-delay-4ms	0.7873 ± 0.0243	2
layer-delay-6ms	0.8818 ± 0.0029	2
predecessor-start	0.7973 ± 0.0057	2
predecessor-start-first-delay-2ms	0.8106 ± 0.0000	2
predecessor-start-first-delay-4ms	0.8910 ± 0.0024	2
two-hops-predecessor-start	0.7624 ± 0.0095	2

Table 6.27: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-cache waste

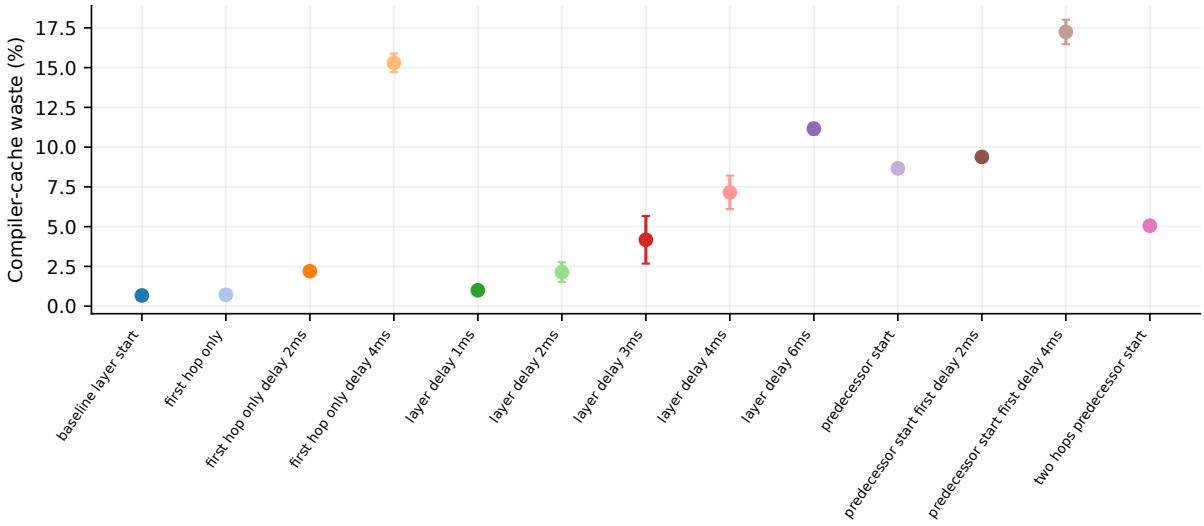


Figure 6.27: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.6729 ± 0.2681	2
first-hop-only	0.7103 ± 0.0016	2
first-hop-only-delay-2ms	2.198 ± 0.105	2
first-hop-only-delay-4ms	15.302 ± 0.584	2
layer-delay-1ms	0.9976 ± 0.1386	2
layer-delay-2ms	2.140 ± 0.623	2
layer-delay-3ms	4.173 ± 1.498	2
layer-delay-4ms	7.153 ± 1.054	2
layer-delay-6ms	11.158 ± 0.367	2
predecessor-start	8.666 ± 0.296	2
predecessor-start-first-delay-2ms	9.382 ± 0.316	2
predecessor-start-first-delay-4ms	17.243 ± 0.769	2
two-hops-predecessor-start	5.058 ± 0.330	2

Table 6.28: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Native-protocol waste

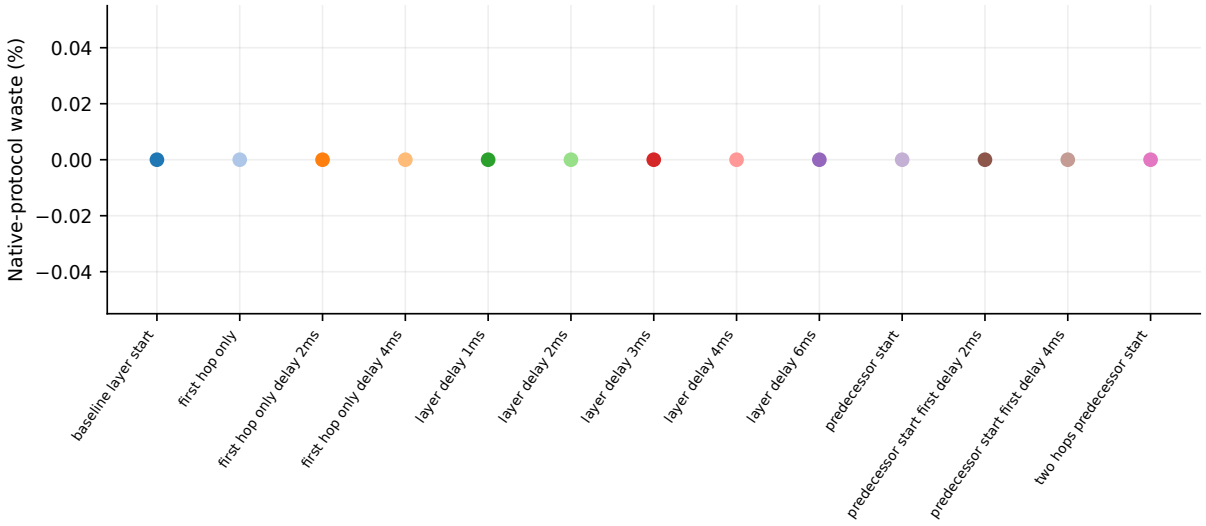


Figure 6.28: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.0000 ± 0.0000	2
first-hop-only	0.0000 ± 0.0000	2
first-hop-only-delay-2ms	0.0000 ± 0.0000	2
first-hop-only-delay-4ms	0.0000 ± 0.0000	2
layer-delay-1ms	0.0000 ± 0.0000	2
layer-delay-2ms	0.0000 ± 0.0000	2
layer-delay-3ms	0.0000 ± 0.0000	2
layer-delay-4ms	0.0000 ± 0.0000	2
layer-delay-6ms	0.0000 ± 0.0000	2
predecessor-start	0.0000 ± 0.0000	2
predecessor-start-first-delay-2ms	0.0000 ± 0.0000	2
predecessor-start-first-delay-4ms	0.0000 ± 0.0000	2
two-hops-predecessor-start	0.0000 ± 0.0000	2

Table 6.29: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-pair expiry

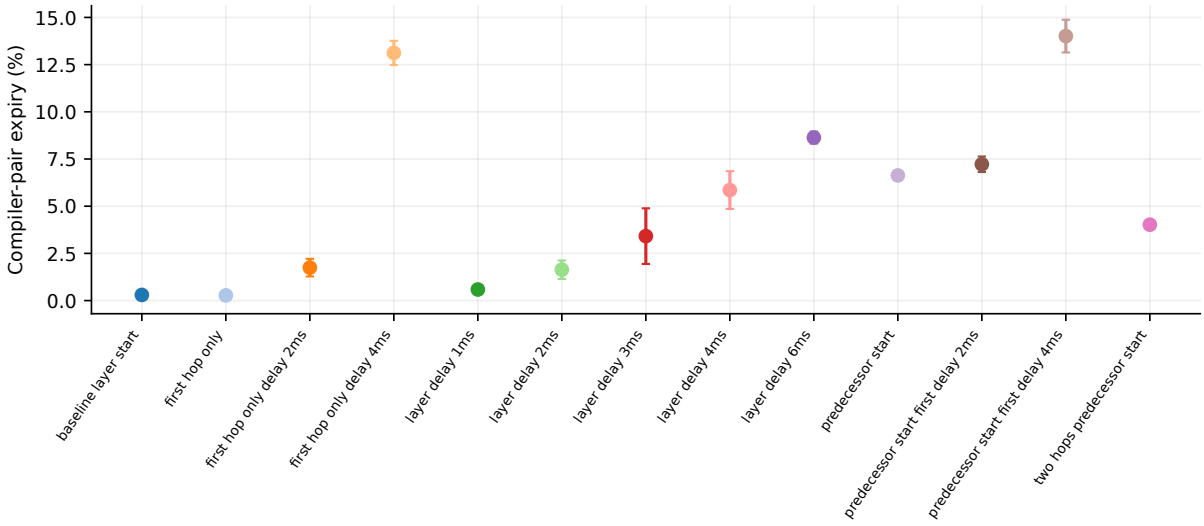


Figure 6.29: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.3000 ± 0.2534	2
first-hop-only	0.2763 ± 0.0564	2
first-hop-only-delay-2ms	1.746 ± 0.466	2
first-hop-only-delay-4ms	13.119 ± 0.640	2
layer-delay-1ms	0.5866 ± 0.2269	2
layer-delay-2ms	1.638 ± 0.492	2
layer-delay-3ms	3.415 ± 1.474	2
layer-delay-4ms	5.854 ± 1.000	2
layer-delay-6ms	8.636 ± 0.315	2
predecessor-start	6.630 ± 0.164	2
predecessor-start-first-delay-2ms	7.222 ± 0.411	2
predecessor-start-first-delay-4ms	14.011 ± 0.867	2
two-hops-predecessor-start	4.021 ± 0.001	2

Table 6.30: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Used compiler-pair storage time

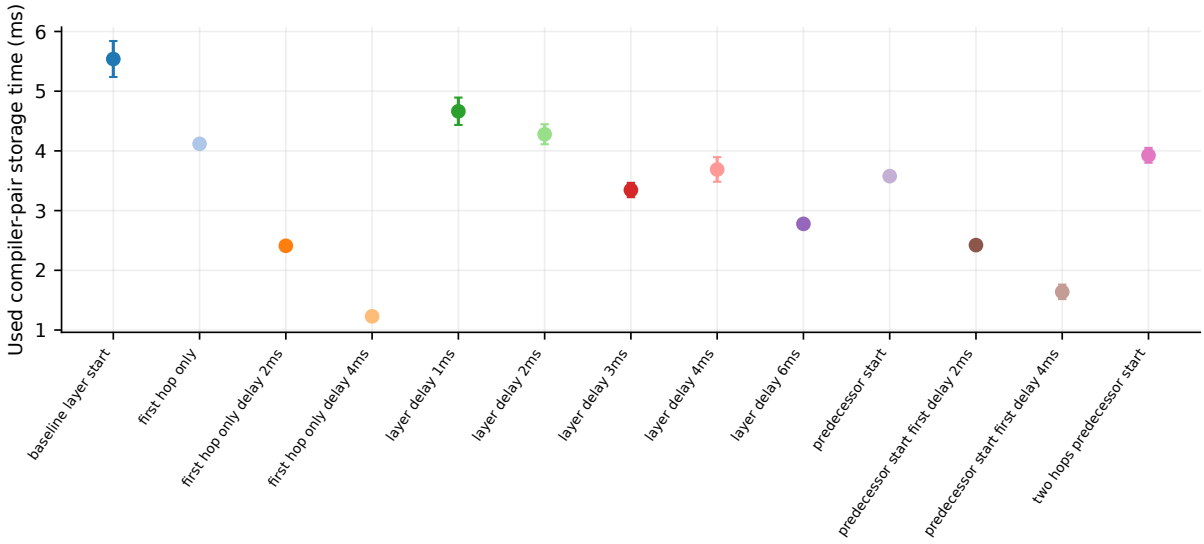


Figure 6.30: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	5.539 ± 0.301	2
first-hop-only	4.118 ± 0.008	2
first-hop-only-delay-2ms	2.411 ± 0.047	2
first-hop-only-delay-4ms	1.229 ± 0.035	2
layer-delay-1ms	4.664 ± 0.229	2
layer-delay-2ms	4.279 ± 0.167	2
layer-delay-3ms	3.345 ± 0.120	2
layer-delay-4ms	3.689 ± 0.206	2
layer-delay-6ms	2.778 ± 0.048	2
predecessor-start	3.577 ± 0.005	2
predecessor-start-first-delay-2ms	2.422 ± 0.008	2
predecessor-start-first-delay-4ms	1.639 ± 0.121	2
two-hops-predecessor-start	3.926 ± 0.125	2

Table 6.31: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered-hop throughput

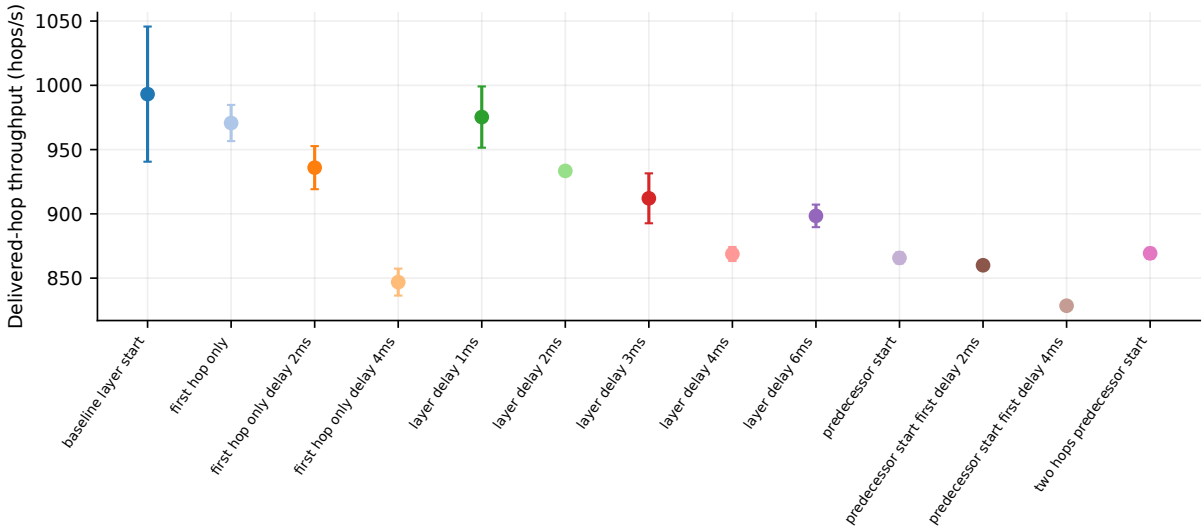


Figure 6.31: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	993.15 ± 52.58	2
first-hop-only	970.68 ± 14.08	2
first-hop-only-delay-2ms	935.96 ± 16.76	2
first-hop-only-delay-4ms	846.89 ± 10.48	2
layer-delay-1ms	975.31 ± 23.84	2
layer-delay-2ms	933.40 ± 3.13	2
layer-delay-3ms	912.09 ± 19.42	2
layer-delay-4ms	868.77 ± 5.47	2
layer-delay-6ms	898.42 ± 8.77	2
predecessor-start	865.73 ± 4.33	2
predecessor-start-first-delay-2ms	860.01 ± 0.59	2
predecessor-start-first-delay-4ms	828.52 ± 0.62	2
two-hops-predecessor-start	869.30 ± 4.26	2

Table 6.32: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Completion fraction

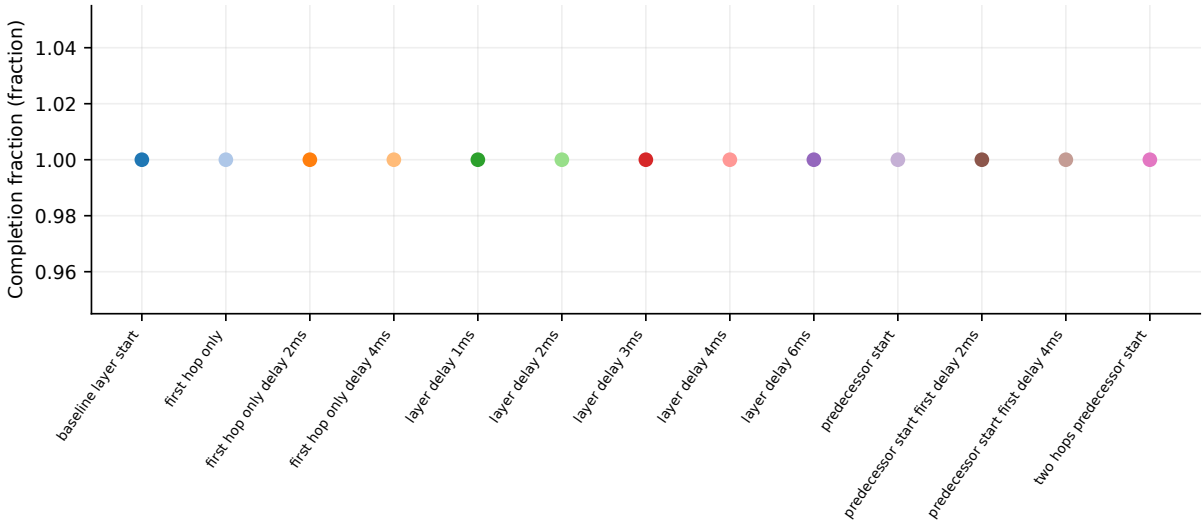


Figure 6.32: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.000 ± 0.000	2
first-hop-only	1.000 ± 0.000	2
first-hop-only-delay-2ms	1.000 ± 0.000	2
first-hop-only-delay-4ms	1.000 ± 0.000	2
layer-delay-1ms	1.000 ± 0.000	2
layer-delay-2ms	1.000 ± 0.000	2
layer-delay-3ms	1.000 ± 0.000	2
layer-delay-4ms	1.000 ± 0.000	2
layer-delay-6ms	1.000 ± 0.000	2
predecessor-start	1.000 ± 0.000	2
predecessor-start-first-delay-2ms	1.000 ± 0.000	2
predecessor-start-first-delay-4ms	1.000 ± 0.000	2
two-hops-predecessor-start	1.000 ± 0.000	2

Table 6.33: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

6.3 Mesh / shortest_reliable

Mean request latency

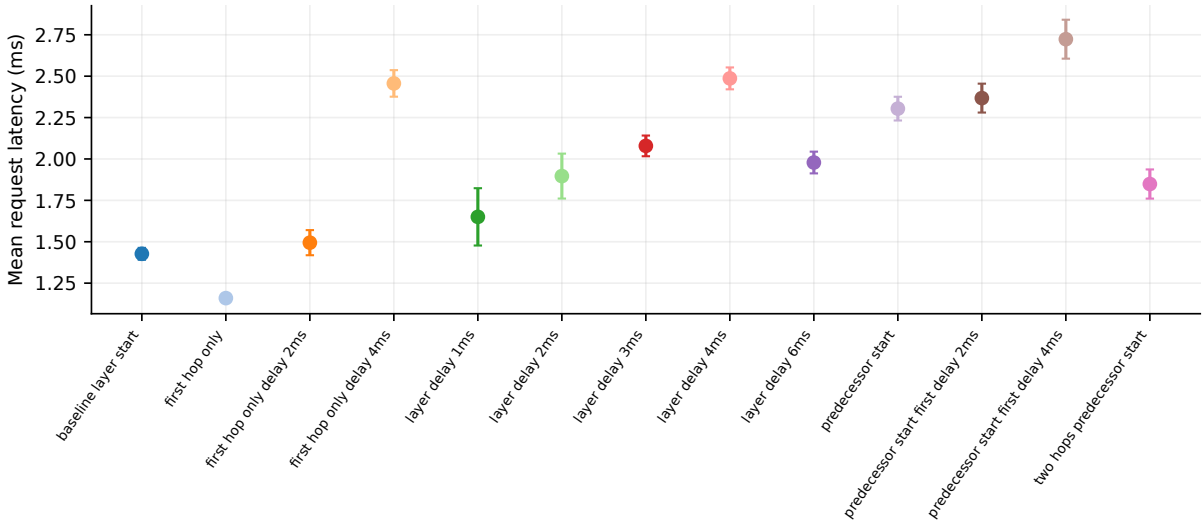


Figure 6.33: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.427 ± 0.036	6
first-hop-only	1.160 ± 0.010	6
first-hop-only-delay-2ms	1.494 ± 0.076	6
first-hop-only-delay-4ms	2.456 ± 0.080	6
layer-delay-1ms	1.650 ± 0.173	6
layer-delay-2ms	1.897 ± 0.136	6
layer-delay-3ms	2.079 ± 0.063	6
layer-delay-4ms	2.487 ± 0.066	6
layer-delay-6ms	1.979 ± 0.066	6
predecessor-start	2.304 ± 0.072	6
predecessor-start-first-delay-2ms	2.368 ± 0.087	6
predecessor-start-first-delay-4ms	2.723 ± 0.118	6
two-hops-predecessor-start	1.849 ± 0.088	6

Table 6.34: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Median request latency

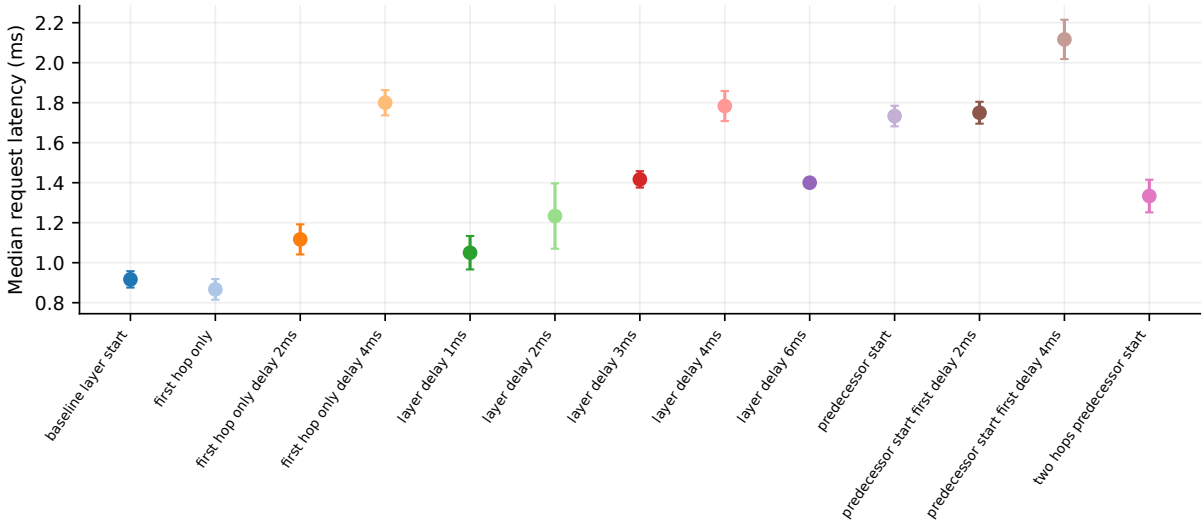


Figure 6.34: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.9167 ± 0.0408	6
first-hop-only	0.8667 ± 0.0516	6
first-hop-only-delay-2ms	1.117 ± 0.075	6
first-hop-only-delay-4ms	1.800 ± 0.063	6
layer-delay-1ms	1.050 ± 0.084	6
layer-delay-2ms	1.233 ± 0.163	6
layer-delay-3ms	1.417 ± 0.041	6
layer-delay-4ms	1.783 ± 0.075	6
layer-delay-6ms	1.400 ± 0.000	6
predecessor-start	1.733 ± 0.052	6
predecessor-start-first-delay-2ms	1.750 ± 0.055	6
predecessor-start-first-delay-4ms	2.117 ± 0.098	6
two-hops-predecessor-start	1.333 ± 0.082	6

Table 6.35: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

p95 request latency

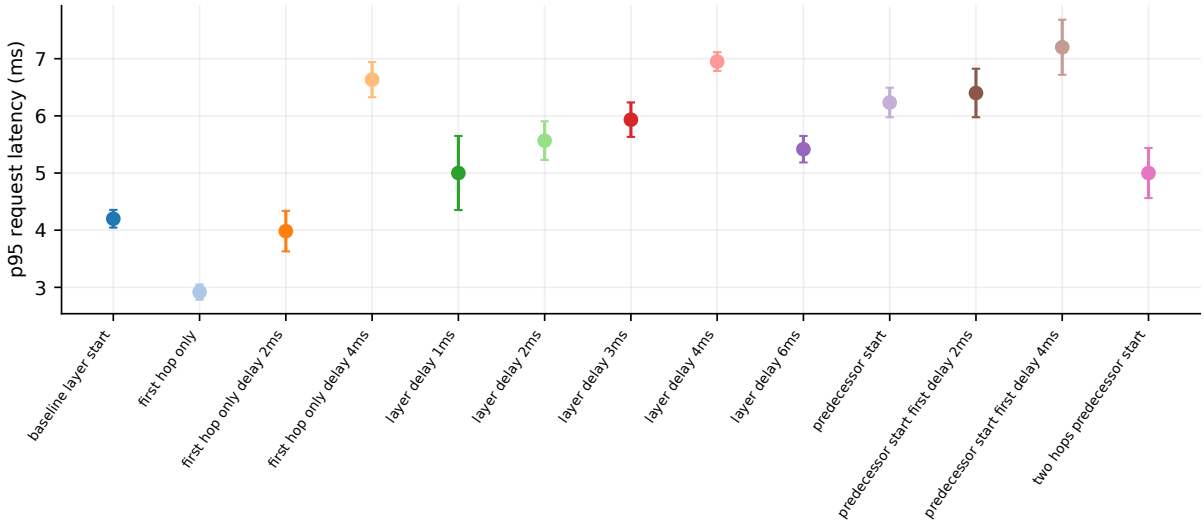


Figure 6.35: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	4.200 ± 0.155	6
first-hop-only	2.917 ± 0.133	6
first-hop-only-delay-2ms	3.983 ± 0.355	6
first-hop-only-delay-4ms	6.633 ± 0.308	6
layer-delay-1ms	5.000 ± 0.648	6
layer-delay-2ms	5.567 ± 0.339	6
layer-delay-3ms	5.933 ± 0.301	6
layer-delay-4ms	6.950 ± 0.164	6
layer-delay-6ms	5.417 ± 0.232	6
predecessor-start	6.233 ± 0.258	6
predecessor-start-first-delay-2ms	6.400 ± 0.424	6
predecessor-start-first-delay-4ms	7.200 ± 0.482	6
two-hops-predecessor-start	5.000 ± 0.438	6

Table 6.36: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Maximum request latency

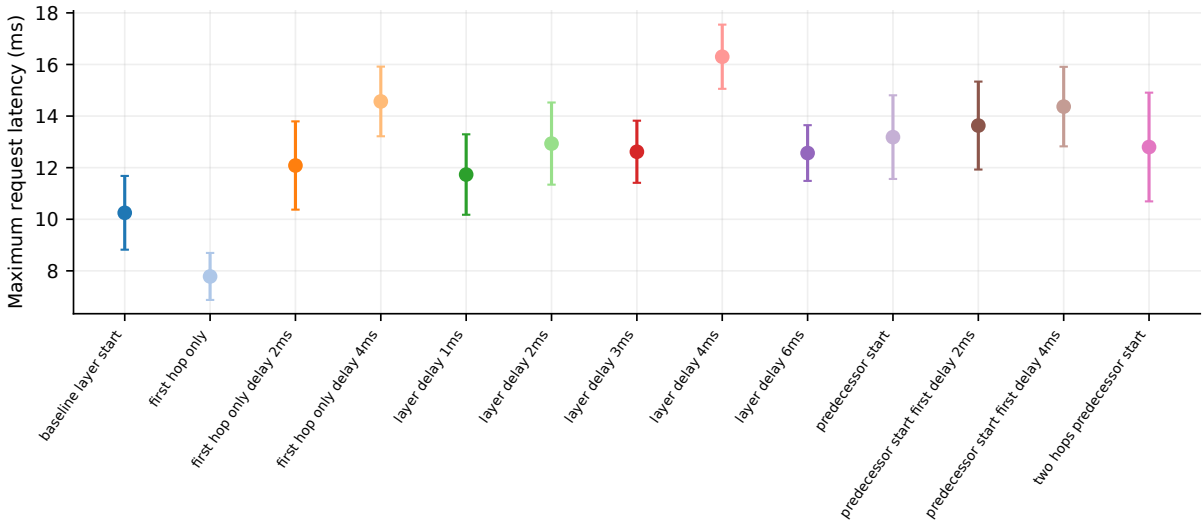


Figure 6.36: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	10.250 ± 1.429	6
first-hop-only	7.784 ± 0.911	6
first-hop-only-delay-2ms	12.084 ± 1.711	6
first-hop-only-delay-4ms	14.567 ± 1.350	6
layer-delay-1ms	11.734 ± 1.559	6
layer-delay-2ms	12.934 ± 1.592	6
layer-delay-3ms	12.617 ± 1.204	6
layer-delay-4ms	16.300 ± 1.244	6
layer-delay-6ms	12.567 ± 1.080	6
predecessor-start	13.184 ± 1.622	6
predecessor-start-first-delay-2ms	13.632 ± 1.705	6
predecessor-start-first-delay-4ms	14.367 ± 1.541	6
two-hops-predecessor-start	12.800 ± 2.107	6

Table 6.37: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Communication makespan

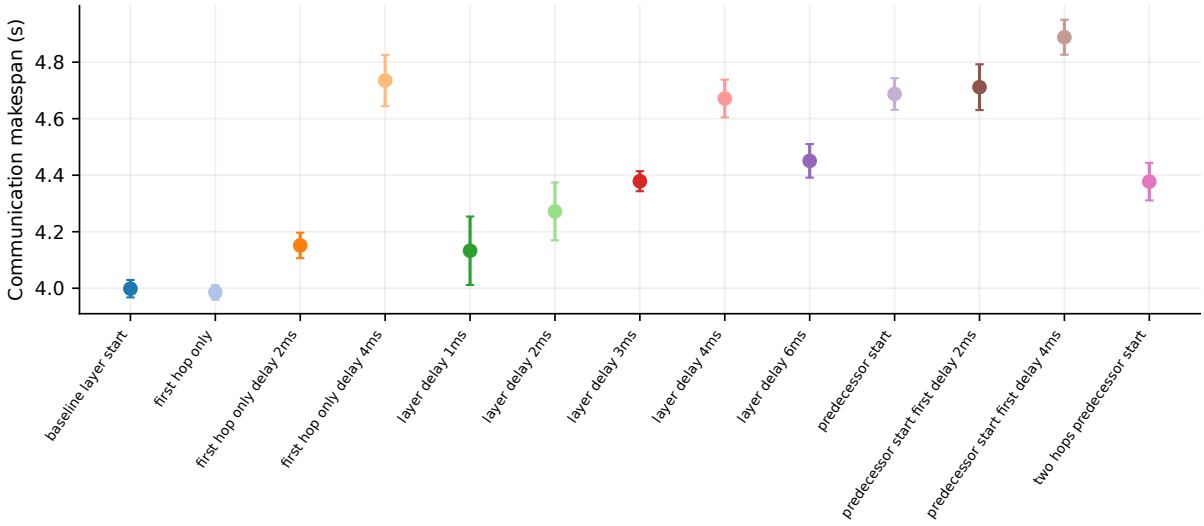


Figure 6.37: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	3.998 ± 0.031	6
first-hop-only	3.985 ± 0.026	6
first-hop-only-delay-2ms	4.151 ± 0.045	6
first-hop-only-delay-4ms	4.735 ± 0.091	6
layer-delay-1ms	4.133 ± 0.121	6
layer-delay-2ms	4.272 ± 0.102	6
layer-delay-3ms	4.379 ± 0.035	6
layer-delay-4ms	4.671 ± 0.067	6
layer-delay-6ms	4.451 ± 0.059	6
predecessor-start	4.687 ± 0.056	6
predecessor-start-first-delay-2ms	4.711 ± 0.081	6
predecessor-start-first-delay-4ms	4.888 ± 0.062	6
two-hops-predecessor-start	4.377 ± 0.066	6

Table 6.38: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Mean admission wait

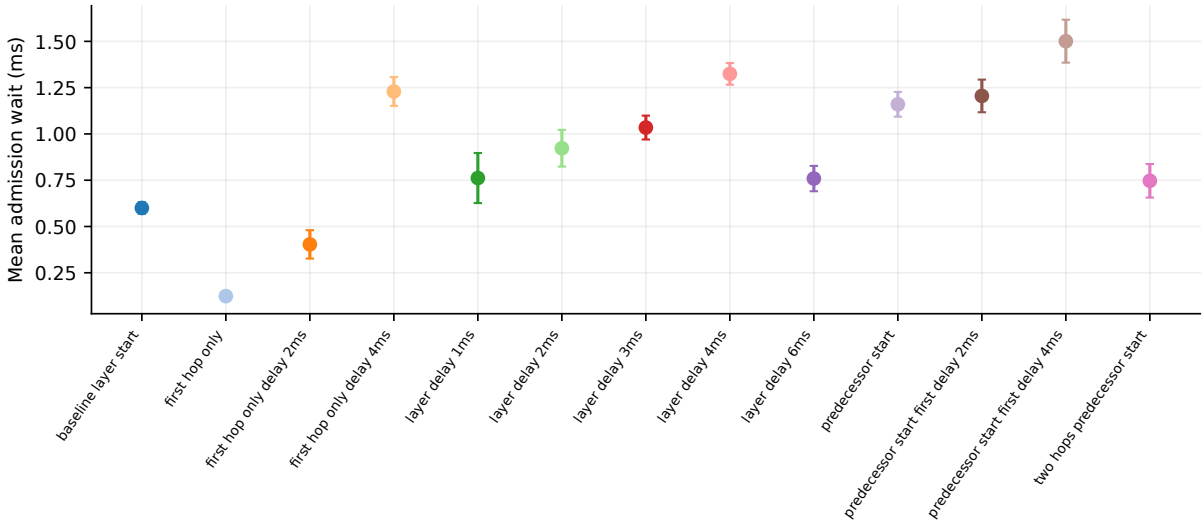


Figure 6.38: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.6000 ± 0.0306	6
first-hop-only	0.1238 ± 0.0192	6
first-hop-only-delay-2ms	0.4033 ± 0.0767	6
first-hop-only-delay-4ms	1.229 ± 0.078	6
layer-delay-1ms	0.7617 ± 0.1353	6
layer-delay-2ms	0.9227 ± 0.0990	6
layer-delay-3ms	1.034 ± 0.065	6
layer-delay-4ms	1.324 ± 0.059	6
layer-delay-6ms	0.7589 ± 0.0685	6
predecessor-start	1.160 ± 0.067	6
predecessor-start-first-delay-2ms	1.205 ± 0.088	6
predecessor-start-first-delay-4ms	1.501 ± 0.116	6
two-hops-predecessor-start	0.7468 ± 0.0905	6

Table 6.39: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered EPR fidelity

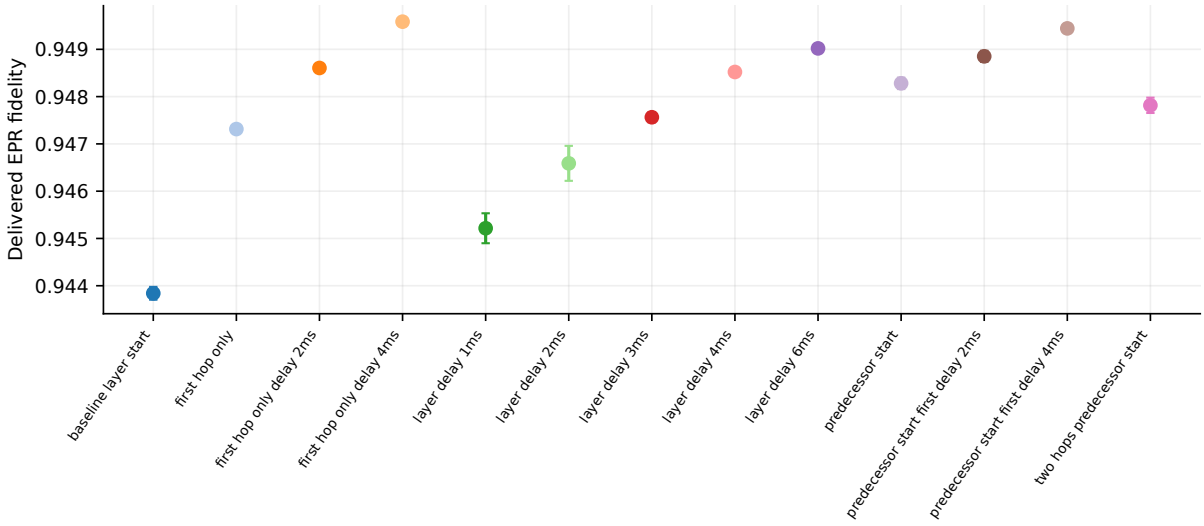


Figure 6.39: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.9438 ± 0.0001	6
first-hop-only	0.9473 ± 0.0001	6
first-hop-only-delay-2ms	0.9486 ± 0.0001	6
first-hop-only-delay-4ms	0.9496 ± 0.0000	6
layer-delay-1ms	0.9452 ± 0.0003	6
layer-delay-2ms	0.9466 ± 0.0004	6
layer-delay-3ms	0.9476 ± 0.0001	6
layer-delay-4ms	0.9485 ± 0.0001	6
layer-delay-6ms	0.9490 ± 0.0000	6
predecessor-start	0.9483 ± 0.0001	6
predecessor-start-first-delay-2ms	0.9489 ± 0.0001	6
predecessor-start-first-delay-4ms	0.9494 ± 0.0000	6
two-hops-predecessor-start	0.9478 ± 0.0002	6

Table 6.40: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler readiness fraction

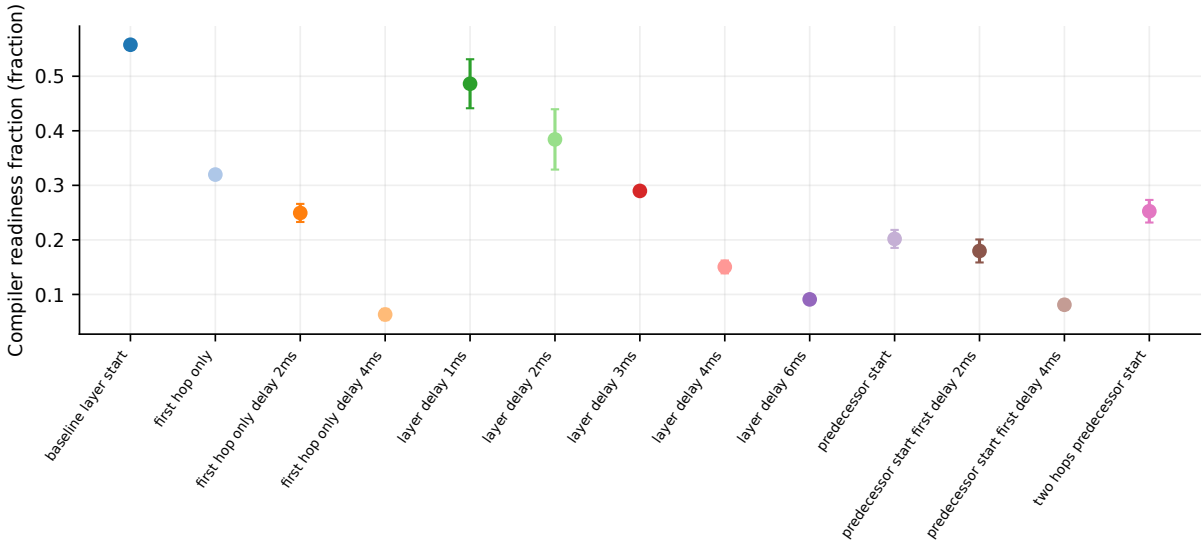


Figure 6.40: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5577 ± 0.0084	6
first-hop-only	0.3197 ± 0.0063	6
first-hop-only-delay-2ms	0.2494 ± 0.0166	6
first-hop-only-delay-4ms	0.0632 ± 0.0103	6
layer-delay-1ms	0.4862 ± 0.0449	6
layer-delay-2ms	0.3842 ± 0.0553	6
layer-delay-3ms	0.2898 ± 0.0070	6
layer-delay-4ms	0.1504 ± 0.0118	6
layer-delay-6ms	0.0909 ± 0.0032	6
predecessor-start	0.2018 ± 0.0165	6
predecessor-start-first-delay-2ms	0.1797 ± 0.0211	6
predecessor-start-first-delay-4ms	0.0811 ± 0.0091	6
two-hops-predecessor-start	0.2525 ± 0.0207	6

Table 6.41: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Intended compiler-hit fraction

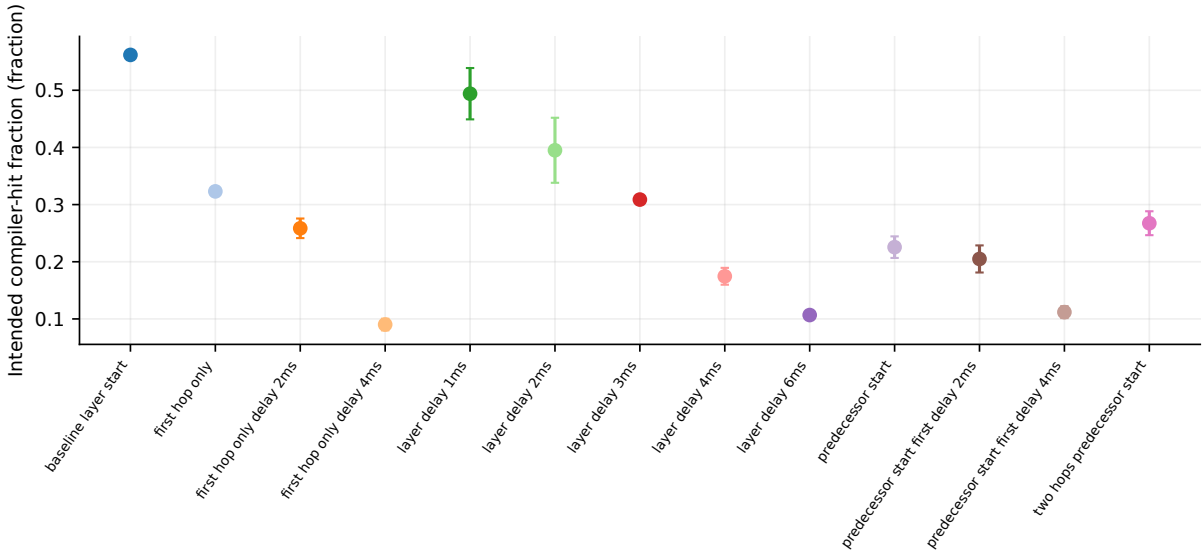


Figure 6.41: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5618 ± 0.0079	6
first-hop-only	0.3231 ± 0.0055	6
first-hop-only-delay-2ms	0.2585 ± 0.0171	6
first-hop-only-delay-4ms	0.0902 ± 0.0102	6
layer-delay-1ms	0.4940 ± 0.0449	6
layer-delay-2ms	0.3950 ± 0.0569	6
layer-delay-3ms	0.3088 ± 0.0073	6
layer-delay-4ms	0.1746 ± 0.0147	6
layer-delay-6ms	0.1068 ± 0.0034	6
predecessor-start	0.2255 ± 0.0189	6
predecessor-start-first-delay-2ms	0.2049 ± 0.0237	6
predecessor-start-first-delay-4ms	0.1119 ± 0.0105	6
two-hops-predecessor-start	0.2674 ± 0.0209	6

Table 6.42: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler fallback fraction

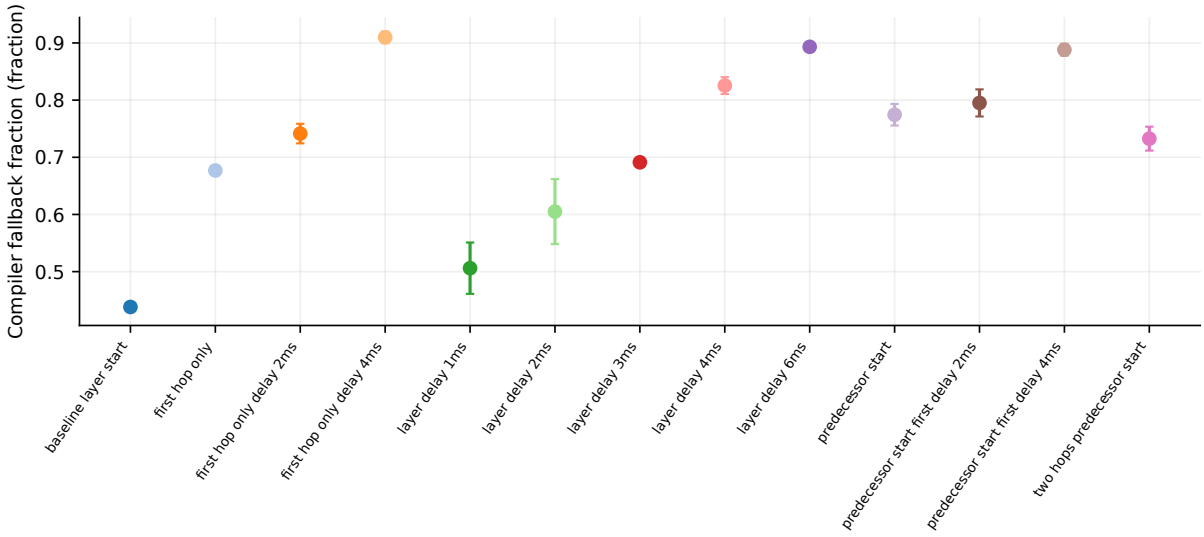


Figure 6.42: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.4382 ± 0.0079	6
first-hop-only	0.6769 ± 0.0055	6
first-hop-only-delay-2ms	0.7415 ± 0.0171	6
first-hop-only-delay-4ms	0.9098 ± 0.0102	6
layer-delay-1ms	0.5060 ± 0.0449	6
layer-delay-2ms	0.6050 ± 0.0569	6
layer-delay-3ms	0.6912 ± 0.0073	6
layer-delay-4ms	0.8254 ± 0.0147	6
layer-delay-6ms	0.8932 ± 0.0034	6
predecessor-start	0.7745 ± 0.0189	6
predecessor-start-first-delay-2ms	0.7951 ± 0.0237	6
predecessor-start-first-delay-4ms	0.8881 ± 0.0105	6
two-hops-predecessor-start	0.7326 ± 0.0209	6

Table 6.43: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-cache waste

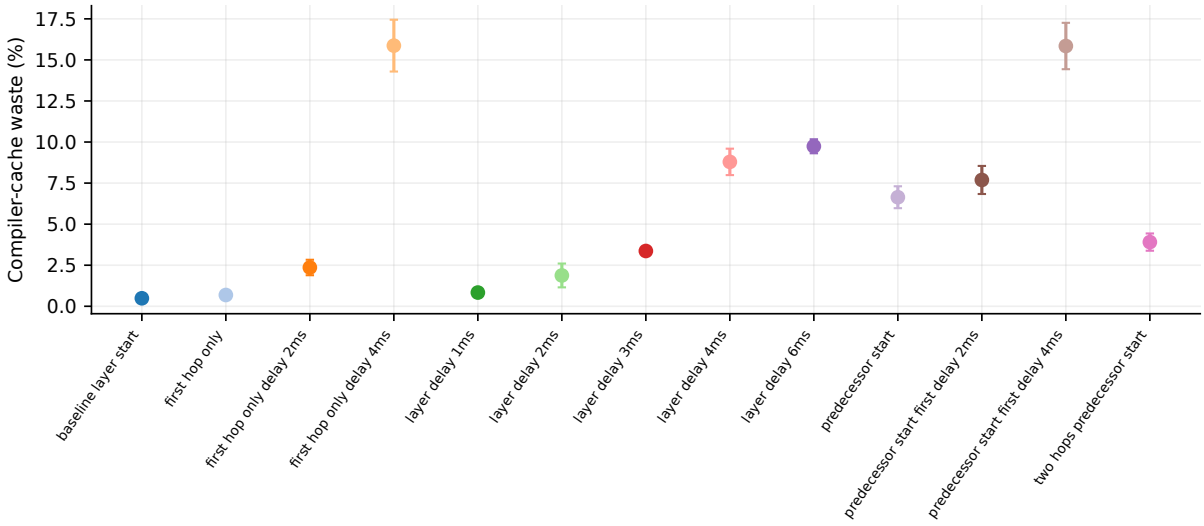


Figure 6.43: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.4870 ± 0.0873	6
first-hop-only	0.6862 ± 0.1865	6
first-hop-only-delay-2ms	2.361 ± 0.471	6
first-hop-only-delay-4ms	15.870 ± 1.577	6
layer-delay-1ms	0.8349 ± 0.2362	6
layer-delay-2ms	1.876 ± 0.725	6
layer-delay-3ms	3.366 ± 0.199	6
layer-delay-4ms	8.791 ± 0.804	6
layer-delay-6ms	9.742 ± 0.427	6
predecessor-start	6.639 ± 0.667	6
predecessor-start-first-delay-2ms	7.690 ± 0.855	6
predecessor-start-first-delay-4ms	15.846 ± 1.412	6
two-hops-predecessor-start	3.907 ± 0.525	6

Table 6.44: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Native-protocol waste

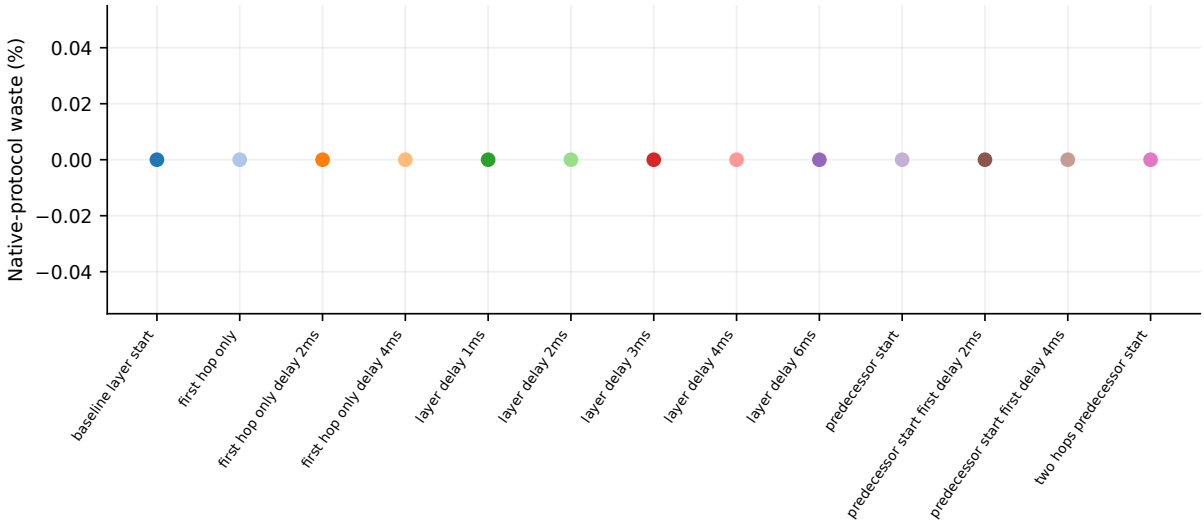


Figure 6.44: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.0000 ± 0.0000	6
first-hop-only	0.0000 ± 0.0000	6
first-hop-only-delay-2ms	0.0000 ± 0.0000	6
first-hop-only-delay-4ms	0.0000 ± 0.0000	6
layer-delay-1ms	0.0000 ± 0.0000	6
layer-delay-2ms	0.0000 ± 0.0000	6
layer-delay-3ms	0.0000 ± 0.0000	6
layer-delay-4ms	0.0000 ± 0.0000	6
layer-delay-6ms	0.0000 ± 0.0000	6
predecessor-start	0.0000 ± 0.0000	6
predecessor-start-first-delay-2ms	0.0000 ± 0.0000	6
predecessor-start-first-delay-4ms	0.0000 ± 0.0000	6
two-hops-predecessor-start	0.0000 ± 0.0000	6

Table 6.45: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-pair expiry

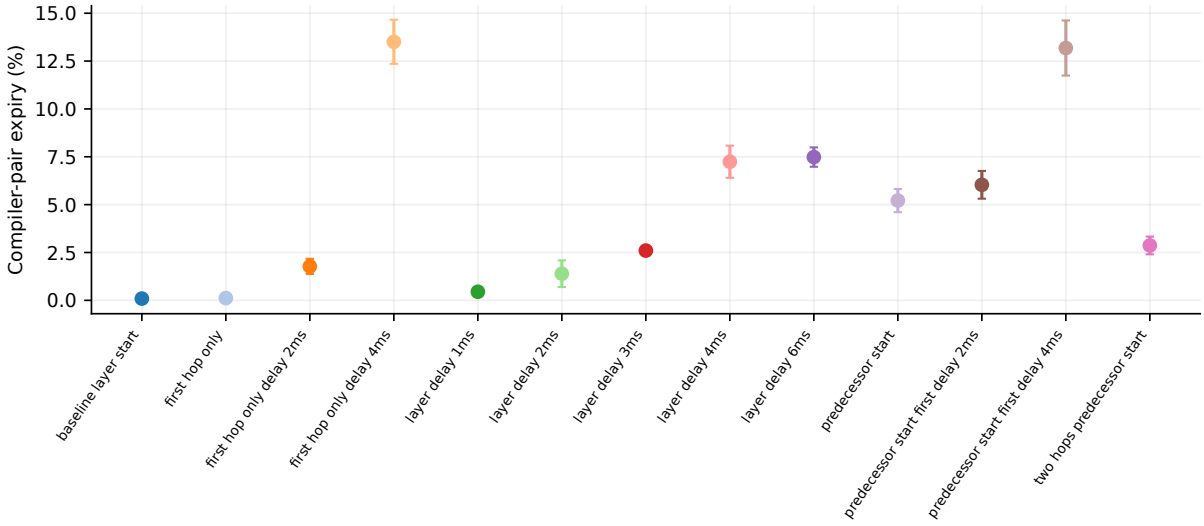


Figure 6.45: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.0916 ± 0.0585	6
first-hop-only	0.1184 ± 0.0822	6
first-hop-only-delay-2ms	1.774 ± 0.395	6
first-hop-only-delay-4ms	13.507 ± 1.153	6
layer-delay-1ms	0.4481 ± 0.2454	6
layer-delay-2ms	1.391 ± 0.696	6
layer-delay-3ms	2.599 ± 0.182	6
layer-delay-4ms	7.242 ± 0.841	6
layer-delay-6ms	7.484 ± 0.507	6
predecessor-start	5.213 ± 0.605	6
predecessor-start-first-delay-2ms	6.036 ± 0.725	6
predecessor-start-first-delay-4ms	13.182 ± 1.440	6
two-hops-predecessor-start	2.867 ± 0.462	6

Table 6.46: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Used compiler-pair storage time

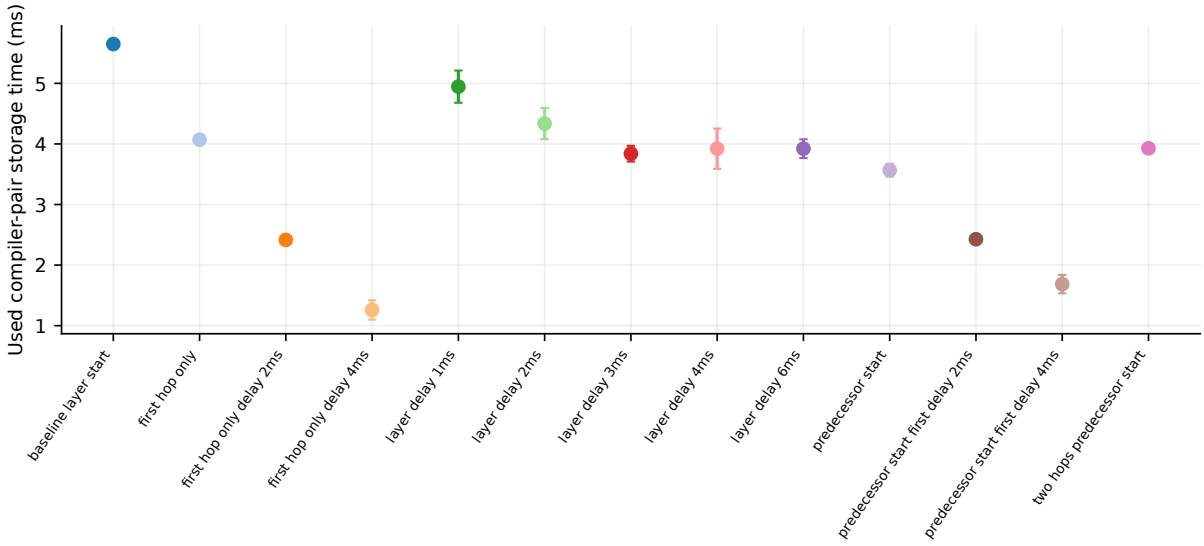


Figure 6.46: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	5.649 ± 0.071	6
first-hop-only	4.070 ± 0.019	6
first-hop-only-delay-2ms	2.416 ± 0.053	6
first-hop-only-delay-4ms	1.260 ± 0.161	6
layer-delay-1ms	4.946 ± 0.266	6
layer-delay-2ms	4.336 ± 0.257	6
layer-delay-3ms	3.839 ± 0.130	6
layer-delay-4ms	3.922 ± 0.333	6
layer-delay-6ms	3.922 ± 0.155	6
predecessor-start	3.567 ± 0.107	6
predecessor-start-first-delay-2ms	2.427 ± 0.071	6
predecessor-start-first-delay-4ms	1.685 ± 0.152	6
two-hops-predecessor-start	3.927 ± 0.046	6

Table 6.47: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered-hop throughput

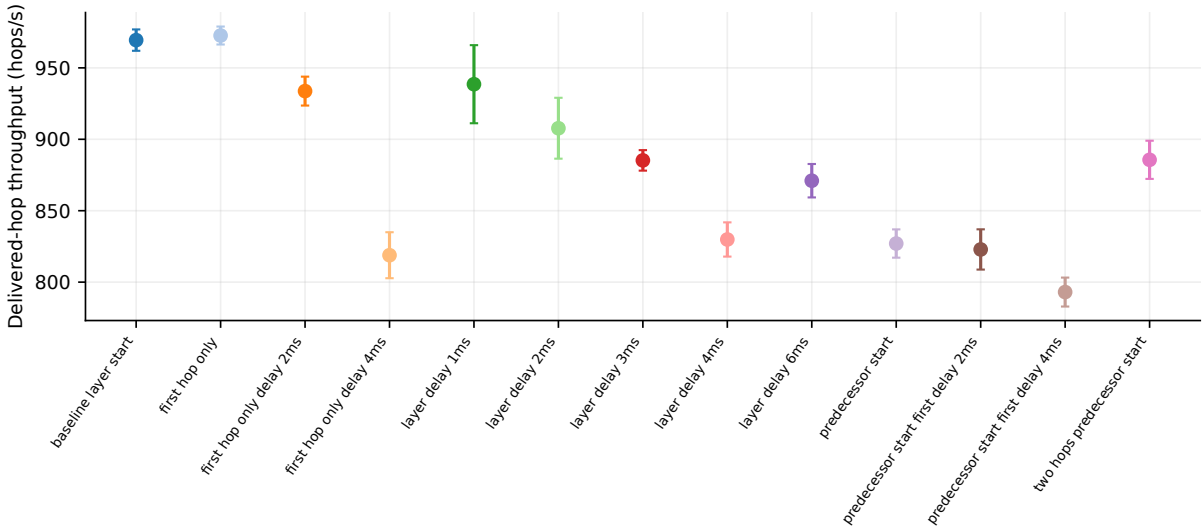


Figure 6.47: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	969.43 ± 7.48	6
first-hop-only	972.64 ± 6.28	6
first-hop-only-delay-2ms	933.73 ± 10.12	6
first-hop-only-delay-4ms	818.84 ± 16.10	6
layer-delay-1ms	938.56 ± 27.34	6
layer-delay-2ms	907.74 ± 21.31	6
layer-delay-3ms	885.23 ± 7.18	6
layer-delay-4ms	829.86 ± 11.98	6
layer-delay-6ms	871.00 ± 11.70	6
predecessor-start	827.02 ± 9.90	6
predecessor-start-first-delay-2ms	822.88 ± 14.09	6
predecessor-start-first-delay-4ms	793.04 ± 10.13	6
two-hops-predecessor-start	885.63 ± 13.36	6

Table 6.48: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Completion fraction

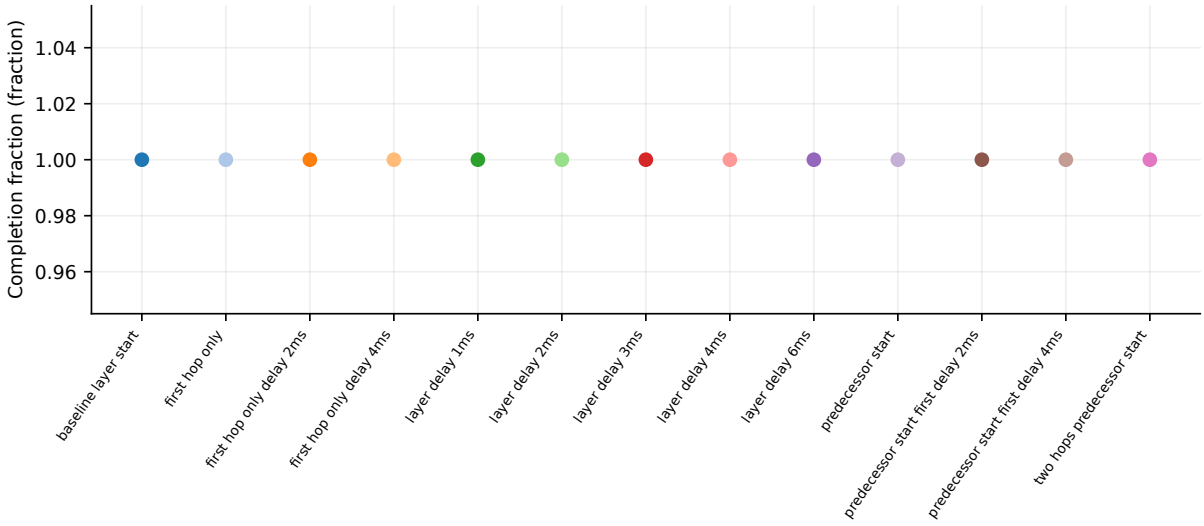


Figure 6.48: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.000 ± 0.000	6
first-hop-only	1.000 ± 0.000	6
first-hop-only-delay-2ms	1.000 ± 0.000	6
first-hop-only-delay-4ms	1.000 ± 0.000	6
layer-delay-1ms	1.000 ± 0.000	6
layer-delay-2ms	1.000 ± 0.000	6
layer-delay-3ms	1.000 ± 0.000	6
layer-delay-4ms	1.000 ± 0.000	6
layer-delay-6ms	1.000 ± 0.000	6
predecessor-start	1.000 ± 0.000	6
predecessor-start-first-delay-2ms	1.000 ± 0.000	6
predecessor-start-first-delay-4ms	1.000 ± 0.000	6
two-hops-predecessor-start	1.000 ± 0.000	6

Table 6.49: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

6.4 Mesh / max_reliability

Mean request latency

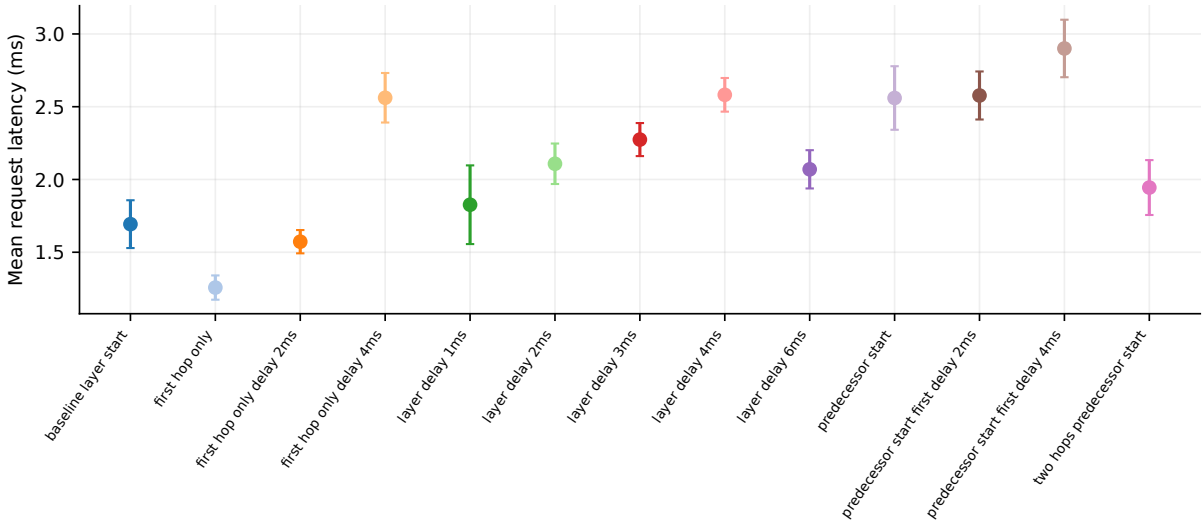


Figure 6.49: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.693 ± 0.164	6
first-hop-only	1.257 ± 0.083	6
first-hop-only-delay-2ms	1.573 ± 0.080	6
first-hop-only-delay-4ms	2.561 ± 0.170	6
layer-delay-1ms	1.826 ± 0.270	6
layer-delay-2ms	2.108 ± 0.139	6
layer-delay-3ms	2.274 ± 0.114	6
layer-delay-4ms	2.582 ± 0.116	6
layer-delay-6ms	2.070 ± 0.131	6
predecessor-start	2.560 ± 0.218	6
predecessor-start-first-delay-2ms	2.577 ± 0.165	6
predecessor-start-first-delay-4ms	2.900 ± 0.198	6
two-hops-predecessor-start	1.945 ± 0.189	6

Table 6.50: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Median request latency

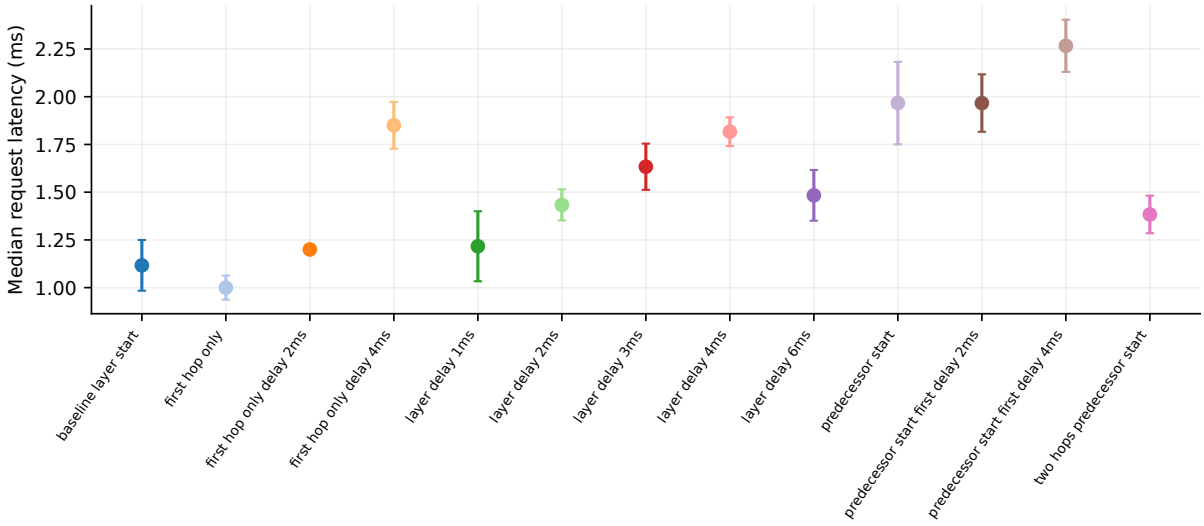


Figure 6.50: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.117 ± 0.133	6
first-hop-only	1.000 ± 0.063	6
first-hop-only-delay-2ms	1.200 ± 0.000	6
first-hop-only-delay-4ms	1.850 ± 0.122	6
layer-delay-1ms	1.217 ± 0.183	6
layer-delay-2ms	1.433 ± 0.082	6
layer-delay-3ms	1.633 ± 0.121	6
layer-delay-4ms	1.817 ± 0.075	6
layer-delay-6ms	1.483 ± 0.133	6
predecessor-start	1.967 ± 0.216	6
predecessor-start-first-delay-2ms	1.967 ± 0.151	6
predecessor-start-first-delay-4ms	2.267 ± 0.137	6
two-hops-predecessor-start	1.383 ± 0.098	6

Table 6.51: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

p95 request latency

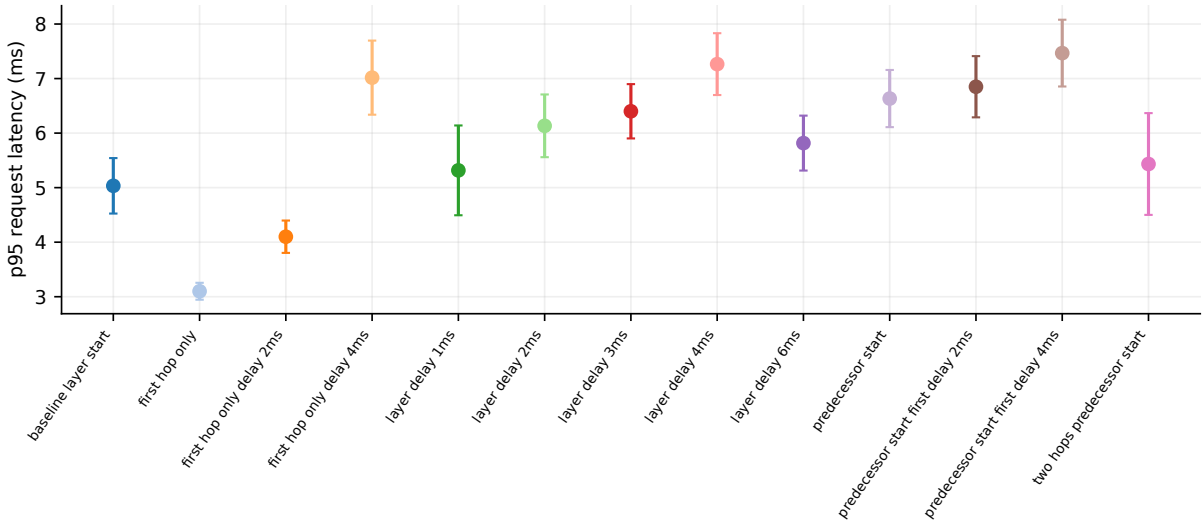


Figure 6.51: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	5.033 ± 0.509	6
first-hop-only	3.100 ± 0.155	6
first-hop-only-delay-2ms	4.100 ± 0.297	6
first-hop-only-delay-4ms	7.017 ± 0.679	6
layer-delay-1ms	5.317 ± 0.823	6
layer-delay-2ms	6.133 ± 0.575	6
layer-delay-3ms	6.400 ± 0.498	6
layer-delay-4ms	7.265 ± 0.567	6
layer-delay-6ms	5.817 ± 0.504	6
predecessor-start	6.633 ± 0.524	6
predecessor-start-first-delay-2ms	6.850 ± 0.561	6
predecessor-start-first-delay-4ms	7.467 ± 0.612	6
two-hops-predecessor-start	5.433 ± 0.933	6

Table 6.52: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Maximum request latency

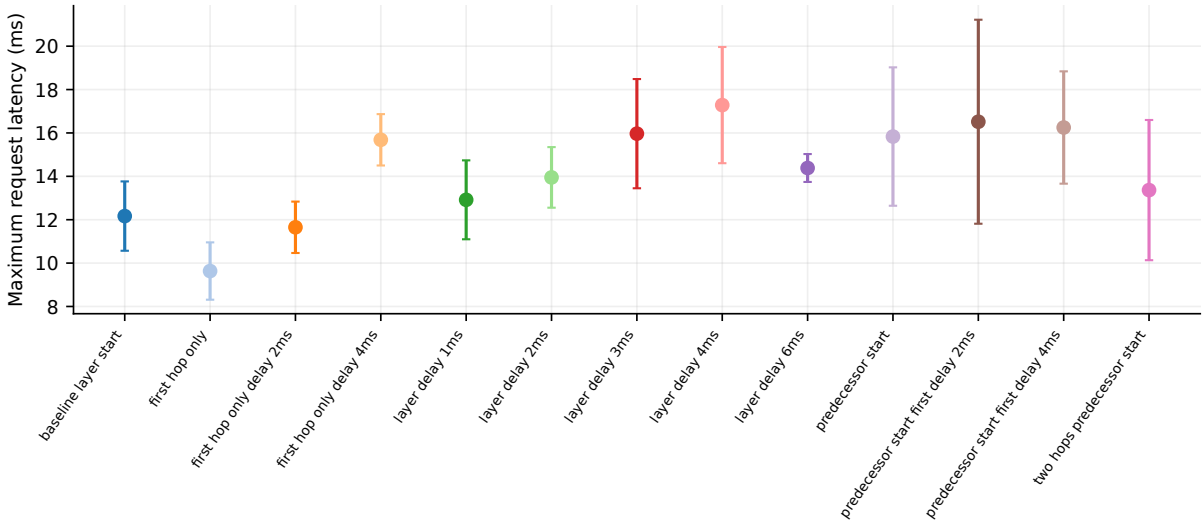


Figure 6.52: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	12.167 ± 1.598	6
first-hop-only	9.634 ± 1.322	6
first-hop-only-delay-2ms	11.650 ± 1.185	6
first-hop-only-delay-4ms	15.684 ± 1.184	6
layer-delay-1ms	12.917 ± 1.819	6
layer-delay-2ms	13.950 ± 1.397	6
layer-delay-3ms	15.967 ± 2.518	6
layer-delay-4ms	17.284 ± 2.678	6
layer-delay-6ms	14.384 ± 0.643	6
predecessor-start	15.834 ± 3.190	6
predecessor-start-first-delay-2ms	16.517 ± 4.703	6
predecessor-start-first-delay-4ms	16.250 ± 2.589	6
two-hops-predecessor-start	13.365 ± 3.232	6

Table 6.53: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Communication makespan

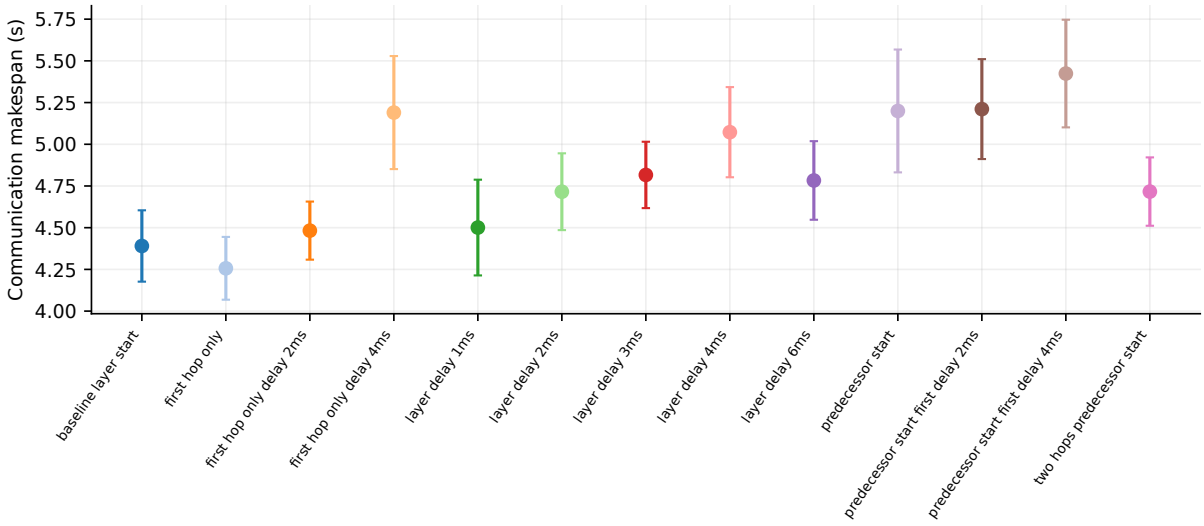


Figure 6.53: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	4.390 ± 0.214	6
first-hop-only	4.256 ± 0.188	6
first-hop-only-delay-2ms	4.482 ± 0.174	6
first-hop-only-delay-4ms	5.190 ± 0.339	6
layer-delay-1ms	4.501 ± 0.287	6
layer-delay-2ms	4.716 ± 0.230	6
layer-delay-3ms	4.816 ± 0.199	6
layer-delay-4ms	5.072 ± 0.270	6
layer-delay-6ms	4.783 ± 0.236	6
predecessor-start	5.200 ± 0.368	6
predecessor-start-first-delay-2ms	5.211 ± 0.299	6
predecessor-start-first-delay-4ms	5.424 ± 0.323	6
two-hops-predecessor-start	4.716 ± 0.205	6

Table 6.54: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Mean admission wait

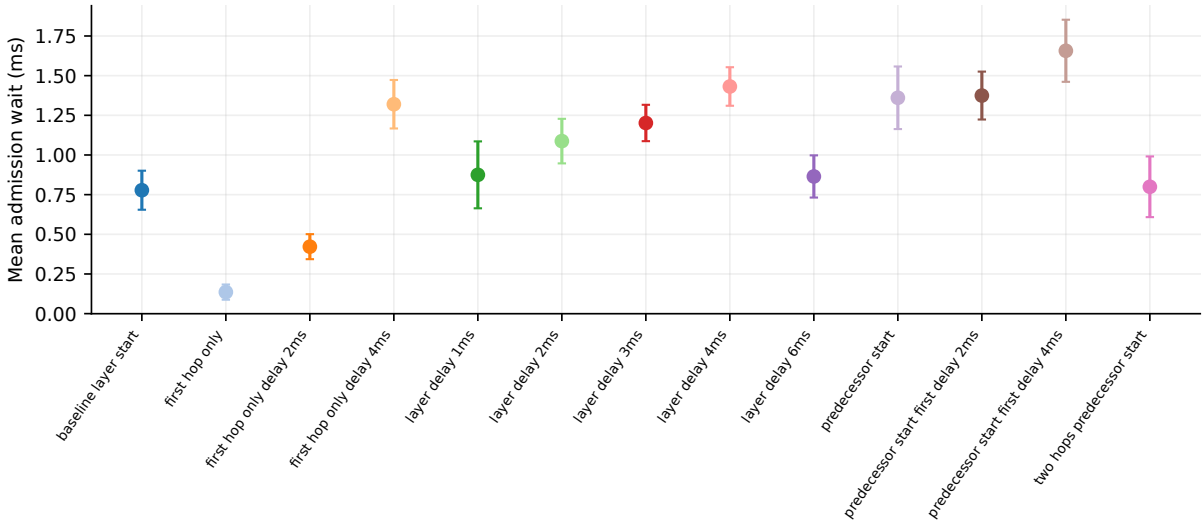


Figure 6.54: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.7779 ± 0.1230	6
first-hop-only	0.1357 ± 0.0479	6
first-hop-only-delay-2ms	0.4221 ± 0.0789	6
first-hop-only-delay-4ms	1.320 ± 0.153	6
layer-delay-1ms	0.8748 ± 0.2109	6
layer-delay-2ms	1.087 ± 0.140	6
layer-delay-3ms	1.202 ± 0.115	6
layer-delay-4ms	1.432 ± 0.121	6
layer-delay-6ms	0.8647 ± 0.1329	6
predecessor-start	1.361 ± 0.197	6
predecessor-start-first-delay-2ms	1.375 ± 0.151	6
predecessor-start-first-delay-4ms	1.657 ± 0.196	6
two-hops-predecessor-start	0.7995 ± 0.1913	6

Table 6.55: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered EPR fidelity

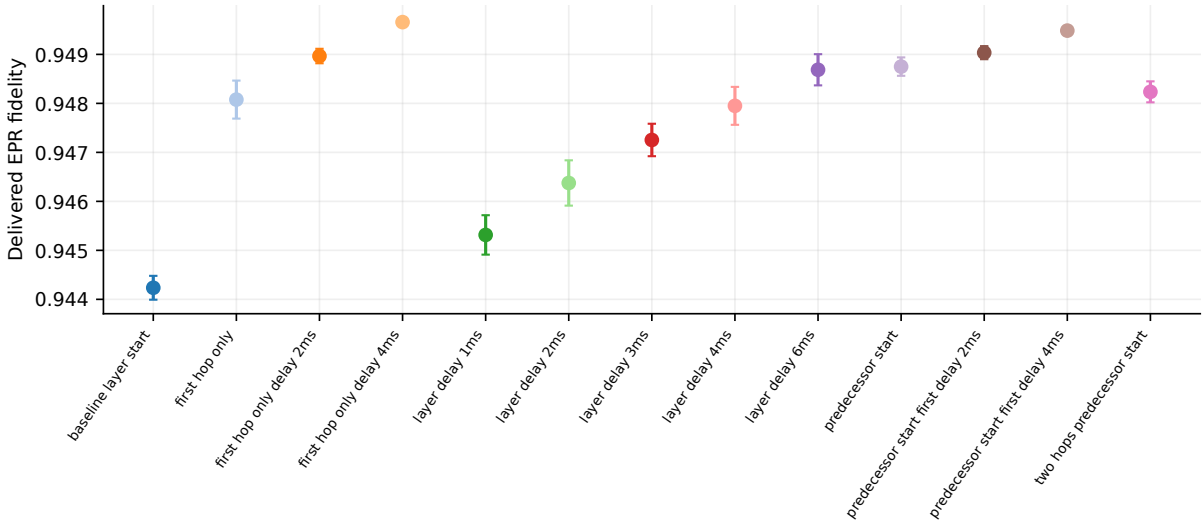


Figure 6.55: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.9442 ± 0.0002	6
first-hop-only	0.9481 ± 0.0004	6
first-hop-only-delay-2ms	0.9490 ± 0.0001	6
first-hop-only-delay-4ms	0.9497 ± 0.0000	6
layer-delay-1ms	0.9453 ± 0.0004	6
layer-delay-2ms	0.9464 ± 0.0005	6
layer-delay-3ms	0.9473 ± 0.0003	6
layer-delay-4ms	0.9479 ± 0.0004	6
layer-delay-6ms	0.9487 ± 0.0003	6
predecessor-start	0.9488 ± 0.0002	6
predecessor-start-first-delay-2ms	0.9490 ± 0.0001	6
predecessor-start-first-delay-4ms	0.9495 ± 0.0001	6
two-hops-predecessor-start	0.9482 ± 0.0002	6

Table 6.56: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler readiness fraction

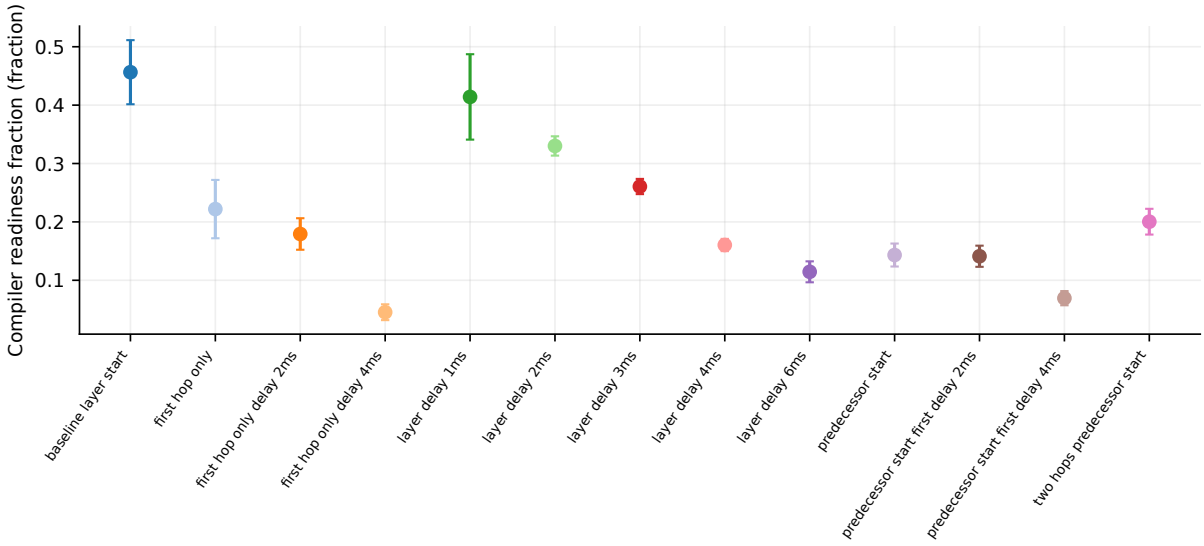


Figure 6.56: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.4564 ± 0.0549	6
first-hop-only	0.2219 ± 0.0499	6
first-hop-only-delay-2ms	0.1793 ± 0.0270	6
first-hop-only-delay-4ms	0.0453 ± 0.0136	6
layer-delay-1ms	0.4141 ± 0.0731	6
layer-delay-2ms	0.3301 ± 0.0165	6
layer-delay-3ms	0.2606 ± 0.0130	6
layer-delay-4ms	0.1604 ± 0.0105	6
layer-delay-6ms	0.1145 ± 0.0179	6
predecessor-start	0.1433 ± 0.0197	6
predecessor-start-first-delay-2ms	0.1412 ± 0.0181	6
predecessor-start-first-delay-4ms	0.0693 ± 0.0122	6
two-hops-predecessor-start	0.2004 ± 0.0221	6

Table 6.57: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Intended compiler-hit fraction

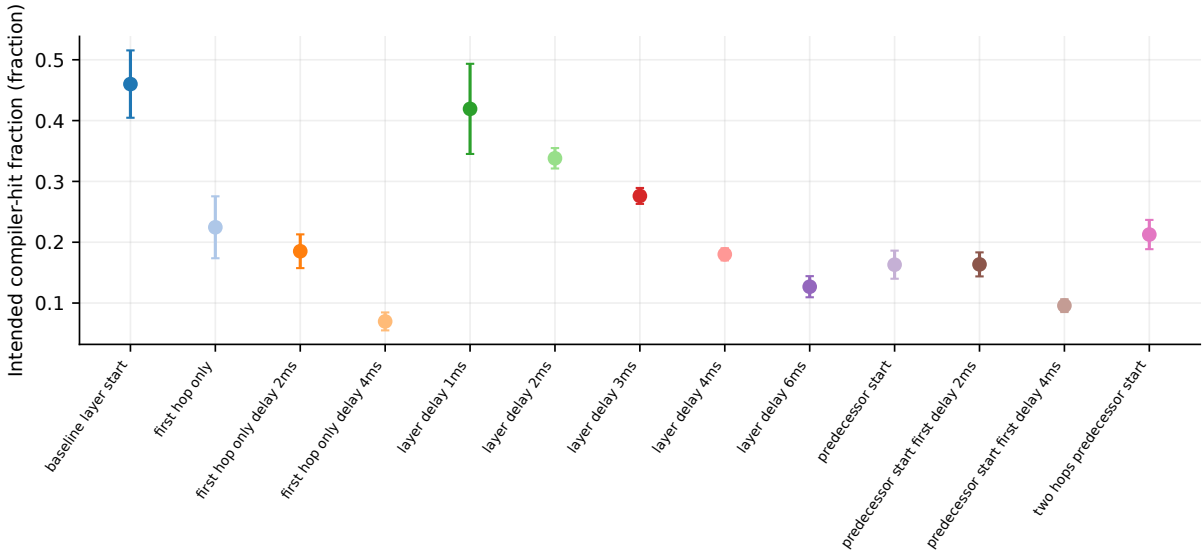


Figure 6.57: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.4600 ± 0.0554	6
first-hop-only	0.2246 ± 0.0509	6
first-hop-only-delay-2ms	0.1852 ± 0.0278	6
first-hop-only-delay-4ms	0.0698 ± 0.0148	6
layer-delay-1ms	0.4193 ± 0.0741	6
layer-delay-2ms	0.3380 ± 0.0168	6
layer-delay-3ms	0.2761 ± 0.0131	6
layer-delay-4ms	0.1801 ± 0.0100	6
layer-delay-6ms	0.1269 ± 0.0174	6
predecessor-start	0.1631 ± 0.0231	6
predecessor-start-first-delay-2ms	0.1635 ± 0.0197	6
predecessor-start-first-delay-4ms	0.0958 ± 0.0105	6
two-hops-predecessor-start	0.2126 ± 0.0241	6

Table 6.58: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler fallback fraction

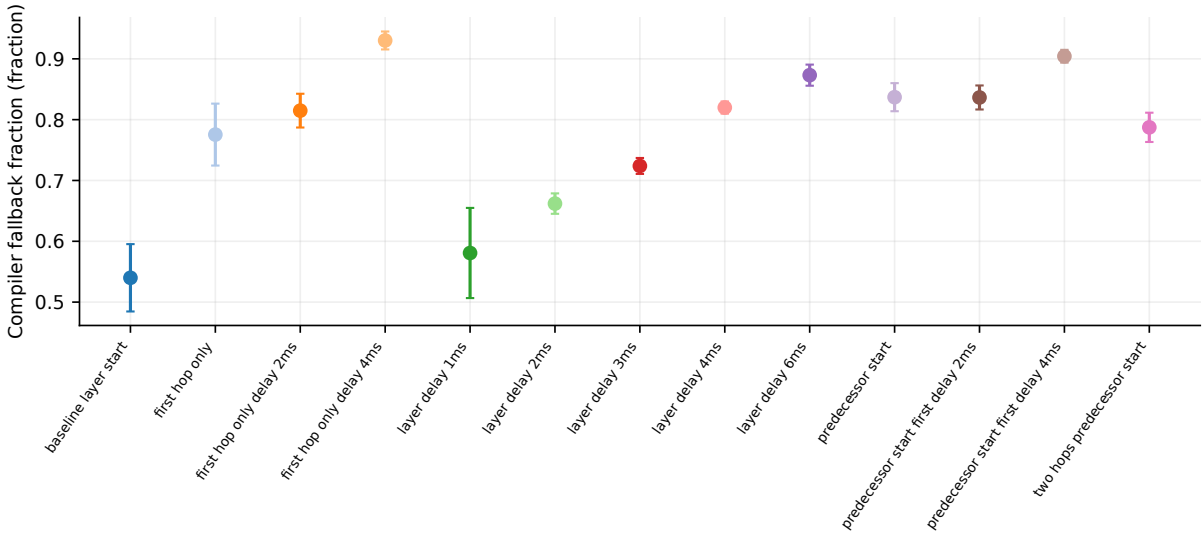


Figure 6.58: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5400 ± 0.0554	6
first-hop-only	0.7754 ± 0.0509	6
first-hop-only-delay-2ms	0.8148 ± 0.0278	6
first-hop-only-delay-4ms	0.9302 ± 0.0148	6
layer-delay-1ms	0.5807 ± 0.0741	6
layer-delay-2ms	0.6620 ± 0.0168	6
layer-delay-3ms	0.7239 ± 0.0131	6
layer-delay-4ms	0.8199 ± 0.0100	6
layer-delay-6ms	0.8731 ± 0.0174	6
predecessor-start	0.8369 ± 0.0231	6
predecessor-start-first-delay-2ms	0.8365 ± 0.0197	6
predecessor-start-first-delay-4ms	0.9042 ± 0.0105	6
two-hops-predecessor-start	0.7874 ± 0.0241	6

Table 6.59: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-cache waste

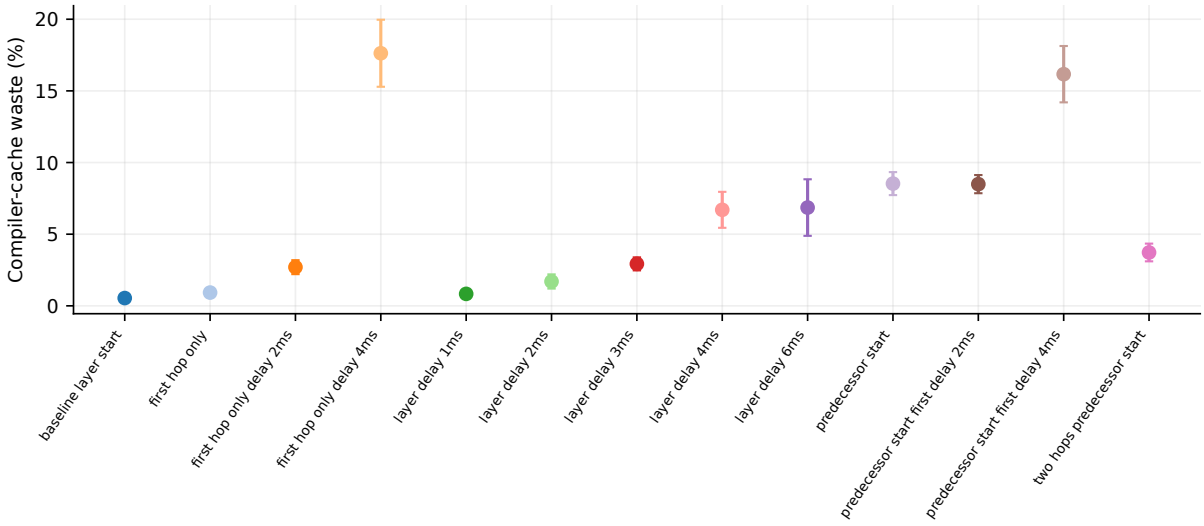


Figure 6.59: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5427 ± 0.1146	6
first-hop-only	0.9258 ± 0.2332	6
first-hop-only-delay-2ms	2.699 ± 0.488	6
first-hop-only-delay-4ms	17.626 ± 2.340	6
layer-delay-1ms	0.8349 ± 0.3123	6
layer-delay-2ms	1.700 ± 0.496	6
layer-delay-3ms	2.928 ± 0.456	6
layer-delay-4ms	6.700 ± 1.255	6
layer-delay-6ms	6.858 ± 1.973	6
predecessor-start	8.530 ± 0.802	6
predecessor-start-first-delay-2ms	8.493 ± 0.634	6
predecessor-start-first-delay-4ms	16.165 ± 1.966	6
two-hops-predecessor-start	3.724 ± 0.618	6

Table 6.60: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Native-protocol waste

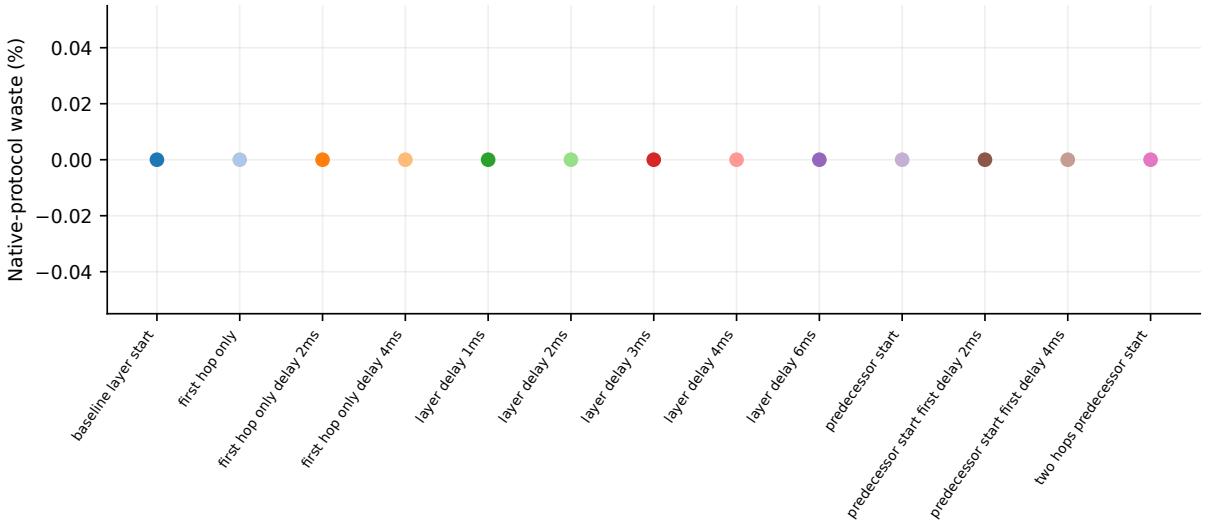


Figure 6.60: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.0000 ± 0.0000	6
first-hop-only	0.0000 ± 0.0000	6
first-hop-only-delay-2ms	0.0000 ± 0.0000	6
first-hop-only-delay-4ms	0.0000 ± 0.0000	6
layer-delay-1ms	0.0000 ± 0.0000	6
layer-delay-2ms	0.0000 ± 0.0000	6
layer-delay-3ms	0.0000 ± 0.0000	6
layer-delay-4ms	0.0000 ± 0.0000	6
layer-delay-6ms	0.0000 ± 0.0000	6
predecessor-start	0.0000 ± 0.0000	6
predecessor-start-first-delay-2ms	0.0000 ± 0.0000	6
predecessor-start-first-delay-4ms	0.0000 ± 0.0000	6
two-hops-predecessor-start	0.0000 ± 0.0000	6

Table 6.61: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-pair expiry

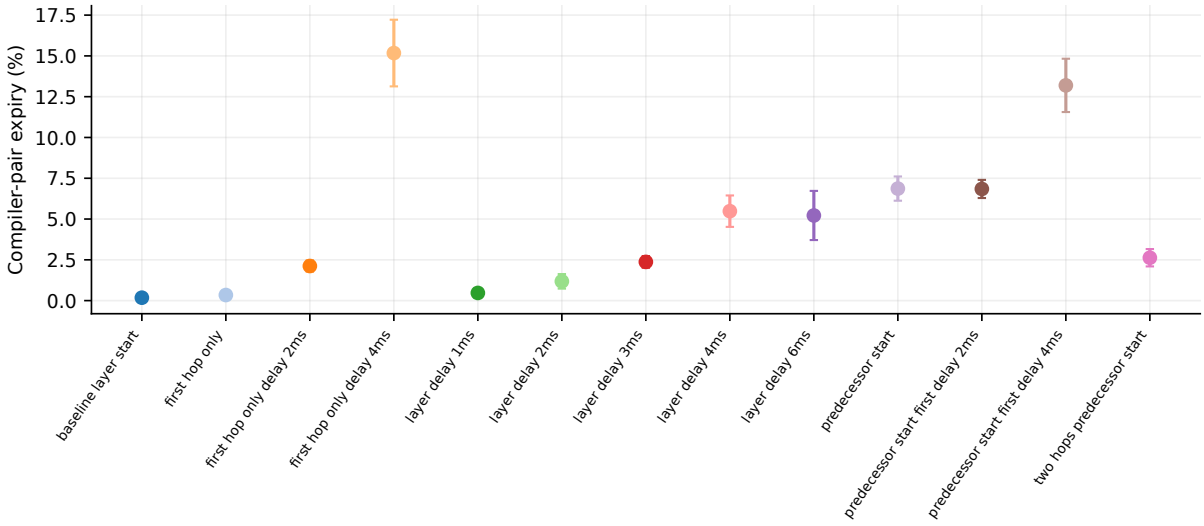


Figure 6.61: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.1790 ± 0.1236	6
first-hop-only	0.3422 ± 0.2835	6
first-hop-only-delay-2ms	2.121 ± 0.336	6
first-hop-only-delay-4ms	15.175 ± 2.043	6
layer-delay-1ms	0.4705 ± 0.2971	6
layer-delay-2ms	1.181 ± 0.446	6
layer-delay-3ms	2.373 ± 0.356	6
layer-delay-4ms	5.482 ± 0.963	6
layer-delay-6ms	5.218 ± 1.506	6
predecessor-start	6.866 ± 0.743	6
predecessor-start-first-delay-2ms	6.844 ± 0.556	6
predecessor-start-first-delay-4ms	13.193 ± 1.634	6
two-hops-predecessor-start	2.628 ± 0.532	6

Table 6.62: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Used compiler-pair storage time

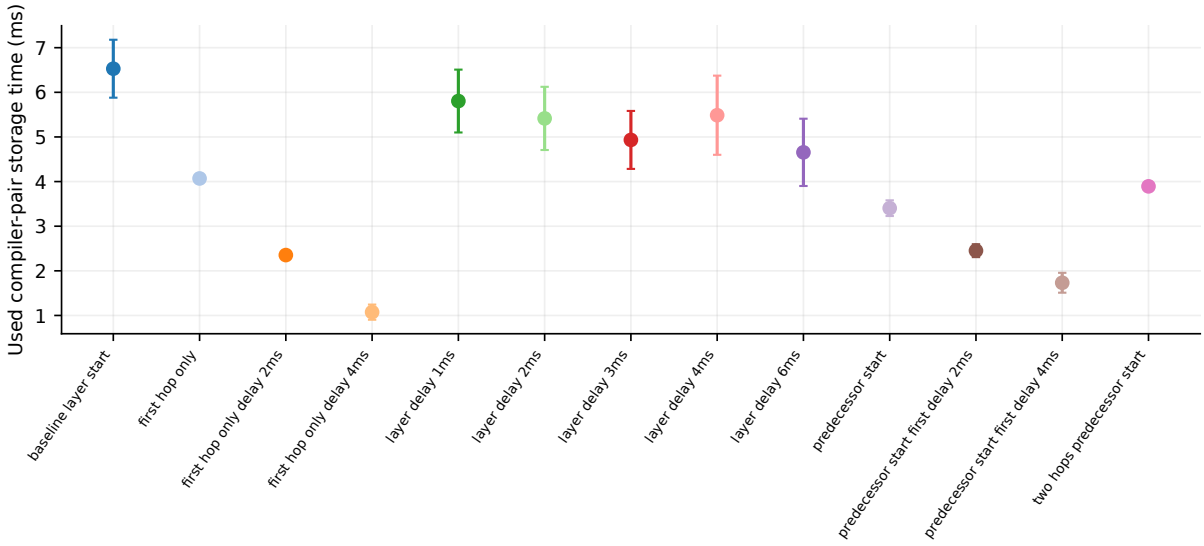


Figure 6.62: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	6.529 ± 0.649	6
first-hop-only	4.070 ± 0.019	6
first-hop-only-delay-2ms	2.353 ± 0.061	6
first-hop-only-delay-4ms	1.074 ± 0.170	6
layer-delay-1ms	5.804 ± 0.704	6
layer-delay-2ms	5.415 ± 0.708	6
layer-delay-3ms	4.933 ± 0.650	6
layer-delay-4ms	5.487 ± 0.887	6
layer-delay-6ms	4.655 ± 0.754	6
predecessor-start	3.404 ± 0.176	6
predecessor-start-first-delay-2ms	2.452 ± 0.145	6
predecessor-start-first-delay-4ms	1.733 ± 0.223	6
two-hops-predecessor-start	3.893 ± 0.098	6

Table 6.63: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered-hop throughput

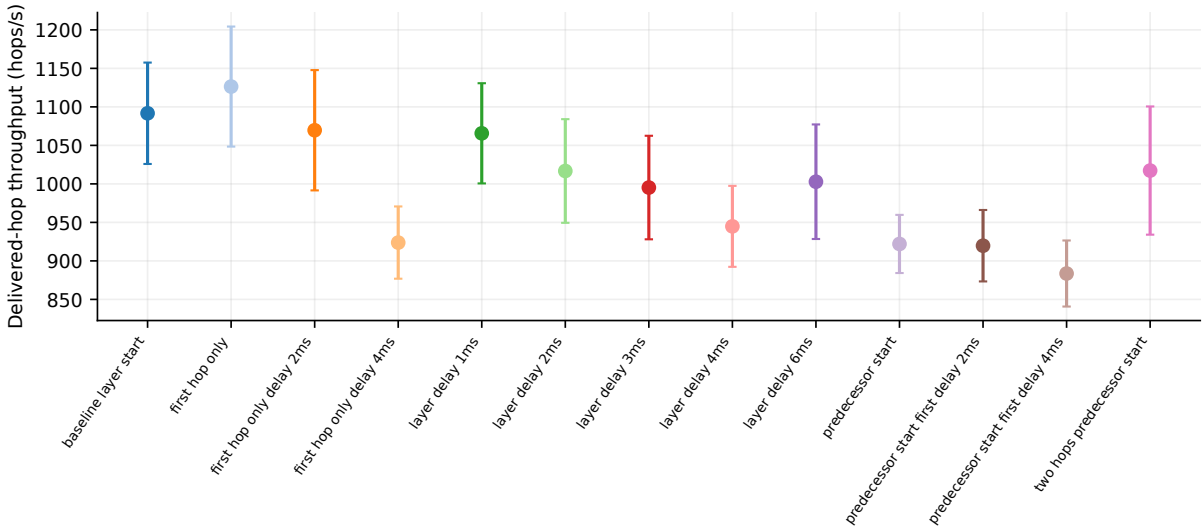


Figure 6.63: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1091.69 ± 65.83	6
first-hop-only	1126.37 ± 77.93	6
first-hop-only-delay-2ms	1069.65 ± 78.11	6
first-hop-only-delay-4ms	923.78 ± 46.92	6
layer-delay-1ms	1065.66 ± 65.05	6
layer-delay-2ms	1016.74 ± 67.30	6
layer-delay-3ms	995.25 ± 67.23	6
layer-delay-4ms	944.85 ± 52.56	6
layer-delay-6ms	1002.81 ± 74.38	6
predecessor-start	922.00 ± 37.76	6
predecessor-start-first-delay-2ms	919.72 ± 46.38	6
predecessor-start-first-delay-4ms	883.61 ± 42.88	6
two-hops-predecessor-start	1017.30 ± 83.25	6

Table 6.64: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Completion fraction

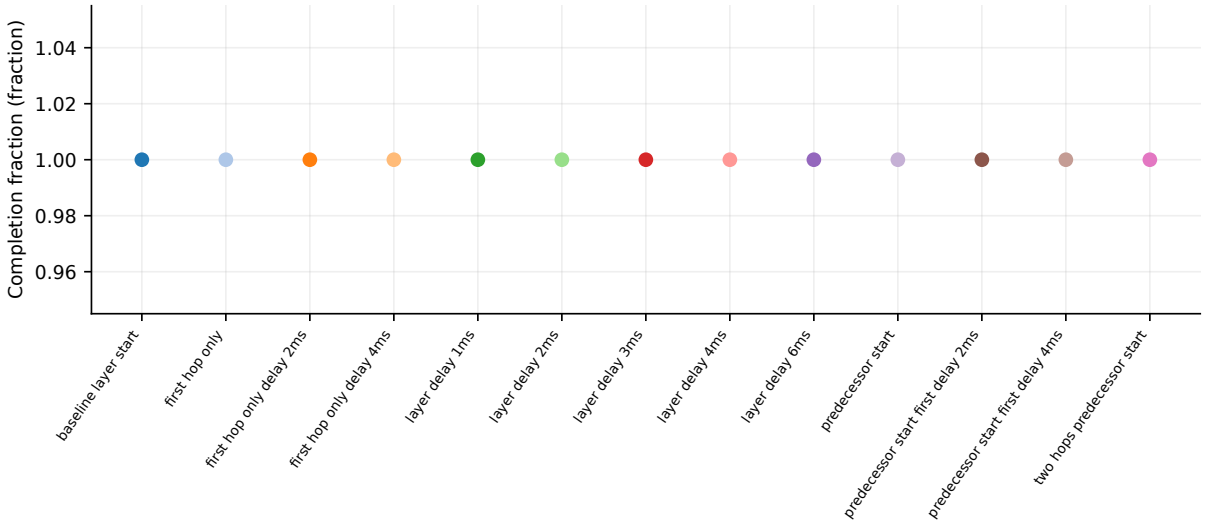


Figure 6.64: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.000 ± 0.000	6
first-hop-only	1.000 ± 0.000	6
first-hop-only-delay-2ms	1.000 ± 0.000	6
first-hop-only-delay-4ms	1.000 ± 0.000	6
layer-delay-1ms	1.000 ± 0.000	6
layer-delay-2ms	1.000 ± 0.000	6
layer-delay-3ms	1.000 ± 0.000	6
layer-delay-4ms	1.000 ± 0.000	6
layer-delay-6ms	1.000 ± 0.000	6
predecessor-start	1.000 ± 0.000	6
predecessor-start-first-delay-2ms	1.000 ± 0.000	6
predecessor-start-first-delay-4ms	1.000 ± 0.000	6
two-hops-predecessor-start	1.000 ± 0.000	6

Table 6.65: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

6.5 Torus / dijkstra

Mean request latency

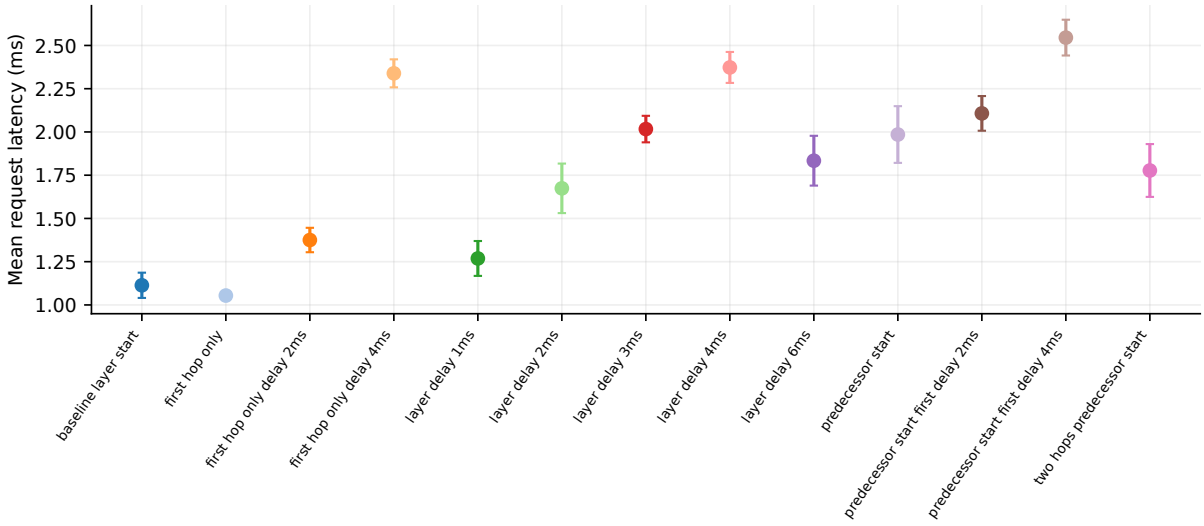


Figure 6.65: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.113 ± 0.073	6
first-hop-only	1.054 ± 0.024	6
first-hop-only-delay-2ms	1.375 ± 0.071	6
first-hop-only-delay-4ms	2.339 ± 0.081	6
layer-delay-1ms	1.269 ± 0.101	6
layer-delay-2ms	1.674 ± 0.143	6
layer-delay-3ms	2.017 ± 0.077	6
layer-delay-4ms	2.373 ± 0.089	6
layer-delay-6ms	1.834 ± 0.144	6
predecessor-start	1.985 ± 0.164	6
predecessor-start-first-delay-2ms	2.107 ± 0.100	6
predecessor-start-first-delay-4ms	2.545 ± 0.103	6
two-hops-predecessor-start	1.777 ± 0.153	6

Table 6.66: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Median request latency

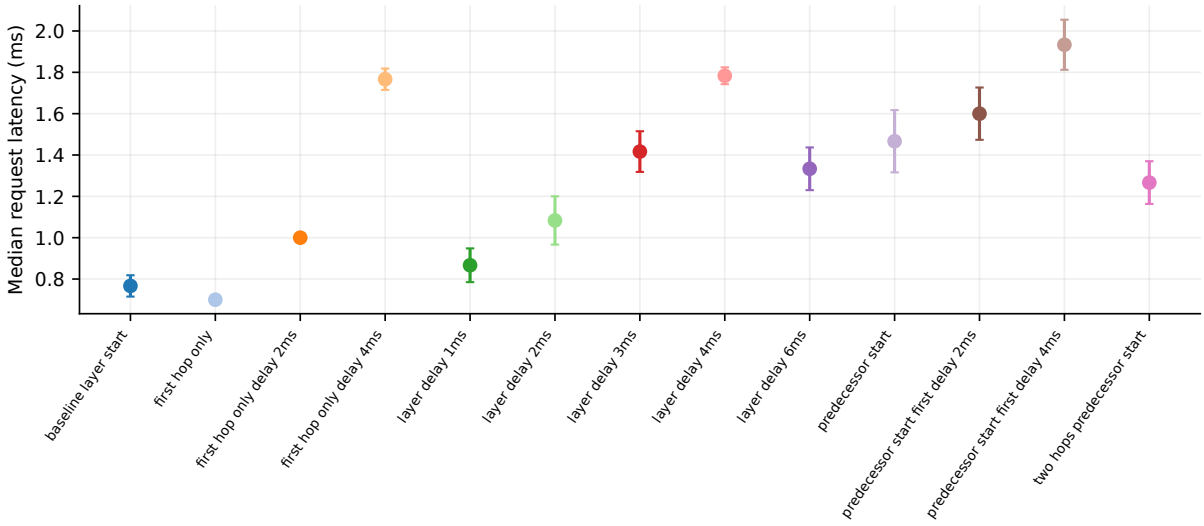


Figure 6.66: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.7667 ± 0.0516	6
first-hop-only	0.7000 ± 0.0000	6
first-hop-only-delay-2ms	1.000 ± 0.000	6
first-hop-only-delay-4ms	1.767 ± 0.052	6
layer-delay-1ms	0.8667 ± 0.0816	6
layer-delay-2ms	1.083 ± 0.117	6
layer-delay-3ms	1.417 ± 0.098	6
layer-delay-4ms	1.783 ± 0.041	6
layer-delay-6ms	1.333 ± 0.103	6
predecessor-start	1.467 ± 0.151	6
predecessor-start-first-delay-2ms	1.600 ± 0.126	6
predecessor-start-first-delay-4ms	1.933 ± 0.121	6
two-hops-predecessor-start	1.267 ± 0.103	6

Table 6.67: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

p95 request latency

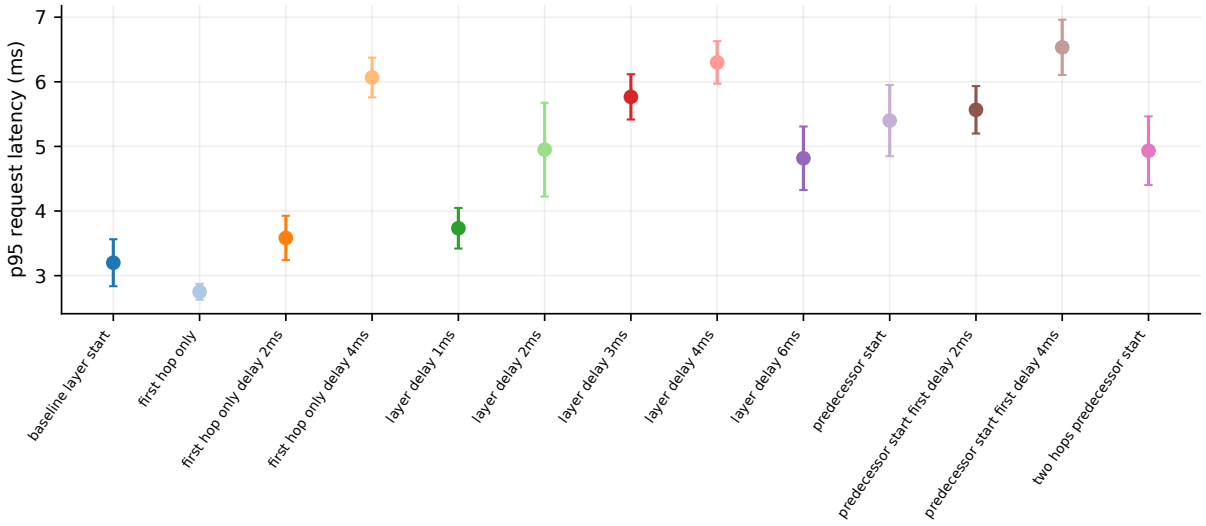


Figure 6.67: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	3.200 ± 0.363	6
first-hop-only	2.750 ± 0.122	6
first-hop-only-delay-2ms	3.583 ± 0.343	6
first-hop-only-delay-4ms	6.067 ± 0.308	6
layer-delay-1ms	3.733 ± 0.314	6
layer-delay-2ms	4.950 ± 0.726	6
layer-delay-3ms	5.767 ± 0.350	6
layer-delay-4ms	6.300 ± 0.329	6
layer-delay-6ms	4.817 ± 0.492	6
predecessor-start	5.400 ± 0.551	6
predecessor-start-first-delay-2ms	5.567 ± 0.367	6
predecessor-start-first-delay-4ms	6.533 ± 0.427	6
two-hops-predecessor-start	4.933 ± 0.532	6

Table 6.68: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Maximum request latency

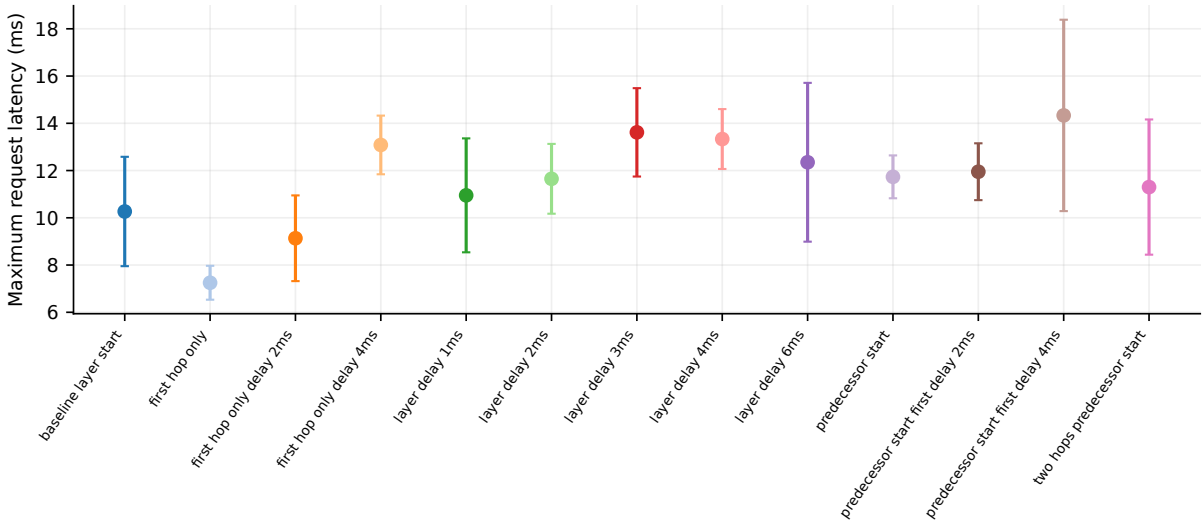


Figure 6.68: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	10.267 ± 2.315	6
first-hop-only	7.250 ± 0.718	6
first-hop-only-delay-2ms	9.134 ± 1.814	6
first-hop-only-delay-4ms	13.084 ± 1.242	6
layer-delay-1ms	10.950 ± 2.411	6
layer-delay-2ms	11.650 ± 1.478	6
layer-delay-3ms	13.617 ± 1.870	6
layer-delay-4ms	13.334 ± 1.268	6
layer-delay-6ms	12.350 ± 3.361	6
predecessor-start	11.734 ± 0.907	6
predecessor-start-first-delay-2ms	11.950 ± 1.203	6
predecessor-start-first-delay-4ms	14.334 ± 4.051	6
two-hops-predecessor-start	11.300 ± 2.862	6

Table 6.69: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Communication makespan

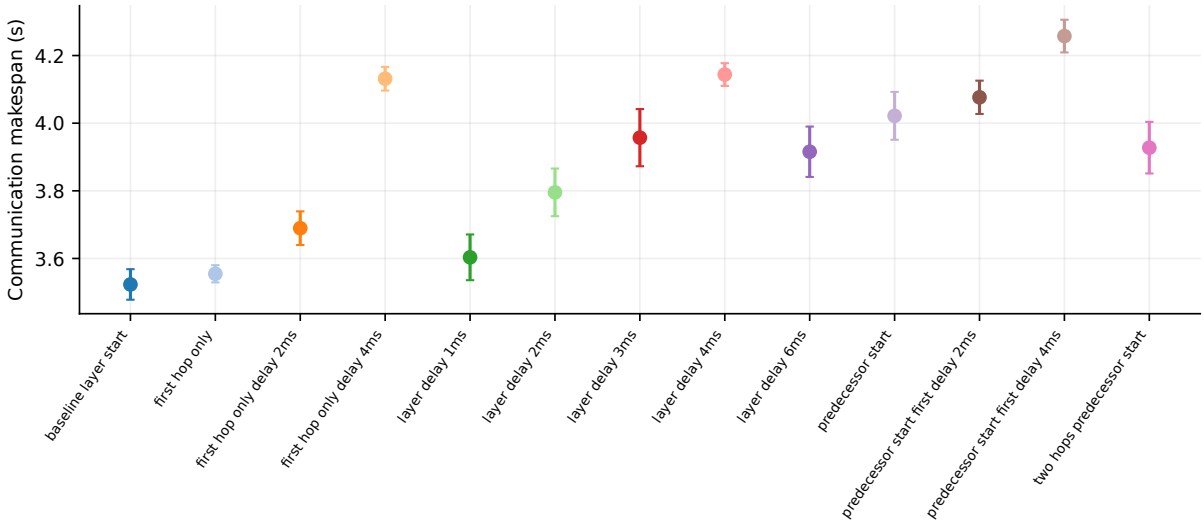


Figure 6.69: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	3.523 ± 0.045	6
first-hop-only	3.555 ± 0.025	6
first-hop-only-delay-2ms	3.690 ± 0.050	6
first-hop-only-delay-4ms	4.131 ± 0.035	6
layer-delay-1ms	3.603 ± 0.068	6
layer-delay-2ms	3.795 ± 0.070	6
layer-delay-3ms	3.957 ± 0.085	6
layer-delay-4ms	4.144 ± 0.034	6
layer-delay-6ms	3.916 ± 0.074	6
predecessor-start	4.022 ± 0.071	6
predecessor-start-first-delay-2ms	4.076 ± 0.049	6
predecessor-start-first-delay-4ms	4.258 ± 0.048	6
two-hops-predecessor-start	3.928 ± 0.076	6

Table 6.70: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Mean admission wait

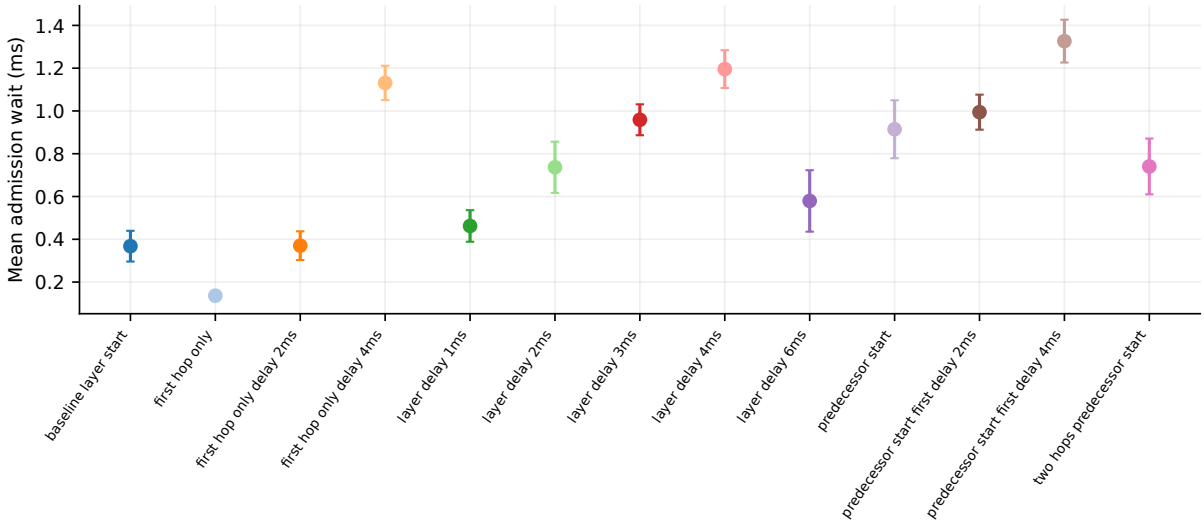


Figure 6.70: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.3678 ± 0.0718	6
first-hop-only	0.1362 ± 0.0187	6
first-hop-only-delay-2ms	0.3702 ± 0.0671	6
first-hop-only-delay-4ms	1.131 ± 0.080	6
layer-delay-1ms	0.4623 ± 0.0738	6
layer-delay-2ms	0.7367 ± 0.1197	6
layer-delay-3ms	0.9587 ± 0.0723	6
layer-delay-4ms	1.196 ± 0.088	6
layer-delay-6ms	0.5792 ± 0.1436	6
predecessor-start	0.9144 ± 0.1355	6
predecessor-start-first-delay-2ms	0.9943 ± 0.0818	6
predecessor-start-first-delay-4ms	1.326 ± 0.100	6
two-hops-predecessor-start	0.7405 ± 0.1304	6

Table 6.71: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered EPR fidelity

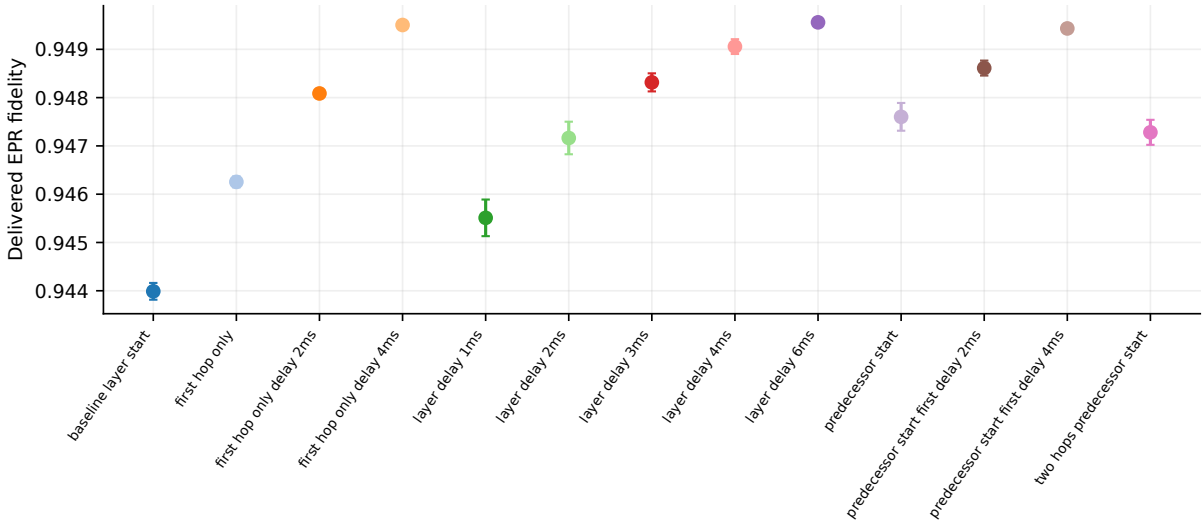


Figure 6.71: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.9440 ± 0.0002	6
first-hop-only	0.9463 ± 0.0001	6
first-hop-only-delay-2ms	0.9481 ± 0.0001	6
first-hop-only-delay-4ms	0.9495 ± 0.0000	6
layer-delay-1ms	0.9455 ± 0.0004	6
layer-delay-2ms	0.9472 ± 0.0003	6
layer-delay-3ms	0.9483 ± 0.0002	6
layer-delay-4ms	0.9491 ± 0.0002	6
layer-delay-6ms	0.9496 ± 0.0001	6
predecessor-start	0.9476 ± 0.0003	6
predecessor-start-first-delay-2ms	0.9486 ± 0.0002	6
predecessor-start-first-delay-4ms	0.9494 ± 0.0000	6
two-hops-predecessor-start	0.9473 ± 0.0003	6

Table 6.72: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler readiness fraction

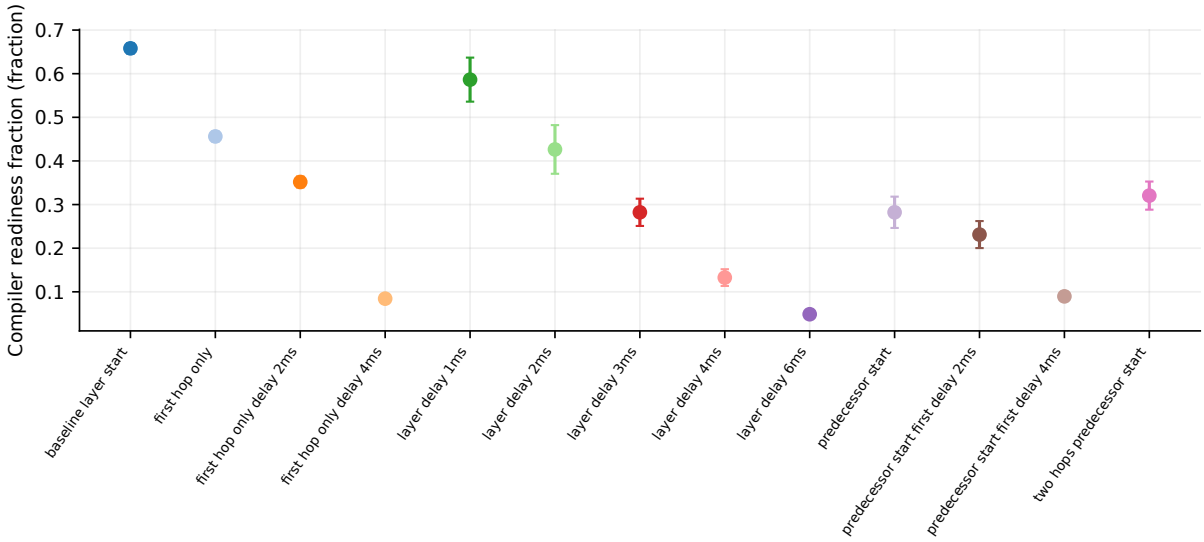


Figure 6.72: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.6581 ± 0.0120	6
first-hop-only	0.4562 ± 0.0116	6
first-hop-only-delay-2ms	0.3517 ± 0.0124	6
first-hop-only-delay-4ms	0.0843 ± 0.0089	6
layer-delay-1ms	0.5864 ± 0.0505	6
layer-delay-2ms	0.4263 ± 0.0558	6
layer-delay-3ms	0.2822 ± 0.0312	6
layer-delay-4ms	0.1326 ± 0.0192	6
layer-delay-6ms	0.0486 ± 0.0068	6
predecessor-start	0.2823 ± 0.0359	6
predecessor-start-first-delay-2ms	0.2312 ± 0.0310	6
predecessor-start-first-delay-4ms	0.0896 ± 0.0104	6
two-hops-predecessor-start	0.3205 ± 0.0322	6

Table 6.73: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Intended compiler-hit fraction

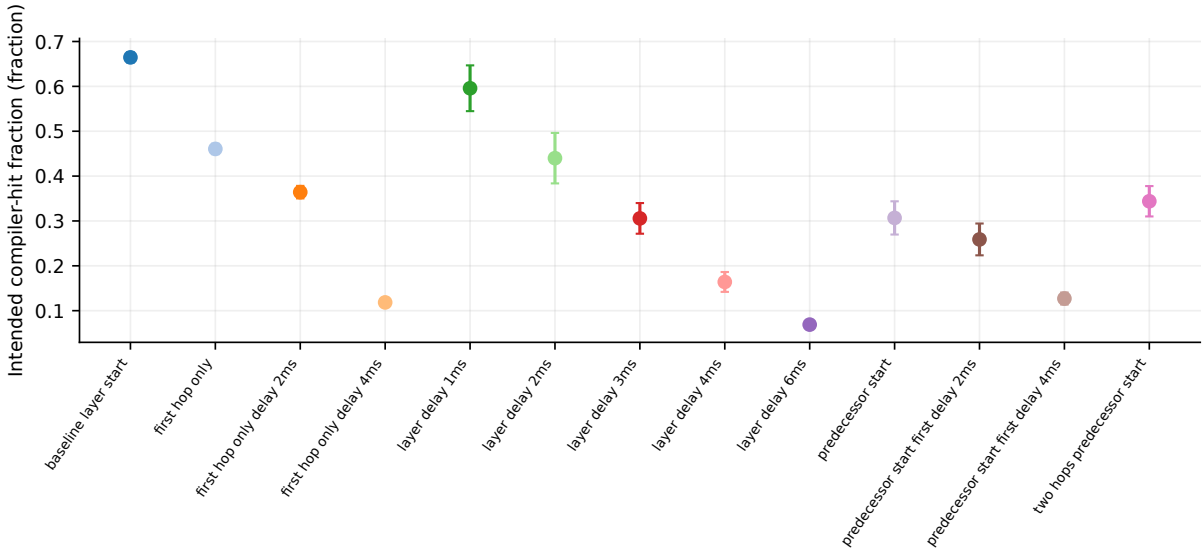


Figure 6.73: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.6646 ± 0.0114	6
first-hop-only	0.4606 ± 0.0117	6
first-hop-only-delay-2ms	0.3642 ± 0.0140	6
first-hop-only-delay-4ms	0.1184 ± 0.0096	6
layer-delay-1ms	0.5958 ± 0.0510	6
layer-delay-2ms	0.4399 ± 0.0562	6
layer-delay-3ms	0.3057 ± 0.0342	6
layer-delay-4ms	0.1641 ± 0.0221	6
layer-delay-6ms	0.0689 ± 0.0087	6
predecessor-start	0.3068 ± 0.0370	6
predecessor-start-first-delay-2ms	0.2588 ± 0.0354	6
predecessor-start-first-delay-4ms	0.1271 ± 0.0135	6
two-hops-predecessor-start	0.3439 ± 0.0338	6

Table 6.74: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler fallback fraction

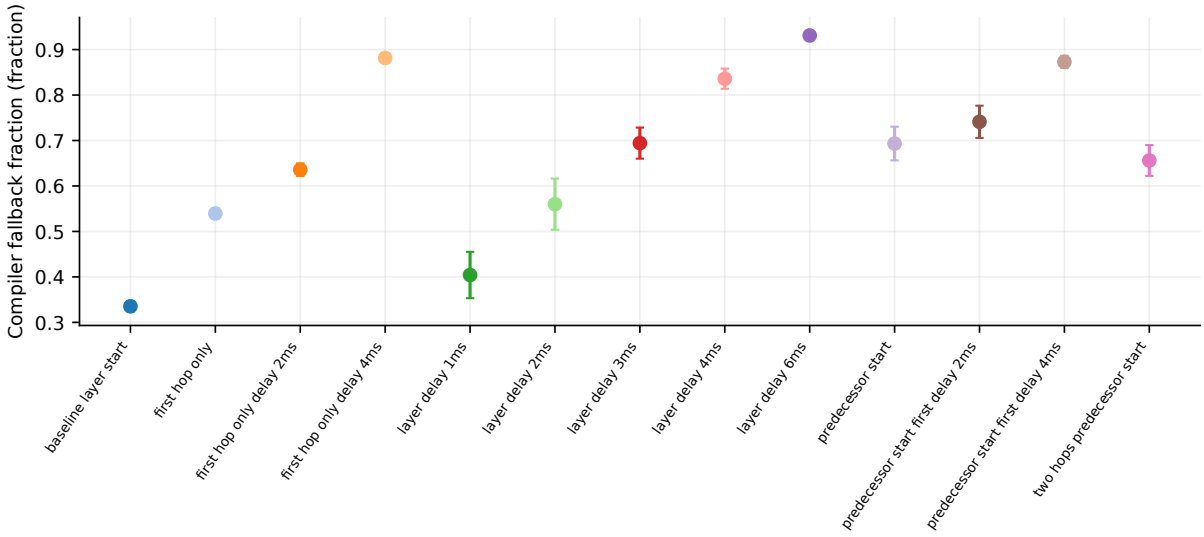


Figure 6.74: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.3354 ± 0.0114	6
first-hop-only	0.5394 ± 0.0117	6
first-hop-only-delay-2ms	0.6358 ± 0.0140	6
first-hop-only-delay-4ms	0.8816 ± 0.0096	6
layer-delay-1ms	0.4042 ± 0.0510	6
layer-delay-2ms	0.5601 ± 0.0562	6
layer-delay-3ms	0.6943 ± 0.0342	6
layer-delay-4ms	0.8359 ± 0.0221	6
layer-delay-6ms	0.9311 ± 0.0087	6
predecessor-start	0.6932 ± 0.0370	6
predecessor-start-first-delay-2ms	0.7412 ± 0.0354	6
predecessor-start-first-delay-4ms	0.8729 ± 0.0135	6
two-hops-predecessor-start	0.6561 ± 0.0338	6

Table 6.75: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-cache waste

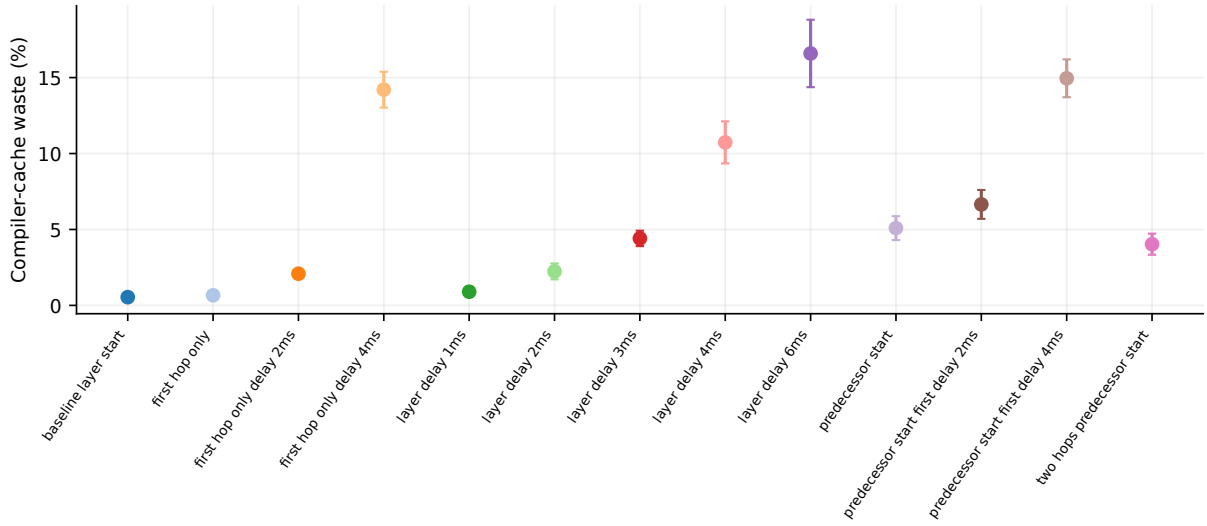


Figure 6.75: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.5420 ± 0.1678	6
first-hop-only	0.6647 ± 0.1258	6
first-hop-only-delay-2ms	2.086 ± 0.285	6
first-hop-only-delay-4ms	14.205 ± 1.180	6
layer-delay-1ms	0.8995 ± 0.3274	6
layer-delay-2ms	2.238 ± 0.525	6
layer-delay-3ms	4.411 ± 0.508	6
layer-delay-4ms	10.733 ± 1.386	6
layer-delay-6ms	16.591 ± 2.221	6
predecessor-start	5.089 ± 0.788	6
predecessor-start-first-delay-2ms	6.650 ± 0.951	6
predecessor-start-first-delay-4ms	14.954 ± 1.247	6
two-hops-predecessor-start	4.030 ± 0.696	6

Table 6.76: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Native-protocol waste

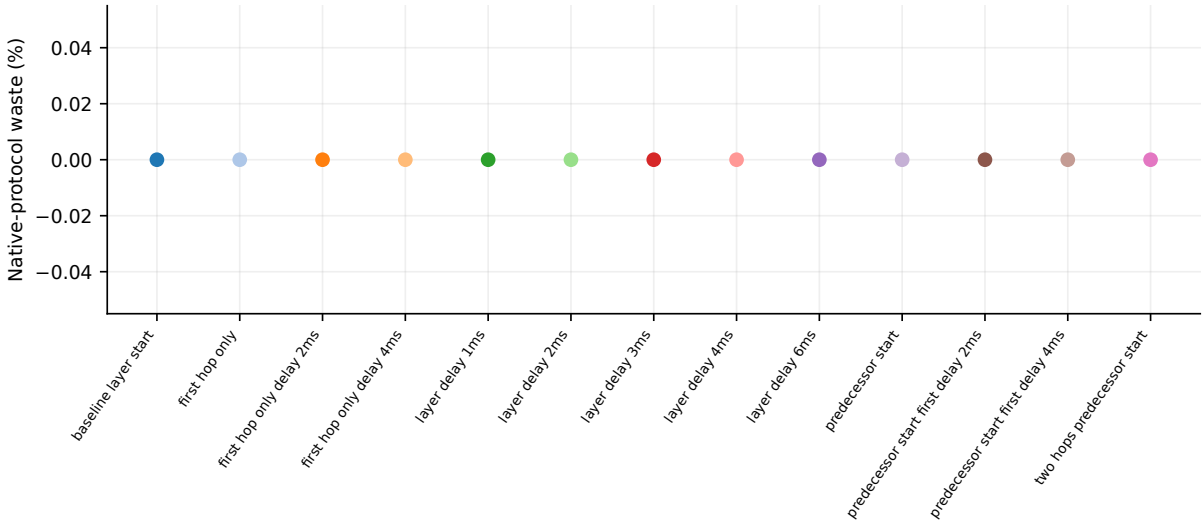


Figure 6.76: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.0000 ± 0.0000	6
first-hop-only	0.0000 ± 0.0000	6
first-hop-only-delay-2ms	0.0000 ± 0.0000	6
first-hop-only-delay-4ms	0.0000 ± 0.0000	6
layer-delay-1ms	0.0000 ± 0.0000	6
layer-delay-2ms	0.0000 ± 0.0000	6
layer-delay-3ms	0.0000 ± 0.0000	6
layer-delay-4ms	0.0000 ± 0.0000	6
layer-delay-6ms	0.0000 ± 0.0000	6
predecessor-start	0.0000 ± 0.0000	6
predecessor-start-first-delay-2ms	0.0000 ± 0.0000	6
predecessor-start-first-delay-4ms	0.0000 ± 0.0000	6
two-hops-predecessor-start	0.0000 ± 0.0000	6

Table 6.77: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Compiler-pair expiry

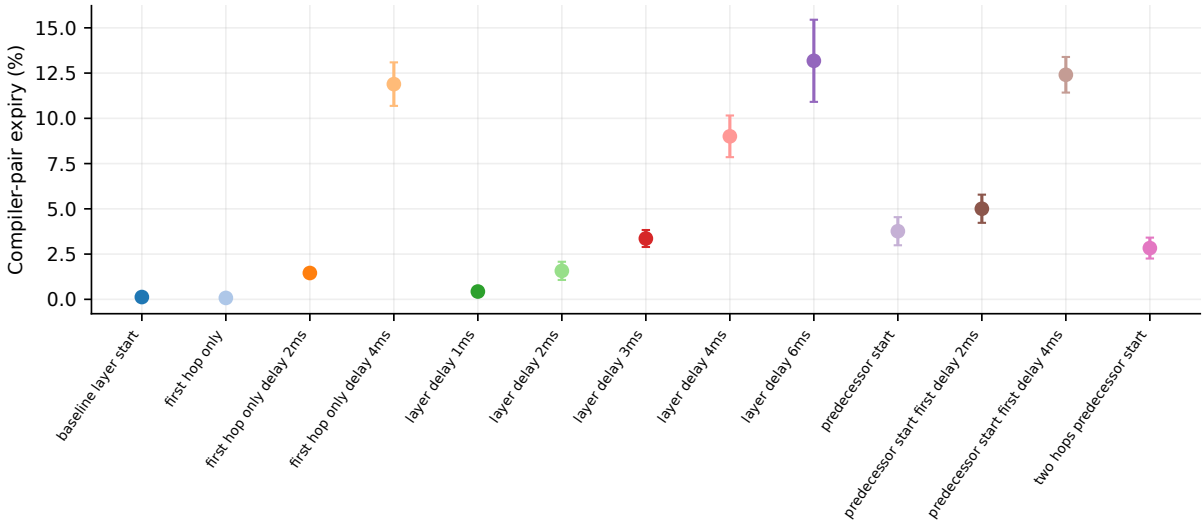


Figure 6.77: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	0.1267 ± 0.1472	6
first-hop-only	0.0780 ± 0.0657	6
first-hop-only-delay-2ms	1.455 ± 0.227	6
first-hop-only-delay-4ms	11.890 ± 1.202	6
layer-delay-1ms	0.4311 ± 0.2370	6
layer-delay-2ms	1.573 ± 0.503	6
layer-delay-3ms	3.361 ± 0.469	6
layer-delay-4ms	9.006 ± 1.151	6
layer-delay-6ms	13.179 ± 2.269	6
predecessor-start	3.764 ± 0.777	6
predecessor-start-first-delay-2ms	5.005 ± 0.778	6
predecessor-start-first-delay-4ms	12.407 ± 0.984	6
two-hops-predecessor-start	2.832 ± 0.578	6

Table 6.78: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Used compiler-pair storage time

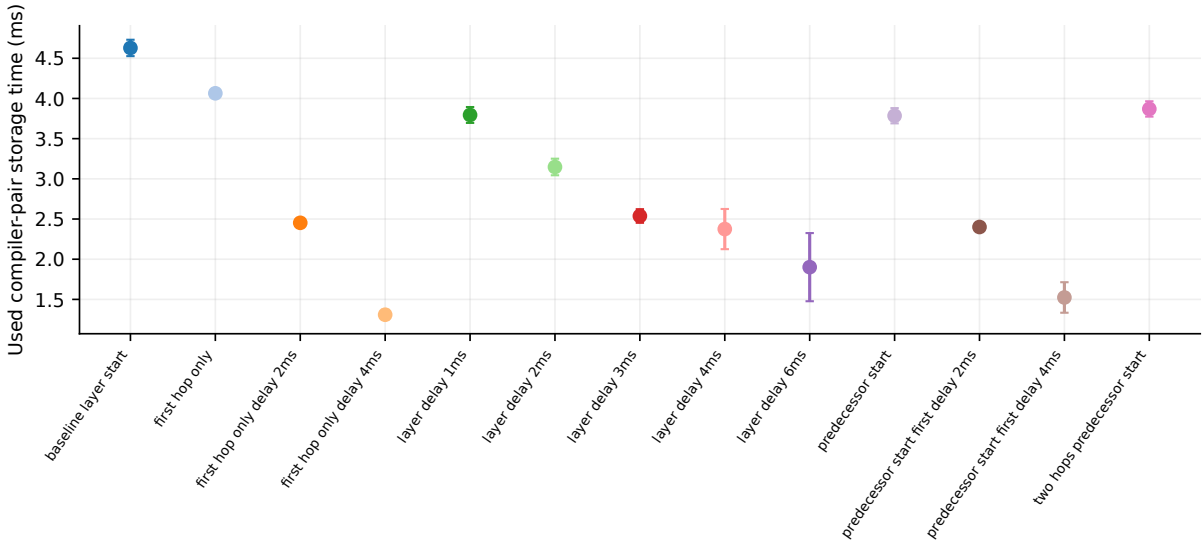


Figure 6.78: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	4.629 ± 0.102	6
first-hop-only	4.064 ± 0.038	6
first-hop-only-delay-2ms	2.453 ± 0.052	6
first-hop-only-delay-4ms	1.309 ± 0.062	6
layer-delay-1ms	3.795 ± 0.099	6
layer-delay-2ms	3.147 ± 0.103	6
layer-delay-3ms	2.538 ± 0.085	6
layer-delay-4ms	2.375 ± 0.250	6
layer-delay-6ms	1.901 ± 0.424	6
predecessor-start	3.785 ± 0.095	6
predecessor-start-first-delay-2ms	2.401 ± 0.055	6
predecessor-start-first-delay-4ms	1.524 ± 0.190	6
two-hops-predecessor-start	3.870 ± 0.095	6

Table 6.79: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Delivered-hop throughput

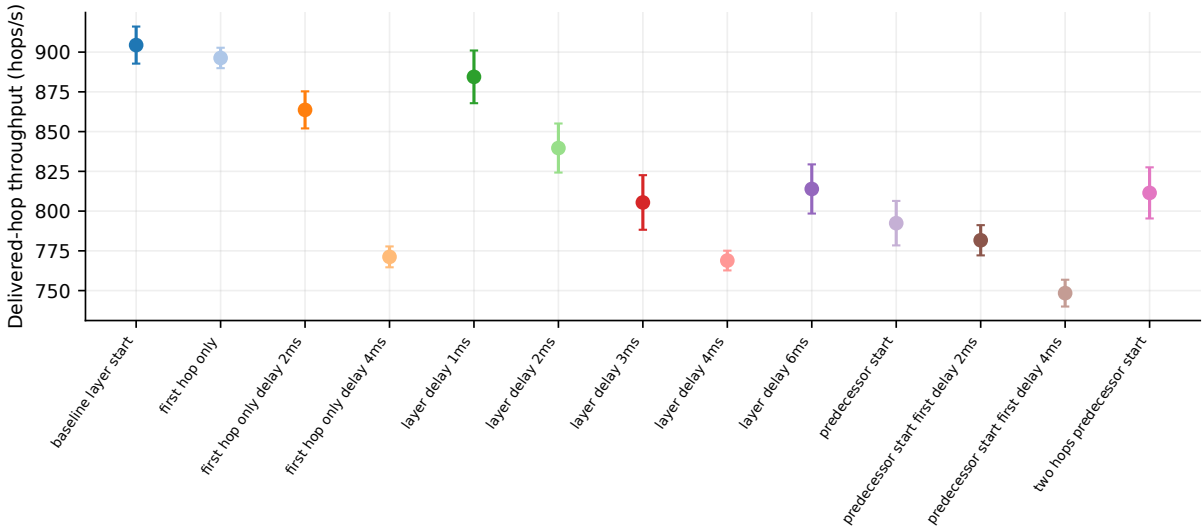


Figure 6.79: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	904.41 ± 11.66	6
first-hop-only	896.32 ± 6.42	6
first-hop-only-delay-2ms	863.66 ± 11.66	6
first-hop-only-delay-4ms	771.21 ± 6.56	6
layer-delay-1ms	884.43 ± 16.57	6
layer-delay-2ms	839.66 ± 15.43	6
layer-delay-3ms	805.43 ± 17.17	6
layer-delay-4ms	768.89 ± 6.20	6
layer-delay-6ms	813.92 ± 15.46	6
predecessor-start	792.41 ± 13.98	6
predecessor-start-first-delay-2ms	781.66 ± 9.51	6
predecessor-start-first-delay-4ms	748.40 ± 8.43	6
two-hops-predecessor-start	811.45 ± 16.08	6

Table 6.80: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Completion fraction

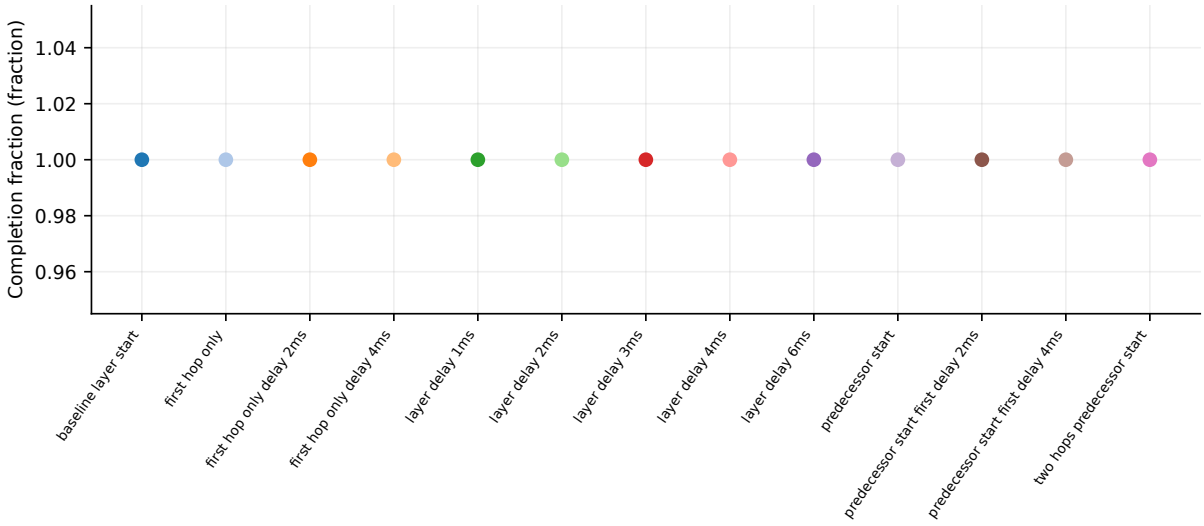


Figure 6.80: Thirteen Dynamic launch variants, M=4 and C=3; zero-delay structural rules and delay sensitivities are distinguished in the definitions.

Variant	Mean ± SD	n
baseline-layer-start	1.000 ± 0.000	6
first-hop-only	1.000 ± 0.000	6
first-hop-only-delay-2ms	1.000 ± 0.000	6
first-hop-only-delay-4ms	1.000 ± 0.000	6
layer-delay-1ms	1.000 ± 0.000	6
layer-delay-2ms	1.000 ± 0.000	6
layer-delay-3ms	1.000 ± 0.000	6
layer-delay-4ms	1.000 ± 0.000	6
layer-delay-6ms	1.000 ± 0.000	6
predecessor-start	1.000 ± 0.000	6
predecessor-start-first-delay-2ms	1.000 ± 0.000	6
predecessor-start-first-delay-4ms	1.000 ± 0.000	6
two-hops-predecessor-start	1.000 ± 0.000	6

Table 6.81: All thirteen variants; n counts byte-distinct trace/physics runs, not conceptual aliases.

Exact CSV values and sample counts

Chapter 7

Final measured comparison and interpretation

The following fixed-budget comparison gives the final $M = 4$ results, with cached methods at $C = 3$ and ODG at $C = 0$. It reports latency and tail latency together with makespan and fidelity. These are directly measured means and sample SDs, not an optimum selected from the all-allocation grid.

Mesh / xy

Policy	Latency ms	p95 ms	Makespan s	Delivered F
ODG	1.327 ± 0.006	3.100 ± 0.141	4.033 ± 0.031	0.9498 ± 0.0000
ACGP	1.908 ± 0.079	5.600 ± 0.283	4.075 ± 0.028	0.9262 ± 0.0004
CGP	1.803 ± 0.075	5.150 ± 0.495	4.006 ± 0.031	0.9271 ± 0.0004
Dynamic first	1.141 ± 0.058	2.900 ± 0.283	3.928 ± 0.029	0.9472 ± 0.0000
Dynamic full	1.335 ± 0.020	4.050 ± 0.212	3.830 ± 0.048	0.9438 ± 0.0002

Table 7.1: M=4; ODG C=0, cached methods C=3. These are final measured results, not policy-selected optima.

Exact CSV values and sample counts

Mesh / yx

Policy	Latency ms	p95 ms	Makespan s	Delivered F
ODG	1.326 ± 0.001	3.200 ± 0.000	4.036 ± 0.032	0.9498 ± 0.0000
ACGP	1.854 ± 0.055	5.250 ± 0.212	4.037 ± 0.032	0.9262 ± 0.0006
CGP	1.828 ± 0.019	5.300 ± 0.000	4.055 ± 0.006	0.9265 ± 0.0003
Dynamic first	1.192 ± 0.025	3.000 ± 0.283	3.993 ± 0.058	0.9473 ± 0.0000
Dynamic full	1.414 ± 0.282	4.250 ± 0.919	3.908 ± 0.207	0.9437 ± 0.0004

Table 7.2: M=4; ODG C=0, cached methods C=3. These are final measured results, not policy-selected optima.

Exact CSV values and sample counts

Mesh / shortest_reliable

Policy	Latency ms	p95 ms	Makespan s	Delivered F
ODG	1.337 ± 0.005	3.133 ± 0.103	4.064 ± 0.029	0.9498 ± 0.0000
ACGP	2.035 ± 0.109	5.581 ± 0.424	4.258 ± 0.060	0.9303 ± 0.0007
CGP	2.106 ± 0.066	5.850 ± 0.164	4.307 ± 0.070	0.9305 ± 0.0006
Dynamic first	1.160 ± 0.010	2.917 ± 0.133	3.985 ± 0.026	0.9473 ± 0.0001
Dynamic full	1.427 ± 0.036	4.200 ± 0.155	3.998 ± 0.031	0.9438 ± 0.0001

Table 7.3: M=4; ODG C=0, cached methods C=3. These are final measured results, not policy-selected optima.

Exact CSV values and sample counts

Mesh / max_reliability

Policy	Latency ms	p95 ms	Makespan s	Delivered F
ODG	1.362 ± 0.032	3.200 ± 0.000	4.321 ± 0.164	0.9498 ± 0.0000
ACGP	2.162 ± 0.120	5.956 ± 0.585	4.598 ± 0.214	0.9321 ± 0.0018
CGP	2.183 ± 0.142	5.900 ± 0.551	4.661 ± 0.244	0.9334 ± 0.0020
Dynamic first	1.257 ± 0.083	3.100 ± 0.155	4.256 ± 0.188	0.9481 ± 0.0004
Dynamic full	1.693 ± 0.164	5.033 ± 0.509	4.390 ± 0.214	0.9442 ± 0.0002

Table 7.4: M=4; ODG C=0, cached methods C=3. These are final measured results, not policy-selected optima.

Exact CSV values and sample counts

Torus / dijkstra

Policy	Latency ms	p95 ms	Makespan s	Delivered F
ODG	1.326 ± 0.008	3.067 ± 0.103	3.666 ± 0.014	0.9498 ± 0.0000
ACGP	1.973 ± 0.072	5.273 ± 0.173	3.837 ± 0.046	0.9299 ± 0.0008
CGP	2.022 ± 0.059	5.388 ± 0.045	3.858 ± 0.042	0.9304 ± 0.0013
Dynamic first	1.054 ± 0.024	2.750 ± 0.122	3.555 ± 0.025	0.9463 ± 0.0001
Dynamic full	1.113 ± 0.073	3.200 ± 0.363	3.523 ± 0.045	0.9440 ± 0.0002

Table 7.5: M=4; ODG C=0, cached methods C=3. These are final measured results, not policy-selected optima.
Exact CSV values and sample counts

The first-hop Dynamic policy has lower mean latency than ODG in each listed fixed-budget routing cell, under this workload and physical model. The full-chain policy can have a shorter makespan while retaining higher mean hop latency. This is possible because eligibility-based request intervals and the elapsed completion of parallel chains are different observables. Routing and policy decisions should therefore be judged jointly on latency, makespan, fidelity and resource waste.

More cache use or a higher readiness count is not automatically a better result. Cached EPR pairs can increase admission contention; storage changes delivered fidelity; route length changes the number of hop requests. The detailed memory and allocation curves preserve these trade-offs. The launch sensitivities should be read as an ablation of trigger and preparation choices, rather than as thirteen unrelated algorithms.

The experiment establishes a reproducible QFT-96 comparison. It does not prove universal superiority over ODG, establish optimal parameters for other workloads, or measure a complete distributed-QFT algorithm execution. In particular, the physical parameters are a simulation model, and data-qubit relay occupancy and final algorithm fidelity require additional modelling. The small physics-seed count also limits inference about rare failures and tails. These boundaries are part of the methodology, not missing results to be filled by assumptions.

Appendix A

Metric coverage and instrumentation notes

The machine-readable metric registry enumerates all 47 report metrics, units, applicability and figure coverage. The per-seed exports retain all original runner columns as well as derived delivered-hop throughput. Mean latency aliases (arrival/eligible/average-request fields) are retained in the raw export but not plotted repeatedly under different names.

The report includes latency mean, median, p95 and maximum; makespan; mean/max admission wait and waiting fraction; service, retry-wait and reservation counters; completion and throughput; delivered fidelity; generation/use/expiry/remaining counters; compiler readiness, intended use, fallback and late use; waste; storage; planner/runtime preparation diagnostics; and mean/max/min layer latency. Constant-zero diagnostics are preserved as counters, not interpreted as proof that all control operations are instantaneous.

Compiler counters are reported only for Dynamic policies. Native-protocol counters use their own record population and may include protocol-side bookkeeping rather than one logical migration per count. No attempt is made to add native and compiler counts or infer uninstrumented total CGP readiness. Storage and compiler fidelity-at-use are conditional on successful compiler utilisation. The total number of layers is a trace property, not a stochastic performance metric.

Some requested quantities require instrumentation beyond these saved summaries: an isolated aggregate RSVP/start-guard duration, p99 latency, a physical time-series memory-occupancy distribution, and a dedicated starvation-event count are not available as separate verified outcome columns. The reservation-setup counter does not substitute for the complete control guard. Full completion is reported directly; it is not converted into an invented starvation statistic. Empty communication layers can also produce zero minimum layer latency. The complete raw exports preserve the measured fields without fabricating these missing quantities.

The run's safety horizon is not a measured latency. The fidelity acceptance threshold is not the average delivered fidelity. Planner coherence in layers is not physical memory coherence in seconds. Likewise, static congestion capacity is a structural threshold; it does not record transient memory bookings inside ACE. These distinctions prevent the most common misreadings of the graphs.

Appendix B

Evidence, files and reproducibility

The report's committed data directory contains:

- `per_seed_base.csv`: all 6,402 base observations and original runner columns.
- `per_seed_variants.csv`: all 286 launch observations.
- `all_allocations_all_metrics.csv`: 1,455 route/memory/allocation/policy aggregates after exact trace deduplication.
- `all_variants_all_metrics.csv`: all 65 route/variant aggregates.
- `congestion_verified.csv`, `heatmap_inventory.csv` and `trace_structure.csv`: independent congestion values, original image hashes and input structure.
- `job_provenance.csv`, `source_ledger.csv` and `validation.json`: execution identities, hashes and validation checks.
- A separate numerical CSV for every metric graph and grouped heatmap table.

The source study is the QFT-96 results root. Its execution contract, mapping contract, manifests, configurations and source lock define the experiment. The report includes only the declared complete memory set through 32; it makes no claim for an uncompleted capacity or policy phase.

The local raw-job directories are keyed by job ID in the base-evaluation and Dynamic-variant subdirectories beneath `raw/`. Each contains the summary, metadata, command/execution record and logs. Not every raw directory is versioned. The report's committed per-seed exports provide all numerical evidence without depending on a link to an untracked file.

Rebuild from the repository root with the study data available locally:

```
python -m tools.golden_study.build_qft96_final_report
cd docs/latex/qft96_final
tectonic main.tex
```

Use `-verify-only` for the audit without regenerating figures. The report builder validates records and generates derivative artefacts; it does not run ACE or modify simulator assumptions. It also independently checks dimension-order XY/YX routes and minimum hop counts for shortest-reliable and torus Dijkstra. Maximum-reliability optimality is not independently re-solved by this report audit. The recorded ACE source hashes and clean SeQUeNCe revision identify the simulation implementation. Reproducing physical runs additionally requires that declared environment and the exact job commands.