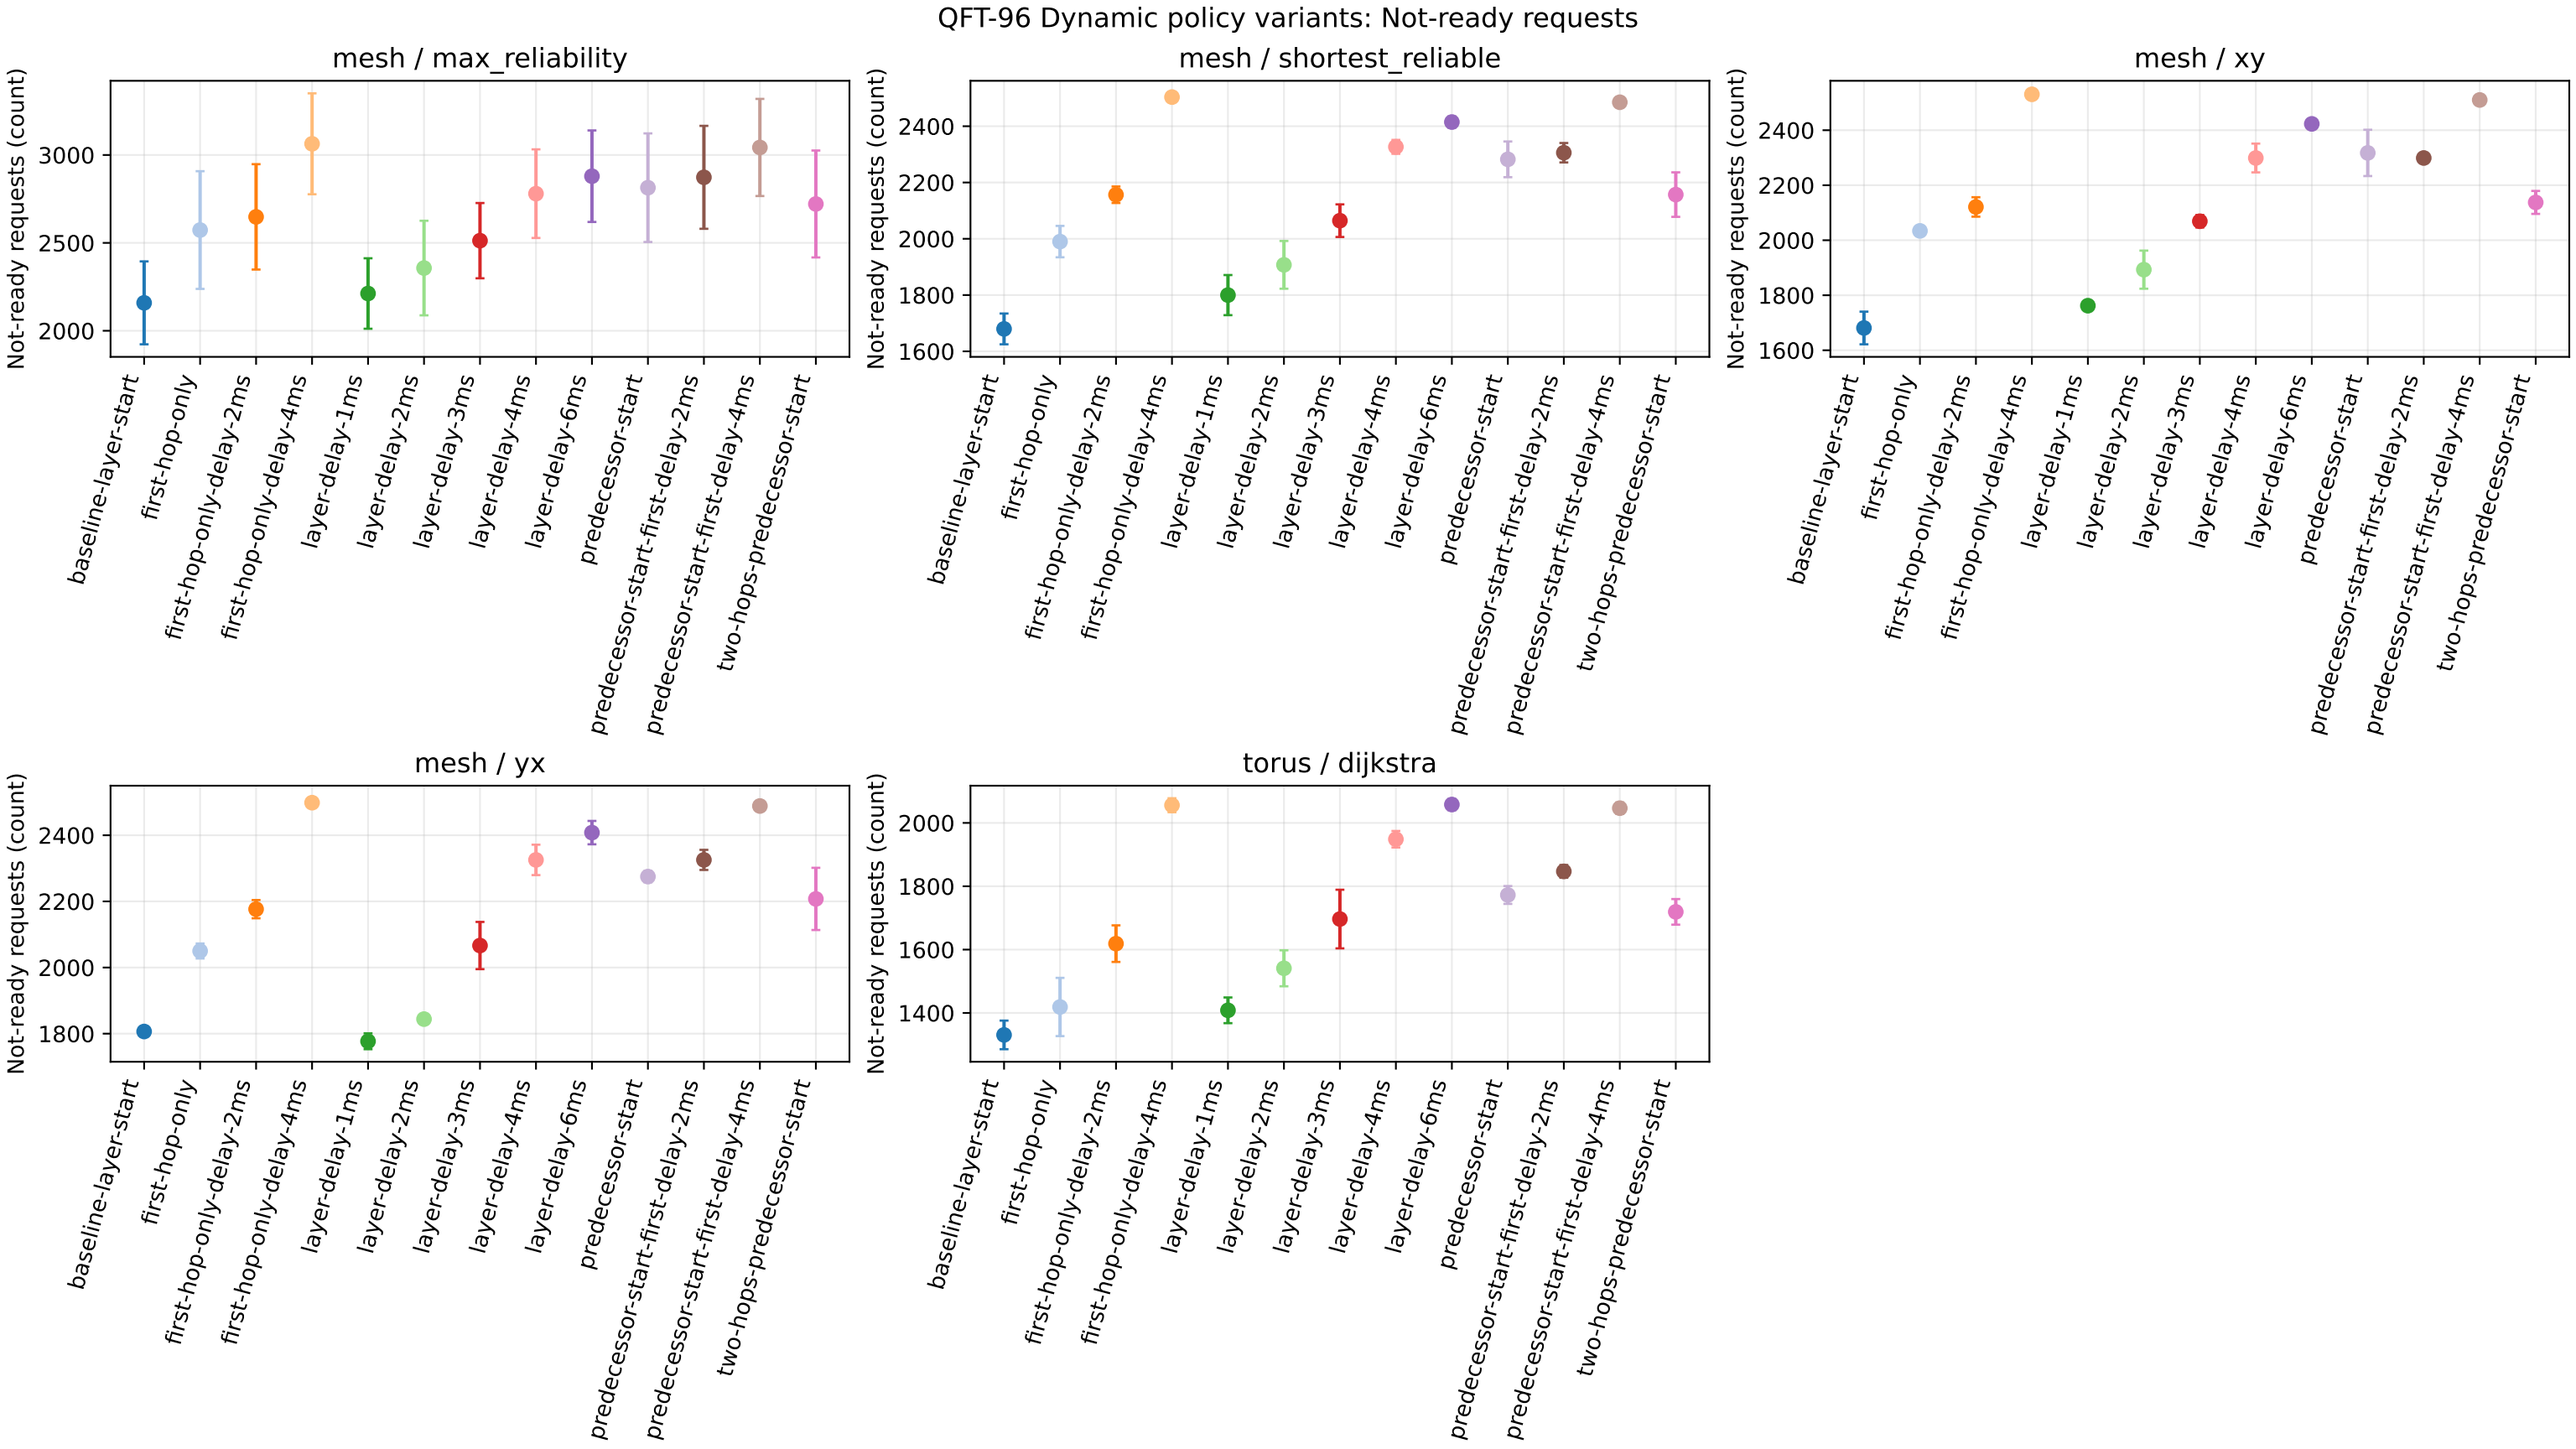
QFT-96 Dynamic policy variants: Not-ready requests
mesh / max_reliability
mesh / shortest_reliable
mesh / xy
mesh / yx
torus / dijkstra
Not-ready requests (count)
baseline-layer-start
first-hop-only
first-hop-only-delay-2ms
first-hop-only-delay-4ms
layer-delay-1ms
layer-delay-2ms
layer-delay-3ms
layer-delay-4ms
layer-delay-6ms
predecessor-start
predecessor-start-first-delay-2ms
predecessor-start-first-delay-4ms
two-hops-predecessor-start