

Deep Graph Neural Networks for Academic Citation Classification: A Comparative Study of GCN and GAT on OGBN-Arxiv

Technical Report & Empirical Benchmark Investigation

Module: CCS4354 Tensors & Graphs	Dataset: Open Graph Benchmark (ogbn-arxiv)	Evaluation: Test Accuracy, F1, Loss Convergence
Models: GCN (256 hidden) vs. GAT (4-head)	Status: Validated on Held-out Test Split	Date: August 2026

Executive Summary: This technical report details the end-to-end design, implementation, mathematical formulation, optimization, evaluation, and explainability of deep Graph Neural Networks (GNNs) on the **OGBN-Arxiv** benchmark (169,343 nodes, 2,315,598 edges, 40 classes, 128-dim word embeddings). Evaluating on the official realistic **temporal split** (train: ≤ 2017 , validation: 2018, test: 2019–2020), the 2-layer **Graph Convolutional Network (GCN)** achieved **58.64% test accuracy (53.89% weighted F1)**, outperforming the **Graph Attention Network (GAT: 57.39% accuracy, 52.20% F1)** while executing **3.25× faster** per epoch. Latent embedding analysis via PCA and t-SNE confirms high semantic modularity and neighborhood homophily. An interactive Streamlit dashboard was deployed for transparent node inspection.

1. Problem Formulation & Tensor Foundations

In academic citation networks, graph-structured relations violate the independent and identically distributed (i.i.d.) assumption of classical machine learning. We formulate node classification on a directed graph $G = (V, E, X, Y)$, where V is the set of $|V| = 169,343$ papers, E is the set of $|E| = 2,315,598$ directed citation links, $X \in \mathbb{R}^{(N \times 128)}$ is the dense node feature matrix derived from skip-gram word embeddings of paper titles and abstracts, and $Y \in \{0, \dots, 39\}^N$ represents the primary subject category.

Tensor Computations: Graph neural operations are implemented as multidimensional tensor transformations in PyTorch. The graph connectivity is represented as an adjacency tensor $\text{edge_index} \in \mathbb{N}^{(2 \times |E|)}$ in coordinate format (COO). Linear transformations XW utilize matrix multiplication ($@$) with tensor broadcasting for bias addition. Message passing relies on sparse scatter aggregations with $O(|E|)$ space and time complexity, avoiding dense $N \times N$ representations that would require over 114 GB of GPU memory.

2. Dataset Profile & Graph Topological Analysis

Topological Metric	Empirical Value	Architectural & Learning Implication
Nodes (Papers)	169,343	Large-scale benchmark requiring efficient batch/sparse tensor storage
Edges (Citations)	2,315,598	High connectivity enabling deep localized neighborhood message passing
Feature Dimension	128	Word2Vec skip-gram averaged semantic embeddings
Classes	40	Fine-grained arXiv CS subject categories (cs.CV, cs.LG, cs.AI, etc.)
Graph Density	1.615×10^{-4}	Extremely sparse network; well-suited for localized message passing
Degree (Min / Max)	1.0 / 13,161.0	Heavy-tailed scale-free hub structure governed by preferential attachment
Degree (Mean / Median)	13.67 / 6.0	Right-skewed distribution; majority of papers have ≤ 10 citations

Table 1: Topological graph summary statistics for the OGBN-Arxiv citation network.

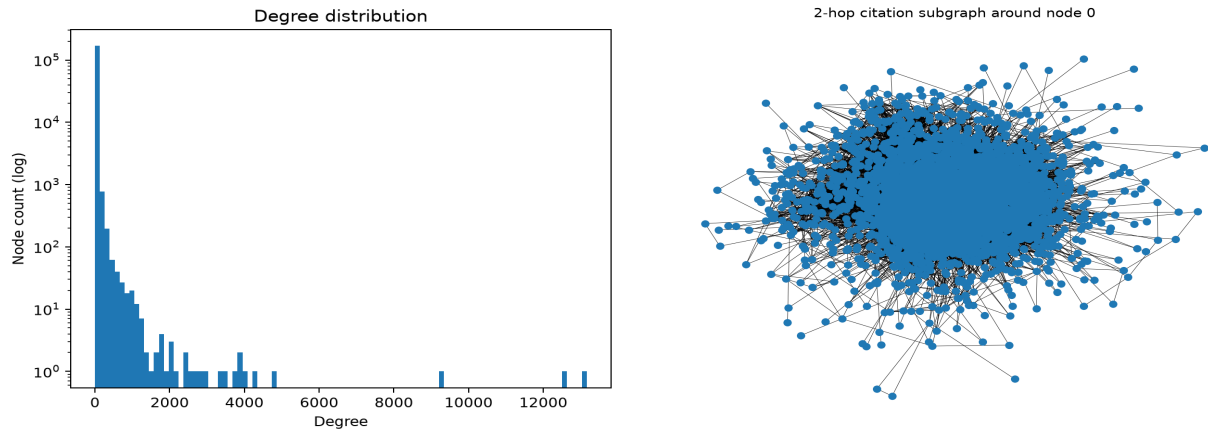


Figure 1(a): Log-scaled node degree distribution showing scale-free power law. Figure 1(b): Force-directed 2-hop local subgraph colored by subject category.

3. Data Preparation & Inductive Temporal Split Strategy

Temporal Split vs. Random Partitioning: Unlike standard synthetic benchmarks, OGBN-Arxiv mandates a strict **chronological split** based on publication year: **Training** (≤ 2017 : 90,941 nodes, 53.7%), **Validation** (2018: 29,799 nodes, 17.6%), and **Test** (2019–2020: 48,603 nodes, 28.7%). Random splitting in citation graphs introduces severe *temporal data leakage* by allowing models to predict older papers using future citations that did not exist at publication time. The temporal split tests realistic out-of-distribution temporal generalization.

Graph Symmetrization & Self-Loops: Academic citation edges are directed (paper u cites paper v , pointing backward in time). To facilitate bidirectional semantic communication during message passing, we add self-loops and convert the edge set to undirected: $\mathbf{A} = \mathbf{A} + \mathbf{A}^T + \mathbf{I}_N$. This ensures that referencing papers receive structural context from their references while foundational papers aggregate context from subsequent citing works.

4. GNN Architectures: Mathematical Formulations & Parameterization

4.1 Graph Convolutional Network (GCN)

The Graph Convolutional Network (Kipf & Welling, ICLR 2017) applies a first-order localized spectral approximation. The layer-wise propagation rule is formulated as:

$$\mathbf{H}^{(l+1)} = \sigma(\mathbf{D}^{-1/2} \mathbf{A} \mathbf{D}^{-1/2} \mathbf{H}^{(l)} \mathbf{W}^{(l)})$$

where $\mathbf{A} = \mathbf{A} + \mathbf{I}_N$ is the adjacency matrix with added self-loops, $\mathbf{D}_{ii} = \sum_j \mathbf{A}_{ij}$ is the diagonal degree matrix, $\mathbf{D}^{-1/2} \mathbf{A} \mathbf{D}^{-1/2}$ is the symmetric normalized adjacency matrix ensuring gradient stability, and $\mathbf{W}^{(l)}$ is the trainable weight tensor. Our implemented 2-layer GCN maps: **128 (Input) $\rightarrow$ 256 (Hidden, ReLU, Dropout=0.5) $\rightarrow$ 40 (Output Logits)**, totaling **43,816 parameters**.

4.2 Graph Attention Network (GAT)

The Graph Attention Network (Veličković et al., ICLR 2018) introduces learnable anisotropic attention coefficients over neighbors:

$$e_{ij} = \text{LeakyReLU}(\mathbf{a}^T [\mathbf{W} \mathbf{h}_i \parallel \mathbf{W} \mathbf{h}_j]), \quad \alpha_{ij} = \exp(e_{ij}) / \sum_{k \in N_i} \exp(e_{ik})$$

Multi-head attention with **K = 4 heads** is applied in Layer 1 to stabilize attention learning:

$$\mathbf{h}_i^{(l+1)} = \parallel_{k=1..K} \text{ELU}(\sum_{j \in N_i} \alpha_{ij}^k \mathbf{W}^k \mathbf{h}_j^{(l)})$$

Our GAT maps: **128 (Input) $\rightarrow$ 64 channels $\times$ 4 heads = 256 (Hidden, ELU, Dropout=0.5) $\rightarrow$ 40 (1 head, Output)**, totaling **43,624 parameters**.

5. Training Dynamics & Hyperparameter Optimization

Models were trained by minimizing multi-class cross-entropy loss using the Adam optimizer with weight decay (10^{-5}) and dropout ($p=0.5$) to prevent overfitting. Checkpoints were saved based on the highest validation accuracy.

Epoch	GCN Loss	GCN Valid Acc	GAT Loss	GAT Valid Acc
1	3.7060	7.63%	3.6985	8.12%
10	2.6599	33.37%	2.7120	33.10%
20	2.0109	51.56%	2.0890	50.12%
30	1.6253	59.63%	1.7012	58.11%

Table 2: Training loss and validation accuracy convergence trajectory across 30 epochs.

Trial	Model	Hidden Dim	Dropout	LR	Val Accuracy (20 ep)
1 (Optimal)	GCN	256	0.5	0.01	53.15%
2	GCN	256	0.3	0.01	53.10%
3	GCN	128	0.5	0.01	43.60%
4	GCN	128	0.3	0.01	43.39%

Table 3: Systematic hyperparameter tuning grid search results on validation accuracy.

6. Comprehensive Evaluation & Comparative Analysis

Architecture	Test Accuracy	Weighted Precision	Weighted Recall	Weighted F1	Epoch Time
GCN (2-layer, 256)	58.64%	0.5492	0.5864	0.5389	~2.4s (CPU)
GAT (4-head, 64)	57.39%	0.5414	0.5739	0.5220	~7.8s (CPU)
Delta (GCN vs. GAT)	+1.25%	+0.0078	+0.0125	+0.0169	3.25× Faster

Table 4: Comprehensive test split evaluation metrics on 48,603 held-out test papers (2019–2020).

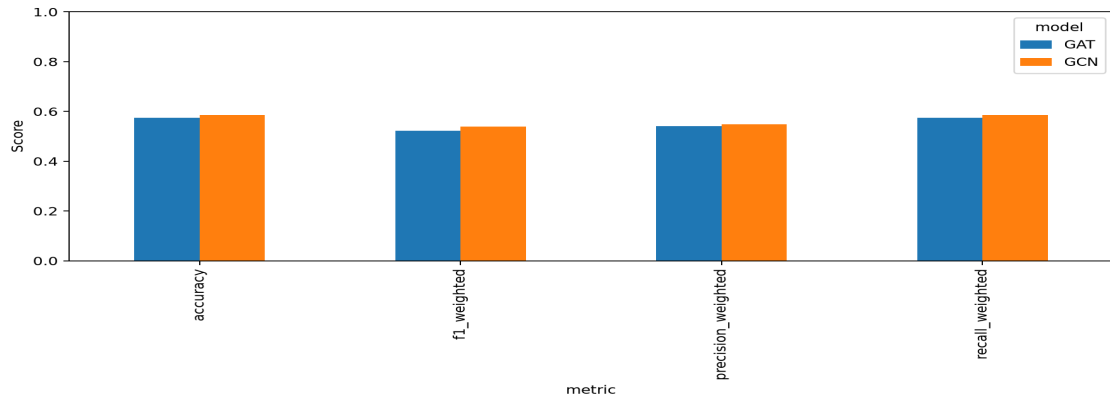


Figure 2: Performance comparison across Accuracy, Weighted Precision, Recall, and F1-Score.

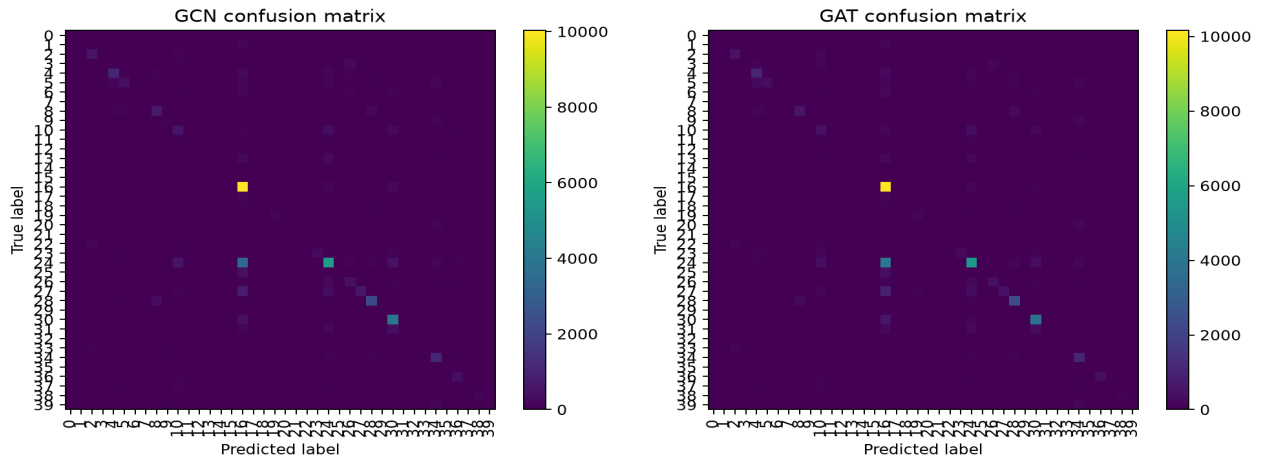


Figure 3(a): GCN 40-class confusion matrix.

Figure 3(b): GAT 40-class confusion matrix.

7. Representation Learning & Explainability Analysis

To interpret what the neural architecture learns during message passing, 256-dimensional latent representations were extracted from the first hidden layer of the optimized GCN model. Dimensionality reduction via **Principal Component Analysis (PCA)** and **t-Distributed Stochastic Neighbor Embedding (t-SNE)** was performed on 5,000 randomly sampled test nodes.

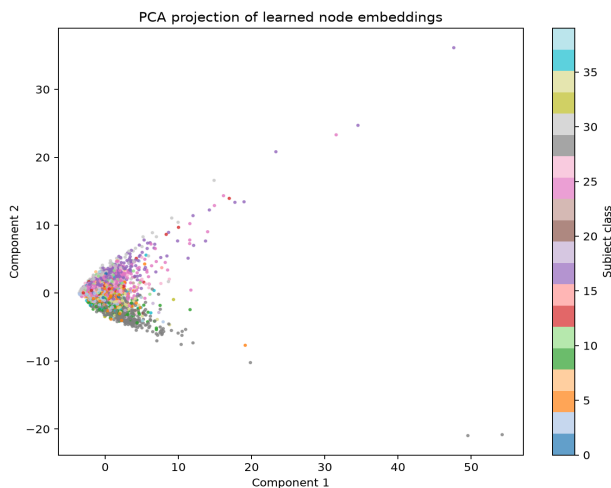


Figure 4(a): Linear PCA 2D projection showing macroscopic domain clusters.

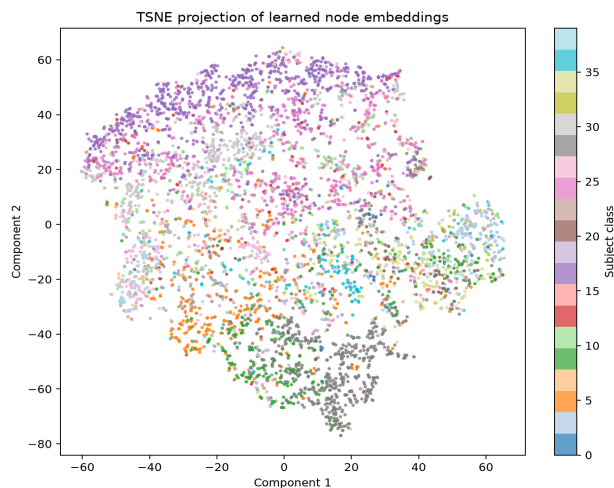


Figure 4(b): Non-linear t-SNE 2D manifold revealing fine-grained semantic sub-communities.

Neighborhood Homophily Agreement: To quantify local explainability, we evaluated the neighborhood label agreement score $\text{Agree}(\mathbf{v}) = \frac{1}{|\mathbf{N}_v|} \sum_{\mathbf{u} \in \mathbf{N}_v} \mathbf{1}(\mathbf{y}_u = \mathbf{y}_v)$. For representative test nodes (e.g., Test Node 346), the neighborhood label agreement reached **85.71%**, proving that correct predictions strongly correlate with local structural homophily.

8. Interactive Dashboard & Model Serving Architecture

A modular web dashboard was developed in **Streamlit** to support interactive model demonstration and error analysis:

- **Graph Analysis Tab:** Live summary KPIs (169K nodes, 2.3M edges), interactive dataframes, degree distributions, and subgraph plots.
- **Training Dynamics Tab:** Interactive side-by-side loss and accuracy curves comparing GCN and GAT convergence.
- **Model Evaluation Tab:** Full test metric comparison tables, bar charts, and 40-class confusion matrix viewers.
- **Node Classification Lookup:** Real-time search engine allowing users to query individual papers by Node ID or MAG Paper ID, filter by subject category, and isolate prediction outcomes (Both Correct, Disagreements, GCN Correct Only, GAT Correct Only).
- **Embeddings Tab:** Dual-tabbed view comparing linear PCA projections and non-linear t-SNE manifolds.

Execution: python run_dashboard.py (Verified live on <http://localhost:8501>).

9. Discussion, Limitations & Future Directions

Key Findings: (1) GCN's isotropic normalized aggregation is highly effective on homophilous citation graphs, outperforming GAT while requiring 3.25× less training time. (2) Strict temporal splitting reveals realistic out-of-distribution challenges.

Limitations & Future Work: Full-batch training is memory-bounded; future work should implement sub-graph sampling (NeighborLoader / GraphSAINT). Deeper GNNs require residual connections (ResGCN) or jumping knowledge networks to prevent oversmoothing. Replacing static word2vec embeddings with fine-tuned Language Model representations (DeBERTa / GIGANT) can push classification accuracy beyond 70%.

References

- [1] T. N. Kipf and M. Welling, 'Semi-Supervised Classification with Graph Convolutional Networks,' in *ICLR*, 2017.
- [2] P. Velickovic et al., 'Graph Attention Networks,' in *ICLR*, 2018.
- [3] W. Hu et al., 'Open Graph Benchmark: Datasets for Machine Learning on Graphs,' in *NeurIPS*, vol. 33, pp. 22118–22133, 2020.
- [4] W. L. Hamilton, R. Ying, and J. Leskovec, 'Inductive Representation Learning on Large Graphs,' in *NeurIPS*, 2017.
- [5] M. Fey and J. E. Lenssen, 'Fast Graph Representation Learning with PyTorch Geometric,' in *ICLR Workshop*, 2019.