



Create a S3 Bucket Replica from one AWS account to another AWS account

By : Sanket Daingade


1. Sign in to the AWS Management Console using credentials for the source AWS account (Account A), and navigate to the Amazon S3 console.

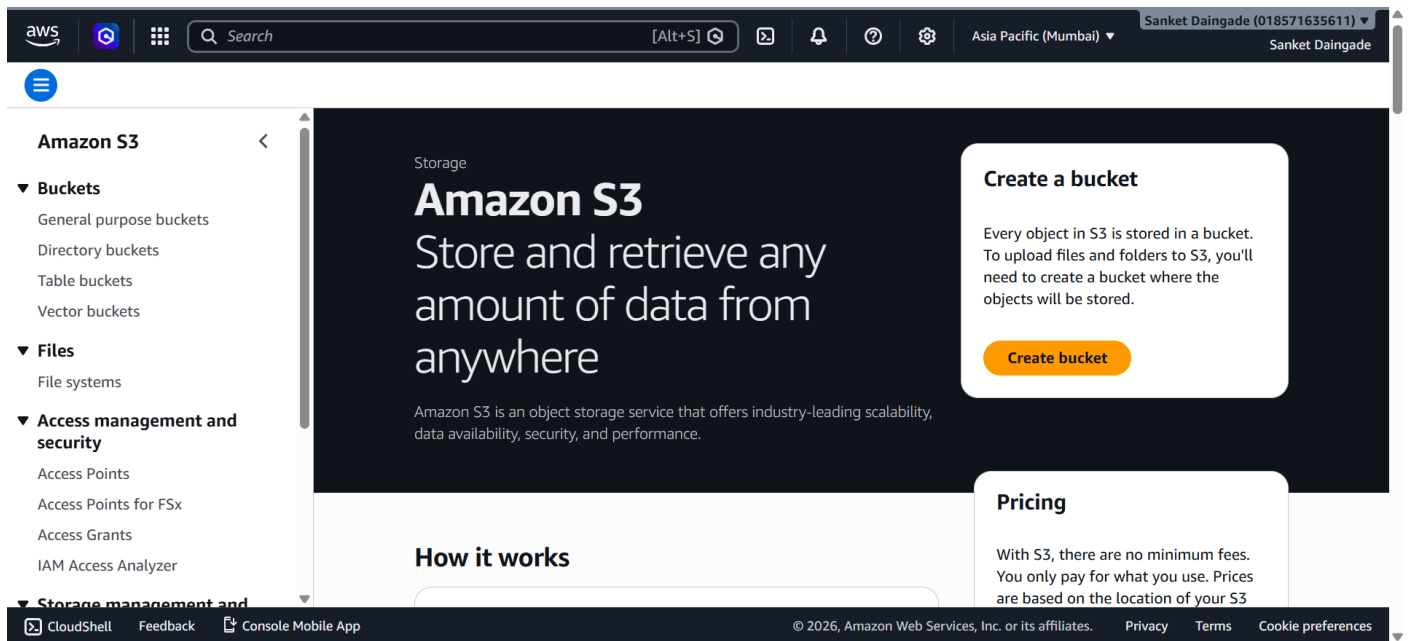

2. Click Create bucket, select General purpose as the bucket type, choose region Mumbai ap-south-1, and enter a unique bucket name such as source-replica07, then leave block public access enabled and complete the creation.

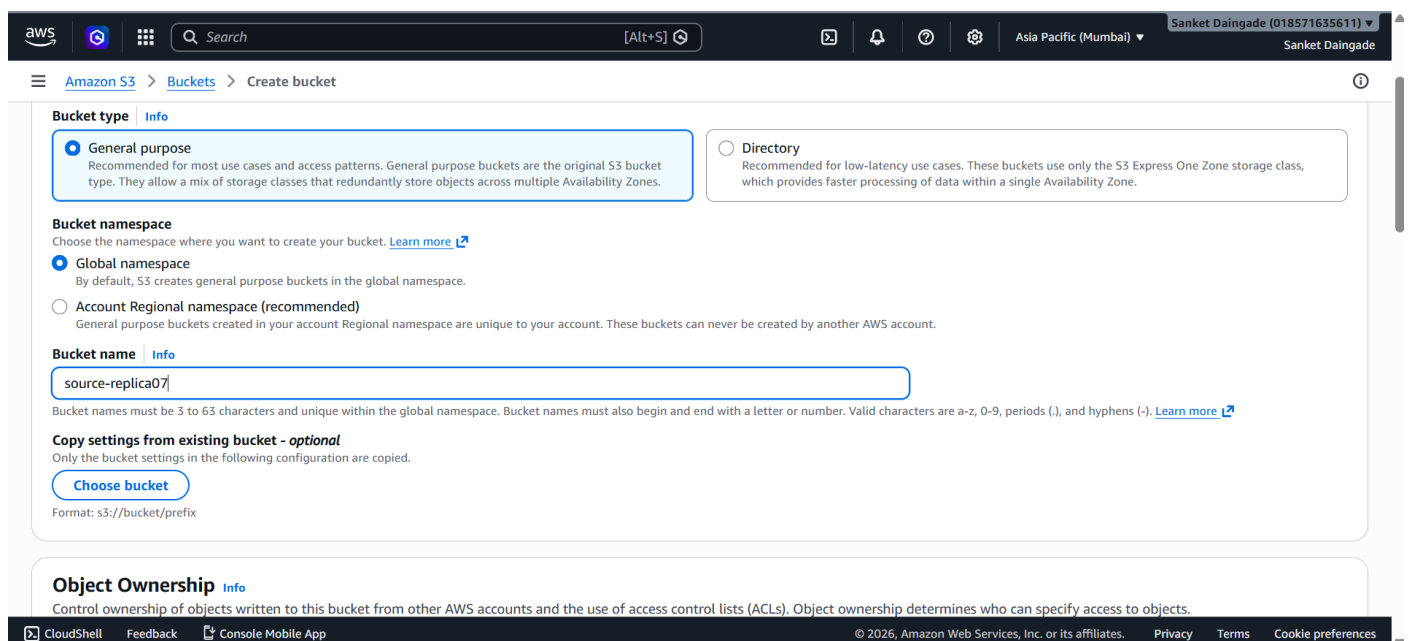


3. Scroll down in the bucket-creation form and enable Bucket Versioning, which is required for replication, then create the bucket.

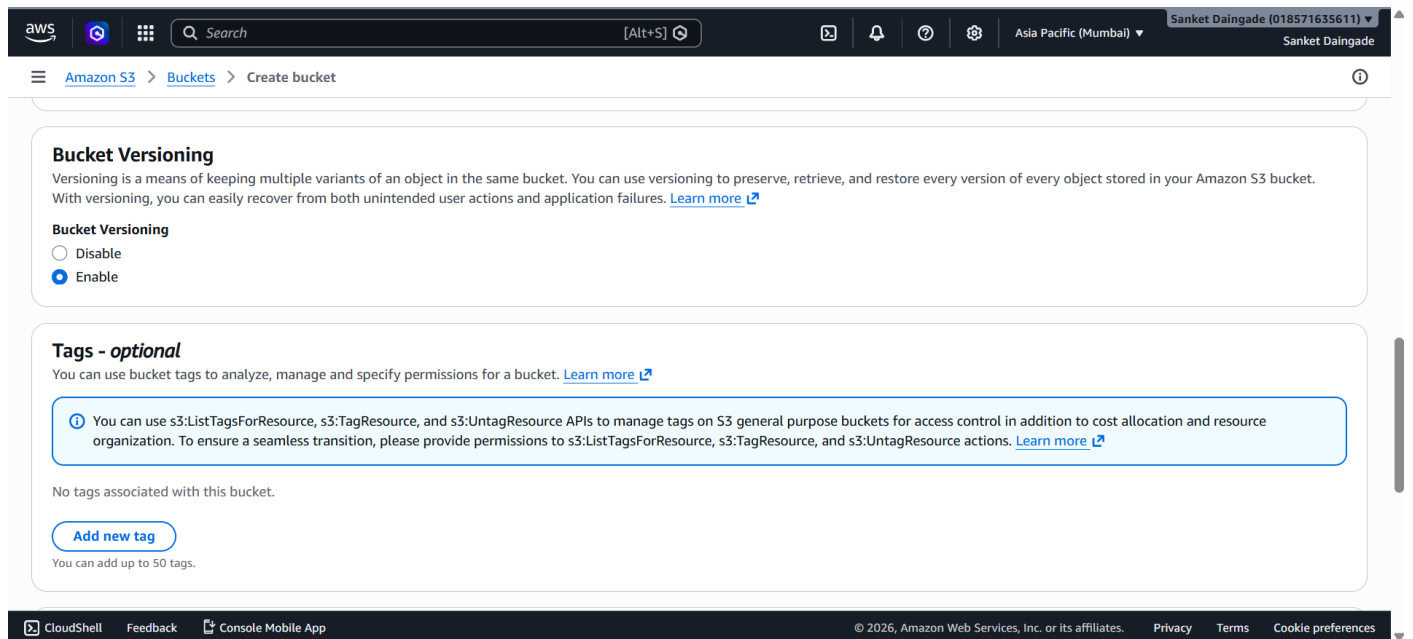

On the S3 console in Account A, the new source-replica07 bucket now appears in the buckets list.

4. Switch to the source AWS account (Account B), open Amazon S3, and again click Create bucket. Use region Mumbai ap-south-1 and specify a bucket name such as destination-replica007; keep the type as General purpose.

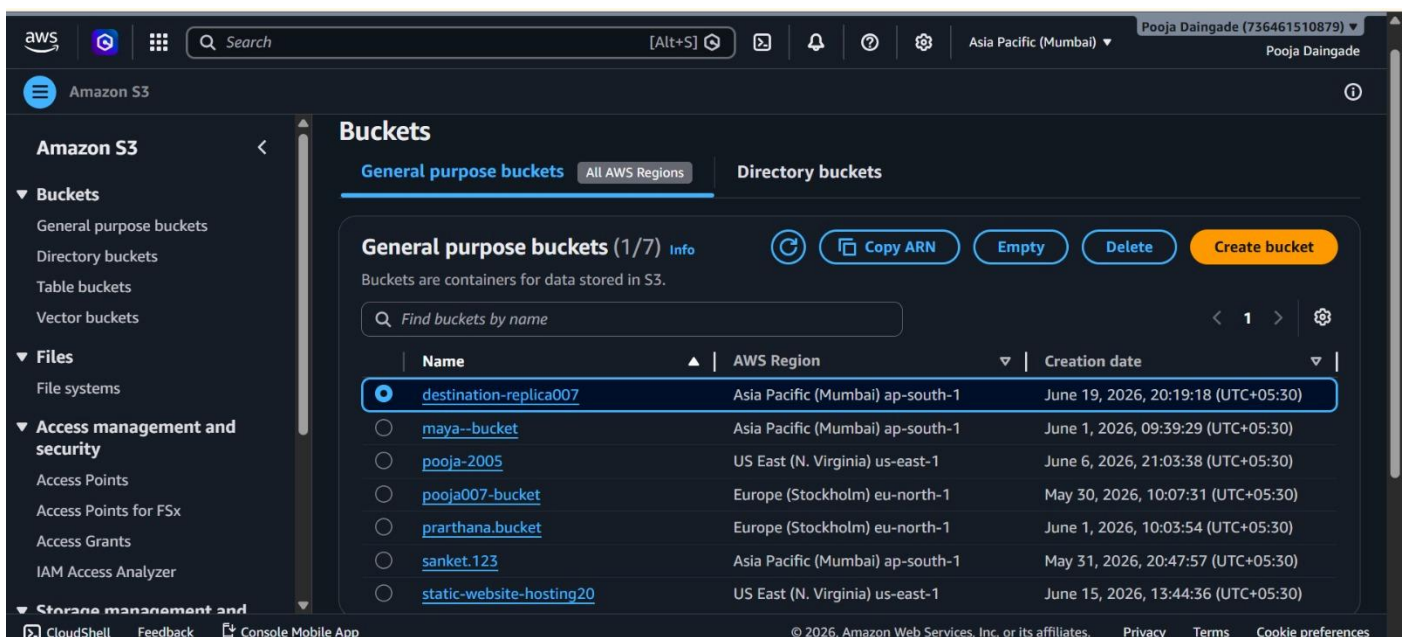

5. Access the Amazon S3 console in Account A, open the source-replica07 bucket, and navigate to the Management tab. Under the Replication rules section, which initially displays “No replication rules,” click Create replication rule to initiate the configuration of cross-account replication for the bucket.

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

Sanket Daingade (018571635611)

Sanket Daingade

Amazon S3

Buckets

source-replica07

source-replica07

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Lifecycle configuration

To manage your objects so that they are stored cost effectively throughout their lifecycle, configure their lifecycle. A lifecycle configuration is a set of rules that define actions that Amazon S3 applies to a group of objects. Lifecycle rules run once per day.

Lifecycle rules

View details

Edit

Delete

Actions

Create lifecycle rule

Use lifecycle rules to define actions you want Amazon S3 to take during an object's lifetime such as transitioning objects to another storage class, archiving them, or deleting them after a specified period of time. [Learn more](#)

Lifecycle rule name

Status

Scope

Current version acti...

Noncurrent versions...

Expired object delet...

Incomplete multipa...

No lifecycle rules

There are no lifecycle rules for this bucket.

Create lifecycle rule

Replication rules (0)

View details

Edit rule

Delete

Actions

Create replication rule

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. Replication also includes any annotations attached to your objects. [Learn more](#)

Replication now includes replicating any annotations attached to your objects, which might increase your costs. To understand the potential cost impact, review your replication rules and annotations usage.

Replication rule name

Status

Destination bucket

Destination Region

Priority

Scope

Storage class

Replica owner

Replication Time Control

KMS-encrypted objects (SSE-KMS or DSSE-KMS)

Replica modification sync

No replication rules

You don't have any rules in the replication configuration.

Create replication rule

CloudShell

Feedback

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

6. On the Create replication rule page, enter a descriptive rule name, such as different-account07, set the Status to Enabled, and retain the default Priority value of 0.

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

Sanket Daingade (018571635611)

Sanket Daingade

Amazon S3

Buckets

source-replica07

Replication rules

Create replication rule

Create replication rule

Info

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. Replication also includes any annotations attached to your objects. [Learn more](#)

Replication now includes replicating any annotations attached to your objects, which might increase your costs. To understand the potential cost impact, review your replication rules and annotations usage.

Replication rule configuration

Replication rule name

different-account07

Up to 255 characters. In order to be able to use CloudWatch metrics to monitor the progress of your replication rule, the replication rule name must only contain English characters.

Status

Choose whether the rule will be enabled or disabled when created.

Enabled

Disabled

Priority

The priority value resolves conflicts that occur when an object is eligible for replication under multiple rules to the same destination. The rule is added to the configuration at the highest priority and the priority can be changed on the replication rules table.

0

Source bucket

Source bucket name

<https://ap-south-1.console.aws.amazon.com/console/home?region=ap-sout...>

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

- Under Source bucket, confirm the bucket name source-replica07 and choose Apply to all objects in the bucket so every object will be replicated.
- In the Destination section of the same rule wizard, select Specify a bucket in another account. Enter the Account ID of the destination account (e.g., 736461510879) and type the previously created destination bucket name destination-replica007; the Destination Region remains Mumbai ap-south-1.

The screenshot shows the 'Create replication rule' wizard in the AWS IAM console, specifically the 'Destination' section. The breadcrumb trail is 'Amazon S3 > Buckets > source-replica07 > Replication rules > Create replication rule'. The 'Source Region' is 'Asia Pacific (Mumbai) ap-south-1'. Under 'Choose a rule scope', 'Apply to all objects in the bucket' is selected. The 'Destination' section explains that you can replicate objects across buckets in different AWS Regions (Cross-Region Replication) or in the same AWS Region (Same-Region Replication). Under 'Choose a bucket in this account', 'Specify a bucket in another account' is selected. The 'Account ID' field contains '736461510879'. The 'Bucket name' field contains 'destination-replica007'. The 'Destination Region' is 'Asia Pacific (Mumbai) ap-south-1'. A checkbox 'Change object ownership to destination bucket owner' is checked, with a note: 'Objects in the source bucket not owned by the source bucket owner will be replaced with access policy that grants full permission to the destination bucket owner'. The footer includes 'CloudShell', 'Feedback', 'Console Mobile App', and copyright information for 2026 Amazon Web Services, Inc.

Source Region
Asia Pacific (Mumbai) ap-south-1

Choose a rule scope

- ☐ Limit the scope of this rule using one or more filters
- ☒ Apply to all objects in the bucket

Destination

Destination
You can replicate objects across buckets in different AWS Regions (Cross-Region Replication) or you can replicate objects across buckets in the same AWS Region (Same-Region Replication). You can also specify a different bucket for each rule in the configuration. [Learn more](#) or see [Amazon S3 pricing](#)

☐ Choose a bucket in this account

☒ Specify a bucket in another account

Account ID
736461510879

Bucket name
Choose the bucket that will receive replicated objects.
destination-replica007

Destination Region
Asia Pacific (Mumbai) ap-south-1

☒ Change object ownership to destination bucket owner
Objects in the source bucket not owned by the source bucket owner will be replaced with access policy that grants full permission to the destination bucket owner

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Check the option Change object ownership to destination bucket owner so that replicated objects are owned and fully manageable by Account B's bucket owner.

- In the IAM role section of the replication rule configuration, select Create new role to allow Amazon S3 to automatically create and configure an IAM role that it can assume to perform the replication process.

The screenshot shows the 'Create replication rule' wizard in the AWS IAM console, specifically the 'IAM role' section. The breadcrumb trail is 'Amazon S3 > Buckets > source-replica07 > Replication rules > Create replication rule'. The 'Source Region' is 'Asia Pacific (Mumbai) ap-south-1'. A checkbox 'Change object ownership to destination bucket owner' is checked, with a note: 'Objects in the source bucket not owned by the source bucket owner will be replaced with access policy that grants full permission to the destination bucket owner'. The 'IAM role' section explains that you can create a new role or choose from existing IAM roles. Under 'Permission to access the specified resources', 'Create new role' is selected. The 'Encryption' section explains that server-side encryption protects data at rest. Under 'Replicate objects encrypted with AWS Key Management Service (AWS KMS)', the checkbox is unchecked. The 'Destination storage class' section explains that Amazon S3 offers a range of storage classes designed for different use cases. Under 'Change the storage class for the replicated objects', the checkbox is unchecked. The footer includes 'CloudShell', 'Feedback', 'Console Mobile App', and copyright information for 2026 Amazon Web Services, Inc.

Asia Pacific (Mumbai) ap-south-1

☒ Change object ownership to destination bucket owner
Objects in the source bucket not owned by the source bucket owner will be replaced with access policy that grants full permission to the destination bucket owner

IAM role
Permission to access the specified resources

- ☒ Create new role
- ☐ Choose from existing IAM roles
- ☐ Enter IAM role ARN

Encryption
Server-side encryption protects data at rest.

☐ Replicate objects encrypted with AWS Key Management Service (AWS KMS)
Replicate SSE-KMS and DSE-KMS encrypted objects.

Destination storage class
Amazon S3 offers a range of storage classes designed for different use cases. [Learn more](#) or see [Amazon S3 pricing](#)

☐ Change the storage class for the replicated objects

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

After the rule is saved, S3 creates a service role with a name like [s3crr_role_for_source-replica07_3](#) that has permission to read from the source bucket and write to the destination bucket.

- Once all settings are reviewed, scroll to the bottom and click Save to create and enable the replication rule. Verify that the rule different-account07 is listed with Status: Enabled, destination bucket [s3://destination-replica007](#), region (Mumbai) ap-south-1, scope Entire bucket, and replica owner set to Destination bucket owner. The IAM role column links to the auto-created role [s3crr_role_for_source-replica07_3](#), confirming that S3 has everything required to perform replication.

The screenshot displays the AWS Management Console interface for configuring S3 Replication rules. The top navigation bar shows the user is logged in as Sanket Daingade (018571635611) in the Asia Pacific (Mumbai) region. The breadcrumb trail indicates the path: Amazon S3 > Buckets > source-replica07 > Replication rules.

Replication rules Info

Replication enables automatic and asynchronous copying of objects across buckets in the same or different AWS Regions. A replication configuration is a set of rules that define what options should be applied to a group of objects during replication.

Replication now includes replicating any annotations attached to your objects, which might increase your costs. To understand the potential cost impact, review your replication rules and annotations usage.

Replication configuration settings

Configuration settings affect all replication rules in the bucket.

Source bucket
source-replica07

Source Region
Asia Pacific (Mumbai) ap-south-1

IAM role
[s3crr_role_for_source-replica07_3](#)

[Create replication job](#) [Edit](#)

Replication rules (1) [View details](#) [Edit rule](#) [Delete](#) [Actions](#) [Create replication rule](#)

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. Replication also includes any annotations attached to your objects. [Learn more](#)

Replication rule name	Status	Destination bucket	Destination Region	Priority	Scope	Storage class	Replica owner	Replication Time Control	KMS-encrypted objects (SSE-KMS or DSSE-KMS)
different-account07	Enabled	s3://destination-replica007	Asia Pacific (Mumbai) ap-south-1	0	Entire bucket	Same as source	Destination bucket owner	Disabled	Do not replicate

CloudShell Feedback Console Mobile App © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

11. To allow the S3 replication role from Account A to write into destination-replica007, open a new browser tab with the AWS Policy Generator set to S3 Bucket Policy.

Configure the statement with:

aws

Browser Default AWS

AWS Policy Generator

The AWS Policy Generator is a tool that enables you to create policies that control access to [Amazon Web Services \(AWS\)](#) products and resources. For more information about creating policies, [key concepts in Using AWS Identity and Access Management](#).

Step 1: Select policy type

A Policy is a container for permissions. The different types of policies you can create are an [IAM Policy](#), an [S3 Bucket Policy](#), an [SNS Topic Policy](#), a [VPC Endpoint Policy](#), and an [SQS Queue Policy](#).

Type of Policy

S3 Bucket Policy

Step 2: Add statement(s)

A statement is the formal description of a single permission. See [a description of elements](#) that you can use in statements.

Effect

Allow

Deny

Principal

arn:aws:iam::018571635611:role/service-role/s3crr_role_for_source-replica07_3

Use a comma to separate multiple values.

12. Click Add Statement and then Generate Policy to view the JSON document, which looks like this in the Policy Generator preview.

► Add conditions (optional)

Add Statement

Statements added (1)

You added the following statements. Click the button below to Generate a policy.

Principal(s)	Effect	Action	Resource(s)	Condition(s)	Remove
arn:aws:iam::018571635611:role/service-role/s3crr_role_for_source-replica07_3	Allow	s3:ReplicateObject s3:ReplicateDelete	arn:aws:s3:::destination-replica007/	None	Remove

Step 3: Generate policy


A policy is a document (written in the [Access Policy Language](#)) that acts as a container for one or more statements.

Generate Policy


This AWS Policy Generator is provided for informational purposes only, you are still responsible for your use of Amazon Web Services technologies and ensuring that your use is in compliance with all applicable terms and conditions. This AWS Policy Generator is provided **as is** without warranty of any kind, whether express, implied, or statutory. This AWS Policy Generator does not modify the applicable terms and conditions governing your use of Amazon Web Services technologies.

©2026, Amazon Web Services or its affiliates. All rights reserved.

13. Copy this JSON and go back to Account B's S3 console, open the destination-replica007 bucket Permissions tab, and edit the Bucket policy.

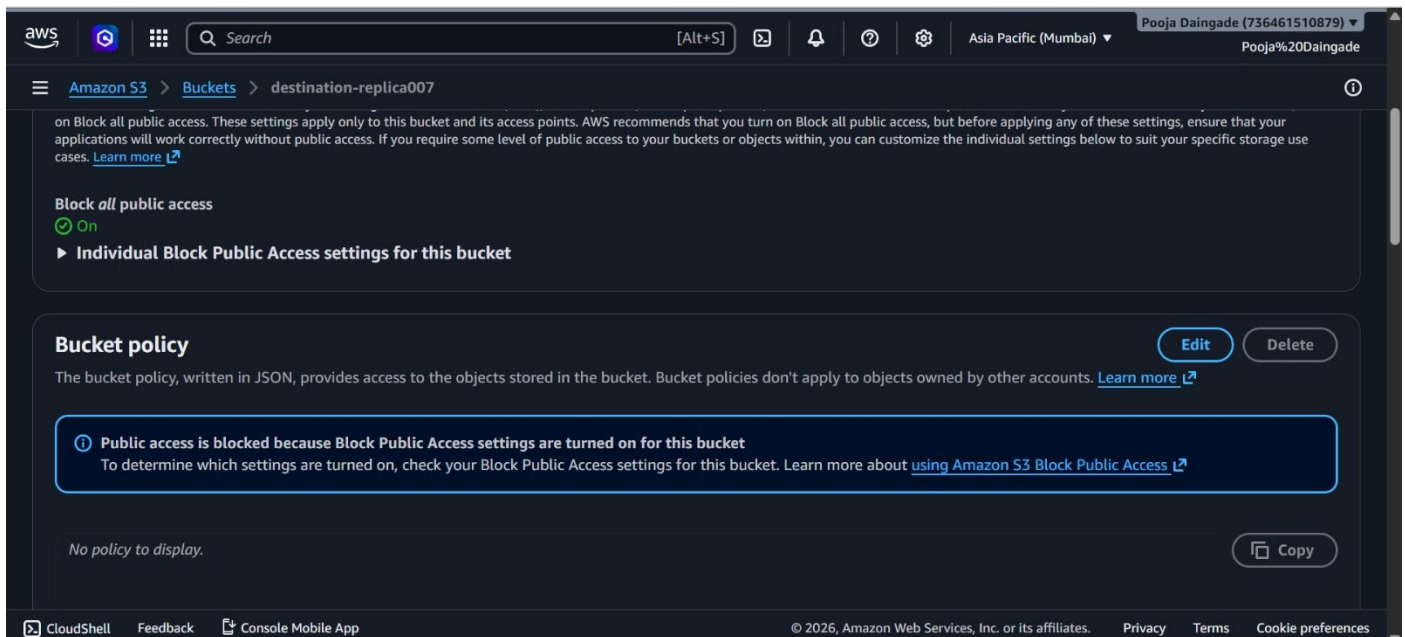

14. Paste the generated policy and save; the editor now shows the full bucket policy granting the replication role permissions on the destination bucket.

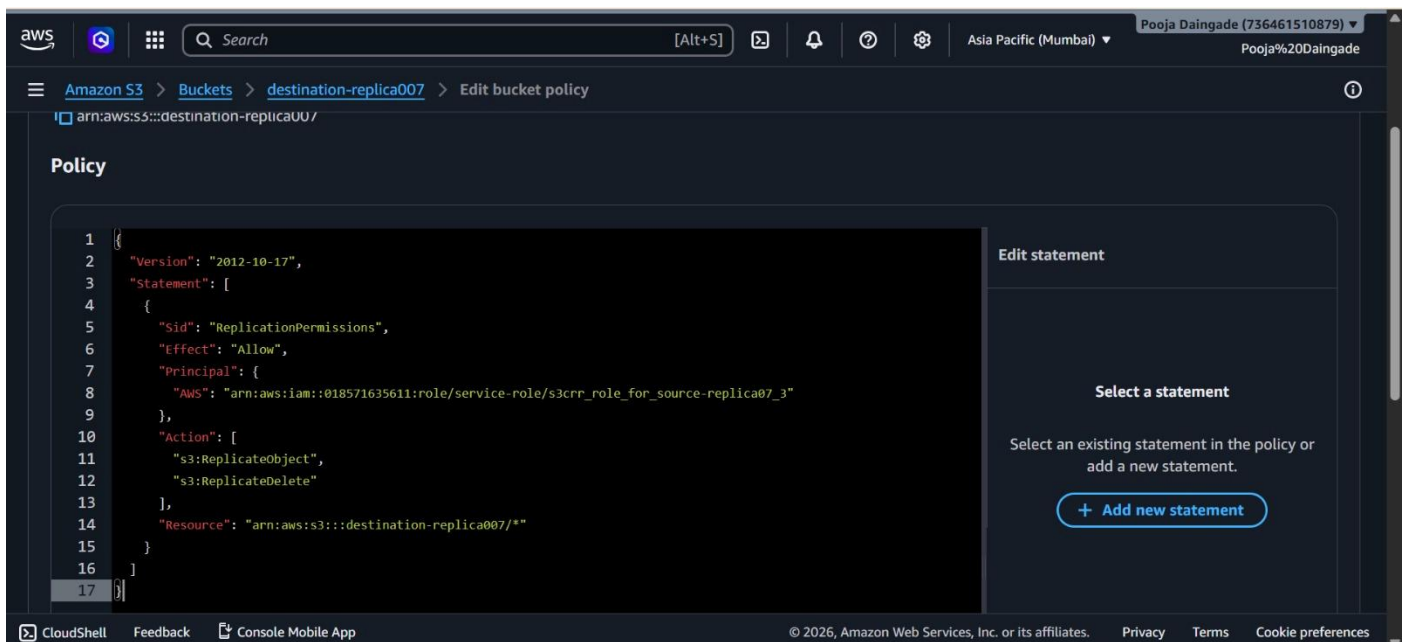


15. In the source-replica07 bucket's Objects tab, click Upload, add a test file such as Sanket_Daingade_Resume.pdf, and start the upload.

The screenshot shows the Amazon S3 console interface for the bucket 'source-replica07'. The 'Objects' tab is selected, displaying a list of objects. Since there are no objects, a message states 'No objects. You don't have any objects in this bucket.' with an 'Upload' button. The left sidebar shows navigation options like Buckets, Files, and Access management. The top bar includes the AWS logo, search bar, and user information.

The screenshot shows the 'Upload' page in the Amazon S3 console for the bucket 'source-replica07'. The page includes a drag-and-drop area with the text 'Drag and drop files and folders you want to upload here, or choose Add files or Add folder.' Below this is a table for 'Files and folders (0)' with columns for Name, Folder, Type, and Size. A message states 'No files or folders. You have not chosen any files or folders to upload.' The bottom of the page features a footer with links to CloudShell, Feedback, Console Mobile App, and copyright information.

16. The upload page shows the file listed under Files and folders with the destination s3://source-replica07, and once the upload completes the object appears in the source bucket.

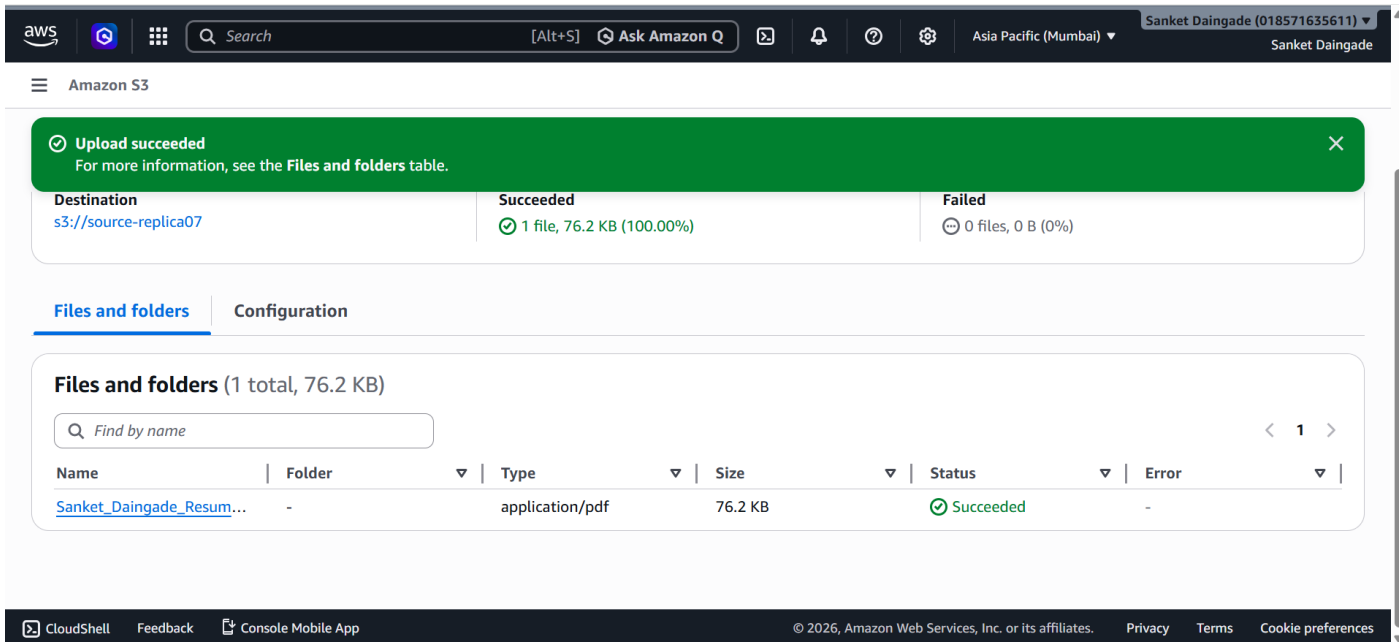

17. After a short delay, open the destination-replica007 bucket in Account B and confirm that the same object now appears there, proving that cross-account replication from Account A to Account B is working.

