


10 25 37 45

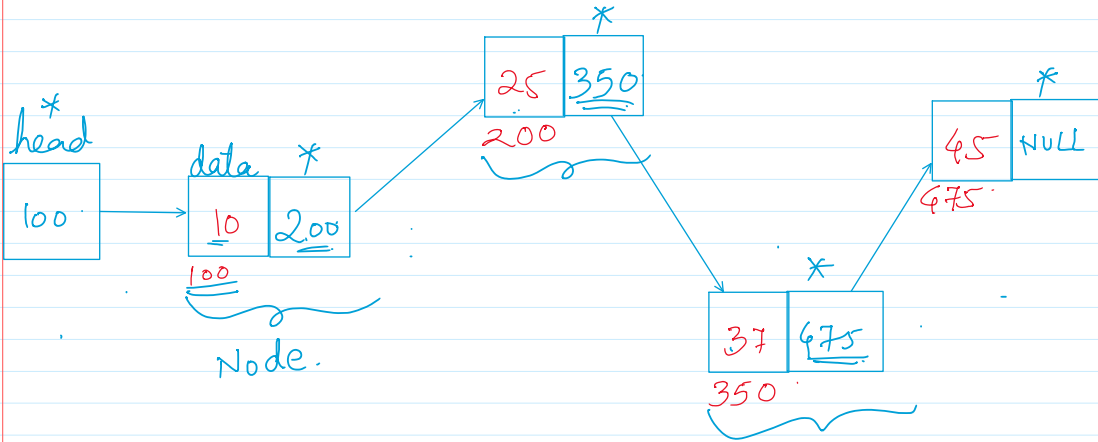


```

struct node
{
    int data;
    struct node.* next;
};
    
```

self referential structure.

`int *pte = (int*) malloc(sizeof(int));`

500

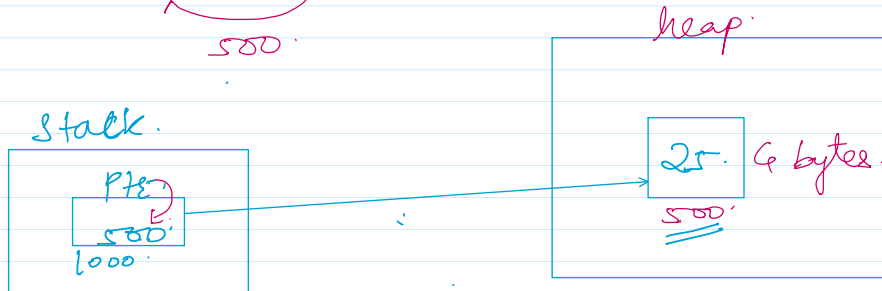


`[pte] → 500`
`*pte = 25;`
 value at `[pte]` = 25;
 value at 500 = 25;

`= (char*) malloc(sizeof(char));` → char. 100
`= (float*) malloc(sizeof(float));` → 200
 10...k

$= (\text{float}^*) \text{malloc}(\text{size of}(\text{float})); \rightarrow 200$
 $\swarrow$
 float
void *

$\text{struct node}^* \text{pte} = (\text{struct node}^*) \text{malloc}(\text{size of}(\text{struct node}));$

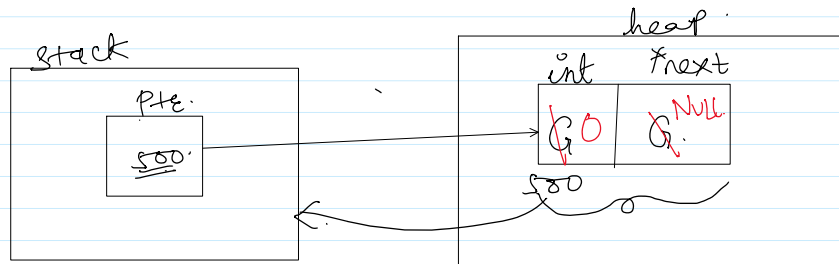

$\text{struct node } \text{nl}$

$\text{nl.data} = 10;$
 $\text{nl.next} = \text{NULL};$

$\text{struct node } \text{pte};$

$\text{pte} \rightarrow \text{data} = 10;$
 $\text{pte} \rightarrow \text{next} = \text{NULL};$