

pos → 6

```


If List is empty → {
    If head == NULL
    {
        if (pos == 1)
            add_first_node();
        else
            printf("cannot attach node");
    }
}

If pos == 1
    → add_first_node()

If pos == count+1
    → add_last_node()

If pos < 1 or pos > count+1
    {
        -3          6+1
        → printf("cannot attach the node");
    }
  
```

pos = 3

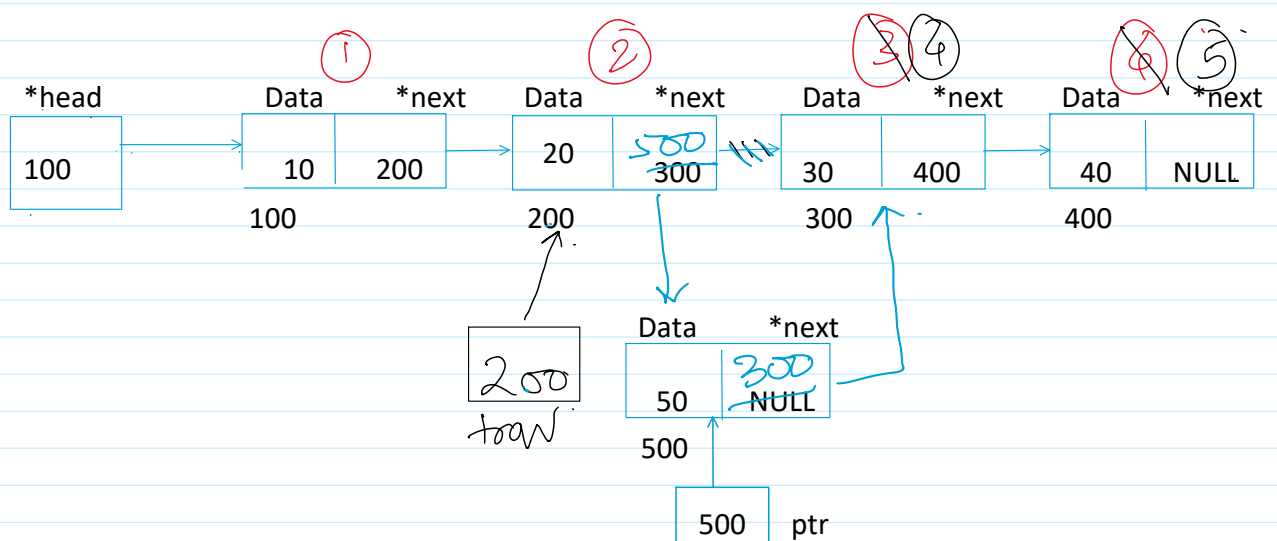

- 1) Traverse till pos - 1 node.
Struct node * trav = head;

```

For(int i = 1; i < pos-1; i++)
    Trav = trav->next;
  
```

- 2) Attach the new node to the pos node(3rd node) of the linked list.

```

500->next = 300;
Ptr->next = 200->next;
Ptr->next = trav->next;
  
```

- 1) Attach the pos-1 node (2nd node) to the new node.
200->next = 500;

1) Attach the pos-1 node (2nd node) to the new node.

200->next = 500;

Trav->next = ptr;