


① Create a node.


② assign a value to the data field. $\rightarrow \begin{cases} 500 \rightarrow \underline{\text{data}} = 10; \\ \text{ptr} \rightarrow \text{data} = 10; \end{cases}$

③ attach it to the linked list.

a) If the list is empty.
If ($\text{head} == \text{NULL}$)
 $\text{head} = \text{ptr};$

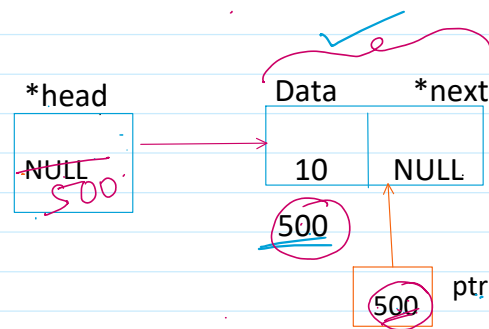

b) If linked list contains nodes

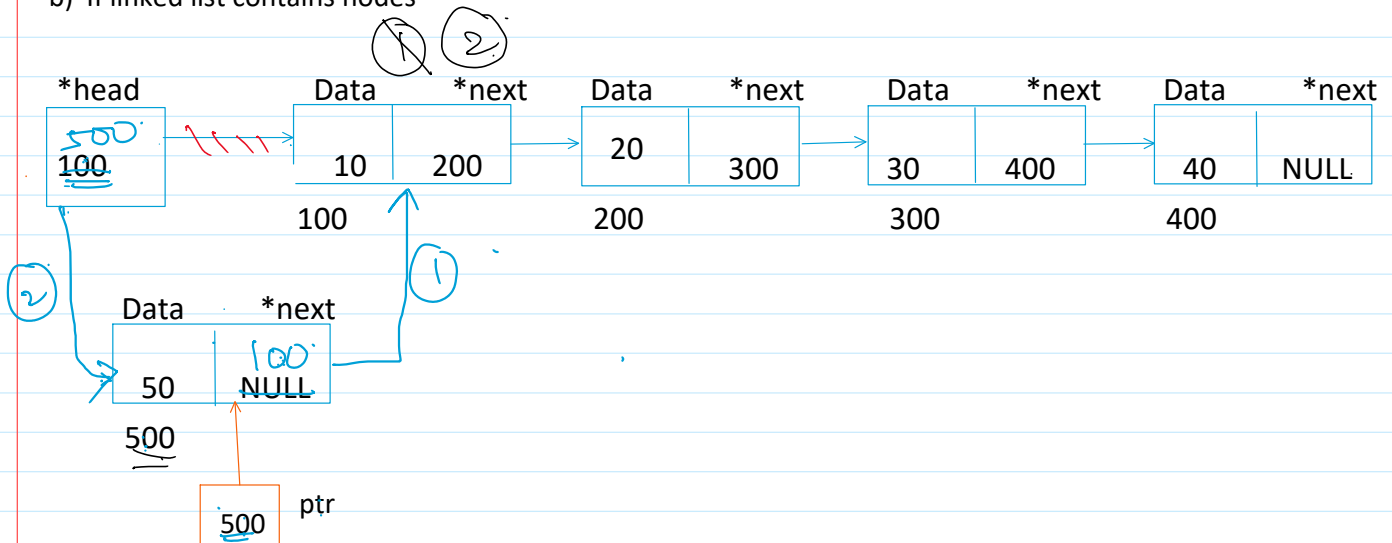

1) Create a link/connection between the new node (at 500) and the first node (at 100).

$\underline{500} \rightarrow \text{next} = 100;$

$\text{ptr} \rightarrow \text{next} = \text{head};$

2) Update the head pointer to point to the new node (at 500).

2) Update the head pointer to point to the new node (at 500).

head = 500;

head = pte;