



```
int num1 = 10;
int *pte = &num1;
```

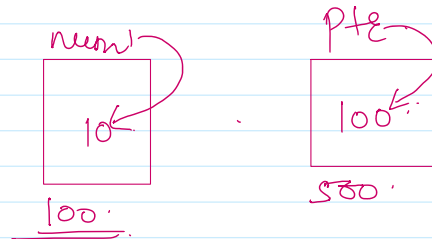


num1 → 10
 &num1 → 100
 pte → 100
 &pte → 500


```
char ch = 'A';
char *pte = &ch;
```

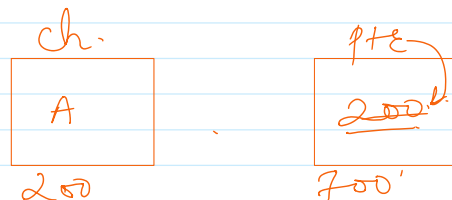

```
float fvar = 1.2f;
float *pte = &fvar;
```

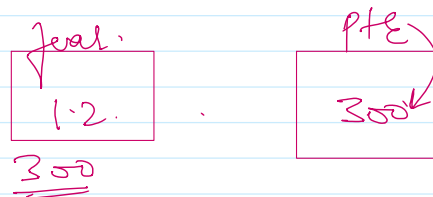

```
int num1 = 10;
int *pte = &num1;
```

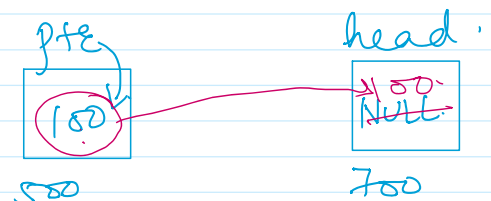

```
int *head = NULL;
```

num1 → 10
 &num1 → 100

pte → 100
 &pte → 500

head = pte;

```
if (head == NULL)
```

pte → 100
 *pte → 10

head = 100;

value at pte → 10
 value at 100 → 10