

- ① Create a node -
- ② assign a value to the data field.
- ③ attach.


a) if (head == NULL).

head = newnode;


newnode → next = head;

OR.

head → next = head;

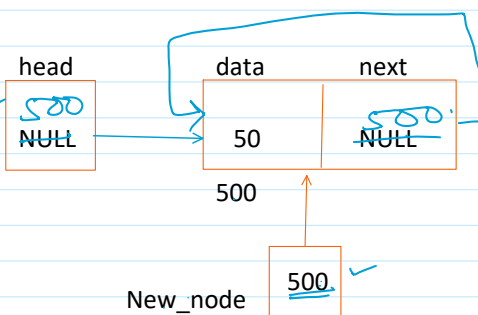

500 → next = 500;

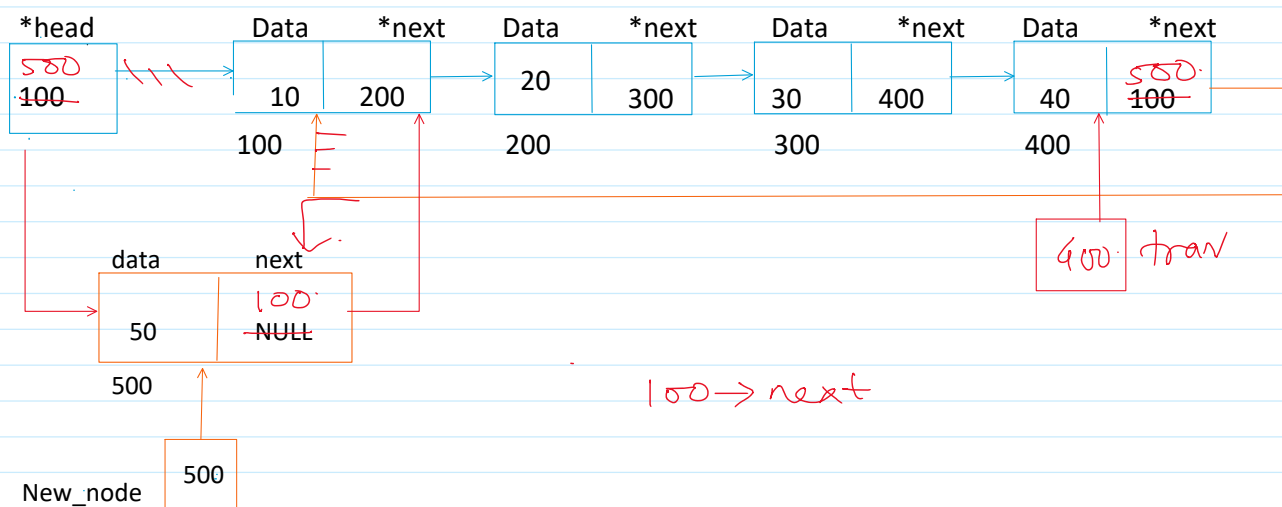

1) Traverse till the last node.

Struct node *trav = head;

```
while (trav → next != head)
{
    trav = trav → next;
}
```

2) Attach the new node to the first node of the list.

New_node → next = head;

3) Update the head pointer to point to the new node.

Head = new_node;

4) Update the next field of the last node to point to the new first node.

Trav → next = head;

Best case : if list is empty : $O(1)$
Worst / avg case : $O(n)$