
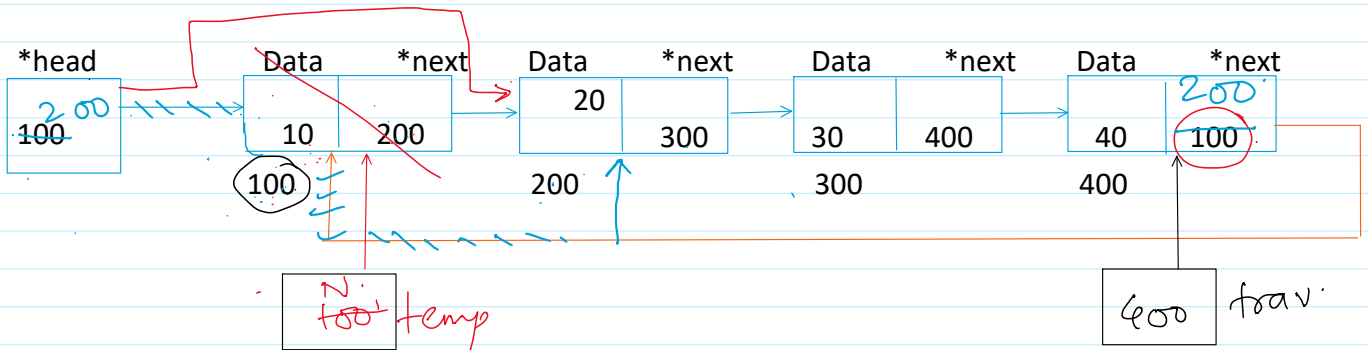


① If $\text{head} == \text{NULL}$
 $\text{printf}(\text{"Empty"});$

② If $(\text{head} \rightarrow \text{next} == \text{head})$
 $\{$
 $\text{free}(\text{head});$
 $\text{head} = \text{NULL};$
 $\}$

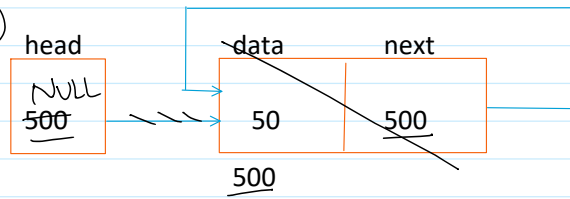

- 1) Traverse till the last node.
 $\text{Struct node } *trav = \text{head};$

 $\text{While}(trav \rightarrow \text{next} != \text{head})$
 $\text{Trav} = trav \rightarrow \text{next};$
- 2) Take a backup of the first node in the temp pointer variable.
 $\text{Struct node } *temp = \text{head};$
- 3) Update the head pointer to point to the second node.
 $\text{Head} = temp \rightarrow \text{next};$
OR
 $\text{Head} = \text{head} \rightarrow \text{next};$
- 4) Free the temp node.
 $\text{Free}(temp);$
 $\text{Temp} = \text{NULL};$
- 5) Update the pointer of the last node.
 $\text{Trav} \rightarrow \text{next} = \text{head};$

Best Case : if list has only one node. : $O(1)$
Worst/avg : $O(n)$