



① If linked list is empty.
 If (head == NULL)
 printf("List is empty");

② If the list contains only 1 node.
 If (head->next == NULL)
 {
 free(head);
 head = NULL;
 }

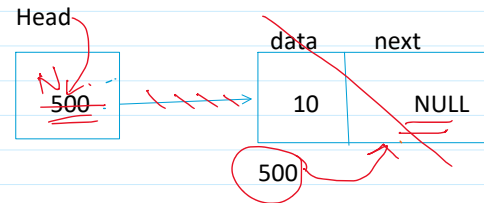

③

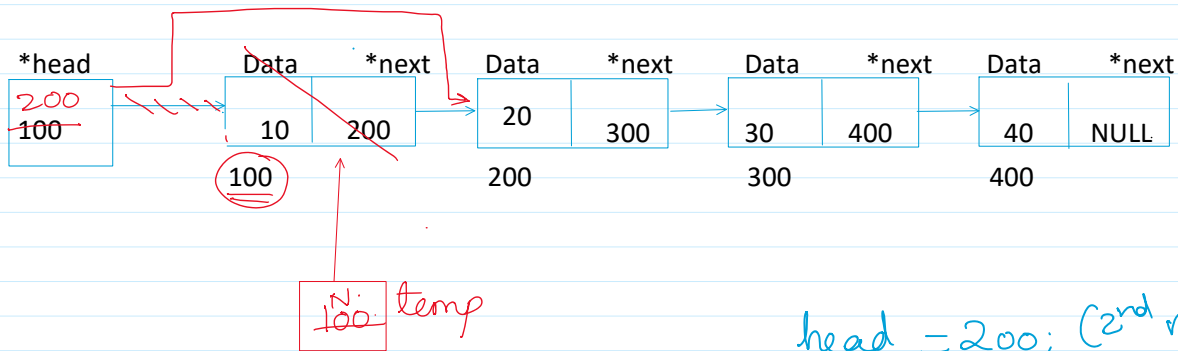

head = 200; (2nd node's address).
 1st node->next;
 ↙ ↘
 head temp

1) Take a backup of the first node in the temp pointer variable.

Struct node *temp = head;

2) Update the head pointer to point to the second node.

Head = head->next;

OR

Head = temp->next;

3) Free the temp node.

Free(temp);

Temp = NULL;

Best case : if the list has only 1 node. : O(1)

Worst / avg case : O(1)