

If the list is empty



If(head == NULL)

Printf("empty");

If the list contains only 1 node.

If(head->next == NULL)

```
{
    Free(head);
    Head = NULL;
}
```

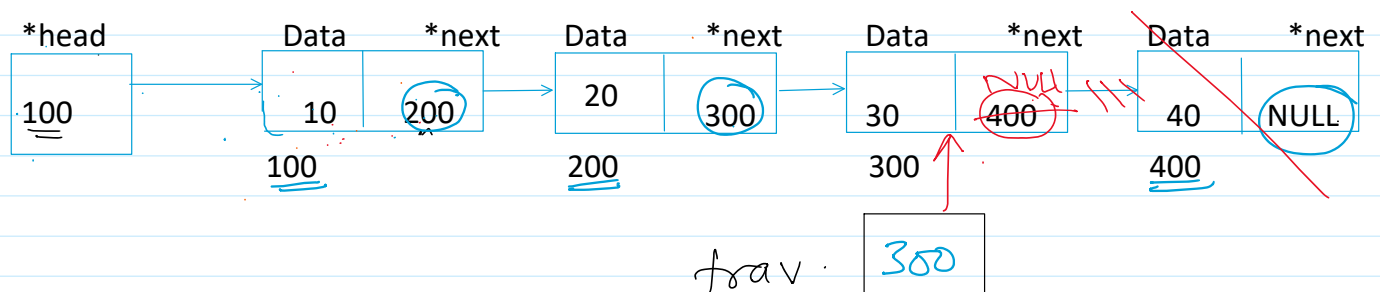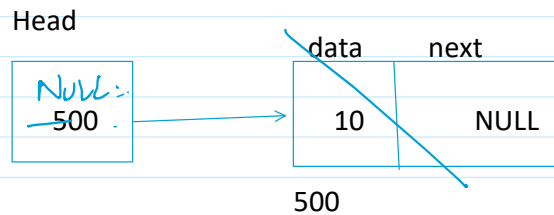

- 1) Take a trav pointer and traverse till the second last node.

Struct node *trav = head;

While(trav->next->next != NULL)

```
{
    Trav = trav->next;
}
```

- 2) Free the last node using the trav pointer.

Free(trav->next);

- 3) Avoid dangling pointer

Trav->next = NULL;

Best case : if the list has only 1 node : $O(1)$
Worst/avg case : $O(n)$