


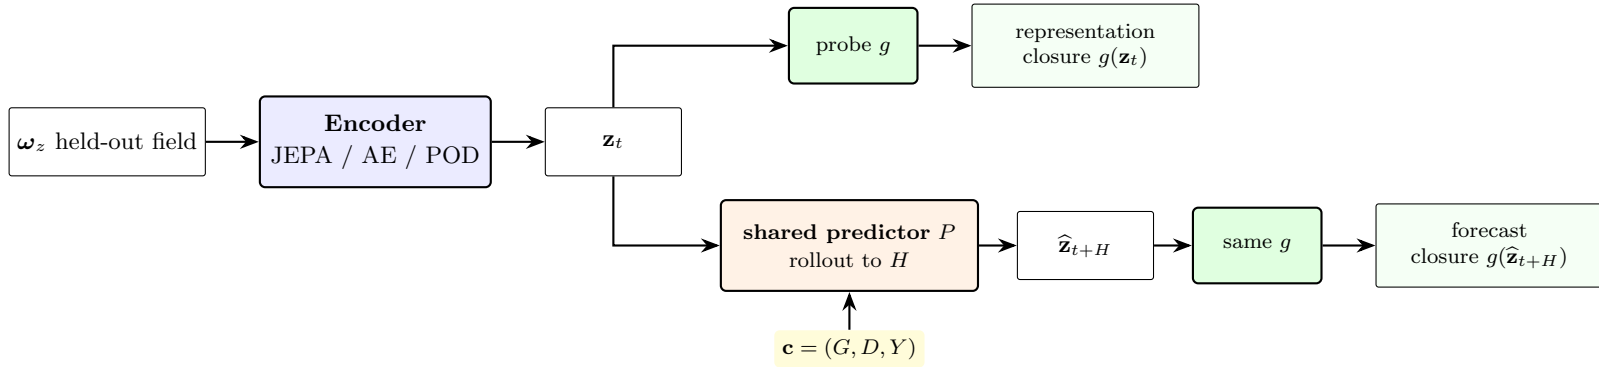

The predictor, the conditioning $\mathbf{c}$, and the probe family g are held fixed across the three encoder families.