


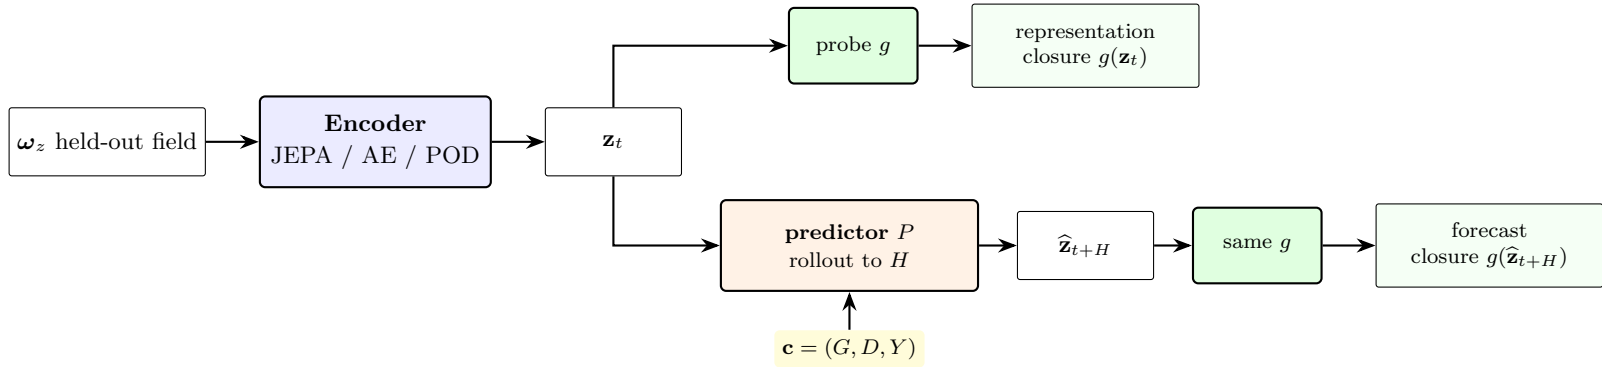

The predictor architecture, the conditioning $\mathbf{c}$, and the probe family g are identical across the three encoder families, each trained or fitted separately per family.