


Basic information about the platform used

- Acer Swift 3
- Windows 11
- Docker version 28.4.0
- Docker Compose version v2.39.2-desktop.1

Diagram showing the services, network and storage

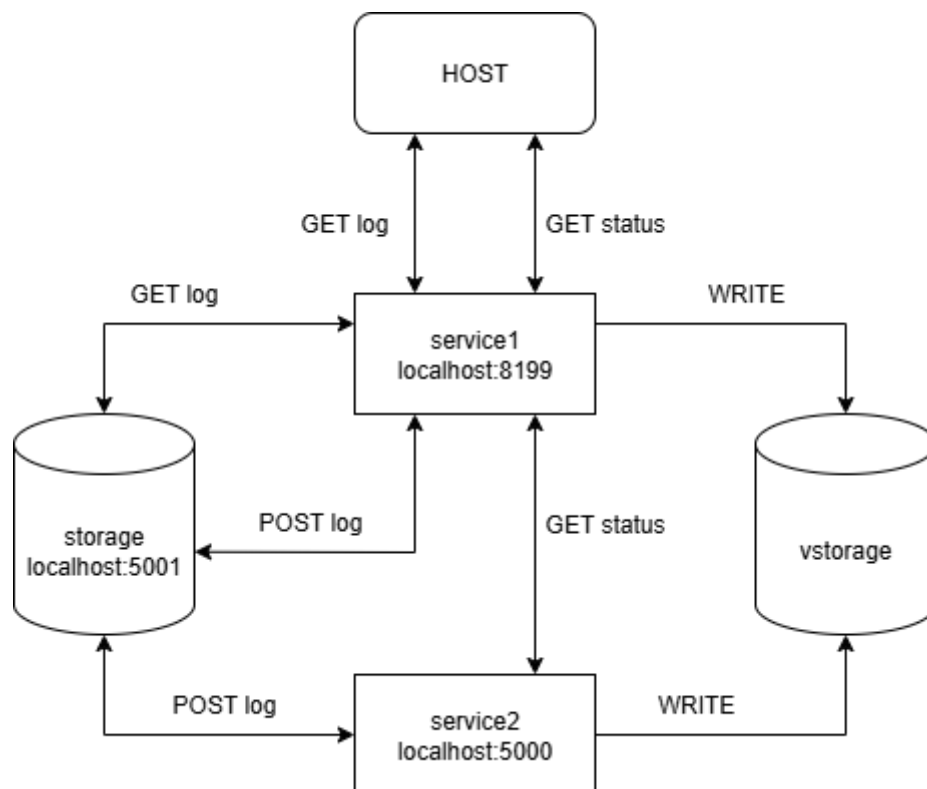

Analysis of the content of the status record

The disc space measured is of the host machine. The uptime is of the services. The disc space of the vstorage or storage could be more relevant as it is where the services are writing to. The uptime of the services is relevant as it is, as the uptime of those is more interesting than for example the runtime of the host machine.

Analysis of the storage solutions

Two different storage solutions were implemented. The first, vStorage, is a bind-mounted file that the services write directly to. This makes it easy for the user to see stored data as the directory can be directly accessed from the host. This solution must have the mounted directory and is considered a

bad design as it is not isolated. In this solution all services write to the same file which could cause conflicts or overwrites.

The other solution is a separate storage container that listens to the POST or LOG commands of services 1 and 2. It writes and reads the log in control of the storage container. This is a better solution in the aspect of containerization but with this implementation the readability from the host is not immediately available.

Cleaning the persistent storage

```
run docker-compose down -v
```

What was difficult, what were the main problems

I was having a very hard time understanding how the two storages worked and how to take them into account when writing the docker-compose. The exercise instructions could have a bit more of explanation of the backgrounds regarding these storages.