

Preauthorization Submission

Preauthorization Submission- Request

Providers should send the following details in the request body while making a call for Preauthorization Submit:

- A set of header attributes that provide transport, security, message integrity and summary information about the message being exchanged. This information is used by the NHCX gateway for routing the request and auditing purposes.
- 2. Domain payload containing the “Claim” as prescribed for the use case by the domain specifications. This needs to be encrypted so that NHCX cannot read this and can be decrypted & processed only by the intended recipient. Please refer the link for Domain specifications of Claim bundle.
<https://nrces.in/ndhm/fhir/r4/StructureDefinition/ClaimBundle>
- 3. Request body (header attributes and the FHIR bundle) should be sent in the form of a JWE token ([RFC-7516](#)) using the steps defined in the link <https://datatracker.ietf.org/doc/html/rfc7516>.

The response to this API could be one of the following:

- 4. A successful accepted response from the NHCX gateway if the structure of the request is valid and the validation of open attributes (protocol headers) is successful. Upon successful validation, NHCX gateway forwards the same request to the intended recipient asynchronously.
- 5. An error response if any of the validations fail.

Preauthorization Submission – Response

This is the callback API on NHCX gateways and on Provider systems which will be called by Payer systems and NHCX gateways to return the response for Pre-Authorization requests. Payload for this API has to be created as per the specifications of NHCX published in the link <https://nrces.in/preview/ndhm/fhir/r4/StructureDefinition-ClaimResponseBundle.html>.

- 2. A set of header attributes that provide transport, security, message integrity and summary information about the message being exchanged. This information is used by the NHCX gateway for routing the request and auditing purposes.

3. If Preauth Submit request is successfully processed, payer should send a ClaimResponse domain entity as specified for the use case in domain specifications in the link.
<https://nrces.in/preview/ndhm/fhir/r4/StructureDefinition-ClaimResponseBundle.html>.
4. This needs to be encrypted so that NHCX cannot read this, and this can be decrypted & processed only by the intended recipient.
5. In any scenario if Payer is unable to process the request due to provider is invalid or decryption of the message fails or any mandatory protocol attributes are missing with regards to the use case, an error message will be sent as “protocol response” which contains the same protocol header attributes along with error messages.


The error details should be sent in the following manner:

- Basic details about the error must be sent as part of the header attributes. NHCX gateway shall read and store this information for audit & search purposes.
 - Following header attributes should be used for sending the error details:
 - **x-hcx-status** should be set to **response.fail**.
 - **x-hcx-error_details** attribute should be set with the appropriate error code, message and trace details (if available).
6. In case where there are clinical, patient or business-related errors, the payer should send exact details of the error to the recipient. These details should not be shared with the NHCX gateway and hence, should be sent in encrypted form. Payer should embed the error details within the CoverageEligibilityResponse resource that is sent as part of the request body.

Note: Refer to the JWEPayload schema definition for details & structure of the JWE token that has to be sent as the request body in this API. The response to this API could be one of the following:

7. A successful accepted response from the NHCX gateway if the structure of the request payload is valid and the validation of open attributes (protocol headers) is successful. Upon successful validation, NHCX gateway forwards the same request to the intended recipient asynchronously.
8. An error response if any of the validations fail.

iii. Sequence Diagram

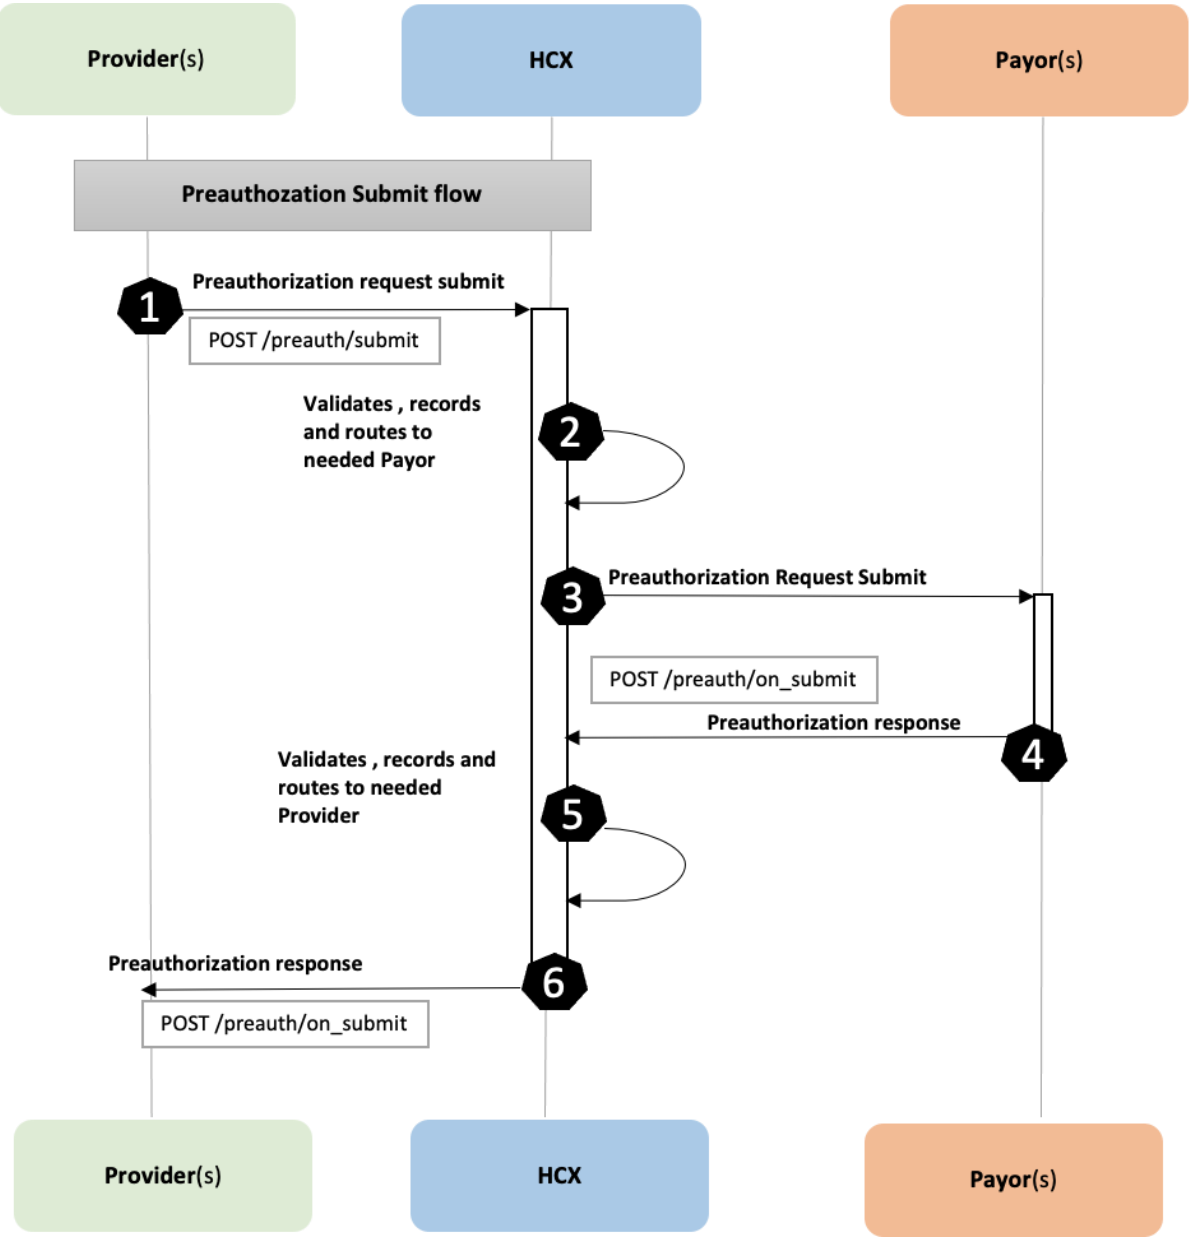

High-level definition of API

API Definition – Preauth Submission - Payer	
Name of the API	/preauth/submit
Description/Purpose	This API is for providers to submit preauth requests (and resubmit updated request) to NHCX gateway and for NHCX gateway to route the same request to payers. Payload for this API must be created as per the Claim Request bundle

	defined in NHCX Specifications and serialized as per the guidelines in NHCX Specifications.
Input (API to be consumed by)	Provider
Key Processing/Validations	Validate the protected header values.
HTTP Method	POST
External API	
Input JSON Structure	As per the API specifications published
Response JSON Structure	As per the API specifications published
HTTP Response Status Code	202- Accepted
Exception Code	400 – Request Validation Failed 404- Request resource was not found 500 – Downstream systems down/unhandled exception
Error Response JSON	As per the API specifications published
Remarks (If Any)	

API Definition – Preauth Submission - Provider

Name of the API	/preauth/on_submit
Description/Purpose	This is the callback API on NHCX gateways and on Provider systems which will be called by Payor systems and NHCX gateways to return the response for Pre-Authorization requests. Payload for this API has to be created as per the Claim Response bundle defined in NHCX Specifications and serialized as per the guidelines in NHCX Specifications.
Input (API to be consumed by)	Payers
Key Processing/Validations	Validate the protected header values.
HTTP Method	POST
External API	
Input JSON Structure	As per the API specifications published
Response JSON Structure	As per the API specifications published

HTTP Response Status Code	202- Accepted
Exception Code	400 – Request Validation Failed 404- Request resource was not found 500 – Downstream systems down/unhandled exception
Error Response JSON	As per the API specifications published
Remarks (If Any)	