# LAB ASSIGNMENT – 2

## DATE: 19/01/2024

Q1. Make a schema first and then insert 6 documents.

- Roll_no=[1,2,3,4,5,]
- Name=["Ram","Alex","John","Bob","Mukesh",”Danny”]
- Age=[20,19,40,55,30,28]
- Salary=[546.7,333.4,666.7,678.4,245.6,546.3]
- City=["A","B","C","D","E",”F”]
- Phone_no=[123,456,122,444,567,892]

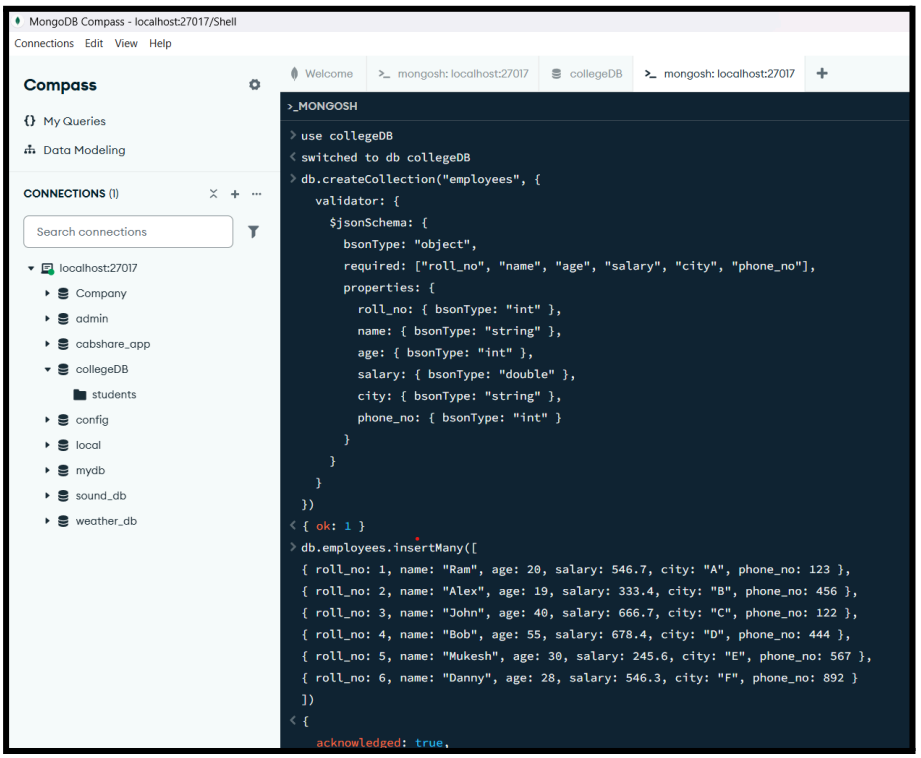

MongoDB Compass - localhost:27017/Shell

Connections Edit View Help

**Compass**

My Queries

Data Modeling

**CONNECTIONS** (1)

Search connections

localhost:27017

- Company
- admin
- cabshare_app
- collegeDB
  - students

Welcome | mongosh: localhost:27017 | collegeDB | mongo

>_MONGOSH

```
< {
    acknowledged: true,
    insertedIds: {
      '0': ObjectId('699b3ffda2e1af8cddac7ade'),
      '1': ObjectId('699b3ffda2e1af8cddac7adf'),
      '2': ObjectId('699b3ffda2e1af8cddac7ae0'),
      '3': ObjectId('699b3ffda2e1af8cddac7ae1'),
      '4': ObjectId('699b3ffda2e1af8cddac7ae2'),
      '5': ObjectId('699b3ffda2e1af8cddac7ae3')
    }
  }
> db.employees.updateOne(
    { name: "Ram" }
```

Q2. Write a query to update the name of RAM to SAM

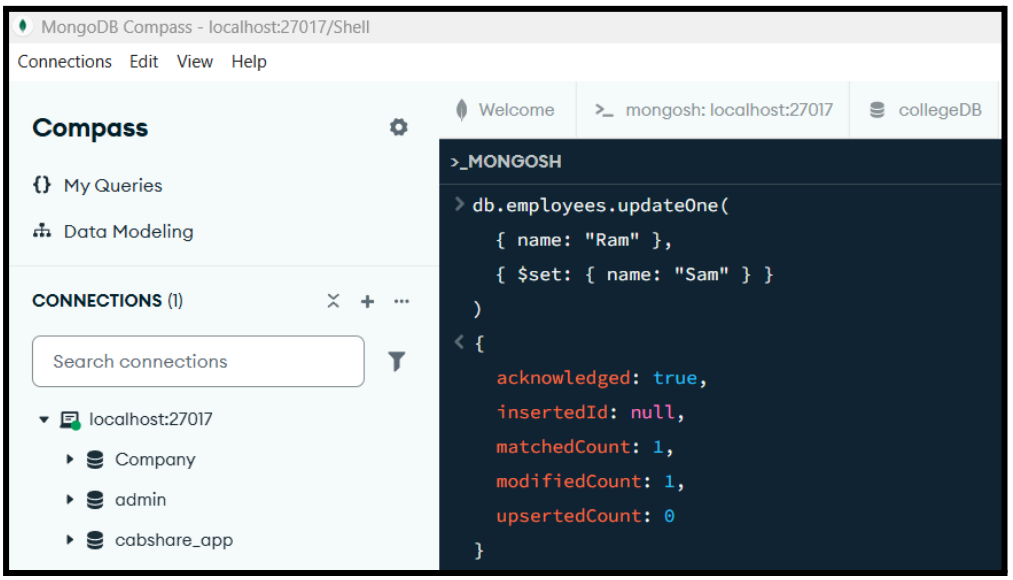


.

Q3. Write a query to display only the cities present in that collection.

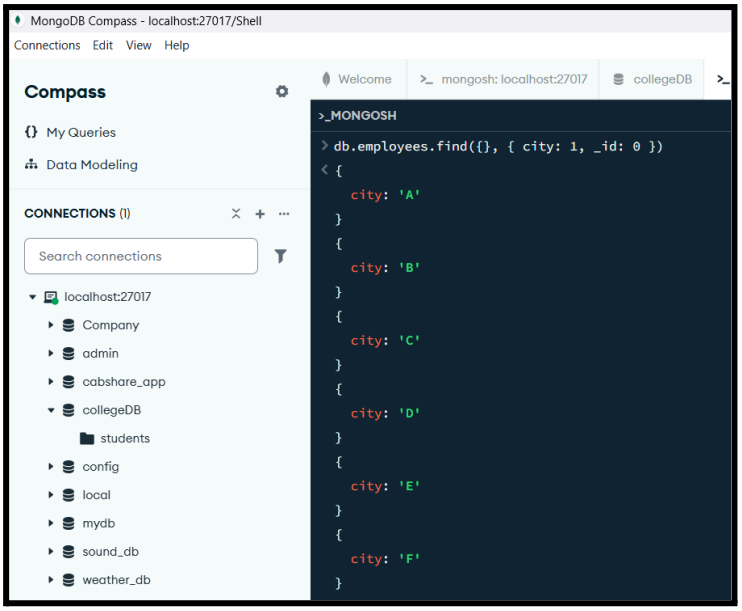

Q4. Write a query to update the salary by 10%.

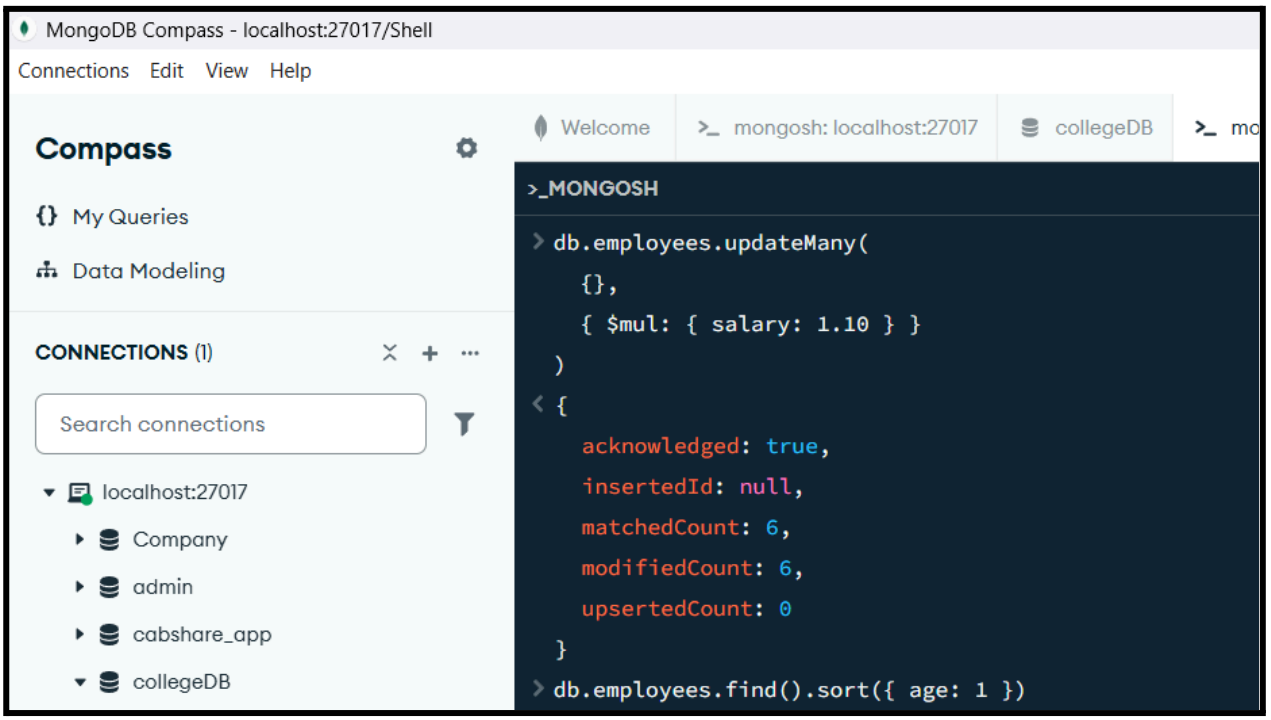

Q5. Write a query to display all the documents in ascending and descending order of age.

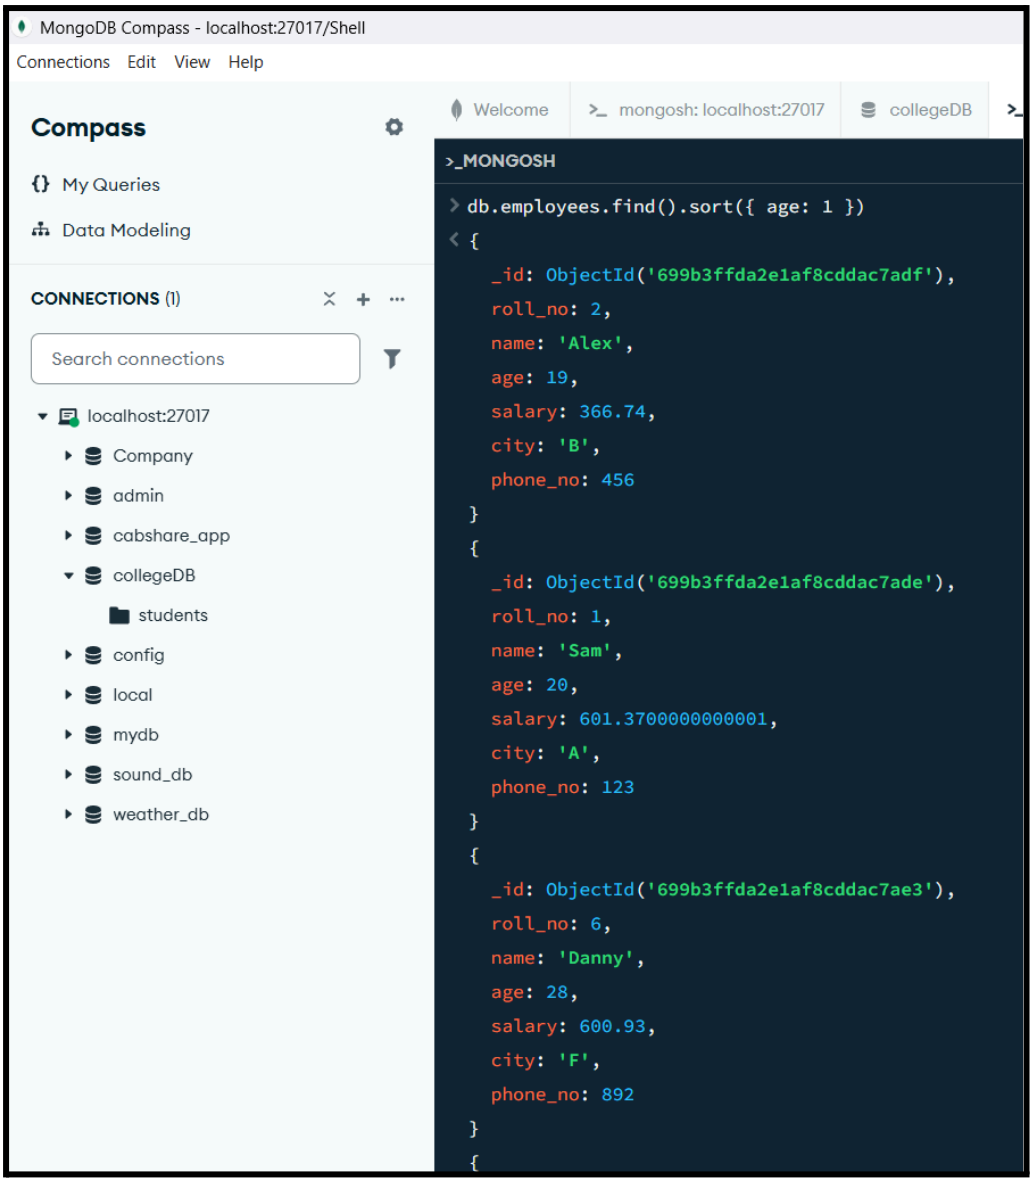

MongoDB Compass - localhost:27017/Shell

Connections Edit View Help

**Compass**

My Queries

Data Modeling

**CONNECTIONS** (1)

Search connections

- localhost:27017
  - Company
  - admin
  - cabshare_app
  - collegeDB
    - students
  - config
  - local
  - mydb
  - sound_db
  - weather_db

Welcome | mongosh: localhost:27017 | collegeDB | m

>_MONGOSH

```
{
  _id: ObjectId('699b3ffda2e1af8cddac7ae2'),
  roll_no: 5,
  name: 'Mukesh',
  age: 30,
  salary: 270.16,
  city: 'E',
  phone_no: 567
}
{
  _id: ObjectId('699b3ffda2e1af8cddac7ae0'),
  roll_no: 3,
  name: 'John',
  age: 40,
  salary: 733.3700000000001,
  city: 'C',
  phone_no: 122
}
{
  _id: ObjectId('699b3ffda2e1af8cddac7ae1'),
  roll_no: 4,
  name: 'Bob',
  age: 55,
  salary: 746.24,
  city: 'D',
  phone_no: 444
}
> db.employees.find().sort({ age: -1 })
< {
```

MongoDB Compass - localhost:27017/Shell

Connections Edit View Help

**Compass**

My Queries

Data Modeling

**CONNECTIONS** (1)

Search connections

- localhost:27017
  - Company
  - admin
  - cabshare_app
  - collegeDB
    - students
  - config
  - local
  - mydb
  - sound_db
  - weather_db

Welcome | mongosh: localhost:27017 | collegeDB

>_MONGOSH

```
> db.employees.find().sort({ age: -1 })
< {
    _id: ObjectId('699b3ffda2e1af8cddac7ae1'),
    roll_no: 4,
    name: 'Bob',
    age: 55,
    salary: 746.24,
    city: 'D',
    phone_no: 444
  }
  {
    _id: ObjectId('699b3ffda2e1af8cddac7ae0'),
    roll_no: 3,
    name: 'John',
    age: 40,
    salary: 733.3700000000001,
    city: 'C',
    phone_no: 122
  }
  {
    _id: ObjectId('699b3ffda2e1af8cddac7ae2'),
    roll_no: 5,
    name: 'Mukesh',
    age: 30,
    salary: 270.16,
    city: 'E',
    phone_no: 567
  }
  {
```

MongoDB Compass - localhost:27017/Shell

Connections Edit View Help

**Compass**

My Queries

Data Modeling

**CONNECTIONS** (1)

Search connections

- localhost:27017
  - Company
  - admin
  - cabshare_app
  - collegeDB
    - students
  - config
  - local
  - mydb
  - sound_db
  - weather_db

Welcome | mongosh: localhost:27017 | collegeDB

>_MONGOSH

```
  }
  {
    _id: ObjectId('699b3ffda2e1af8cddac7ae3'),
    roll_no: 6,
    name: 'Danny',
    age: 28,
    salary: 600.93,
    city: 'F',
    phone_no: 892
  }
  {
    _id: ObjectId('699b3ffda2e1af8cddac7ade'),
    roll_no: 1,
    name: 'Sam',
    age: 20,
    salary: 601.3700000000001,
    city: 'A',
    phone_no: 123
  }
  {
    _id: ObjectId('699b3ffda2e1af8cddac7adf'),
    roll_no: 2,
    name: 'Alex',
    age: 19,
    salary: 366.74,
    city: 'B',
    phone_no: 456
  }
> db.employees.find({ city: { $in: ["A", "B", "C"] } }
```

Q6. Write a query to display all the documents with City → A,B,C.

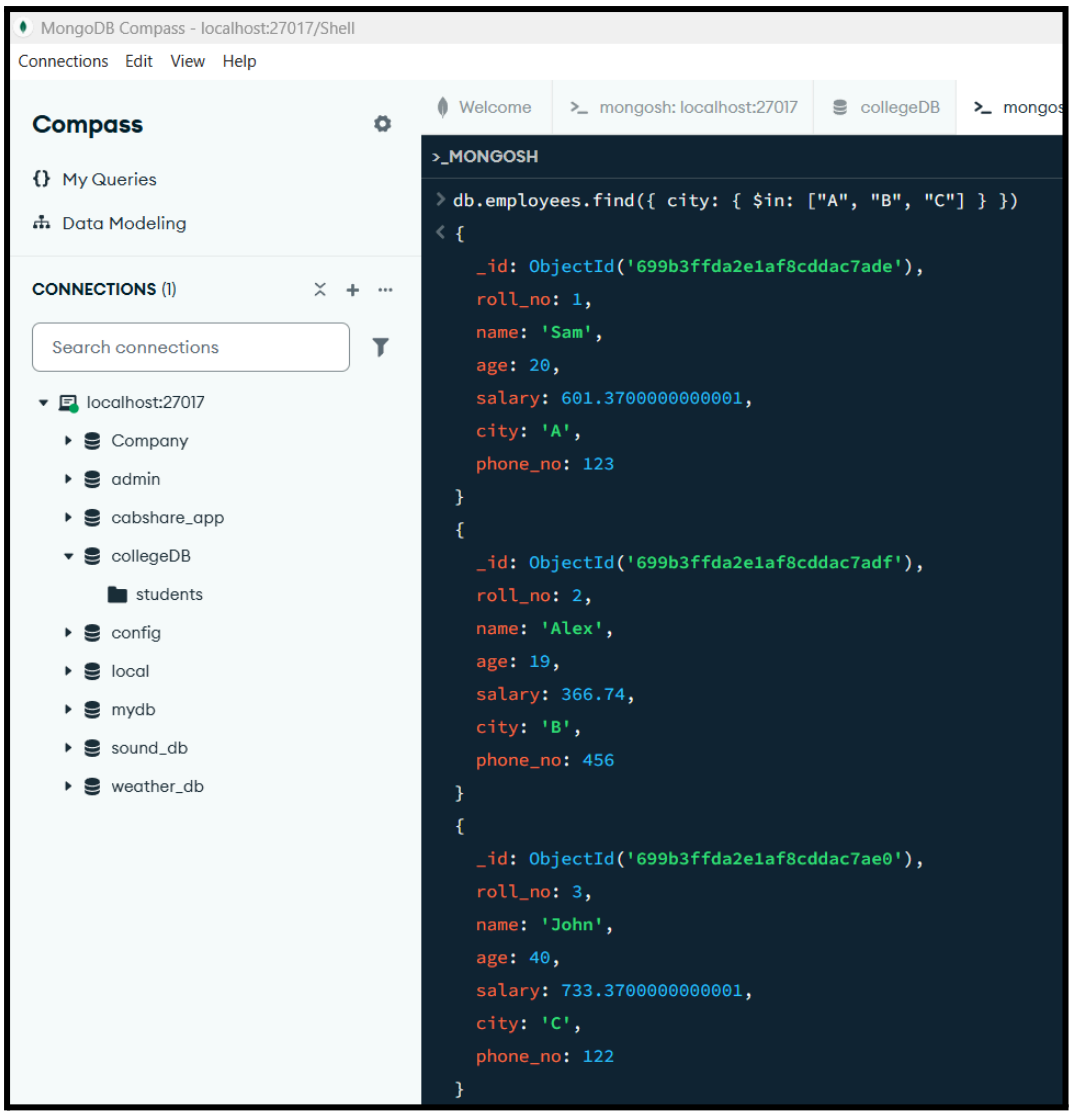

Q7. Write a query to display only two documents from the entire collection.

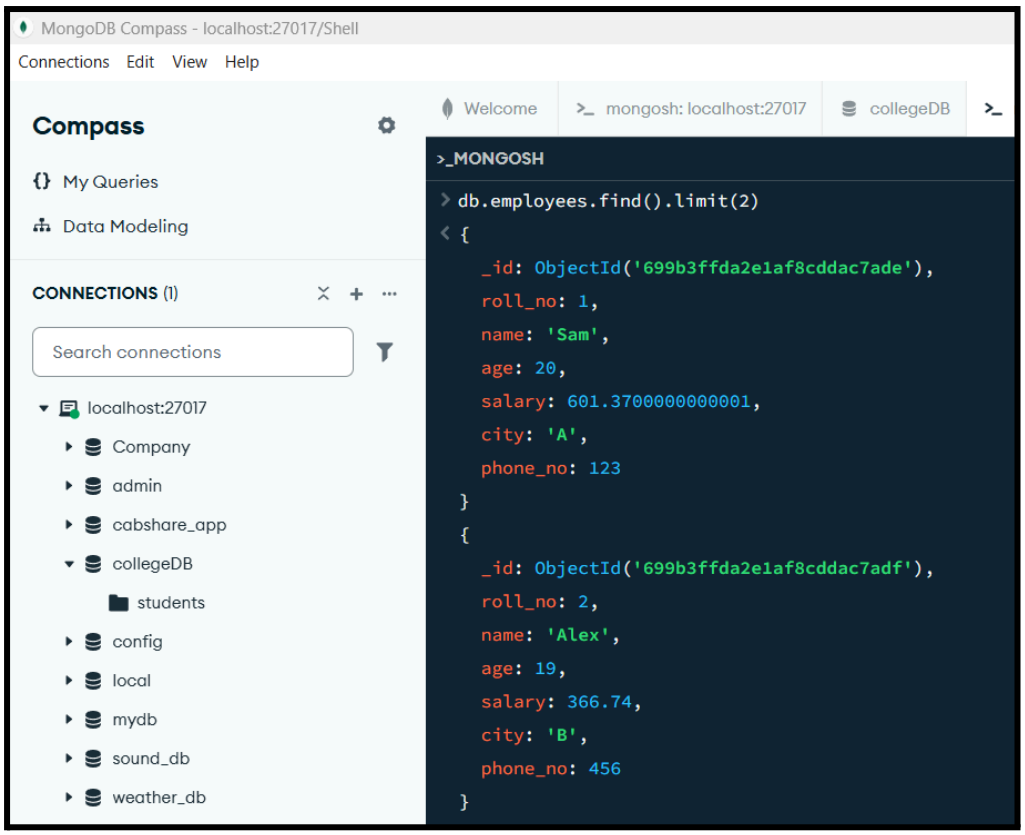

Q8. Write a query to delete a document with ROLL_NO:5.

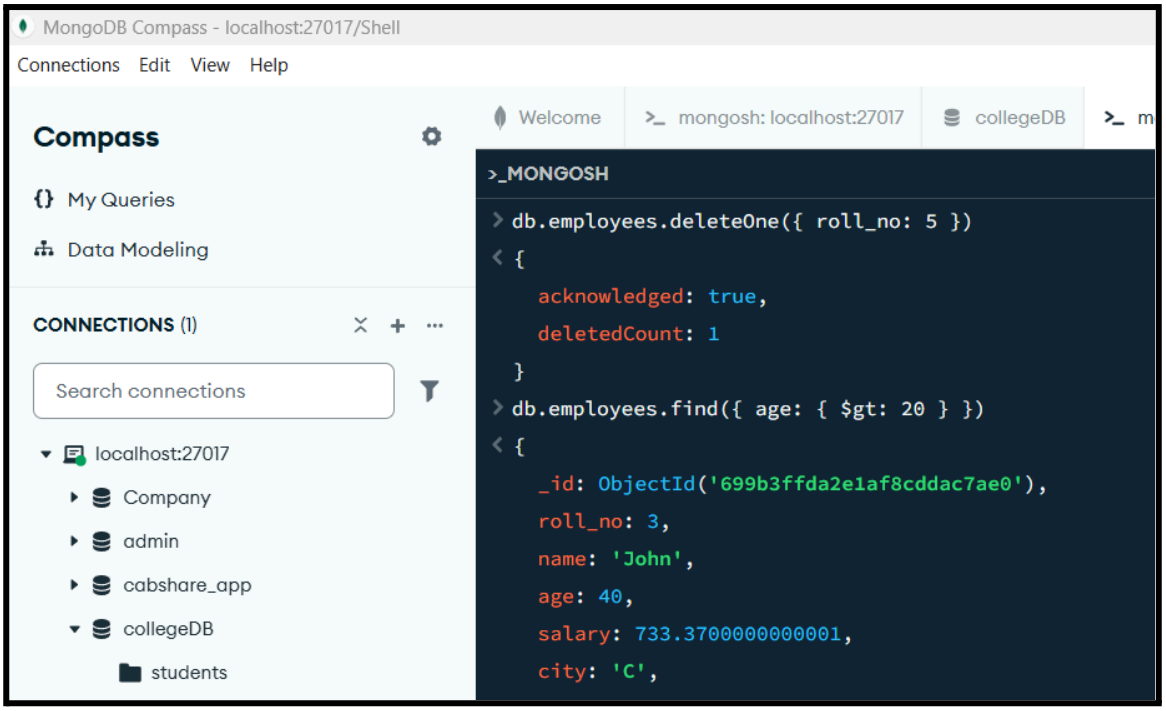

Q9. Write a query to display all the documents with AGE greater than 20.

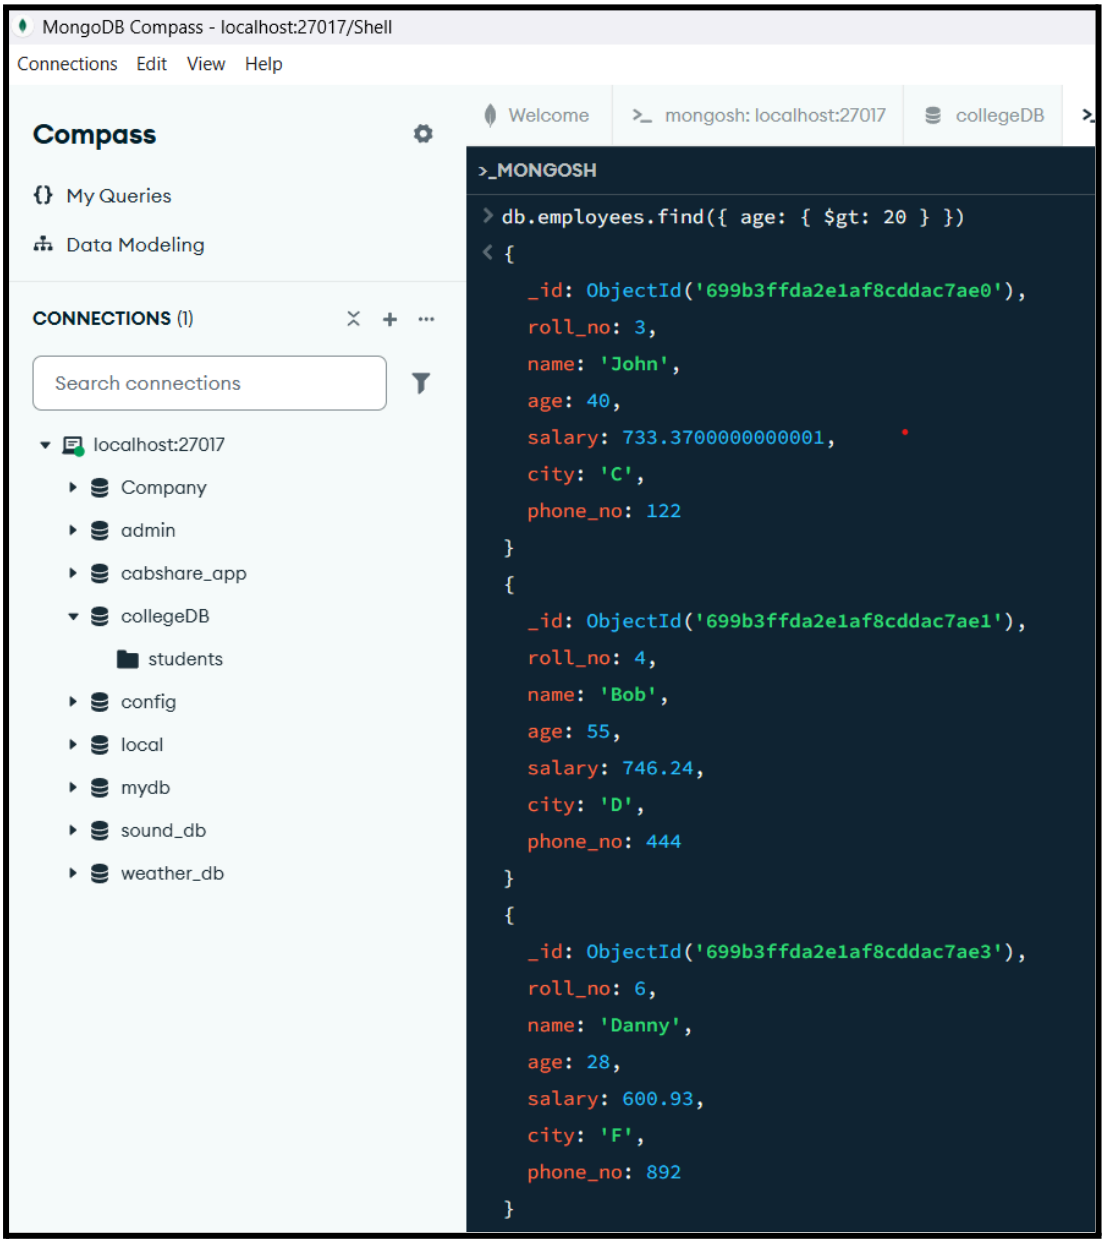

Q10. Write a query to display all the documents with AGE less than 20.

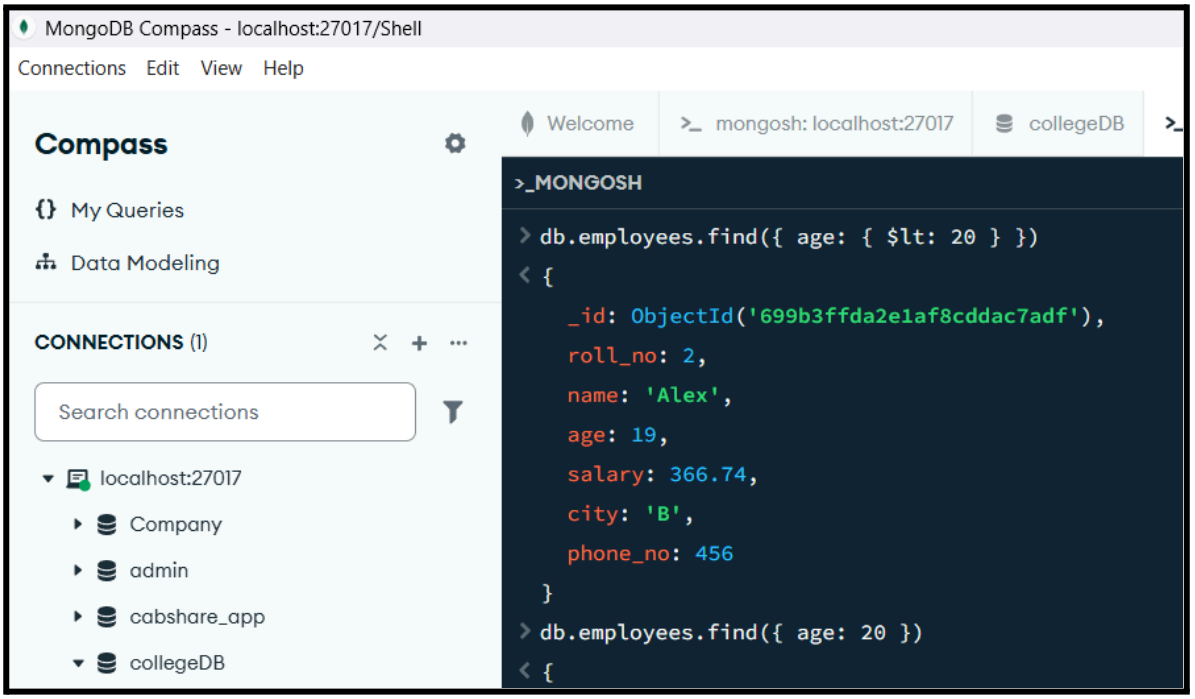

Q11. Write a query to display all the documents with AGE equals to 20.

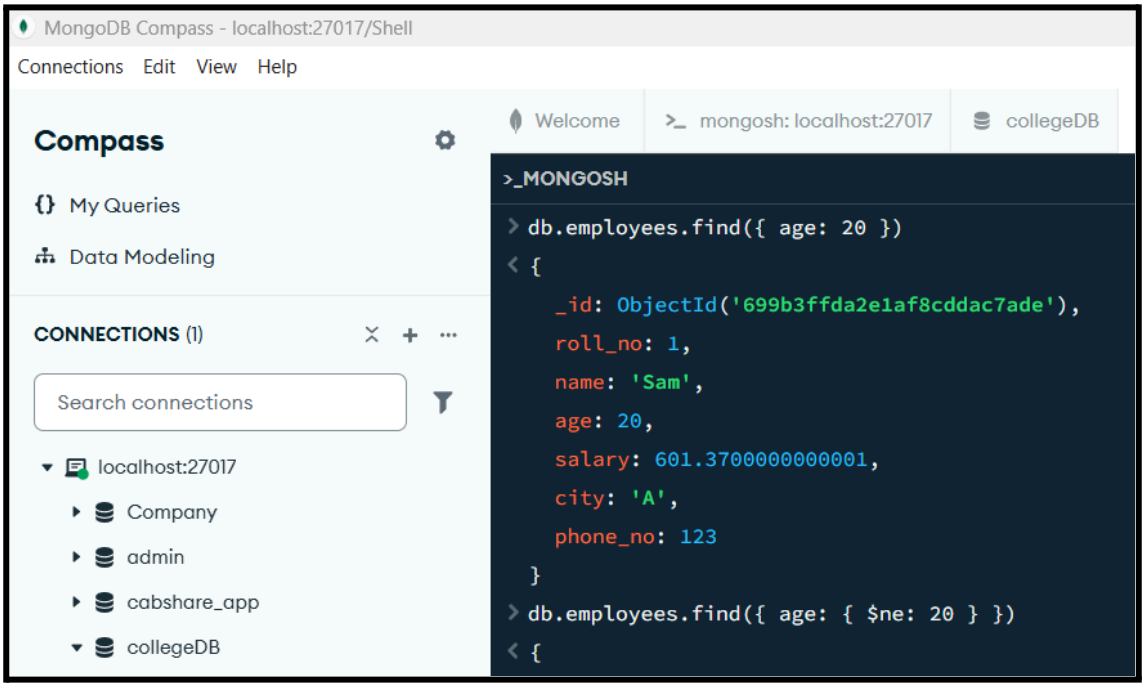

Q12. Write a query to display all the documents with AGE not equals to 20.

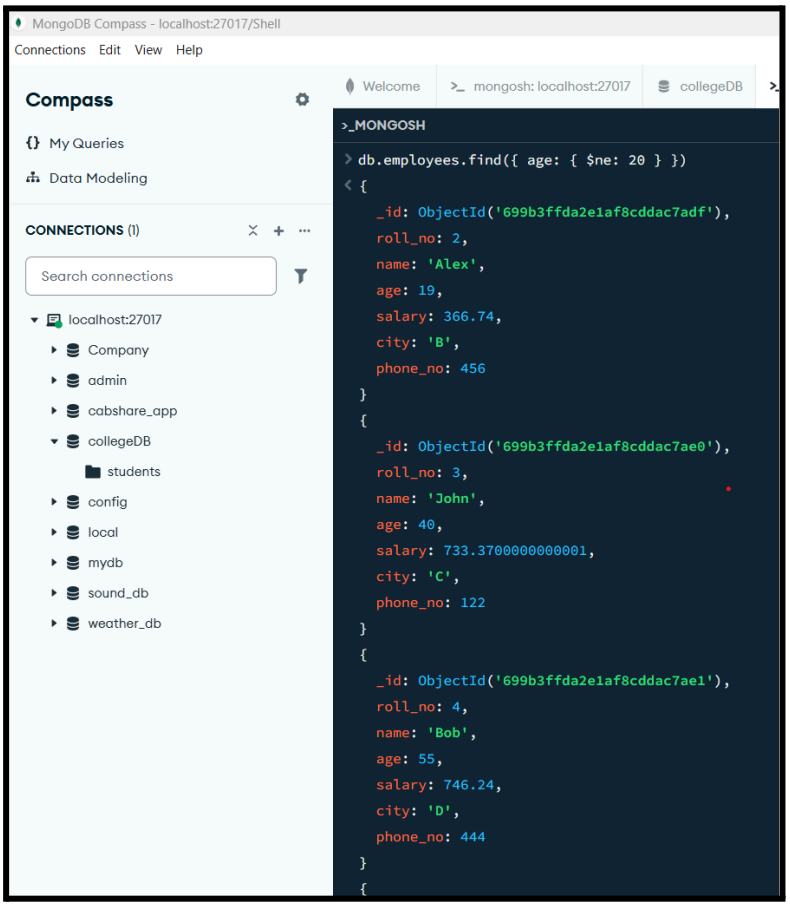


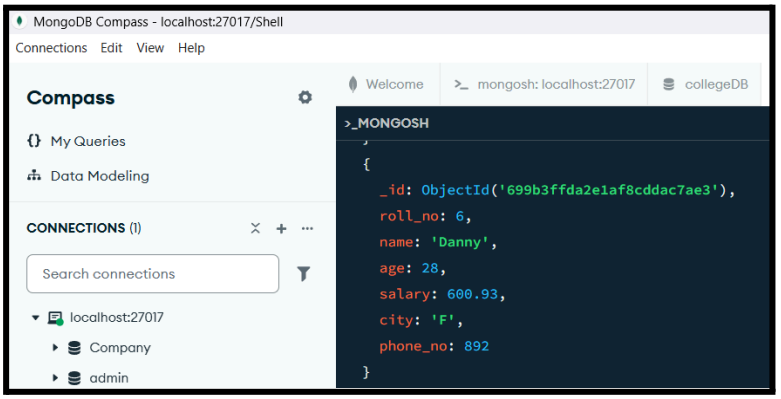
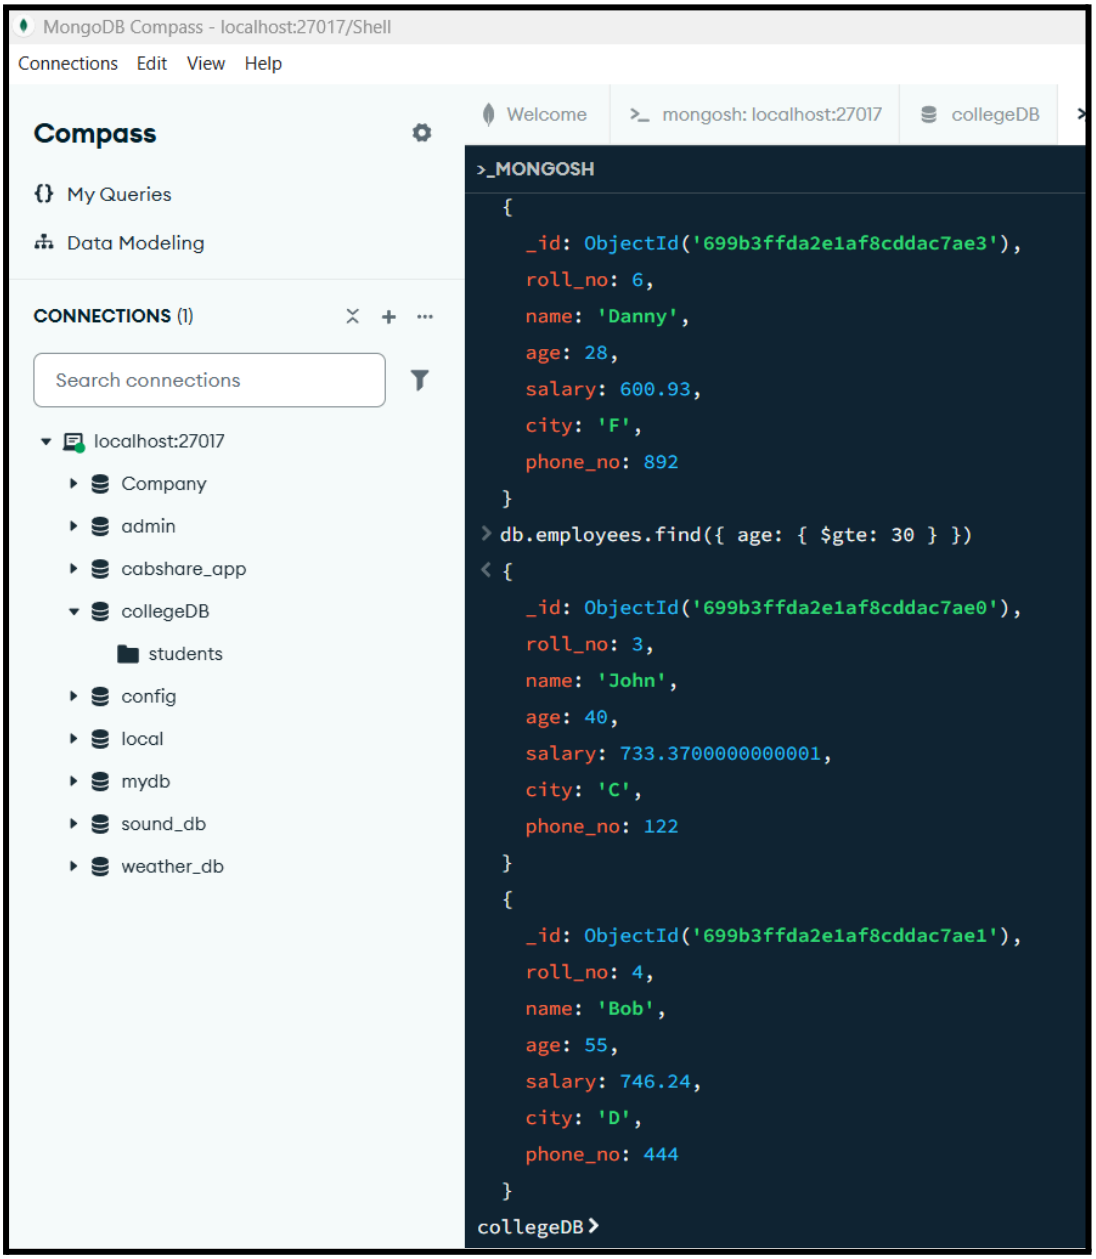
Q13. Write a query to display all the documents where AGE is greater than equals to 30.