



OUTPUTS AND URL

TOKEN GENERATION -----

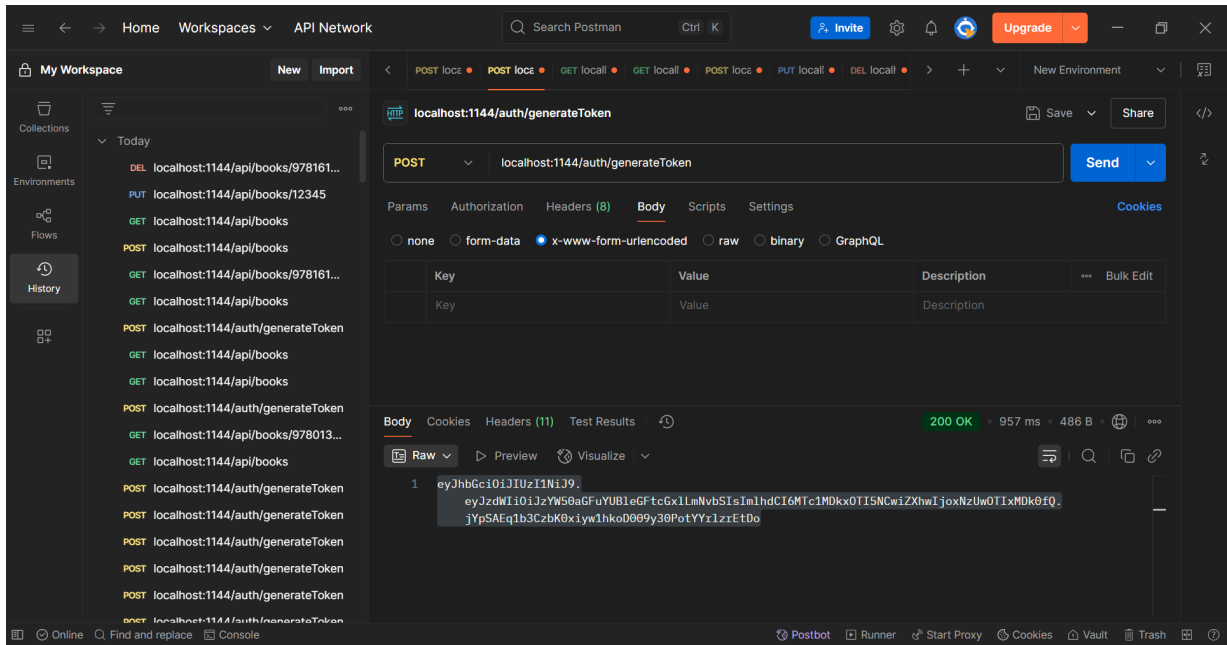

GET ALL BOOKS -----

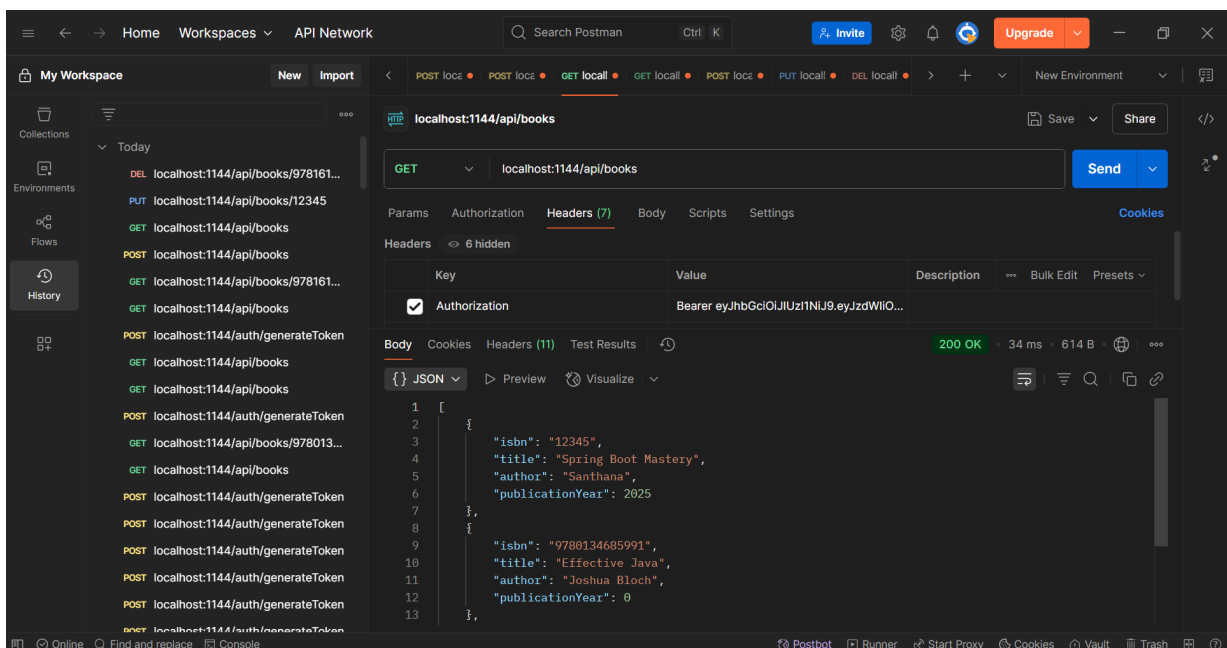

GET BOOK BY {ISBN} -----

The screenshot shows the Postman interface with a GET request to `localhost:1144/api/books/9781617294945`. The request is authenticated with a Bearer token. The response is a 200 OK status with a JSON body containing book details.

Request:

- Method: GET
- URL: `localhost:1144/api/books/9781617294945`
- Headers (7):
 - Authorization: Bearer eyJhbGciOiJIUzI1NiJ9.eyJzdWIiOi...

Response:

```
1 {
2   "isbn": "9781617294945",
3   "title": "Spring in Action",
4   "author": "Craig Walls",
5   "publicationYear": 0
6 }
```

ADD NEW BOOK -----

The screenshot shows the Postman interface with a POST request to `localhost:1144/api/books`. The request body is a JSON object representing a new book. The response is a 200 OK status with a JSON body containing the created book details.

Request:


- Method: POST
- URL: `localhost:1144/api/books`
- Body (raw):

```
1 {
2   "isbn": "12345",
3   "title": "Spring Boot Mastery",
4   "author": "Santhana",
5   "publicationYear": 2025
6 }
```

Response:

```
1 {
2   "isbn": "12345",
3   "title": "Spring Boot Mastery",
4   "author": "Santhana",
5   "publicationYear": 2025
6 }
```

UPDATE BOOK -----

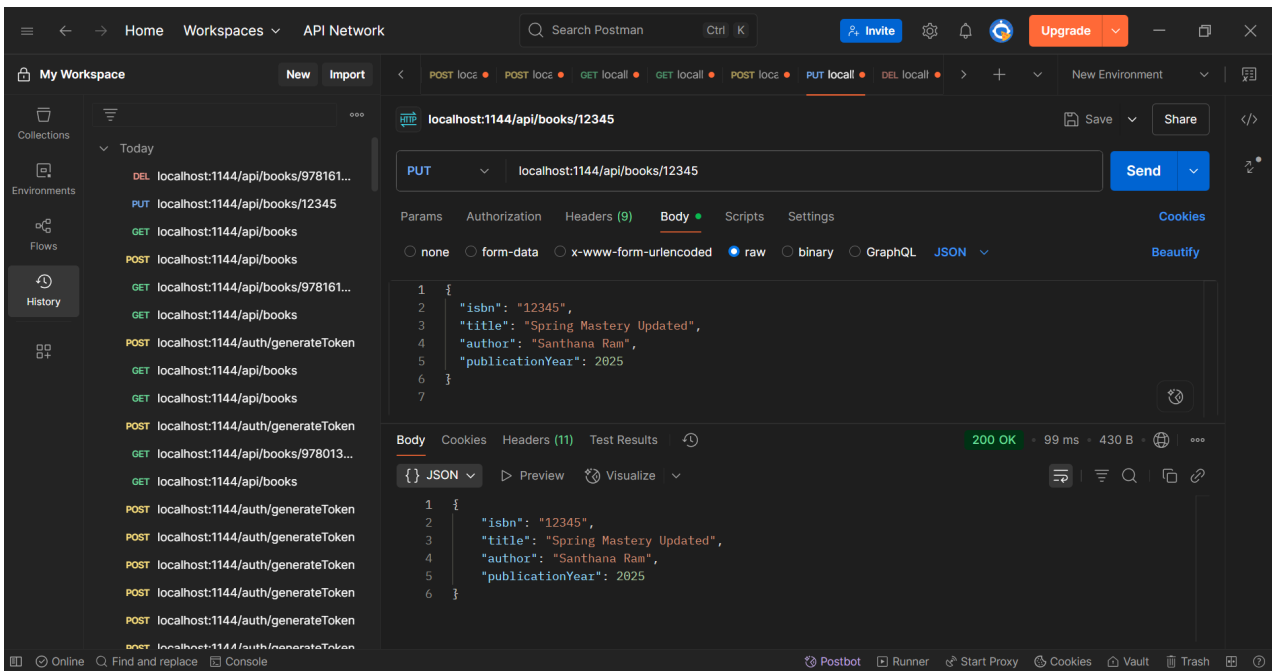

DELETE BOOK -----

