

CKAD^{Q&As}

Certified Kubernetes Application Developer (CKAD) Program

Pass Linux Foundation CKAD Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.certbus.com/ckad.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Linux Foundation Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



QUESTION 1

Exhibit:




Task Create a new deployment for running nginx with the following parameters; Run the deployment in the kdpd00201 namespace. The namespace has already been created Name the deployment frontend and configure with 4 replicas Configure the pod with a container image of lfcncf/nginx:1.13.7 Set an environment variable of NGINX__PORT=8080 and also expose that port for the container above

A. Please check explanations

B. Place Holder

Correct Answer: AB

Solution:

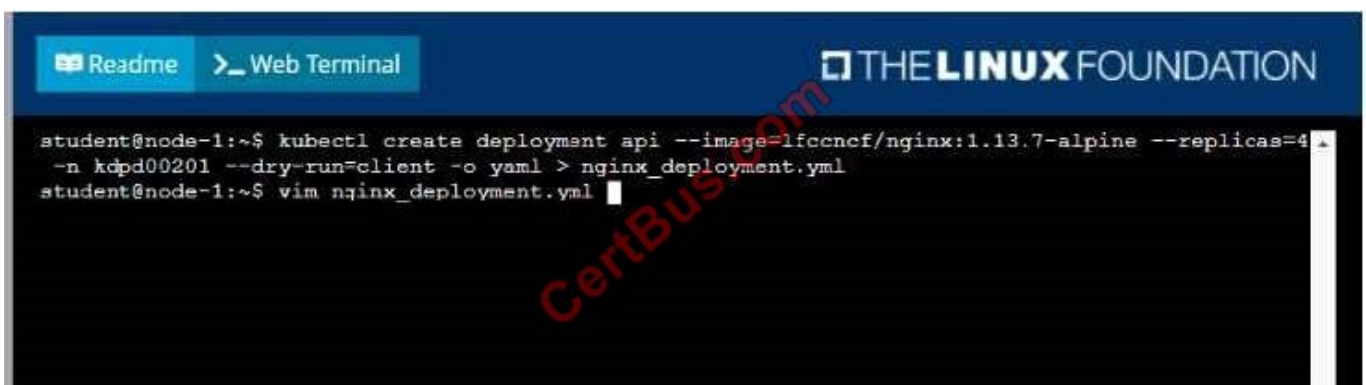

Readme
Web Terminal
THE **LINUX** FOUNDATION

```

apiVersion: apps/v1
kind: Deployment
metadata:
  creationTimestamp: null
  labels:
    app: api
  name: api
  namespace: kdpd00201
spec:
  replicas: 4
  selector:
    matchLabels:
      app: api
  strategy: {}
  template:
    metadata:
      creationTimestamp: null
      labels:
        app: api
    spec:
      containers:
      - image: lfccncf/nginx:1.13.7-alpine
        name: nginx
        resources: {}
status: {}
~
"nginx_deployment.yml" 25L, 421C
4,1
All

```

Readme
Web Terminal
THE **LINUX** FOUNDATION

```

apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: api
  name: api
  namespace: kdpd00201
spec:
  replicas: 4
  selector:
    matchLabels:
      app: api
  template:
    metadata:
      labels:
        app: api
    spec:
      containers:
      - image: lfccncf/nginx:1.13.7-alpine
        name: nginx
        ports:
        - containerPort: 8080
        env:
        - name: NGINX_PORT
          value: "8080"
~
23,8
All

```

Readme
Web Terminal
THE **LINUX** FOUNDATION

```

student@node-1:~$ kubectl create deployment api --image=lfcncf/nginx:1.13.7-alpine --replicas=4
-n kdpd00201 --dry-run=client -o yaml > nginx_deployment.yml
student@node-1:~$ vim nginx_deployment.yml
student@node-1:~$ kubectl create nginx_deployment.yml
Error: must specify one of -f and -k

error: unknown command "nginx_deployment.yml"
See 'kubectl create -h' for help and examples
student@node-1:~$ kubectl create -f nginx_deployment.yml
error: error validating "nginx_deployment.yml": error validating data: ValidationError(Deployment.spec.template.spec): unknown field "env" in io.k8s.api.core.v1.PodSpec; if you choose to ignore these errors, turn validation off with --validate=false
student@node-1:~$ vim nginx_deployment.yml
student@node-1:~$ kubectl create -f nginx_deployment.yml
deployment.apps/api created
student@node-1:~$ kubectl get pods -n kdpd00201
NAME                                READY   STATUS    RESTARTS   AGE
api-745677f7dc-7hnmv               1/1     Running   0           13s
api-745677f7dc-9q5vp               1/1     Running   0           13s
api-745677f7dc-fd4gk               1/1     Running   0           13s
api-745677f7dc-mbnpc               1/1     Running   0           13s
student@node-1:~$

```

QUESTION 2

Exhibit: Context Developers occasionally need to submit pods that run periodically. Task Follow the steps below to create a pod that will start at a predetermined time and which runs to completion only once each time it is started: Create a YAML formatted Kubernetes manifest /opt/KDPD00301/periodic.yaml that runs the following shell command: date in a single busybox container. The command should run every minute and must complete within 22 seconds or be terminated by Kubernetes. The Cronjob name and container name should both be hello Create the resource in the above manifest and verify that the job executes successfully at least once



- A. Please check explanations
- B. Place Holder

Correct Answer: AB

Solution:

```
Readme Web Terminal THE LINUX FOUNDATION

student@node-1:~$ kubectl create cronjob hello --image=busybox --schedule "* * * * *" --dry-run=
client -o yaml > /opt/KDPD00301/periodic.yaml
error: unable to match a printer suitable for the output format "yaml", allowed formats are: go t
emplate, go-template-file, json, jsonpath, jsonpath-as-json, jsonpath-file, name, template, templatefile
, yaml
student@node-1:~$ kubectl create cronjob hello --image=busybox --schedule "* * * * *" --dry-run=
client -o yaml > /opt/KDPD00301/periodic.yaml
student@node-1:~$ vim /opt/KDPD00301/periodic.yaml
```

```
Readme Web Terminal THE LINUX FOUNDATION

apiVersion: batch/v1beta1
kind: CronJob
metadata:
  name: hello
spec:
  jobTemplate:
    metadata:
      name: hello
    spec:
      template:
        spec:
          containers:
            - image: busybox
              name: hello
              args: ["/bin/sh", "-c", "date"]
          restartPolicy: Never
  schedule: "* * * * *"
  startingDeadlineSeconds: 32
  concurrencyPolicy: Allow
```

19,26 All

```

student@node-1:~$ kubectl create cronjob hello --image=busybox --schedule "* * * * *" --dry-run=
client -o yaml > /opt/KDPD00301/periodic.yaml
error: unable to match a printer suitable for the output format "yaml", allowed formats are: go-t
emplate, go-template-file, json, jsonpath, jsonpath-as-json, jsonpath-file, name, template, templatefile
, yaml
student@node-1:~$ kubectl create cronjob hello --image=busybox --schedule "* * * * *" --dry-run=
client -o yaml > /opt/KDPD00301/periodic.yaml
student@node-1:~$ vim /opt/KDPD00301/periodic.yaml
student@node-1:~$ kubectl create -f /opt/KDPD00301/periodic.yaml
cronjob.batch/hello created
student@node-1:~$ kubectl get cronjob
NAME          SCHEDULE          SUSPEND   ACTIVE   LAST SCHEDULE   AGE
hello         */1 * * * *       False     0        <none>           6s
student@node-1:~$
  
```

QUESTION 3

Exhibit:



Context A web application requires a specific version of redis to be used as a cache. Task Create a pod with the following characteristics, and leave it running when complete: The pod must run in the web namespace. The namespace has already been created The name of the pod should be cache Use the lffcnf/redis image with the 3.2 tag Expose port 6379

- A. Please check explanations
- B. Place Holder

Correct Answer: AB

Solution:

```

student@node-1:~$ kubectl run cache --image=lfcncf/redis:3.2 --port=6379 -n web
pod/cache created
student@node-1:~$ kubectl get pods -n web
NAME      READY   STATUS             RESTARTS   AGE
cache     0/1     ContainerCreating   0           6s
student@node-1:~$ kubectl get pods -n web
NAME      READY   STATUS    RESTARTS   AGE
cache     1/1     Running   0           9s
student@node-1:~$

```

QUESTION 4

Exhibit: Context You are tasked to create a secret and consume the secret in a pod using environment variables as follow: Task Create a secret named another-secret with a key/value pair; key1/value4 Start an nginx pod named nginx-secret using container image nginx, and add an environment variable exposing the value of the secret key key 1, using COOL_VARIABLE as the name for the environment variable inside the pod



A. Please check explanations

B. Place Holder

Correct Answer: AB

Solution:

```

student@node-1:~$ kubectl create secret generic some-secret --from-literal=key1=value4
secret/some-secret created
student@node-1:~$ kubectl get secret
NAME                                TYPE                                DATA   AGE
default-token-4kvr5                 kubernetes.io/service-account-token 3       2d11h
some-secret                          Opaque                             1       5s
student@node-1:~$ kubectl run nginx-secret --image=nginx --dry-run=client -o yaml > nginx_secret.yml
student@node-1:~$ vim nginx_secret.yml

```

Readme Web Terminal THE **LINUX** FOUNDATION

```

apiVersion: v1
kind: Pod
metadata:
  creationTimestamp: null
  labels:
    run: nginx-secret
  name: nginx-secret
spec:
  containers:
  - image: nginx
    name: nginx-secret
    resources: {}
  dnsPolicy: ClusterFirst
  restartPolicy: Always
status: {}

```

"nginx_secret.yml" 15L, 253C 1,1 All

Readme Web Terminal THE **LINUX** FOUNDATION

```

apiVersion: v1
kind: Pod
metadata:
  labels:
    run: nginx-secret
  name: nginx-secret
spec:
  containers:
  - image: nginx
    name: nginx-secret
    env:
    - name: COOL_VARIABLE
      valueFrom:
        secretKeyRef:
          name: some-secret
          key: key1

```

-- INSERT -- 16,20 All

Readme
Web Terminal
THE LINUX FOUNDATION


```

student@node-1:~$ kubectl get pods -n web
NAME      READY   STATUS    RESTARTS   AGE
cache     1/1     Running   0           9s
student@node-1:~$ kubectl create secret generic some-secret --from-literal=key1=value4
secret/some-secret created
student@node-1:~$ kubectl get secret
NAME                TYPE          DATA   AGE
default-token-4kvr5  kubernetes.io/service-account-token  3       2d11h
some-secret          Opaque        1       5s
student@node-1:~$ kubectl run nginx-secret --image=nginx --dry-run=client -o yaml > nginx_secret.yaml
student@node-1:~$ vim nginx_secret.yaml
student@node-1:~$ kubectl create -f nginx_secret.yaml
pod/nginx-secret created
student@node-1:~$ kubectl get pods
NAME            READY   STATUS    RESTARTS   AGE
liveness-http   1/1     Running   0           6h38m
nginx-101       1/1     Running   0           6h39m
nginx-secret     0/1     ContainerCreating  0           4s
poller          1/1     Running   0           6h39m
student@node-1:~$ kubectl get pods
NAME            READY   STATUS    RESTARTS   AGE
liveness-http   1/1     Running   0           6h38m
nginx-101       1/1     Running   0           6h39m
nginx-secret     1/1     Running   0           8s
poller          1/1     Running   0           6h39m
student@node-1:~$

```

QUESTION 5

Exhibit: Context As a Kubernetes application developer you will often find yourself needing to update a running application. Task Please complete the following: Update the app deployment in the kdpd00202 namespace with a maxSurge of 5% and a maxUnavailable of 2% Perform a rolling update of the web1 deployment, changing the Ifccncf/ngmx image version to 1.13 Roll back the app deployment to the previous version

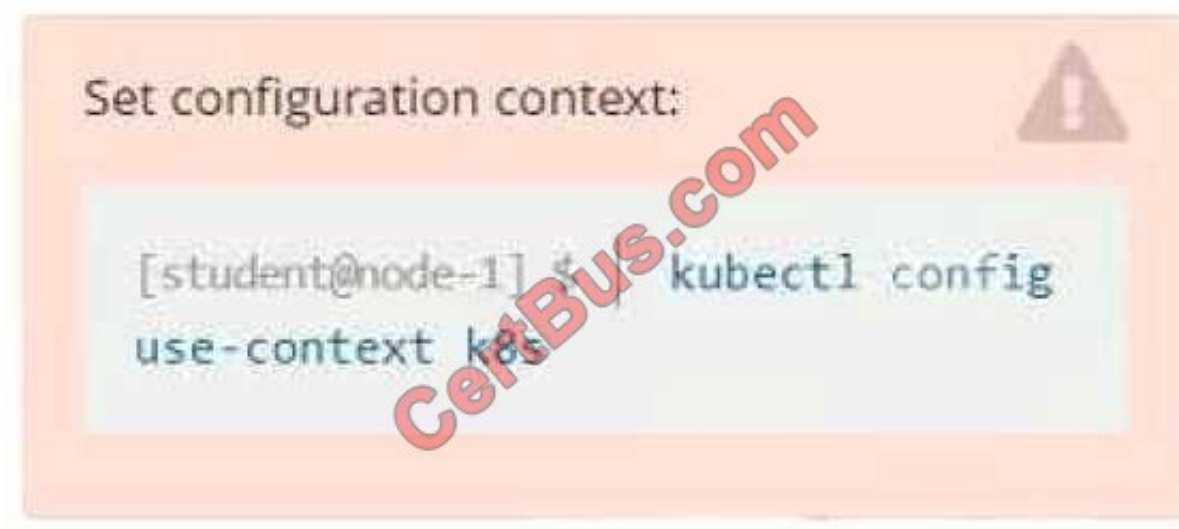


A. Please check explanations

B. Place Holder

Correct Answer: AB

Solution:

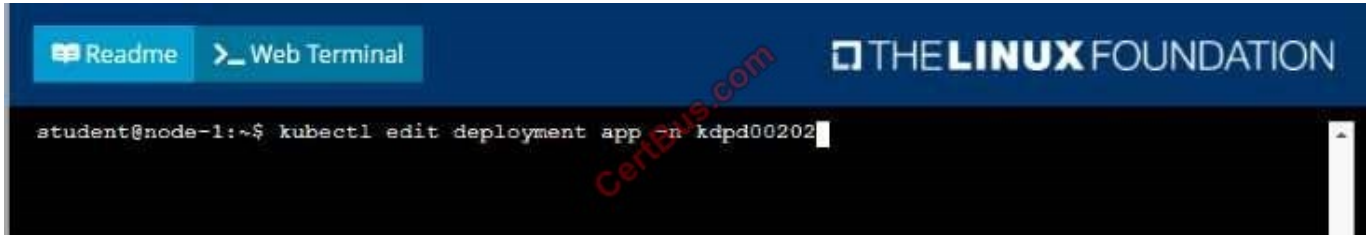

```
student@node-1:~$ kubectl edit deployment app -n kdpd00202
```

Readme Web Terminal THE **LINUX** FOUNDATION

```
uid: 1dfa2527-5c61-46a9-8dd3-e24643d3ce14
spec:
  progressDeadlineSeconds: 600
  replicas: 10
  revisionHistoryLimit: 10
  selector:
    matchLabels:
      app: nginx
  strategy:
    rollingUpdate:
      maxSurge: 5%
      maxUnavailable: 2
    type: RollingUpdate
  template:
    metadata:
      creationTimestamp: null
      labels:
        app: nginx
    spec:
      containers:
      - image: lfocncf/nginx:1.13
        imagePullPolicy: IfNotPresent
        name: nginx
        ports:
        - containerPort: 80
          protocol: TCP
:wg!
```

Readme Web Terminal THE **LINUX** FOUNDATION

```
student@node-1:~$ kubectl edit deployment app -n kdpd00202
deployment.apps/app edited
student@node-1:~$ kubectl rollout status deployment app -n kdpd00202
Waiting for deployment "app" rollout to finish: 6 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 8 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 8 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 8 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 8 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "app" rollout to finish: 8 of 10 updated replicas are available...
Waiting for deployment "app" rollout to finish: 9 of 10 updated replicas are available...
deployment "app" successfully rolled out
student@node-1:~$ kubectl rollout undo deployment app -n kdpd00202
deployment.apps/app rolled back
student@node-1:~$ kubectl rollout status deployment app -n kdpd00202
```

```
student@node-1:~$ kubectl rollout status deployment app -n kdpd00202
Waiting for deployment "app" rollout to finish: 6 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 6 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 6 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 6 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 7 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 9 out of 10 new replicas have been updated...
Waiting for deployment "app" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "app" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "app" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "app" rollout to finish: 8 of 10 updated replicas are available...
Waiting for deployment "app" rollout to finish: 9 of 10 updated replicas are available...
deployment "app" successfully rolled out
student@node-1:~$
```

[CKAD PDF Dumps](#)

[CKAD Study Guide](#)

[CKAD Exam Questions](#)

To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)


We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

<https://www.certbus.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:

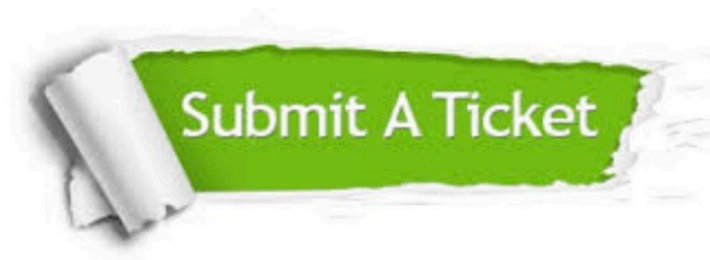

 One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.	 Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.	 Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.
---	---	--

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © certbus, All Rights Reserved.