

UNIVERSIDAD NACIONAL AUTÓNOMA DE
MÉXICO

T E S I S

QUE PARA OPTAR POR EL GRADO DE:

PRESENTA:

TUTOR PRINCIPAL DE TESIS:

COMITÉ TUTOR:





Table of contents

Introduction 2

Introduction

TODO Create a template that demonstrates the appearance, formatting, layout, and functionality of your format. Learn more about journal formats at <https://quarto.org/docs/journals/>. (Cameron and Trivedi 2013).

In Quarto, we can do these by setting the fig-env command to figure* or SCfigure*



Figure 1: This legend would be placed at the side of the figure, rather than below it.

```
library(tidyverse)
```


-- Attaching core tidyverse packages ----- tidyverse 2.0.0 --

```

v dplyr      1.1.3      v readr      2.1.4
v forcats    1.0.0      v stringr    1.5.0
v ggplot2     3.4.4      v tibble     3.2.1
v lubridate   1.9.3      v tidyr      1.3.0
v purrr       1.0.2
-- Conflicts ----- tidyverse_conflicts() --
x dplyr::filter() masks stats::filter()
x dplyr::lag()     masks stats::lag()
i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become
df <- tibble(x = 1:10, y = rnorm(10))

ggplot(df, aes(x, y)) +
  geom_point()

```

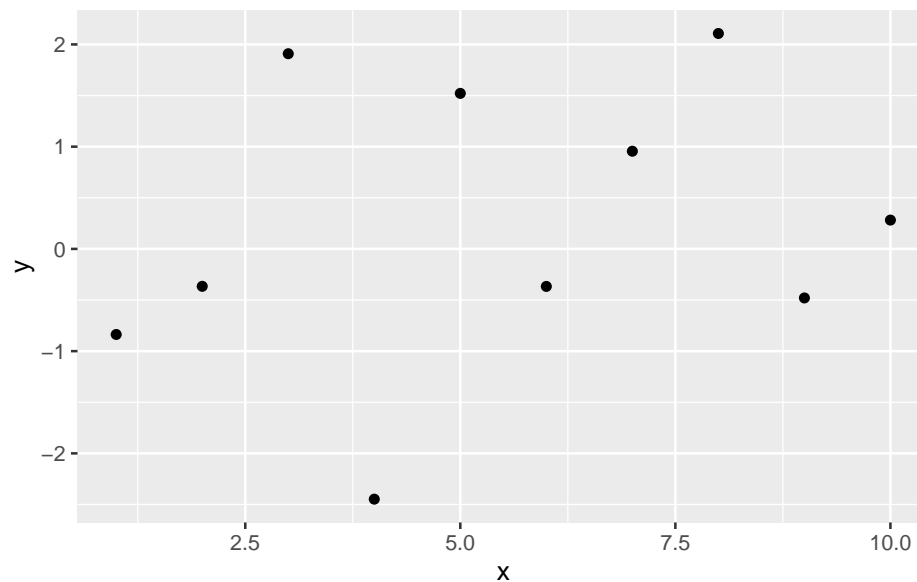

Cameron, A. Colin, and Pravin K. Trivedi. 2013. *Regression Analysis of Count Data*. 2nd ed. Cambridge: Cambridge University Press.