

# ***jqGrid***

---

a jQuery Plugin

by

Tony Tomov

Version 3.3

Released October 2008

## Contents

jqGrid .....	1
Acknowledgements .....	1
What's New in This Release? .....	3
Version 3.3 .....	3
Version 3.2.2 .....	5
Version 3.2.1 .....	7
Version 3.2 .....	7
Version 3.1 .....	10
Introduction .....	11
Requirements .....	11
Do I need to Pay for jqGrid? .....	12
Installation .....	12
How it Works .....	14
Tutorial: Creating Your First Grid .....	17
The Data .....	17
The HTML .....	17
The Server-side File .....	20
PHP and MySQL .....	21
COOP Example .....	23
Data Types .....	25
XML Data .....	26
XML String .....	30
JSON Data .....	30
JSON String .....	35
Array Data .....	35
Function .....	37
User Data .....	38
Basic Grid .....	40
Properties .....	41
colModel Properties .....	45
Height and Width .....	47
Obsolete Properties .....	48
Events .....	49
Methods .....	51
Available methods (as of version 3.2) .....	51
Advanced Methods .....	55
Obsolete Methods .....	56
Pager (Navigation bar) .....	57
Properties .....	57
Events .....	58
Methods .....	58
Custom Buttons .....	58
Form Editing .....	61
Properties .....	61
Searching - Single Field .....	61
Searching - Multiple Fields .....	63
Add Row .....	66
Edit Row .....	66
Delete Row .....	69
Inline Editing .....	72
Properties .....	72
Methods .....	74
Example .....	76

Cell Editing.....78

Multi-Selecting Items.....81

Subgrids .....83

    A Subgrid.....83

    Defining a SubGrid.....83

    A Grid as Subgrid.....86

    Defining a Grid as a subGrid.....87

    Master/Detail Grids .....88

    Defining Master/Details Grids .....89

Tree Grid.....90

    treeReader Properties.....92

User Modules.....94

    Posting Data.....94

    Show/Hide Columns .....94

    Table to jqGrid .....95

## jqGrid

jqGrid is an Ajax-enabled JavaScript control that provides solutions for representing and manipulating tabular data on the web. Since the grid is a client-side solution loading data dynamically through Ajax callbacks, it can be integrated with any server-side technology, including PHP, ASP, Java Servlets, JSP, ColdFusion, and Perl.

jqGrid uses a jQuery Java Script Library and is written as plugin for that package. For more information on jQuery, please refer to the [jQuery web site](#).

jqGrid's Home page can be found [here](#).

Working examples of jqGrid, with explanations, can be found [here](#).

I started the idea when I needed an easy way to represent database information in my project. The first requirement was speed and the second, independence from server-side technology and the database backend.

-- Tony

## Acknowledgements

### Author

The author of jqGrid and its accompanying documentation is [Tony Tomov](#). Suggestions for enhancements, reports of bugs, and requests for help can be made on [jqGrid's community forum](#).

### Editor

This documentation is edited and maintained by [Reg Brehaut](#). Reports of errors or confusing expressions, and suggestions for inclusion or enhancement can be made on the forum or directly to [Reg](#).

### Special Thanks

Special thanks to Brice Burgess for the invaluable advice, writing the shrinkToFit feature and, of course, providing the excellent jqModal plugin used by jqGrid.

### Contributors

Paul Tiseo contributed [grid.posttext.js](#).

Participants in the [jqGrid forum](#) have contributed significantly by asking questions for clarification, by pointing out problems, and by suggesting ideas for enhancements.

## Software

This documentation has been produced using [West Wind's HTML Help Builder](#), quite possibly the best product of its kind on the market. Check out how it can help you document your system, today.

## What's New in This Release?

As new versions are released, Release Notes will be posted here.

### Version 3.3

Released 2008-10-14

#### IMPORTANT: Modules have been restructured

In response to many requests, the structure of the modules has been revised.

- all text strings now reside in a separate module. This will allow dynamically changing the language. The modules are named `grid.locale-(two letters for the locale).js`. For example, for English this should be `grid.locale-en.js`. Modules available are English (en), Bulgarian (bg) and Italian (it).
- Also, to overcome writing a lot of repeatable code for inline, form and cell editing modules, some common functions have been gathered in another module called *grid.common.js*.

Both of these new modules are required for the proper functioning of jqGrid.

#### Bug Fixes

- fixed *editRow* method where *addRowData* method is used; there was a bad 3rd parameter: 'top' instead of 'first'.
- fixed *jsonReader* when trying to set the id of the row from non-existing data
- fixed *jsonReader* bug when trying to set id:0
- fixed *beforeInitData* event in *formedit* module when we create the modal for first time
- fixed validation in *formedit* module when the first column has a validation rule
- fixed bug in *inline edit* module when running in IE6/IE7 and setting input text with attr size = 0
- fixed bug in image path when creating modals.
- fixed resizing bug when jqGrid is used with jQuery UI
- fixed bug in FF when trying to show caption
- doubleclick has been removed from *tree grid* as it was causing problems in selection
- fixed bug when clicking on a checkbox of a particular row and multiselect is `true` and multikey is set
- fixed bug in *aftersavefunc* - the response parameter passed to this event is now `response.responseText` (introduced in early releases of Version 3.3).
- fixed bug in the loader - support for Safari.

#### User Contributions

- [Show/Hide Columns](#), a modal dialog allowing users to choose which columns to show or hide. Contributed by Piotr Roznicki.
- [Table to jqGrid](#), Convert an existing html table to jqGrid. Contributed by Peter Romianowski.

## Additions and Enhancements

### Installation

The structure of the package is extended with two additional folders containing packed versions of jqGrid. See [Installation](#).

### basegrid

- added property *forceFit* (boolean, default false) When set to `true` and resizing the width of a column, the adjacent column (to the right) resizes so that the overall grid width is maintained (e.g., reducing the width of column 2 by 30px increases the size of column 3 by 30px). In this case there is no horizontal scrollbar. Note: this option is not compatible with *shrinkToFit* option - i.e. if *shrinkToFit* is set to `false`, *forceFit* is ignored.
- added property *sortclass* (string, default 'grid\_sort') the class to be applied to the header element (<th>) of the currently sorted column
- added property *resizeclass* (string, default 'grid\_resize') the class to be applied to the columns that are resizable so that we can show a *resize* handle for ones that are resizable
- added property *gridstate* (string) Determines the current state of the grid (i.e. when used with *hiddengrid*, *hidegrid* and *caption* options): can be either 'visible' or 'hidden'.
- added event *onHeaderClick*(gridstate) can be used when clicking to hide or show the grid; *gridstate* is defined in the previous point.
- added event *onCellSelect*(rowid, iCol, cellcontent) fires when we click on particular cell in the grid; rowid is the id of the row, iCol is the index of the cell, content is the content of the cell. (Note that this is available only when we are not using the cell editing module -- and is disabled when using cell editing). Important note regarding IE6: this event may exhibit strange behaviours because of a bug in early IE6 releases. When we have a hidden column the index will not be calculated correctly. You can avoid using this feature in a grid with hidden columns, test for these browsers and conditionally suppress this feature, or suggest that your IE6 users upgrade. For more information refer to <http://support.microsoft.com/kb/814506>
- added method *setGridWidth*(new\_width, shrink) sets a new width to the grid dynamically. new\_width is the new width in pixels. shrink (default true) has the same behavior as *shrinkToFit*
- added method *setGridHeight* (new\_height) sets the new height of the grid dynamically. Note that the height is set only to the grid cells and not to the grid. new\_height can be in pixels, percentage, or 'auto'
- added method *getCell* (rowid, iCol) gets the content of the cell with id = rowid and index column iCol. Note that iCol is a index and not a name.
- added a third parameter to the *afterInsertRow* event: rowelem, the element from the response.
- added a third parameter to the *onSortCol* event: sortorder, the sorting order (either 'asc' or 'desc').
- added method *addJSONData*: add json data from a custom response into the grid.
- added method *addXmlData*: add xml data from a custom response into the grid.
- added new *DataTypes*, *function* to take advantage of new methods (addJSONData and addXmlData)

We can now sort a column based on another column. For example, if we have a formatted datetime column for display purposes plus a hidden int value of that datetime, sorts on the displayed column can be based on the hidden one. This can be achieved when using *onSortCol* event this way:

```
onSortCol: function(name,index) {
    if(name == 'displaydate') {
        jQuery("#grid_id").setGridParam({sortname:"hiddendate"});
    }
}
```

```
}
```

## colModel

The following apply to all editing modules: inlineedit, formedit, celledit

- added new email validation to editrules: e.g., editrules:{email:true}
- added new edit type: password. e.g., edittype:"password"
- added support for multiple selection of options in select boxes, e.g., editoptions:{multiple:true, size:4... }

## formEditing

- added option *checkInput* (Boolean) in searchGrid method. When set to true in search Dialog there is a validation of values according the rules in *colModel* (editrules option)
- added event *onInitializeSearch* in searchGrid method. This event fires only once when the form is constructed
- added events *beforeShowSearch* and *afterShowSearch* in searchGrid method. These events fire before and after showing the search dialog.
- added option *title* in navButtonAdd - a tooltip option for the button.
- added support for multiple select boxes (see addition to colModel).

## Cell editing

This is a new feature of jqGrid, supporting navigation through a grid cell-by-cell with editing (for cells marked as editable). See [Cell Editing](#) for details.

Important Note: currently cell editing does not work in Safari browser.

## treegrid

- can now use JSON data.

## custom

- added support for searching on multiple fields, see [Searching - Multiple Fields](#)

## Version 3.2.2

Released 2008-08-10

## Bug Fixes

- fixed *setColProp* method to exit when the column properties are set
- fixed bug in *colspan* in a subgrid when hidden fields are present



- fixed error function in *saveRow* method in Inline editing; \$.post has been replaced with \$.ajax
- fixed bug in *formedit* when using html tags in column names
- fixed bug in *multikey* compare
- fixed *addRowData* method: when adding a empty value, IE was not correctly displaying the border of the cell
- fixed bug in *pager* when trying to dynamically add an additional class
- fixed bug in *clearGridData* method: was not correctly resetting some values
- fixed a bug when *key: true* : was not working correctly with either xml or JSON data types under some conditions
- fixed *pginput* bug. Previously this would hide the number of pages; now the number of pages and records are hidden if *viewrecords* is set to false
- fixed bug in sorting local data when try to sort a cell which contains additional html tags
- fixed bug in sorting local data when multi select is true: the header check box does not change the state if sorting on some column
- fixed bug in sort local data when trying to set the column dynamically with *onSortCol* event
- fixed bug in FireFox 2 when *height* is set to 'auto'
- fixed bug in Firefox 3 on Mac related to css visualization

## Additions

### basegrid

- added another parameter to the *addRowData* method: *addRowData(rowid, data, position, srcrowid)* where *position* has the following values: first, last, before, after. The *before* and *after* options refer to the row id set in *srcrowid* (the new row is inserted before or after this row; if the *srcrowid* is not found, no data is inserted).
- added new property *pgtext*: this is the text that appears before value for *totalpages* in pager. The default value is "/"

### formedit

- the pager in *navButtonAdd* can be set either as '#pager\_id' or 'pager\_id'
- all modal windows in *formedit* module now have a zIndex of 950 to be compatible with the datepicker or other plugins, such as autocomplete.
- added 2 new parameters to the *editGridRow* method:
  1. *onclickSubmit* event; this fires after the submit button is clicked and after the postdata is constructed, but before the data is submitted to the server. Parameters passed to this event is an options array of the method. The event should return array of type {}.
  2. *editData* property: an array that is initially empty and can be used to dynamically add parameters to the content (postdata)
- added 2 new parameters to the *delGridRow* method, with the same role as those in *editGridRow* method (described above):
  1. *onclickSubmit* event
  2. *delData* property

### treegrid

This module is currently under development and should be used with care. It is not recommended for use in a production environment. For more information refer to jqGrid Forum: TreeGrid component.

## Version 3.2.1

Released 2008-07-23

### Bug Fixes

- corrected 100% *height* bug in FF
- corrected bug in *showCol* when showing the last column in grid when it was initially hidden
- corrected *shrinkToFit* bug when columns in *colModel* initially have no width set.
- corrected *altRows* bug when using xml datatype
- corrected bug in the following methods when try to use grid as subgrid: *getDataIDs*, *setSelection*, *resetSelection*, *getRowData*, *delRowData*, *addRowData*, *hideCol*, *showCol*, *setCell*, *setRowData*
- corrected *viewRecords* bug when the *rowNum* parameter is not set
- corrected bug in *shrinkToFit* when using grid as a subgrid

### Improvements

- *addRowData* speed improvements (contributed by Peter Romianowski)

### Additions formedit

- Added additional parameter *mtype* in *editRow* and *delRow* methods. This parameter have the same sense as those in jqGrid: possible values are "POST" or "GET", default is "POST"

### basegrid

- added property *pgbuttons* (boolean). This disables or enables the pager buttons in pager if present. Default `true`
- added property *pginput* (boolean) This disables or enables the input box in pager if present. Default `true`

## Version 3.2

Released 2008-07-15

**IMPORTANT: Required Actions for Updating**

1. Some methods, parameters or options have been removed in this release; please refer to [Obsolete Properties](#) and [Obsolete Methods](#) to see what has been removed and what to use instead.
2. The distribution of code across modules has been enhanced to allow for future expansion while still keeping the basic package as small as possible. Please review the contents of `jquery.jqGrid.js` to see what you may need to add or change. See [Installation](#).
3. Additions have been made to the CSS files (in themes); either replace the previous versions with what comes with this release or, if you have incorporated the jqGrid CSS settings into your own CSS files, review and revise the sections noted here:

```
/* Pager */
...
/* End Pager */
```

and

```
/*Subgrid text mode*/
...
/* End Subgrid */
```

4. Previous versions of jqModal are not compatible with jQuery 1.2.6; please replace your copy of jqModal.js with the updated version included in this release.

## Bug Fixes

- corrected bug in *delRowData* and *setRowData* methods when using two or more grids and trying to delete/update a row with the same id
- corrected bug with url parameter in *editGridRow* (now the url can be changed dynamically)
- corrected bug in modal window
- corrected bug in formedit with class names
- corrected bug when the [Enter] key is pressed in *editGridRow*
- corrected bug in Safari 3 when resizing columns
- corrected bug with header columns and data columns position
- corrected misalignment between table header and table rows bug in IE (this reduces the header width by 1px and previously tight columns may now cut off the header text slightly)
- corrected bug in *hideCol* and *showCol* methods in IE
- corrected bug in IE when inline edit of element of type select
- corrected bug in safari when try to use pager in grid as subgrid
- corrected bug in navigator when try to attach buttons in grid as subgrid
- corrected mouseover bug when using grid as subgrid
- corrected bug when *shrinkToFit* parameter is set to false and the grid is resized
- corrected jquery.jqGrid.js loader bug
- corrected bug in *delGridRow* method when using modal for first time
- corrected bug in *getRowData* method to properly handle empty fields
- corrected bug in inline edit when restoring non-editable cells
- corrected bug that occurred when starting to resize a column but the mouse is not moved
- corrected bug in subgrid when the data in a cell is wider than the width of the cell.

## Additions & Changes

### grid base

- added *afterInsertRow*(rowid, rowdata) event - fires after every inserted row. Rowid is the id of inserted row. Rowdata is array of the inserted values. The array is of type name:value, where the name is the name from colModel.

- added *setLabel*(colname,newlabel, sattr) method set a new label to the header. We can set attributes and classes (sattr). If sattr is a string, we add a class using the using the jQuery *addClass*. If sattr is array we set css properties via jQuery *css*
- added *gridComplete* event - fires after all the data is loaded into the grid and all other processes are complete
- added *onSelectAll*(array of the selected ids) fires (if defined) when multiselect is true and you click on the header checkbox. Parameter passed to this event is an array of selected rows. If the rows are unselected, the array is empty.
- added *clearGridData* - clear the currently loaded data from grid
- added *loadError* - fires when a error in ajax request
- added *loadBeforeSend* - fires before sending the request
- added method *setCell*. This very useful method can change the content of particular cell and can set class or style properties.
- added property *hiddengrid*. If set to true the grid initially is hidden. The data is not loaded and only the caption layer is shown. When click to show grid the data is loaded and grid is shown. From this point we have a regular grid.
- added property *loadui* - "disable", "enable", "block"
- *onPaging*(which button) fires when a pager button is clicked and before populating the data; accepts which button is clicked: first, last, prev, next
- *resetSelection* method now resets the header checkbox, if mutiselect is true
- hidden fields are no longer included in the calculation of the grid width
- the grid should be set only with table element and class. The *cellSpacing*, *cellPadding* and *border* attributes are added automatically.
- *hideCol* and *showCol* can accept an array of data as parameter. Example: *hideCol*(["name1","name2"]) will hide the name1 and name2 columns. Also the method can accept a single string as parameter - i.e. *hideCol*("name1").The same applies to the *showCol* method
- the appropriate sort image now appears in the column heading when the grid is initially loaded and the sortname is set.

### formedit

- added method *navButtonAdd* - add a custom button to pager
- added method *GridToForm*
- added method *FormToGrid*
- added property *editrules*: {edithidden:true, required:true(false), number:true(false), minVal:val, maxVal:val}
- *editGridRow* can now accept default values in input text field, when action is add
- *searchGrid* now searches not by name but by the index name, if any

### inlineedit

- added *onerrorfunc* as the 6th parameter in *saveRow* to handle errors returned from the server; also can be passed from *editRow* (where it is the new 8th parameter) when using the [Enter] key to trigger the save.

### Miscellaneous

- improved performance in json and xml data reading when using zebra-stripping
- improved performance (by 50%) in *addRowData* and *setRowData* methods
- improved performance of reading data when browser is IE or Mozilla (related to corrected misalignment bug)

- formedit (modal windows) are now compatible with jQuery 1.2.6
- formedit is now compatible with other JS libraries, like Prototype

## Version 3.1

Released 2008-04-05

### Bug Fixes

- grid width bug when hidden fields are set and width of grid too.
- fixed bug in setSortName method.
- fixed bug in addRowData method when add at top of the grid and grid has no data.
- CSS bug when editing input type=text field in inline edit module
- added missed functions in editGridRow method
- fixed bugs with events names in formedit module

**IMPORTANT:** Some methods are to be removed in the next release; please refer to [Replaced Methods](#) to see which will be removed and what to use instead.

### Additions

- added getGridParam method - this method requested parameters from option array of the grid. If the parameter is empty - the entry options are get
- added setGridParam method - set a particular parameter. Note - for some parameters to take effect a trigger("reloadGrid") should be executed. Note that with this method we can override events like onSelectRow and etc.
- added onPaging event - this event fires after click on page button and before data population
- added resetSelection method - this method reset (unselect) the selected row(s)
- added option toolbar add at bottom or at top of the gridbody div element where we can put custom html content.
- added option userData in options array. With this we get user defined data from the response and use it later. To use this an additional option userdata in xmlReader and jsonReader is added. (thanks to Paul Tiseo). For more information refer to xml file and JSON Data
- added option postData. This array is passed directly to the url options - ajax request (thanks to Paul Tiseo). Refer to API Methods for manipulating postData array.
- added scope for easy translation when the grid is used multiple times in the application. That mean that the translation strings can be called only once and not every time when the grid is constructed. The scope is \$.jgrid.defaults To use this you need to simply do \$.extend(\$.jgrid.defaults,{ recordtext: "My record text", loadtext: "Process text",...}) only once. Note that we can override all other parameters. There are other additions for form manipulation module - \$.jgrid.search - for the search method, \$.jgrid.edit - for editing and adding method, \$.jgrid.del - for deleting method, \$.jgrid.nav - for the navigator .

## Introduction

This documentation is also available as a [pdf file](#).

This documentation assumes that you are familiar with concepts like web server, database server and scripting programming language. Using this documentation will be easier if you have already installed this software.

### Conventions

- Names of things -- modules, options, parameters or settings, etc. -- are in *italics*
- Values are shown in a different font: e.g., "change the value of the associated *include* from `true` to `false`."
- Names of keys (e.g., Enter) appear in square brackets in the text, e.g., press [Enter]
- for readability, code samples are shown with spaces separating elements e.g., *name: value*; in practice however, spaces are not significant and *name : value*, *name:value* and *name :value* are treated all the same

A reminder: javascript is case-sensitive, so *subGrid: true* is not the same as *subgrid: true*

### Errors and Omissions

It is almost inevitable that some errors will creep into this documentation; please report any you find to [the editor](#).

Suggestions for expanded or new topics, or contributions of examples are also very welcome.

## Requirements

At the very least, you will need:

- jqGrid plugin,
- jQuery library, version 1.1.4 or later, and
- a web browser

To manipulate and represent local (static) data – i.e. array data, data stored in an xml file, or data stored in a JSON file – that's all you need.

But the primary purpose of jqGrid is to manipulate and represent dynamic data over the web, and for this you will also need

- a web server (e.g., IIS, Apache, Tomcat),
- a database backend (e.g., Postgre SQL, Oracle, MSSQL, MySQL), and
- a server-side scripting language (e.g., PHP, ASP)

## Do I need to Pay for jqGrid?

No. This package is free, distributed under GPL and MIT, so you don't need to pay. Just follow the GPL rules and everybody will be happy. I really was needing some way to contribute to the open source community, and I hope this is just the beginning.

If you really love jqGrid and wish to make a donation, you can contact me (Tony) at [tony@trirand.com](mailto:tony@trirand.com).

## Installation

First you need to download the jQuery JavaScript library. This library can be downloaded from [www.jquery.com](http://www.jquery.com). Please download the latest stable version of jQuery library and not a development version.

You need to download the [jqGrid plugin](#).

Create a directory on your web server, so that you can access it: `http://myserver/mydir/`, where mydir is the name that you have created.

Place the jQuery library in that directory; unpack the jqGrid.zip in the same directory. You should have this directory structure:

- jquery.js
- jquery.jqGrid.js
- js
  - grid.base.js
  - grid.celledit.js
  - grid.common.js
  - grid.custom.js
  - grid.formedit.js
  - grid.inlinedit.js
  - grid.locale-en.js
  - grid.posttext.js
  - grid.setcolumns.js
  - grid.subgrid.js
  - grid.tbltograd.js
  - grid.treegrid.js
  - jqDnR.js
  - jqModal.js
  - min
    - grid.base-min.js
    - grid.celledit-min.js
    - grid.common-min.js
    - grid.custom-min.js
    - grid.formedit-min.js
    - grid.inlinedit-min.js
    - grid.locale-en-min.js
    - grid.posttext-min.js
    - grid.setcolumns-min.js
    - grid.subgrid-min.js
    - grid.tbltograd-min.js
    - grid.treegrid-min.js
  - packed

- packall
- themes
  - basic (a folder containing several files related to this theme)
  - coffee (another folder with theme files)
  - green (jqGrid comes with the four themes shown here)
  - sand (you can easily add your own)
  - jqModal.css

where:

- *jquery.js* is the jQuery library,
- *jquery.jqGrid.js* is the main module for including different plugins depending on your needs.
- *grid.base.js* is the main plugin. Without this plugin, all other plugins are unusable.
- *grid.celledit.js* a plugin used if you want to have [cell editing](#)
- *grid.common.js* a required module containing code common to many areas of jqGrid
- *grid.custom.js* a plugin used if you want to use [advanced grid methods](#)
- *grid.formedit.js* a plugin used for [form editing](#), including adding and deleting data.
- *grid.inlinedit.js* a plugin used if you want to have [inline editing](#)
- *grid.locale-en.js* a plugin used if you want to dynamically change the language.
- *grid.posttext.js* a plugin (available separately) used to manipulate the [post data array](#)
- *grid.setcolumns.js* a plugin used if you want to allow users to choose which [columns to show or hide](#)
- *grid.subgrid.js* a plugin used if you want to use [subgrids](#)
- *grid.tbltograd.js* a plugin used if you want to [convert html tables to a jqGrid](#)
- *grid.treegrid.js* a plugin used if you want to use a [tree grid](#)
- *jqModal.js* a plugin used for form editing (modal dialogs)
- *jqDnR.js* a plugin used for form editing (drag and resize)
- *min* the directory/folder containing the minified versions of the javascript files, suitable for production
- *packed* the directory/folder containing all the modules in packed variant (named the same as those in js), suitable for production use.
- *packall* the directory/folder containing a single file, grid.pack.js, which contains the entire suite of jqGrid files without any language file, suitable for production use.
- *themes* the directory/folder containing the different styles for the grid.

If you want to use all of the features of jqGrid you do not need to do anything more.

If you want to use only some of the features or only the basic functions of jqGrid, you may want to edit the jquery.jqGrid.js file and remove the files you will not be using. This file must also be edited if you place the javascript files in other locations than those specified above. This file is simple and can be easily configured.

```
// we make it simple as possible
function jqGridInclude()
{
    var pathtojsfiles = "js/"; // need to be adjusted
    // if you do not want some module to be included
    // set include to false.
    // by default all modules are included.
    var minver = false;
    var modules = [
        { include: true, incfile: 'grid.locale-en.js', minfile: 'min/grid.locale-en-min.js'}, // jqGrid
        translation
        { include: true, incfile: 'grid.base.js', minfile: 'min/grid.base-min.js'}, // jqGrid base
        { include: true, incfile: 'grid.common.js', minfile: 'min/grid.common-min.js' }, // jqGrid common for
        editing
    ]
}
```



```

    { include: true, incfile:'grid.formedit.js',minfile: 'min/grid.formedit-min.js' }, // jqGrid Form
editing
    { include: true, incfile:'grid.inlinedit.js',minfile: 'min/grid.inlinedit-min.js' }, // jqGrid inline
editing
    { include: true, incfile:'grid.celledit.js',minfile: 'min/grid.celledit-min.js' }, // jqGrid cell
editing
    { include: true, incfile:'grid.subgrid.js',minfile: 'min/grid.subgrid-min.js'}, //jqGrid subgrid
    { include: true, incfile:'grid.treegrid.js',minfile: 'min/grid.treegrid-min.js'}, //jqGrid treegrid
    { include: true, incfile:'grid.custom.js',minfile: 'min/grid.custom-min.js'}, //jqGrid custom
    { include: true, incfile:'grid.posttext.js',minfile: 'min/grid.posttext-min.js'}, //jqGrid posttext
    { include: true, incfile:'grid.tbltogrid.js',minfile: 'min/grid.tbltogrid-min.js'}, //jqGrid table to
grid function
    { include: true, incfile:'grid.setcolumns.js',minfile: 'min/grid.setcolumns-min.js'} //jqGrid
hide/show columns function
};
for(var i=0;i<modules.length; i++)
{
    if(modules[i].include === true) {
        if (minver !== true) IncludeJavaScript(pathtojfiles+modules[i].incfile,CallMe);
        else IncludeJavaScript(pathtojfiles+modules[i].minfile,CallMe);
    }
}
function IncludeJavaScript(jsFile,oCallback)
{
    var oHead = document.getElementsByTagName('head')[0];
    var oScript = document.createElement('script');
    oScript.type = 'text/javascript';
    oScript.src = jsFile;
    oHead.appendChild(oScript);
}
}
jqGridInclude();

```

If you have a different path to javascript files you must change the value of the variable *pathtojfiles* appropriately. This path is relative to your application (or the server application), not to jquery.jqGrid.js; so if your path to jquery.jqGrid.js is "..scripts\", this will need to be "..\scripts\js\".

If you want to exclude some modules you simply change the value of the associated *include* from `true` to `false`, in the *modules* array.

If you plan to use the form editing module you should include *jqModal.js*, *jqDnR.js* and *jqModal.css* files in your html page.

## Using Packed Versions

If we want to use the packed variant we need only to change the variable *pathtojfiles* to point to this folder. If the original *pathtojfiles* is "js/", then for the packed version we change *pathtojfiles* to "js/packed/".

To use grid.pack.js in packall, we need first to load the appropriate language file and after that this file. Or more simply, we can set the include property in the loader to `false` and add new two lines for the language and the packed version.

## How it Works

Understanding this will help you to work better with jqGrid and use the full capabilities of the plugin.

The first thing we must understand is that we have two major divisions:

- Server-side manipulation, and
- Client-side representation.

In other words, jqGrid is a component that helps you, in an easy way, to represent database information on the client side using a server-side technology. Moreover it helps you to manipulate that data back into the database.

What is server-side manipulation (SSM)? There are many definitions possible, but I try to explain it in terms of jqGrid.

Basically SSM means the server handles the editing and not the user's browser. SSM isn't something that is visible within a web page. Everything is done on the server side using any common programming language. Basically it's a server-side command that tells the server to place a file or text within the page once it is called from a user.

In terms of jqGrid this means that you should care about this: you must have a piece of code that deals with information stored in the database using some scripting language and web server. Using this code you should be able to return requested information back to the client (web browser). jqGrid uses Ajax calls to retrieve the requested information and represent it to client using Java Script language.

Having the needed (requested) information, jqGrid constructs the representation (tabular data) described by you in what is called the Column Model ([colModel](#)).

The constructed tabular data at the client side has:

- Caption layer
- Header layer
- Body layer
- Navigation layer

Navigator Example								
Inv No	Date	Client	Amount	Tax	Total	Closed	Ship via	Notes
13	2007-10-06	Client 3	1000.00	0.00	1000.00	No	TNT	
12	2007-10-06	Client 2	700.00	140.00	840.00	No	FedEx	
11	2007-10-06	Client 1	600.00	120.00	720.00	No	FedEx	
10	2007-10-06	Client 2	100.00	20.00	120.00	Yes	TNT	
9	2007-10-06	Client 1	200.00	40.00	240.00	No	TNT	
8	2007-10-06	Client 3	200.00	0.00	200.00	No	FedEx	
7	2007-10-05	Client 2	120.00	12.00	134.00	Yes	TNT	
6	2007-10-05	Client 1	50.00	10.00	60.00	No	FedEx	
5	2007-10-05	Client 3	100.00	0.00	100.00	No	FedEx	no tax
4	2007-10-04	Client 3	150.00	0.00	150.00	Yes	TNT	no tax

1 / 2
10
13 Rows

*Caption Layer*      *Header Layer*      *Body Layer*      *Navigation Layer*

**Caption layer** contains common information for the represented data.

**Header layer** contains information about the columns: labels, width, etc.

**Body layer** is the data requested from the server and displayed according to the settings in the column model.

**Navigation layer** contains additional information from the requested data and actions for requesting little pieces of information – in the literature called paging. Note that the navigation layer can be placed not only at bottom of the grid, but anywhere on the page. The Navigation layer is also the place for adding buttons or links for editing, deleting, adding to and searching your grid data.

The minimum for the representing the data are Header layer and Body layer.

To allow freedom and flexibility, and often a better impression, jqGrid relies on CCS (Cascading Style Sheets) to govern its appearance.

## Tutorial: Creating Your First Grid

For this tutorial, and as an example to refer to throughout this documentation, we'll create a grid with Invoice information.

First of all we need to decide what data we want to represent at the client. Let's have the following:

- Invid – the invoice number,
- invdate – the date of the invoice,
- amount,
- tax,
- total (including tax), and
- note – additional information about the invoice.

### The Data

We'll need a table with the following format. This example is based on MySQL; please create yours however you would normally do it.

```
CREATE TABLE invheader (
  invid int(11) NOT NULL auto_increment,
  invdate date NOT NULL,
  client_id int(11) NOT NULL,
  amount decimal(10,2) NOT NULL default '0.00',
  tax decimal(10,2) NOT NULL default '0.00',
  total decimal(10,2) NOT NULL default '0.00',
  note char(100) default NULL,
  PRIMARY KEY (id)
);
```

Then, put some values into it.

### The HTML

The html file looks like this:

```
<html>
<head>
<title>jqGrid Demo</title>
<link rel="stylesheet" type="text/css" media="screen" href="themes/basic/grid.css" />
<link rel="stylesheet" type="text/css" media="screen" href="themes/jqModal.css" />
<script src="jquery.js" type="text/javascript"></script>
<script src="jquery.jqGrid.js" type="text/javascript"></script>
<script src="js/jqModal.js" type="text/javascript"></script>
<script src="js/jqDnR.js" type="text/javascript"></script>
<script type="text/javascript">
jQuery(document).ready(function() {
  jQuery("#list").jqGrid({
    url: 'example.php',
    datatype: 'xml',
    mtype: 'GET',
    colNames: ['Inv No', 'Date', 'Amount', 'Tax', 'Total', 'Notes'],
    colModel : [
      {name: 'invid', index: 'invid', width: 55},
      {name: 'invdate', index: 'invdate', width: 90},
      {name: 'amount', index: 'amount', width: 80, align: 'right'},
```

```

    {name:'tax', index:'tax', width:80, align:'right'},
    {name:'total', index:'total', width:80, align:'right'},
    {name:'note', index:'note', width:150, sortable:false} ],
    pager: jQuery('#pager'),
    rowNum:10,
    rowList:[10,20,30],
    sortname: 'id',
    sortorder: "desc",
    viewrecords: true,
    imgpath: 'themes/basic/images',
    caption: 'My first grid'
  });
});
</script>
</head>
<body>
<table id="list" class="scroll"></table>
<div id="pager" class="scroll" style="text-align:center;"></div>
</body>
</html>

```

The assumption that makes the above work is that the saved file is in the directory where you placed the jqGrid files. If it is not, you will need to change the pathing appropriately.

First, we need to include the files required to construct the grid. This is done between the <head> tags in the html document.

```

<head>
<link rel="stylesheet" type="text/css" media="screen" href="themes/basic/grid.css" />
<script src="jquery.js" type="text/javascript"></script>
<script src="jquery.jqGrid.js" type="text/javascript"></script>
...
</head>

```

- The <link.../> tag loads the style sheet for jqGrid,
- The first <script ../> tag loads the jquery library,
- The second <script ../> tag loads the required jqGrid plugins,
- The third and fourth <script ../> tags load the additional modules required for some functions, and
- The last script tag is where we write the commands needed to construct the grid. A detailed description of this area appears below.

Between the <body> tags you define where you want to place the grid.

```

<body>
...
<table id="list" class="scroll"></table>
<div id="pager" class="scroll" style="text-align:center;"></div>
...
</body>

```

The definition of the grid is done via the html tag <table>. To make our life easy it is good idea to give the table an id that is unique in this html document. The second step is to assign a class "scroll" so that we can use the style definitions in the CSS provided with jqGrid. Cellspacing, cellpadding and border attributes are added by jqGrid and should not be included in the definition of your table.

We want to use a paging mechanism too, so we define the navigation layer. This can be done with the commonly-used <div> tag. Giving the class "scroll" of the navigator specifies that we want to use the CSS provided with jqGrid. It is important to note that the navigation layer can be placed arbitrarily any place in the html document. Normally, and in this case, it is under the grid.

We use the jQuery document.ready function to run our script at the appropriate time. For more information on this, refer to the jQuery documentation.

The syntax for constructing the grid is:

```
jQuery('#grid_selector').jqGrid( options )
```

where:

- *grid\_selector* is the unique id of the grid table (*list* using our example above)
- *jqGrid* is the plugin, and
- *options* is an array, in our example several lines, of the information needed to construct the grid.

Let's begin with the options array, which looks like this: (These options can appear in any order)

```
{
  url:'example.php',
  datatype: 'xml',
  mtype: 'GET',
  colNames:['Inv No','Date', 'Amount','Tax','Total','Notes'],
  colModel :[
    {name:'invid', index:'invid', width:55},
    {name:'invdate', index:'invdate', width:90},
    {name:'amount', index:'amount', width:80, align:'right'},
    {name:'tax', index:'tax', width:80, align:'right'},
    {name:'total', index:'total', width:80,align:'right'},
    {name:'note', index:'note', width:150, sortable:false} ],
  pager: jQuery('#pager'),
  rowNum:10,
  rowList:[10,20,30],
  sortname: 'id',
  sortorder: 'desc',
  viewrecords: true,
  imgpath: 'themes/basic/images',
  caption: 'My first grid'
}
```

The settings and options used above are described here; listings of all settings and options can be found in [API Methods](#) and [colModel API](#).

Property	Description
url	tells us where to get the data. Typically this is a server-side function with a connection to a database which returns the appropriate information to be filled into the Body layer in the grid
datatype	this tells jqGrid the type of information being returned so it can construct the grid. In this case we tell the grid that we expect xml data to be returned from the server, but other formats are possible. For a list of all available datatypes refer to <a href="#">API Methods</a>
mtype	tells us how to make the ajax call: either 'GET' or 'POST'. In this case we will use the GET method to retrieve data from the server
colNames	an array in which we place the names of the columns. This is the text that appears in the head of the grid (Header layer). The names are separated with

	commas
colModel	<p>an array that describes the model of the columns. This is the most important part of the grid. Here I explain only the options used above. For the complete list of options see <a href="#">colModel API</a>:</p> <p>name the name of the column. This name does not have to be the name from database table, but later we will see how we can use this when we have different data formats</p> <p>index the name passed to the server on which to sort the data (note that we could pass column numbers instead). Typically this is the name (or names) from database -- this is server-side sorting, so what you pass depends on what your server expects to receive</p> <p>width the width of the column, in pixels</p> <p>align the alignment of the column</p> <p>sortable specifies if the data in the grid can be sorted on this column; if false, clicking on the header has no effect</p>
pager	defines that we want to use a pager bar to navigate through the records. This must be a valid html element; in our example we gave the div the id of "pager", but any name is acceptable. Note that the Navigation layer (the "pager" div) can be positioned anywhere you want, determined by your html; in our example we specified that the pager will appear after the Body layer.
rowNum	sets how many records we want to view in the grid. This parameter is passed to the url for use by the server routine retrieving the data
rowList	an array to construct a select box element in the pager in which we can change the number of the visible rows. When changed during the execution, this parameter replaces the rowNum parameter that is passed to the url
sortname	sets the initial sorting column. Can be a name or number. This parameter is added to the url for use by the server routine
sortorder	sets the sorting order. This parameter is added to the url
viewrecords	defines whether we want to display the number of total records from the query in the pager bar
imgpath	the path to the images needed for the grid. The path should not end with '/'
caption	sets the caption for the grid. If this parameter is not set the Caption layer will be not visible

Having done this, we have now done half the work. The next step is to construct the server-side manipulation -- in the file pointed to in the *url* parameter in the grid.

## The Server-side File

jqGrid can construct a grid from data in any of several formats, but the default is xml data with the following structure. Later we'll see how to use xml data in other structures and data in other formats.

### Default xml Data Structure

```
<?xml version="1.0" encoding="utf-8"?>
<rows>
  <page> </page>
  <total> </total>
```

```

<records> </records>
  <row id = "unique_rowid">
    <cell> cellcontent </cell>
    <cell> <![CDATA[<font color="red">cell</font> content]]> </cell>
    ...
  </row>
  <row id = "unique_rowid">
    <cell> cellcontent </cell>
    <cell> <![CDATA[<font color="red">cell</font> content]]> </cell>
    ...
  </row>
  ...
</rows>

```

The tags used in this example are explained in the following table.

Tag	Description
rows	the root tag for the grid
page	the number of the requested page
total	the total pages of the query
records	the total records from the query
row	a particular row in the grid
cell	the actual data. Note that CDATA can be used. This way we can add images, links and check boxes.

The number of cell tags in each row must equal the number of cells defined in the colModel. In our example, we defined six columns, so the number of cell tags in each row tag should be six.

Note the id attribute in the <row> tags. While this attribute can be omitted, it is a good practice to have a unique id for every row. If this attribute is omitted, jqGrid has two ways of dealing with need for unique ids:

1. if the property key in the colModel is set to `true` for a particular column, then jqGrid will assign the value of this column to be the id of the row; otherwise,
2. jqGrid sets the row id based on the order of the row.

★ If you are using a content-free primary key to identify your data rows, then do not include this value in the grid as a visible cell; instead, include it in the query and pass it as the row id attribute. It will always be available for jqGrid and even jQuery operations but not be visible on the page.

Now it is time to construct our file.

## PHP and MySQL

```

<?php
//include the information needed for the connection to MySQL data base server.
// we store here username, database and password
include("dbconfig.php");

// to the url parameter are added 4 parameters as described in colModel
// we should get these parameters to construct the needed query
// Since we specify in the options of the grid that we will use a GET method
// we should use the appropriate command to obtain the parameters.
// In our case this is $_GET. If we specify that we want to use post

```



```
// we should use $_POST. Maybe the better way is to use $_REQUEST, which
// contain both the GET and POST variables. For more information refer to php documentation.
// Get the requested page. By default grid sets this to 1.
$page = $_GET['page'];

// get how many rows we want to have into the grid - rowNum parameter in the grid
$limit = $_GET['rows'];

// get index row - i.e. user click to sort. At first time sortname parameter -
// after that the index from colModel
$idx = $_GET['sidx'];

// sorting order - at first time sortorder
$order = $_GET['sord'];

// if we not pass at first time index use the first column for the index or what you want
if(!$idx) $idx = 1;

// connect to the MySQL database server
$db = mysql_connect($dbhost, $dbuser, $dbpassword) or die("Connection Error: " . mysql_error());

// select the database
mysql_select_db($database) or die("Error connecting to db.");

// calculate the number of rows for the query. We need this for paging the result
$result = mysql_query("SELECT COUNT(*) AS count FROM invheader");
$row = mysql_fetch_array($result,MYSQL_ASSOC);
$count = $row['count'];

// calculate the total pages for the query
if( $count > 0 ) {
    $total_pages = ceil($count/$limit);
} else {
    $total_pages = 0;
}

// if for some reasons the requested page is greater than the total
// set the requested page to total page
if ($page > $total_pages) $page=$total_pages;

// calculate the starting position of the rows
$start = $limit*$page - $limit;

// if for some reasons start position is negative set it to 0
// typical case is that the user type 0 for the requested page
if($start < 0) $start = 0;

// the actual query for the grid data
$sql = "SELECT invid, invdate, amount, tax,total, note FROM invheader ORDER BY $idx $order LIMIT $start ,
$limit";
$result = mysql_query( $sql ) or die("Couldn't execute query.".mysql_error());

// we should set the appropriate header information
if ( strstr($_SERVER['HTTP_ACCEPT'],'application/xhtml+xml') ) {
    header("Content-type: application/xhtml+xml;charset=utf-8");
} else {
    header("Content-type: text/xml;charset=utf-8");
}

echo "<?xml version='1.0' encoding='utf-8'?>";
echo "<rows>";
echo "<page>".$page."</page>";
echo "<total>".$total_pages."</total>";
echo "<records>".$count."</records>";

// be sure to put text data in CDATA
while($row = mysql_fetch_array($result,MYSQL_ASSOC)) {
    echo "<row id='". $row[invid]."'>";
    echo "<cell>". $row[invid]."</cell>";
    echo "<cell>". $row[invdate]."</cell>";
    echo "<cell>". $row[amount]."</cell>";
    echo "<cell>". $row[tax]."</cell>";
    echo "<cell>". $row[total]."</cell>";
    echo "<cell><![CDATA[" . $row[note]."]></cell>";
}
echo "</row>";
```

```

}
echo "</rows>";
?>

```

That is all. Save the file with name example.php and your first grid is done.

## COOP Example

COOP is inspirational simplicity with separation of the designer's presentation from the developer's logic. The technology starts quickly with powerful prototyping and finishes stronger with preDOM coding and clean versatile logic. The tip of the iceberg is how COOP integrates some of the greatest AJAX libraries into a single framework.

For more information refer to <http://www.coldfusioncommunity.org/group/coop>

This example, coop\_jqGridExample.cfm, is provided by Timothy Farrar.

```

<!-- First import your COOP tagLibraries. This example assumes that your share directory with the COOP
library is at the root of your web server. --->
<cfimport prefix="coop" tagLib="/share/tags/coop">
<cfimport prefix="icejQuery" tagLib="/share/tags/coop/jquery">

<!-- Set up your coop page. --->
<coop:coop>
<html>
  <head>
    <title>jqGrid Example</title>
  </head>
  <body>
    <!-- Your grid tag will only require an id attribute here. The other settings will be managed via the
coProcessor. --->
    <icejQuery:jqGrid id="myjqGrid"/>
  </body>
</html>
</coop:coop>

```

Next, this is the COProcessor, called coop\_jqGridExample.cfc

```

<cfcomponent>
  <cffunction name="onPageStart">
    <cfscript>
      var _init = structNew();
      /*
      Here we set up the attributes for the grid Object
      The gridObject attribute is an object that contains the griData,
      and either self generates or allows you to set other things required
      by the jqGrid.
      The getDataMethod attribute is the method name that will be called from the
browser
      to populate the grid with data.
      */
      createOjqGrid();
      _init.myjqGrid.jqGridObject = variables.ojqGrid;
      _init.myjqGrid.getDataMethod="getData";
      return _init;
    </cfscript>
  </cffunction>
  <cffunction name="createOjqGrid" output="false">
    <!-- This function is where we create the jqGrid Object that is passed into the tag. --->
    <cfscript>
      if (NOT structKeyExists(variables,"ojqGrid")) {

```

```

        variables.oJqGrid = createObject("component","share.objects.coop.jquery.jqGridData");
        /* The gridObject's init method requires the following arguments:
           GridID - the ID of the grid you are setting up
           classPath - The classPath to the shareDirectory with a "." at the end.
           data - The data with which to populate the jqGrid
        */
variables.oJqGrid.init(gridID:"myJQGrid",classPath:"share.",data:getGalleries());
    }
    </cfscript>
</cffunction>
    <cffunction name="getData" access="remote" output="true">
        <!--
        This is the method that is called to retrieve the data for the jqGrid.
        Note that the access level must be set to remote
        in order for it to be accessible from the browser
        --->
        <cfset var data = ''>
        <cfset createOJQGrid()>
        <!--
        The data is obtained by calling the getData()
        method and passing it the grid ID and other
        arguments that the jqGrid plugin passes with a request
        --->
        <cfset data =
variables.oJQGrid.getData(gridID:'myJQGrid',page:arguments.page,sord:arguments.sord,sidx:arguments.sidx,rows
:arguments.rows)>
        <cfcontent reset="true"><cfoutput>#data#</cfoutput>
    </cffunction>
    <cffunction name="getGalleries" output="true">
        <cfquery name="photoQuery" datasource="coop">
            SELECT *
            FROM PHOTOS
        </cfquery>
        <cfreturn photoQuery>
    </cffunction>
</cfcomponent>

```

## Data Types

With the first release of jqGrid, the only possible way to obtain data was via xml as described in the tutorial above. Later, many people requested the ability to obtain data via JSON, then with an array and finally with 'real' names. After lot of work and with the help of the community we now have a wide range of methods for obtaining data.

The related options (in options array) for manipulating different types of data are:

**datatype:** the possible options are - 'xml', 'json', 'clientSide' or 'local', 'xmlstring', 'jsonstring' and 'function (...)'

The default mapping for xml data is as follows:

```
xmlReader : {
  root: "rows",
  row: "row",
  page: "rows>page",
  total: "rows>total",
  records : "rows>records",
  repeatitems: true,
  cell: "cell",
  id: "[id]",
  subgrid: {
    root:"rows",
    row: "row",
    repeatitems: true,
    cell:"cell"
  }
};
```

If your server can provide data in this structure, you need to do nothing more; but if not, there is a way (several ways) to handle the data you are given. See [XML Data](#).

The default mapping for json data is as follows:

```
jsonReader : {
  root: "rows",
  page: "page",
  total: "total",
  records: "records",
  repeatitems: true,
  cell: "cell",
  id: "id",
  subgrid: {
    root:"rows",
    repeatitems: true,
    cell:"cell"
  }
};
```

In colModel, the related options are *xmlmap* for the description of an xml field, and *jsonmap* for the description of a json field. For example:

```
colModel : [ {name:'amount',..., xmlmap:'amt'...}...]
```

will cause jqGrid to search in the xml data for an 'amt' tag (when the *repeatitems* option is set to false).

## XML Data

As mentioned above, if we do not set the datatype and xmlReader parameter in the options array, the grid expects xml data, and the structure of this data is as described in our example. But what if we do not have the chance to manipulate the server response? The solution to this problem is xmlReader, again with some additions in colModel. Here is a brief description of xmlReader.

Important note: the rules of accessing the element from xml are the same as those used in jQuery library, i.e. CSS patterns. For more information refer to: <http://www.w3.org/TR/REC-CSS2/selector.html>

```
xmlReader : {
  root: "rows",
  row: "row",
  page: "rows>page",
  total: "rows>total",
  records : "rows>records",
  repeatitems: true,
  cell: "cell",
  id: "[id]",
  userdata: "userdata",
  subgrid: {
    root:"rows",
    row: "row",
    repeatitems: true,
    cell:"cell"
  }
}
```

The first setting here defines the *root* element. This describes where our data begins and all other loops begin from this element. For example,

```
...
<invoices>
  <request>true</request>
  ...
  <result>
    <row>
      <cell>data1</cell>
      <cell>data2</cell>
      <cell>data3</cell>
      <cell>data4</cell>
      <cell>data5</cell>
      <cell>data6</cell>
    </row>
    ...
  </result>
</invoices>
```

If we set the root element to "result" all data will be processed from there. In this case, because our rows are tagged <row> and our cells tagged <cell>, all that is needed is to set

```
xmlReader: { root:"result" }
```

The next element is the *row* element. This describes the information for particular row. Note that *row* must be a child of the *root* element. Here, if the xml looks like this,

```
<invoices>
  <request>true</request>
  ...
  <result>
```

```

<invoice>
  <cell>data1</cell>
  <cell>data2</cell>
  <cell>data3</cell>
  <cell>data4</cell>
  <cell>data5</cell>
  <cell>data6</cell>
</invoice>
...
</result>
</invoices>

```

the setting to properly interpret this data would be

```
xmlReader: { root:"result", row:"invoice" }
```

The *page*, *total* and *record* elements describe the information needed for the pager. These elements can be, but do not have to be, a child of the *root* element. For example, to interpret this data,

```

<invoices>
  <request>true</request>
  ...
  <currentpage>1</currentpage>
  <totalpages>10</totalpages>
  <totalrecords>20</totalrecords>
  <result>
    <invoice>
      <cell>data1</cell>
      <cell>data2</cell>
      <cell>data3</cell>
      <cell>data4</cell>
      <cell>data5</cell>
      <cell>data6</cell>
    </invoice>
    ...
  </result>
</invoices>

```

the xmlReader will have to look like this:

```

xmlReader : {
  root:"result",
  row:"invoice",
  page:"invoices>currentpage",
  total:"invoices>totalpages",
  records:"invoices>totalrecords"
}

```

The *repeatitems* element tells jqGrid that the information for the data in the row is repeatable - i.e. the elements have the same tag cell described in cell element. For this example,

```

<invoices>
  <request>true</request>
  ...
  <currentpage>1</currentpage>
  <totalpages>10</totalpages>
  <totalrecords>20</totalrecords>
  <result>
    <invoice>
      <invcell>data1</invcell>
      <invcell>data2</invcell>
      <invcell>data3</invcell>
      <invcell>data4</invcell>
    </invoice>
    ...
  </result>
</invoices>

```

```

        <invcell>data5</invcell>
        <invcell>data6</invcell>
    </invoice>
    ...
</result>
</invoices>

```

the xmlReader will look like this:

```

xmlReader : {
  root:"result",
  row:"invoice",
  page:"invoices>currentpage",
  total:"invoices>totalpages",
  records:"invoices>totalrecords",
  repeatitems:true,
  cell:"invcell"
}

```

Next is the *id* element. If *repeatitems* is set to true the id, if present in xml data, must be a attribute of the *row* element. Lets look at the example:

```

<invoices>
  <request>true</request>
  ...
  <currentpage>1</currentpage>
  <totalpages>10</totalpages>
  <totalrecords>20</totalrecords>
  <result>
    <invoice asin='12345'>
      <invcell>data1</invcell>
      <invcell>data2</invcell>
      <invcell>data3</invcell>
      <invcell>data4</invcell>
      <invcell>data5</invcell>
      <invcell>data6</invcell>
    </invoice>
    ...
  </result>
</invoices>

```

In this case the xmlReader is:

```

xmlReader: {
  root:"result",
  row:"invoice",
  page:"invoices>currentpage",
  total:"invoices>totalpages",
  records:"invoices>totalrecords",
  repeatitems:true,
  cell:"invcell",
  id:"[asin]"
}

```

Let's suppose that the structure of the xml document returned from the server has the following format:

```

<invoices>
  <request>true</request>
  ...
  <currentpage>1</currentpage>
  <totalpages>10</totalpages>
  <totalrecords>20</totalrecords>

```

```

<result>
  <invoice>
    <asin>12345</asin>
    <invoiceno>data1</invoiceno>
    <invoicedate>data2</invoicedate>
    <invoiceamount>data3</invoiceamount>
    <invoicetax>data4</invoicetax>
    <invoicetotal>data5</invoicetotal>
    <notes>data6</notes>
  </invoice>
  ...
</result>
</invoices>

```

where the `<asin>` tag describes the unique *id* and this should be set as the row id in the grid and not displayed in the grid. Following the rules we can construct the following:

```

xmlReader: {
  root:"result",
  row:"invoice",
  page:"invoices>currentpage",
  total:"invoices>totalpages",
  records:"invoices>totalrecords",
  repeatitems:false,
  id:"asin"
}

```

and our `colModel` from the example should look like this:

```

colModel :[
  {name:'invid', index:'invid', width:55, xmlmap:"invoiceno"},
  {name:'invdate', index:'invdate', width:90, xmlmap:"invoicedate"},
  {name:'amount', index:'amount', width:80, align:'right', xmlmap:"invoiceamount"},
  {name:'tax', index:'tax', width:80, align:'right', xmlmap:"invoicetax"},
  {name:'total', index:'total', width:80, align:'right', xmlmap:"invoicetotal"},
  {name:'note', index:'note', width:150, sortable:false, xmlmap:"notes"}
],

```

We can use another trick. If the names in `colModel` are not important for you, you can do the following.

```

colModel :[
  { name:"invoiceno", index:'invid', width:55},
  { name:"invoicedate", index:'invdate', width:90},
  { name:"invoiceamount", index:'amount', width:80, align:'right'},
  { name:"invoicetax", index:'tax', width:80, align:'right'},
  { name:"invoicetotal", index:'total', width:80, align:'right'},
  { name:"notes", index:'note', width:150, sortable:false}
],

```

In other words, jqGrid first looks to see if there is an *xmlmap* option available; if this option is not available the *name* is used as the *xmlmap*. But all of this is true only if the *repeatitems* element in `xmlReader` is set to false.

The *subgrid* option is included in several of the `xmlReader` examples above. The principles in constructing the rules for this data are the same as those described above. More details about subgrids can be found in the section on [Subgrids](#).



## XML String

The *xmlstring* option has similar features to the *xml* option. The only difference is that the data is passed as string. In this case we need to have a valid xml data string. To do that we can use a *datastr* option. This example shows how to do that.

```
<script>
var mystr =
"<?xml version='1.0' encoding='utf-8'?>
<invoices>
  <rows>
    <row>
      <cell>data1</cell>
      <cell>data2</cell>
      <cell>data3</cell>
      <cell>data4</cell>
      <cell>data5</cell>
      <cell>data6</cell>
    </row>
  </rows>
</invoices>";

jQuery(document).ready(function(){
  jQuery("#list").jqGrid({
    datatype: 'xmlstring',
    datastr : mystr,
    colNames:['Inv No','Date', 'Amount','Tax','Total','Notes'],
    colModel :[
      {name:'invid', index:'invid', width:55, sorttype:'int'},
      {name:'invdate', index:'invdate', width:90, sorttype:'date', datefmt:'Y-m-d'},
      {name:'amount', index:'amount', width:80, align:'right', sorttype:'float'},
      {name:'tax', index:'tax', width:80, align:'right', sorttype:'float'},
      {name:'total', index:'total', width:80, align:'right', sorttype:'float'},
      {name:'note', index:'note', width:150, sortable:false} ],
    pager: jQuery('#pager'),
    rowNum:10,
    viewrecords: true,
    imgpath: 'themes/basic/images',
    caption: 'My first grid'
  });
});
</script>
```

As you can see, this example introduces another option in *colModel*: *sorttype*. This option describes how a particular column is to be sorted, because when using *xmlstring* as the source for the grid, jqGrid uses client-side sorting.

## JSON Data

JSON data is handled in a fashion very similar to that of xml data. What is important is that the definition of the *jsonReader* matches the data being received

**datatype:** json, (or jsonstring)

The default definition of the *jsonreader* is as follows:

```
jsonReader : {
  root: "rows",
  page: "page",
  total: "total",
  records: "records",
  repeatitems: true,
  cell: "cell",
  id: "id",
```

```

userdata: "userdata",
subgrid: {root:"rows",
  repeatitems: true,
  cell:"cell"
}
}

```

**datastr:**

If the parameter datatype is 'json', jqGrid expects the following default format for json data.

```

{
  total: "xxx",
  page: "yyy",
  records: "zzz",
  rows : [
    [id:"1", cell:["cell11", "cell12", "cell13"]],
    [id:"2", cell:["cell21", "cell22", "cell23"]],
    ...
  ]
}

```

The tags used in this example are described in the following table:

Tag	Description
total	total pages for the query
page	current page of the query
records	total number of records for the query
rows	an array that contains the actual data
id	the unique id of the row
cell	an array that contains the data for a row

In this case, the number of the elements in the cell array should equal the number of elements in colModel.

Let's consider our example in PHP and MySQL with JSON data. In this case I assume that the json service is enabled in PHP.

```

<?php
include("dbconfig.php");
$page = $_REQUEST['page']; // get the requested page
$limit = $_REQUEST['rows']; // get how many rows we want to have into the grid
$idx = $_REQUEST['sidx']; // get index row - i.e. user click to sort
$sord = $_REQUEST['sord']; // get the direction
if(!$idx) $idx = 1;

// connect to the database
$db = mysql_connect($dbhost, $dbuser, $dbpassword) or die("Connection Error: " . mysql_error());
mysql_select_db($database) or die("Error connecting to db.");
$result = mysql_query("SELECT COUNT(*) AS count FROM invheader a, clients b WHERE
a.client_id=b.client_id".$wh);
$row = mysql_fetch_array($result,MYSQL_ASSOC);
$count = $row['count'];
if( $count > 0 ) {
  $total_pages = ceil($count/$limit);
} else {
  $total_pages = 0;
}
if ($page > $total_pages) $page=$total_pages;

```

```

$start = $limit*$page - $limit; // do not put $limit*($page - 1)
if ($start<0) $start = 0;
$SQL = "SELECT invid,invdate,amount,tax,total,note FROM invheader ORDER BY ".$sidx."
".$sord. " LIMIT ".$start. " , ".$limit;
$result = mysql_query( $SQL ) or die("Could not execute query.".mysql_error());

// Construct the json data
$response->page = $page; // current page
$response->total = $total_pages; // total pages
$response->records = $count; // total records
$i=0;
while($row = mysql_fetch_array($result,MYSQL_ASSOC)) {
    $response->rows[$i]['id']=$row[invid]; //id
    $response->rows[$i]['cell']=array($row[invid],$row[invdate],$row[amount],$row[tax],$row[total],$row[note]);
    $i++;
}
echo json_encode($response);
?>

```

The structure of the `jsonReader` is very similar to the `xmlReader`. The only missing part is the `row` element which is not needed for JSON data. Let's begin our walk through the `jsonReader`.

The first element is a *root* element. This element describes where our data begins. In other words, this points to the array that contains the data. If we set

```
jsonReader: { root:"invdata" }
```

then the returned string should be

```

{
  total: "xxx",
  page: "yyy",
  records: "zzz",
  invdata: [
    [id:"1", cell:["cell11", "cell12", "cell13"]],
    [id:"2", cell:["cell21", "cell22", "cell23"]]
  ]
}

```

The *page*, *total* and *record* elements describe the information needed for the pager. For example, if the `jsonReader` is set as follows,

```

jsonReader:{
  root: "invdata",
  page: "currpage"
  total: "totalpages"
  records: "totalrecords"
}

```

then the data should be

```

{
  totalpages: "xxx",
  currpage: "yyy",
  totalrecords: "zzz",
  invdata: [
    [id:"1", cell:["cell11", "cell12", "cell13"]],
    [id:"2", cell:["cell21", "cell22", "cell23"]]
  ]
}

```

```
]
}
```

The *cell* element describes the array which contains the data for the row.

```
jsonReader:{
  root: "invdata",
  page: "currpage"
  total: "totalpages"
  records: "totalrecords",
  cell: "invrow"
}
```

The data to match this description would be

```
{
  totalpages: "xxx",
  currpage: "yyy",
  totalrecords: "zzz",
  invdata : [
    [id:"1", invrow:["cell111", "cell112", "cell113"]],
    [id:"2", invrow:["cell121", "cell122", "cell123"]]
  ]
}
```

The *id* element describes the unique id for the row

```
jsonReader:{
  root: "invdata",
  page: "currpage"
  total: "totalpages"
  records: "totalrecords",
  cell: "invrow",
  id: "invid"
}
```

The data for this description is:

```
{
  totalpages: "xxx",
  currpage: "yyy",
  totalrecords: "zzz",
  invdata : [
    [invid:"1", invrow:["cell111", "cell112", "cell113"]],
    [invid:"2", invrow:["cell121", "cell122", "cell123"]]
  ]
}
```

It is possible to set the *cell* element to an empty string. And, it is possible to set the *id* as number. Here is an example of these possibilities:

```
jsonReader:{
  root: "invdata",
  page: "currpage"
  total: "totalpages"
  records: "totalrecords",
  cell: "",
  id: "0"
}
```

In this case the *id* is the first element from the row data

```
{
  totalpages: "xxx",
  currpage: "yyy",
  totalrecords: "zzz",
  invdata: [
    ["1", "cell111", "cell112", "cell113"],
    ["2", "cell121", "cell122", "cell123"]
  ]
}
```

The *repeatitems* element tells jqGrid that the information for the data in the row is repeatable - i.e. the elements have the same tag cell described in cell element. Setting this option to *false* instructs jqGrid to search elements in the json data by name. This is the name from colModel or the name described with the *jsonmap* option in colModel.

Here is an example:

```
jsonReader:{
  root: "invdata",
  page: "currpage"
  total: "totalpages"
  records: "totalrecords",
  repeatitems: false,
  id: "0"
}
```

The resulting data in our example should be:

```
{
  totalpages: "xxx",
  currpage: "yyy",
  totalrecords: "zzz",
  invdata: [
    [invid:"1", invdate:"cell111", amount:"cell112", tax:"cell113", total:"1234", note:"somenote" ],
    [invid:"2", invdate:"cell121", amount:"cell122", tax:"cell123", total:"2345", note:"some note" ]
  ]
}
```

The *id* element in this case is 'invid'.

A very useful feature here is that there is no need to include all the data that is represented in colModel. Since we make a search by name, the order does not need to match the order in colModel. Hence the following string will be correctly interpreted in jqGrid.

```
{
  totalpages: "xxx",
  currpage: "yyy",
  totalrecords: "zzz",
  invdata: [
    [invid:"1", invdate:"cell111", note:"somenote" ],
    [invid:"2", amount:"cell122", tax:"cell123", total:"2345" ]
  ]
}
```

## JSON String

The `jsonstring` option has the same features as `json`. The only difference is that the data is passed as string. In this case we need to have a valid json data string. To do that we can use a *datastr* option. See the [xmlstring](#) example.

## Array Data

Despite the fact that the primary goal of jqGrid is to represent dynamic data returned from a database, jqGrid includes a wide range of methods to manipulate data at client side: Array data.

Related options in options array: `datatype`

Related options in `colModel`: `sorttype`, `datefmt`

Related methods : `getRowData`, `delRowData`, `setRowData`, `addRowData`

If we have defined a pager for grid with client side data, the buttons in pager are automatically disabled. With other words the current release of grid does not support client side paging.

First we must instruct jqGrid that the data that will be present is at client side. This is done with the option `datatype`. To use this we must set

```
datatype : "clientSide"
```

The other option that can be used is `"local"` i.e. `datatype: "local"`

That are the same things.

Having this it is a good idea to set the `sorttypes` for the columns. If the `sorttype` is not set the default `sorttype` is `"text"`. Let's consider our example in terms of array data.

```
<script>
jQuery(document).ready(function() {
  jQuery("#list").jqGrid({
    datatype: 'clientSide',
    colNames: ['Inv No', 'Date', 'Amount', 'Tax', 'Total', 'Notes'],
    colModel : [
      {name: 'invid', index: 'invid', width: 55, sorttype: 'int'},
      {name: 'invdate', index: 'invdate', width: 90, sorttype: 'date', datefmt: 'Y-m-d'},
      {name: 'amount', index: 'amount', width: 80, align: 'right', sorttype: 'float'},
      {name: 'tax', index: 'tax', width: 80, align: 'right', sorttype: 'float'},
      {name: 'total', index: 'total', width: 80, align: 'right', sorttype: 'float'},
      {name: 'note', index: 'note', width: 150, sortable: false} ],
    pager: jQuery('#pager'),
    rowNum: 10,
    viewrecords: true,
    imgpath: 'themes/basic/images',
    caption: 'My first grid'
  });
});
</script>
```

You can see the new setting here: `datatype`, `sorttype` and `datefmt`.

The possible values for the `sorttype` are:

`int` - the data is interpreted as integer,

`float` - the data is interpreted as decimal number

date - the data is interpreted as data

text - the data is interpreted as text

We need this information for the appropriate sorting of these types. Additionally for the sorttype date we must know the format of the data that will be present in the grid. The default format is a ISO format 'Y-m-d'. The description of the date format is like a PHP way. For more information refer to php.net. The limitation of date format is that the date can be represented only as numbers and not as number and string. By example if the date is represented as '03-Mar-2008' the sorting will be not correct.

Let's add some data. This can be done with the method `addRowData`.  
The parameters to this method are:

```
addRowData( rowid, data, position, srcrowid )
```

where:

- rowid: this value will be set as the id of the row
- data: is the array of data in pair name:value, where the name is the name from *colModel*
- position: specifies where to add the data - first, last, before or after. "first" adds the new row at the top of the grid; "last" adds the data in the last position; "before" and "after" refer to the row identified in srcrowid.
- srcrowid: the id of a row which the new data is to be added either "before" or "after"

```
<script>
...
myfirstrow = {
  invid:"1",
  invdate:"2007-10-01",
  note:"note",
  amount:"200.00",
  tax:"10.00",
  total:"210.00"}
jQuery("#list").addRowData("1", myfirstrow);
...
</script>
```

With this line we have added our first row. It is important to note that the order of the name can be in arbitrary way. More over we can set here only one pair name value Like this.

```
jQuery("#list").addRowData("2", {amount:"300.00"});
```

with this line we have added second row with only one value in the amount column.

To get data from the particular row we should use `getRowData` method:

```
getRowData( rowid ),
```

where rowid is the id for the row which values we will obtain

```
jQuery("#list").getRowData("1");
```

will return array as pair name value - the result is

```
{invid:"1",
 invdate:"2007-10-01",
 note:"note",
```

```
amount:"200.00",
tax:"10.00",
total:"210.00"}
```

To delete a row we should use delRowData method:

```
delRowData( rowid )
```

where rowid is the id of the row that can be deleted.

```
jQuery("list").delRowData("2");
```

will delete the row with the id = 2.

The method return true if the deleting is successfull, false otherwise

To change all or part of values to a given row we can use a setRowData method.

```
setRowData( rowid, data )
```

where

rowid is the id of the row which values will be changed

data is a array of data that contain the new values. The structure of array is in type name:value.

```
jQuery("list").setRowData( "1", { tax:"5", total:"205" })
```

will change the values tax and total of row with id = 1.

The method return true if update is successful, otherwise false.

## Function

This option does not really define the datatype at all, but rather how to handle the data that is provided by the server (which would still come as either xml or json data). The functions defined as a Datatype should (or can) call [addXMLData](#) or [addJSONData](#) once the data has been received.

Calling Convention:

```
datatype : function(postdata) {
// do something here
}
```

Datatype functions are supplied with a single object containing the request information (parameter postdata), which normally would have been transformed into GET or POST arguments. This object is compatible with the data: option supplied to the jQuery \$.ajax function.

Example:

```
jQuery("#"+gridid).jqGrid({
...
datatype : function(postdata) {
    jQuery.ajax({
        url:'server.php',
        data:postdata,
```



```

        dataType:"xml",
        complete: function (xmldata, stat) {
            if (stat=="success") {
                var thegrid = jQuery("#"+gridid)[0];
                thegrid.addXmlData(xmldata.responseXML);
            }
        }
    });
},
...
});

```

## User Data

In some cases we need to have custom data returned from the request that is not automatically displayed by jqGrid, that we use either in a later process or to display additional information somewhere in the html page or associated with the grid. To do that a *userdata* tag can be used.

```
xmlReader: {userdata: "userdata",... }
```

In the data received from the server, this could be structured as follows (in xml):

```

<invoices>
  <request>true</request>
  <userdata name="totalinvoice"> 240.00 </userdata>
  <userdata name="tax"> 40.00</userdata>
  ...
  <result>
    <row>
      <cell>data1</cell>
      <cell>data2</cell>
      <cell>data3</cell>
      <cell>data4</cell>
      <cell>data5</cell>
      <cell>data6</cell>
    </row>
    ...
  </result>
</invoices>

```

If using json data, the definition might look like this:

```

jsonReader : {
  ...
  userdata: "userdata",
  ...
}

```

and the data received, like this:

```

{
  total: "xxx",
  page: "yyy",
  records: "zzz",
  userdata: {totalinvoice:240.00, tax:40.00},
  rows : [
    {id:"1", cell:["cell11", "cell12", "cell13"]},
    {id:"2", cell:["cell21", "cell22", "cell23"]},
    ...
  ]
}

```

When this data has been received, this information is stored in the *userData* array of the options array. Whichever format the data comes in, in this case we would have:

```
userData = {totalinvoice:240.00, tax:40.00}
```

The data can be accessed two ways.

1. Using `getReturnedData` (provided by Paul Tiseo): this method directly returns the `userData` array

```
jQuery("#grid_id").getReturnedData()
```

2. Using a `getGridParam` method. To do that we need to request this data:

```
jQuery("#grid_id").getGridParam('userData')
```

Both methods return the same array.

## Basic Grid

An instance of jqGrid is a javascript object, with properties, events and methods. Properties may be strings, numbers, arrays, boolean values or even other objects.

Calling Convention:

```
jQuery("#grid_id").jqGrid(properties );
```

Where:

- *grid\_id* is the id of the <table> element defined separately in your html and used as the name of your grid.
- *properties* is an array of settings in *name: value* pairs format. Some of these settings are values, some are functions to be performed on an event. Some of these settings are optional while others must be present for jqGrid to work.

An example, taken from the [tutorial](#):

```
jQuery("#list").jqGrid({
    url:'example.php',
    datatype: 'xml',
    mtype: 'GET',
    colNames:['Inv No','Date', 'Amount','Tax','Total','Notes'],
    colModel:[
        {name:'invid', index:'invid', width:55},
        {name:'invdate', index:'invdate', width:90},
        {name:'amount', index:'amount', width:80, align:'right'},
        {name:'tax', index:'tax', width:80, align:'right'},
        {name:'total', index:'total', width:80, align:'right'},
        {name:'note', index:'note', width:150, sortable:false} ],
    pager: jQuery("#pager"),
    rowNum:10,
    rowList:[10,20,30],
    sortname: 'id',
    sortOrder: "desc",
    viewrecords: true,
    imgpath: 'themes/basic/images',
    caption: 'My first grid'
});
```

When the grid is created, normally several properties are set in the same statement (although these properties can be individually overridden later): see [Properties](#)

Events raised by the grid, which offer opportunities to perform additional actions, are described in [Events](#).

The grid also offers several methods for getting or setting properties or data: see [Methods](#)

A key property of the grid is the column model (colModel) that defines the contents of the grid: [colModel Properties](#)

## Properties

The available properties are listed here, in alphabetic order. Some have more details described elsewhere, available by clicking on the link provided.

Property	Type	Description	Default
altRows	boolean	Set a zebra-striped grid	true
caption	string	Defines the Caption layer for the grid. This caption appear above the Header layer. If the string is empty the caption does not appear.	empty string
cellEdit	boolean	Enables (disables) cell editing. See <a href="#">Cell Editing</a> for more details	true
cellsubmit	string	Determines where the contents of the cell are saved: 'remote' or 'clientArray'. See <a href="#">Cell Editing</a> for more details	'remote'
cellurl	string	the url where the cell is to be saved. See <a href="#">Cell Editing</a> for more details	null
<a href="#">colModel</a>	array	Array which describes the parameters of the columns. For a full description of all valid values see colModel API.	empty array
colNames	array	Array which describes the column labels in the grid	empty array
datastr	string	The string of data when datatype parameter is set to xmlstring or jsonstring	null
datatype	string	Defines what type of information to expect to represent data in the grid. Valid options are xml - we expect xml data; xmlstring - we expect xml data as string; json - we expect JSON data; jsonstring - we expect JSON data as string; clientSide - we expect data defined at client side (array data)	xml
editurl	string	Defines the url for inline and form editing.	null
ExpandColumn	string	indicates which column (name from colModel) should be used to expand the tree grid. If not set the first one is used. Valid only when treeGrid option is set to true.	null
firstimg, previmg, nextimg, lastimg	string	Links to image url which are used in the pager bar for the first, previous, next and last buttons	first.gif, prev.gif, next.gif, last.gif
forceFit	boolean	If set to true, and resizing the width of a column, the adjacent column (to the right) will resize so that the overall grid width is maintained (e.g., reducing the width of column 2 by 30px will increase the size of column 3 by 30px). In this case there is no horizontal scrollbar. Note: this option is not compatible with shrinkToFit option - i.e if shrinkToFit is set to false, forceFit is ignored.	false

gridstate	string	Determines the current state of the grid (i.e. when used with <code>hiddengrid</code> , <code>hidegrid</code> and <code>caption</code> options). Can have either of two states: 'visible' or 'hidden'	visible
hiddengrid	boolean	If set to <code>true</code> the grid initially is hidden. The data is not loaded (no request is sent) and only the caption layer is shown. When the show/hide button is clicked the first time to show grid, the request is sent to the server, the data is loaded, and grid is shown. From this point we have a regular grid. This option has effect only if the <code>caption</code> property is not empty and the <code>hidegrid</code> property (see below) is set to <code>true</code> .	false
hidegrid	boolean	Enables or disables the show/hide grid button, which appears on the right side of the Caption layer. Takes effect only if the <code>caption</code> property is not an empty string.	true
<a href="#">height</a>	string	The height of the grid. Can be set as percentage or any valid measured value	150px
imgpath	string	Defines the path to the images that are used in the grid. Set this option without / at end	empty string
<a href="#">jsonReader</a>	array	Array which describes the structure of the expected json data. For a full description and default setting, see <a href="#">JSON Data</a>	
loadonce	boolean	If this flag is set to <code>true</code> , the grid loads the data from the server only once (using the appropriate datatype). After the first request the datatype parameter is automatically changed to <code>clientSide</code> and all further manipulations are done on the client side. The functions of the pager (if present) are disabled.	false
loadtext	string	The text which appear when requesting and sorting data	Loading...
loadui	string	This option controls what to do when an ajax operation is in progress. <ul style="list-style-type: none"> <li>• <code>disable</code> - disables the red box indicator on upper left corner. This way you can use your own indicator.</li> <li>• <code>enable</code> (default) - enables the red box indicator</li> <li>• <code>block</code> - enables the red box indicator and blocks all actions in the grid until the ajax request is finished. Note that this disables paging, sorting and all actions on toolbar, if any.</li> </ul>	
mtype	string	Defines the type of request to make ("POST"	GET

		or "GET")	
multikey	string	This parameter have sense only multiselect option is set to true. Defines the key which will be pressed when we make multiselection. The possible values are: shiftKey - the user should press Shift Key altKey - the user should press Alt Key ctrlKey - the user should press Ctrl Key	empty string
<a href="#">multiselect</a>	boolean	If this flag is set to true a multi selection of rows is enabled. A new column at left side is added. Can be used with any datatype option.	false
page	integer	The requested initial page number when we use datatypes xml or json (data returned from server)	1
pager	DOM element or string	Sets the pager bar for the grid. Must be a valid html element. If the element has class "scroll", then the width is equal to the grid. Usage: If parameter is a DOM element, <code>jQuery("#mypager");</code> if using a string, "mypager", where mypager is the id of the pager. Note the missing "#"	
pgbuttons	boolean	Disables or enables pager buttons, if pager is present	true
pginput	boolean	Disables or enables the input box for current page, if pager is present	true
pgtext	string	Text that appear before the number of total pages	"/"
postData	array	This array is passed directly to the url. This is associative array and can be used this way: {name1:value1...}. See API methods for manipulation.	empty array
recordtext	string	Displays the text associated with the display of total records	Rows
resizeclass	string	Assigns a class to columns that are resizable so that we can show a resize handle only for ones that are resizable	grid_resize
rowList	array	This parameter is used to construct the select box element in the pager in which the user can change the number of the visible rows. Leave it blank to suppress this select box.	empty array
rowNum	integer	The initial number of rows that must be returned from the server	20
sortclass	string	the class to be applied to the currently sorted column, i.e. applied to the th element	grid_sort
<a href="#">shrinkToFit</a>	boolean	This option describes the type of calculation of the initial width of each column against with the width of the grid. If the value is	true

		true and the value in width option is set then: Every column width is scaled according to the defined option width. Example: if we define two columns with a width of 80 and 120 pixels, but want the grid to have a 300 pixels - then the columns are recalculated as follow: 1- column = $300(\text{new width})/200(\text{sum of all width}) \times 80(\text{column width}) = 120$ and 2 column = $300/200 \times 120 = 180$ . The grid width is 300px. If the value is false and the value in width option is set then: The width of the grid is the width set in option. The column width are not recalculated and have the values defined in colModel.	
sortascimg, sortdescimg	string	Links to image url which are used when the user sort a column	sort_asc.gif, sort_desc.gif
sortname	string	The initial sorting name when we use datatypes xml or json (data returned from server)	none (empty string)
sortorder	string	The initial sorting order when we use datatypes xml or json (data returned from server)	asc
<a href="#">subGrid</a>	boolean	Is set to true this enables using of sub grid. Add additional column at the left side of the grid. For more information see Setting subgrid	false
subGridModel	array	This option has effect only if subGrid option is set to true. This option describes the model of the subgrid. For more details see <a href="#">Subgrids</a>	empty array
subGridUrl	string	This option has effect only if subGrid option is set to true. This describes the url for the subgrid data. Additinally to this url is added parameter "id" which is the id of the row.	empty string
toolbar	array	This option defines the toolbar of the grid. This is array with two values in which the first value enables the toolbar and the second defines the position relative to body Layer. Possible values "top" or "bottom"	[false,"top"]
treeGrid	boolean	Enables (disables) the tree grid format. For more details see <a href="#">Tree Grid</a>	false
tree_root_level	numeric	Determines the level where the root element begins when treeGrid is enabled	0
url	string	The url of the file that holds the request	null
<a href="#">userData</a>	array	This array contain custom information from the request. Can be used at any time.	empty array
viewrecords	boolean	Display the total records from the query in the pager bar	false
<a href="#">width</a>	number	If this option is not set, the width of the grid is a sum of the widths of the columns	none

		defined in the colModel (in pixels). If this option is set, the initial width of each column is set according to the value of <i>shrinkToFit</i> option.	
<a href="#">xmlReader</a>	array	Array which describes the structure of the expected xml data. For a full description refer to <a href="#">Data Types</a> .	{ root: "rows", row: "row", page: "rows>page", total: "rows>total", records : "rows>records", repeatitems: true, cell: "cell", id: "[id]", subgrid: { root:"rows", row: "row", repeatitems: true, cell:"cell" } }
\$.jgrid.default	array	This array is used to define a grid option common to all jqGrids in the application. Typically, this is called once to set the default for one or more grid parameters -- any parameter can be changed. Typical implementation; \$.extend(\$.jgrid.defaults,{rowNum:10})	empty array

## colModel Properties

The colModel property defines the individual grid columns as an array of properties.

Syntax:

```
colModel: [
  {name:'name1', index:'index1'...},
  {...},
  ...
]
```

The available *colModel* properties are listed here, in alphabetic order. All of these properties are values, there are no events or methods associated with the *colModel*. The only required property is *name*.

Property	Type	Description	Default
align	string	Defines the alignment of the cell in the Body layer, not in header cell. Possible values: left, center, right.	left
datefmt	string	Only in combination with sorttype:date. Determines the expected date format for that column. Uses a PHP-like date formatting.	ISO Date (Y-m-d)
editable	boolean	Defines if the field is editable. This option is used in inline and form modules.	false



editoptions	array	Array of allowed options (attributes) for edittype option	empty array
editrules	array	<p>editrules: {edithidden:true(false), required:true(false), number:true(false), minValue:val, maxValue:val, email:true(false)}</p> <ul style="list-style-type: none"> <li>• edithidden: if <code>true</code>, fields hidden in the grid are included as editable in form editing when add or edit methods are called.</li> <li>• required: if <code>true</code> the value will be checked and, if it is empty, an error message will be displayed.</li> <li>• number: if <code>true</code> the value will be checked to be sure it is a number and, if it is not, an error message will be displayed.</li> <li>• integer: if <code>true</code> the value will be checked to be sure it is an integer and, if it is not, an error message will be displayed.</li> <li>• minValue: if set to a valid number, the value will be checked and if it is less than the minValue, an error message will be displayed.</li> <li>• maxValue: the same as minValue but the value will be checked to be sure it is not greater than the maxValue.</li> <li>• email: if <code>true</code>, the value will be checked to ensure it conforms to a valid e-mail format (not that the email address exists) and, if it does not, an error message will be displayed.</li> </ul>	empty array
<a href="#">edittype</a>	string	Defines the edit type for inline and form editing Possible values: text, textarea, select, checkbox, password See <a href="#">Inline editing and form editing</a>	text
hidedlg	boolean	If set to <code>true</code> this column will not appear in the modal dialog where users can choose which columns to show or hide. See <a href="#">Show/Hide Columns</a> .	false
hidden	boolean	Defines if this column is hidden at initialization.	false
index	string	Set the index name when sorting. Passed as <code>sidx</code> parameter.	the order of cell
jsonmap	string	Defines the json mapping for the column in the incoming json string.	none
key	boolean	In case if there is no id from server, this can be set as <code>id</code> for the unique row id. Only one column can have this property. If there are more than one key the grid finds the first one and the second is ignored.	false
name	string	Set the unique name in the grid for the column. This property is required. As well as other words used as property/event names, the reserved words (which cannot be used for names) include <i>subgrid</i> and <i>cb</i> .	
resizable	boolean	Defines if the column can be resized	true
search	boolean	When used in <code>formedit</code> , disables or enables searching on that column	true

sortable	boolean	Defines is this can be sorted.	true
sorttype	string	Used when datatype is clientSide. Defines the type of the column for appropriate sorting. Possible values: <ul style="list-style-type: none"> <li>• int - for sorting integer</li> <li>• float - for sorting decimal numbers</li> <li>• date - for sorting date</li> <li>• text - for text sorting</li> </ul>	text
width	number	Set the initial width of the column, in pixels	150
xmlmap	string	Defines the xml mapping for the column in the incoming xml file. Use a CCS specification for this	none

## Height and Width

### Height

The height of the grid can be controlled via the *height* property.

The height property can be set in pixels, a percent or any valid height measure. The default setting is pixels (px); the default value for height is 150, i.e. 150px. To set the grid height in 200 pixels we need to set only the number - i.e.

```
height: 200
```

It is important to note that this setting controls only the height of the Body layer. The height of whole grid is

- the height of the Caption layer (if present),
- plus the height of the Header layer
- plus the height of the Body layer (as set in this option)
- plus the height of the pager (if set as a part of grid).

Setting the height to 100% or auto means that the Body layer will be set to contain all of the returned rows without scrolling. Any other setting will fix the height of the Body layer and show the scroll bar as needed.

### Width

The width of the grid is set only in pixels.

By default, the *width* property of the grid is not set, and the width of the grid is calculated as sum of the width properties of the individual columns set in the *colModel*. (If the *width* property in *colModel* is not set for a column, the width of that column defaults to 150px).

However, setting the width based on the `colModel` can be somewhat misleading. The true width of a grid defined this way will be

- the sum of the widths defined in the `colModel`
- plus padding and border settings for the cells (set in the CSS).

Suppose we have 5 columns with width settings that sum to 500 and in the CSS we have the following definition for the table data:

```
table.scroll tbody td {
  padding: 2px;
  text-align: left;
  border-bottom: 1px solid #D4D0C8;
  border-left: 1px solid #D4D0C8;
  text-overflow: ellipsis;
  overflow: hidden;
  white-space: nowrap;
}
```

The width of this grid will be 500 (the settings in `colModel`) plus 5\*5 (2 padding pixels \* 2 sides + 1 border pixel left ) for a total of 525px.

If this somewhat larger width is not a problem for you, then you need do nothing more. However, in some cases it is needed to have the width of the grid fixed and independent of the widths set for the columns in `colModel`. To accomplish this, we can play with two other options in the grid's options array: *width* and *shrinkToFit*.

The default value of *shrinkToFit* is `true` which means that if we set the width parameter of the grid, the widths of all the columns are recalculated as:

$$\text{new colModel.width} = \text{colModel.width} * \text{width} / \text{swidth}$$

where:

- *colModel.width* is the width set for this column in the `colModel`
- *width* is width set for the grid
- *swidth* is the sum of all widths set in the `colModel`

The effect of this recalculation is that all columns are shrunk proportionately. (Or, if the fixed width of the grid is larger than the sum of the columns, all columns will be proportionately expanded).

If the value of *shrinkToFit* is `false` then jqGrid does not make any recalculation of the initial column width and the grid will have the *width* set in options array, with a horizontal scroll bar.

## Obsolete Properties

The following property, part of jqGrid up to and including version 3.1, has been removed starting with version 3.2.

Property	Description	Use Instead
rowheight	This option was used to define the height of a single row so that the overall height of the grid could be set according to	height: '100%'

	the number of returned rows, making scrolling unnecessary	
--	---	--

## Events

The action to take on an event is set as a property of the grid, e.g.

```
onSelectRow: function(id){
    if(id && id!==lastSel){
        jQuery('#tbleditable').restoreRow(lastSel);
        lastSel=id;
    }
    jQuery('#tbleditable').editRow(id, true); },
```

The above example specifies the action to take when a row is selected. The following one shows how to use *onSortCol*:

```
onSortCol: function( index, colindex, sortorder) {
    // here is the code
}
```

The events that you can use to perform some additional action are listed here, in alphabetic order:

Event	Parameters	Description
afterInsertRow	rowid, rowdata, rowelem	This event fires after every inserted row. <ul style="list-style-type: none"> <li><i>rowid</i> is the id of the inserted row</li> <li><i>rowdata</i> is an array of the data to be inserted into the row. This is array of type <i>name: value</i>, where the name is a <i>name</i> from colModel</li> <li><i>rowelem</i> is the element from the response. If the data is xml this is the xml element of the row; if the data is json this is array containing all the data for the row</li> </ul>
gridComplete	none	This fires after all the data is loaded into the grid and all other processes are complete
loadBeforeSend	xhr	A pre-callback to modify the XMLHttpRequest object (xhr) before it is sent. Use this to set custom headers etc. The XMLHttpRequest is passed as the only argument.
loadComplete	none	This event is executed immediately after every server request
loadError	xhr,st,err	A function to be called if the request fails. The function gets passed three arguments: The XMLHttpRequest object (XHR), a string describing the type of error (st) that occurred and an optional exception object (err), if one occurred.
onCellSelect	rowid, iCol, cellcontent	fires when we click on particular cell in the grid rowid is the id of the row iCol is the index of the cell cellcontent is the content of the cell. (Note that this available when we not use cell editing module and is disabled when using cell editing). Important note regarding IE6: this event may exhibit strange behaviours because of a bug in early IE6 releases. When we have a hidden column the index will not be calculated

		correctly. You can avoid using this feature in a grid with hidden columns, test for these browsers and conditionally suppress this feature, or suggest that your IE6 users upgrade. For more information refer to <a href="http://support.microsoft.com/kb/814506">http://support.microsoft.com/kb/814506</a>
ondblClickRow	rowid	<p>Raised immediately after row was double clicked.</p> <p>Calling convention:</p> <pre>ondblClickRow: function( rowid) {     // here is the code }</pre>
onHeaderClick	gridstate	Can be used when clicking to hide or show grid; gridstate is the state of the grid (visible or hidden)
onPaging	pgButton	<p>This event fires after click on [page button] and before populating the data. Also works when the user enters a new page number in the page input box (and presses [Enter]).</p> <p>pgbutton(string) can be - first,last,prev,next</p>
onRightClickRow	rowid	Raised immediately after row was right clicked.
onSelectAll	array of the selected ids	This event fires (if defined) when multiselect is true and you click on the header checkbox. Parameter passed to this event is array of selected rows. If the rows are unselected, the array is empty.
onSelectRow	rowid	Raised immediately after row was clicked.
onSortCol	index, colindex, sortorder	<p>Raised immediately after sortable column was clicked and before sorting the data</p> <ul style="list-style-type: none"> <li><i>index</i> is the index name from colModel</li> <li><i>colindex</i> is the index of column</li> <li><i>sortorder</i> is the sorting order - can be 'asc' or 'desc'</li> </ul>
subGridRowExpanded	pID, id	<p>This event is raised when the subgrid is enabled and is executed when the user clicks on the plus icon of the grid. Can be used to put custom data in the subgrid.</p> <ul style="list-style-type: none"> <li><i>pID</i> is the unique id of the div element where we can put contents when subgrid is enabled,</li> <li><i>id</i> is the id of the row</li> </ul>
subGridRowColapsed	pID, id	<p>This event is raised when the user clicks on the minus icon.</p> <ul style="list-style-type: none"> <li><i>pID</i> is the unique id of the div element where we can put contents when subgrid is enabled,</li> <li><i>id</i> is the id of the row</li> </ul>

Additional Events specific to [Cell Editing](#) and the [Tree Grid](#) are found in their respective topics.

## Methods

Calling Convention:

```
jQuery("#grid_id").jqGridMethod( parameter1,...parameterN )
```

Where:

- *grid\_id* is the id of the already constructed jqGrid.
- *jqGridMethod* is a method applied to this jqGrid.
- *parameter1,...parameterN* - a list of parameters

**IMPORTANT:** Some 'get' and 'set' methods (e.g., `getUrl()`) supported up to version 3.1 have been removed in version 3.2 and replaced by more generic methods (e.g., `getGridParam(url)` or `setGridParam({url:value})`). See [Replaced Methods](#) for details.

Where a method is not designed to return a requested value, then what is returned is the jqGrid object and a set of such methods can be chained, e.g.,

```
jQuery("#grid_id").setGridParam({..}).hideCol("somecol").trigger("reloadGrid")
```

## Available methods (as of version 3.2)

### addJSONData

Parameters: *data* - array

Returns: `true` on success, otherwise `false`

Populates a grid with the passed data. Suppose we have data from a particular webservice (*jsonresponse*), then

```
var mygrid = jQuery("#"+grid_id)[0];
var myjsongrid = eval("(" + jsonresponse.responseText + ")");
mygrid.addJSONData(myjsongrid);
myjsongrid = null;
jsonresponse = null;
```

will populate the data to the grid. And, of course, the data in *myjsongrid* can be manipulated before being passed to `addJSONData`.

*addJSONData* is a privileged method.

### addRowData

Parameters: *rowid* - string, *data* - array, *position* - string (first, last, before, after) - default last, *srcrowid* - string (source row, applies only when *position* is either *before* or *after*)

Returns: `true` on success, otherwise `false`

Inserts a new row with *id* = *rowid* containing the data in *data* at the *position* specified (first in the table, last in the table or before or after the row specified in *srcrowid*). The syntax of the *data* array is: {name1:value1,name2: value2...} where *name* is the name of the column as described in the *colModel* and the *value* is the value.

### addXmlData

Parameters: *xmlresponse*

Returns: `true` on success, otherwise `false`

Populates a grid with the passed data. Suppose we have data from a particular webservice (*xmlresponse*), then

```
var mygrid = jQuery("#"+grid_id)[0];
mygrid.addXmlData(xmlresponse.responseXML);
```

will populate the data to the grid. And, of course, the data in `xmlresponse` can be manipulated before being passed to `addXmlData`.

*addXmlData* is a privileged method.

### clearGridData

Parameters: none

Returns: jqGrid object

Clears the currently loaded data from grid

### delRowData

Parameters: rowid - string,

Returns: `true` on success, otherwise `false`

Deletes the row with the `id = rowid`. This operation does not delete a data from the server.

### FormToGrid

Parameters: rowid - string, formid - string

Returns: jqGrid object

Reads data from a form (previously defined in html) identified by `formid` and loads data into the grid in row with `rowid`. If the names of both grid and form are the same the data from the form replaces the data in the grid. Note that all fields from grid can be replaced, including hidden. This is the opposite of *GridToForm*

### getCell

Parameters: rowid, iCol

Returns: the content of the cell with `id = rowid` and index column `iCol`.

Note that `iCol` is a index and not a name.

### getDataIDs

Parameters: none

Returns: array of the id's in the current grid view. Empty array if no data is available.

### getGridParam

Parameters: name - string

Returns: the value of the requested parameter.

The name is the name from options array. For a particular options, see below. If the name is not set the entry options are returned.

Option	Returns
<code>getGridParam("url")</code>	the current url from options array
<code>getGridParam("sortname")</code>	the name of last sorted column
<code>getGridParam("sortorder")</code>	the last sorted order
<code>getGridParam("selrow")</code>	the id of the selected row, null if row is not selected
<code>getGridParam("page")</code>	the current page number.
<code>getGridParam("rowNum")</code>	the current number of requested rows
<code>getGridParam("datatype")</code>	the current datatype.
<code>getGridParam("records")</code>	the current number of records in grid.
<code>getGridParam("selarrow")</code>	array of id's of the selected rows when multiselect options is true. Empty array if not selection.

**getRowData**

Parameters: rowid - string

Return: array with data of the requested id = rowid. The returned array is of type name:value, where the name is a name from colModel and the value is a actual value. Returns empty array if the row can not be found.

**GridToForm**

Parameters: rowid - string, formid - string

Returns: jqGrid object

Reads data from a given rowid and fills the form (previously defined in html) identified by formid. If the names of both grid and form are the same the data from the grid replaces the data in the form. Note that all fields from grid can be used, including hidden.

**hideCol**

Parameters: colname - mixed (string or array)

Returns: jqGrid object

Hides a column with a given colname. If the colname is a string, only the specified column is hidden. If the colname is array of type ["name1","name2"] then the columns with names 'name1' and 'name2' will be hidden at the same time. The colname must be a valid *name* from colModel. The width of the grid is changed according to the following rules: if the grid currently has no horizontal scroll bar, the width of the grid is decreased by the width of the hidden column(s). If a scrollbar is visible, the width is adjusted which may or may not change the width of the grid.

**resetSelection**

Parameters: none

Returns: jqGrid object

Resets (unselects) the selected row(s). Also works in multiselect mode.

**setCaption**

Parameters: caption - string

Returns: jqGrid object

Sets a new caption of the grid. If the Caption layer was hidden it is shown.

**setCell**

Parameters: rowid, colname, nData, prop

Returns: jqGrid object

This method can change the content of particular cell and can set class or style properties.

Where:

- *rowid*: the id of the row,
- *colname*: the name of the column (this parameter can be a number beginning from 0)
- *nData*: the content that can be put into the cell. If empty string the content will not be changed
- *prop*: if prop is string then we add a class to the cell using `addClass`; if prop is array we set the new css properties via `css`

**Example**

```
setCell("10","tax","",{color:'red','text-align':'center'})
```

will set the contents of the *tax* field in row *10* to red and centered.

**setGridParam**

Parameters: object - array

Returns: jqGrid object



Sets a particular parameter. Note - for some parameters to take effect a trigger("reloadGrid") should be executed. Note that with this method we can override events like onSelectRow, etc. Example:

```
setGridParam({
  url:"newurl",
  page:1,
  onSelectRow:function(id) {/*here is the new code*/}
});
```

Method	Description
setGridParam({url:newvalue})	Parameters: url - string Set a new url, replacing the older.
setGridParam({sortname:newvalue})	Parameters: sortname - string Set a new sort name
setGridParam({sortorder:newvalue})	Parameters: sortorder - string (asc or desc) Set a new sort order
setGridParam({page:newvalue})	Parameters: page - integer >0 Set a new page number
setGridParam({rowNum:newvalue})	Parameters: rownum - integer > 0 Set a new number of requested rows.
setGridParam({datatype:newvalue})	Parameters: datatype - string (xml,json.xmlstring,jsonstring, clientSide) Set a new datatype.

### setGridHeight

Parameters: new\_height

Returns: jqGrid object

Sets the new height of the grid dynamically. Note that the height is set only to the grid cells and not to the grid. *new\_height* can be in pixels, percentage, or 'auto'

### setGridWidth

Parameters: new\_width, shrink

Returns: jqGrid object

Sets a new width to the grid dynamically. The parameters are:

- new\_width is the new width in pixels.
- shrink (default true) has the same behavior as shrinkToFit

### setLabel

Parameters: colname, newlabel, sattr

Returns: jqGrid object

Sets a new label in the header for the specified column; can also set attributes and classes (sattr). The parameters are:

- colname(mixed) is either the name of the column (from colModel) or the number of the column in colModel beginning from 0.
- newlabel(string) is the label that we want to change. Can be a empty string.
- sattr(mixed) - if this parameter is array - we add this as attributes to this header element. if the parameter is string we add a class to this element

### setRowData

Parameters: rowid - string, data - array

Return: boolean

Updates the values (using data array) in the row with the given rowid. The syntax of data array is:

{name1:value1,name2: value2...} where the name is the name of the column as described in the colModel and the value is the new value. Return true on success, false otherwise.

### setSelection

Parameters: rowid - string

Returns: jqGrid object

Toggles a selection of the row with id = rowid

### showCol

Parameter: colname - mixed (string or array)

Returns: jqGrid object

Shows a column with a given colname. If the colname is a string we show only one column. If colname is array of type ["name1","name2"] then the columns with names 'name1' and 'name2' will be shown at the same time. The colname must be a valid name from colModel. The width of the grid changes by the width of the newly-shown columns.

### .trigger("reloadGrid");

Parameter: none

Returns: jqGrid object

Reloads the grid with the current settings. This means that a new request is send to the server if datatype is xml or json.

This method should be applied to an already-constructed grid - e.g.,

```
jQuery("#grid_id").trigger("reloadGrid");
```

## Advanced Methods

Advanced methods offer the ability to dynamically change properties of the *colModel*. To keep the basic code small, these reside in a separate module (grid.custom.js) that must be installed for these to be available. See [Installation](#)

### getColProp

Parameters: colname

Returns: an array of the properties of the given column from *colModel*

### GridDestroy

Parameters: grid\_id

Returns: `true` on success, otherwise `false`

Destroys the entry grid from the DOM (clears all the html associated with the grid and unbinds all events)

### GridUnload

Parameters: grid\_id

Returns: `true` on success, otherwise `false`

The only difference to previous method is that the grid is destroyed, but the table element and pager (if any) are left ready to be used again.

### setColProp

Parameters: colname, properties

Returns: jqGrid object

Sets new properties in *colModel*. This method is ideal for dynamically changing properties of the column. Note that some properties - like *width* and *align* - have no effect. Example:

```
jQuery("#grid_id").setColProp('colname',{editoptions:{value:"True:False"}})
```

will change the editoptions values.

### sortGrid

Parameters: colname, reload

Returns: jqGrid object

Sorts the given colname and shows the appropriate sort image. The same (without sorting image) can be done using

```
setGridParam({sortname:'myname'}).trigger('reloadGrid')
```

If the reload is set to `true`, the grid reloads with the current page and sortorder settings.

## Obsolete Methods

The following methods, all part of jqGrid up to and including version 3.1, have been removed starting with version 3.2, replaced by a more generic method.


'Get' Methods	Returns	Use Instead
getUrl	the current url from options array	getGridParam("url")
getSortName	the name of last sorted column	getGridParam("sortname")
getSortOrder	the last sorted order	
getSelectedRow	the id of the selected row, null if row is not selected	getGridParam("selrow")
getPage	the current page number	getGridParam("page")
getRowNum	the current number of requested rows	getGridParam("rowNum")
getDataType	the current datatype	getGridParam("datatype")
getRecords	the current number of records in grid.	getGridParam("records")
getMultiRow	array of id's of the selected rows when multiselect options is true. Empty array if no selection.	getGridParam("selarrow")
'Set' Methods	to set	Use Instead
setUrl	a new url, replacing the older.	setGridParam({url:newvalue})
setSortOrder	a new sort order	setGridParam({sortname:newvalue})
setPage	a new page number	setGridParam({page:newvalue})
setRowNum	a new number of requested rows	setGridParam({rowNum:newvalue})
setDataType	a new datatype	setGridParam({datatype:newvalue})

## Pager (Navigation bar)

The pager, or Navigation Bar, for a basic grid is defined first in html -- normally, but not necessarily, placed so it appears at the bottom of the grid. Note that it is a `<div>`, not a `<table>`

```
<body>
<table id="list" class="scroll"></table>
<div id="pager" class="scroll" style="text-align:center;"></div>
</body>
```

In this example, the pager controls are centered, but they could be aligned left or right to suit your preferences, as shown in these three examples:

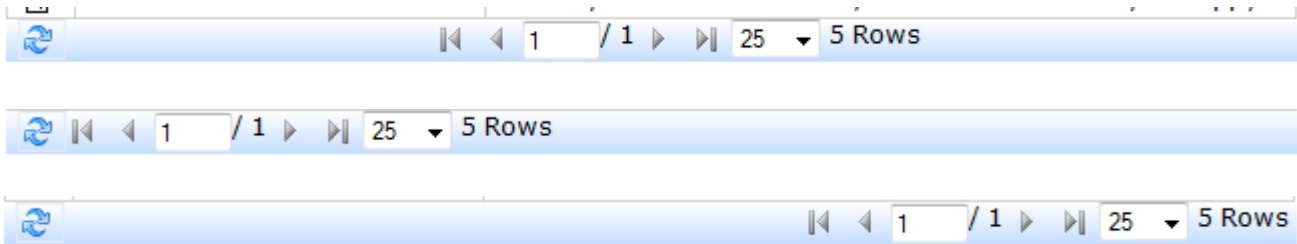

The pager is then connected to the grid with a grid property:

```
pager: jQuery('#pager'),
or
pager: 'pager_id',
```

## Properties

Several properties of the grid govern the function and appearance of the Navigation bar:

Property	Type	Description	Default
page	integer	The requested initial page number when we use datatypes xml or json (data returned from server)	1
pager	DOM element or string	Sets the pager bar for the grid. Must be a valid html element. If the element has class "scroll", then the width is equal to the grid. Usage: If parameter is a DOM element, <code>jQuery("#mypager")</code> ; if using a string, "mypager", where mypager is the id of the pager. Note the missing "#"	
recordtext	string	Displays the text associated with the display of total records	Rows
rowList	array	This parameter construct a select box element in the pager in which the user can change the number of the visible rows.	empty array
rowNum	integer	The initial number of rows that must be returned from the server	20

## Events

One event of the grid relates to the Navigation bar:

Event	Parameters	Description
onPaging	pgButton	This event fires after click on [page button] and before populating the data. Also works when the user enters a new page number in the page input box (and presses [Enter]). pgbutton(string) can be - first,last,prev,next

## Methods

Adding buttons to the Navigation Bar is controlled by a method of the grid.

To use this method we need to enable the form editing feature. For more information refer to [Installation](#)

Calling Convention:

```
jQuery("#grid_id").navGrid("#pager",{parameters})
```

Where:

- *grid\_id* - the id of the already constructed jqGrid.
- *pager* - the id of the navigation bar
- *parameters* - an array of settings, defined below

The *navGrid* method accepts the following settings to govern which buttons appear on the Navigation bar; any of them may be set to `true` or `false`. The default for all is `true`, but may be changed by, for example

```
{refresh: true, edit: true, add: true, del: false, search: true}
```

or

```
{del: false}
```

The position of these buttons is controlled by a *position* setting (the default is `left`):

```
{add:false,del:false,edit:false,position:"right"}
```

Parameters for these buttons can be sent by adding them after the main array:

```
...{add:false,edit:false,del:false},
  {}, // edit parameters
  {}, // add parameters
  {reloadAfterSubmit:false} //delete parameters
```

## Custom Buttons

An additional method *navButtonAdd* (new in Version 3.2) supports adding custom buttons. This method must be chained with the setting of the Standard Buttons:

Calling Convention:

```
jQuery("#grid_id").navGrid("#pager",{standard parameters}).navButtonAdd("#pager",{custom parameters});
```

The Custom parameters are

```
{ caption: 'NewButton', buttonimg: '', onClickButton: null, position: "last", title: 'ToolTip' }
```

where


- *caption*: (string) the caption of the button, can be a empty string.
- *buttonimg*: (string) full path to valid image. If empty string, no image will be attached.
- *onClickButton*: (function) action to be performed when a button is clicked. Default null.
- *position*: ("first" or "last") the position where the button will be added (i.e., before or after the standard buttons).
- *title*: (string) a tooltip for the button.

Multiple buttons can be added by continuing the chain.

```
jQuery("#grid_id").navGrid('#Pager',{
    edit:false,add:false,del:false,search:false
}).navButtonAdd('#Pager',{
    caption:"Add", buttonimg:"fullpath/row_add.gif", onClickButton: function(){ alert("Adding Row")}, position:"last"
}).navButtonAdd('#Pager',{
    caption:"Del", buttonimg:"fullpath/row_del.gif", onClickButton: function(id){
alert("Deleting Row: "+id)}, position:"last"
});
```

## Example I

We want to mimic the look of form editing when in-line editing (i.e., showing buttons on the Navigation bar rather than in the toolbar or on the form), like this:









The code:

```
jQuery("#grid_id").navGrid('#Pager',{
    edit:false,add:false,del:false,search:false
}).navButtonAdd('#Pager',{
    caption:"Add", buttonimg:"fullpath/row-insert-under.gif", onClickButton: function(){
    var datarow = {name1: value1, name2: value2', ...};
    var su=jQuery("#grid_id").addRowData("X",datarow,"last");
    if(su) { jQuery("#grid_id").setSelection('X') };    }, position:"last"
}).navButtonAdd('#Pager',{
    caption:"Delete", buttonimg:"fullpath/row-delete.gif", onClickButton: function(){
    var gr = jQuery("#grid_id").getGridParam("selrow");
    if( gr != null ) {
        jQuery("#grid_id").delGridRow(gr,{afterSubmit: function(xhr,postdata){ alert ('After Submit: ' +
postdata); return [true]}},
        url: 'delete.php'));
    } else {
        alert("Please Select Row to delete!");
    }
});
```

```
    }, position:"last"
  });
```

## Example II

This example shows uses one of the methods new to version 3.2 to synchronize the grid with a form manually defined in html. (A button on the form moves the data back again).

9	2007-10-06	Client 1	200.00	40.00	240.00
  Edit					
  1 / 3   5 13 Rows					

The code:

```
jQuery("#tbleditable").navGrid('#pcustbut',{edit:false,add:false,del:false})
    .navButtonAdd('#pcustbut',{caption:"Edit",
    onClickButton:function(){
        var gsr = jQuery("#custbut").getGridParam('selrow');
        if(gsr){
            jQuery("#custbut").GridToForm(gsr,"#order");
        } else {
            alert("Please select Row")
        }
    }
    });
```

## Form Editing

jqGrid supports creating a form, on the fly, to enter or edit grid data.

To do this we need to enable this feature. For more information refer to [Installation](#)

### Properties

All the properties of the grid are the same as these for Inline editing -- see [Inline Editing: Properties](#) -- with the addition of the following option in the *colModel*:

#### editrules

Calling Convention:

```
{edithidden:true(false), required:true(false), number:true(false), minValue:val, maxValue:val, email:true(false)}
```

With this option we can:

1. edit, in the form, fields that are hidden in the grid. If the field is hidden in the grid and *edithidden* is set to `true`, the field can be edited when add or edit methods are called.
2. perform a client-side validation in the formedit. This is done with:
  - o `required: true(false)` - if set to `true`, the value will be checked and if empty, an error message will be displayed.
  - o `number: true(false)` - if set to `true`, the value will be checked and if this is not a number, an error message will be displayed.
  - o `minValue: valid number` - if set, the value will be checked and if the value is less than this, an error message will be displayed.
  - o `maxValue: valid number` - if set, the value will be checked and if the value is more than this, an error message will be displayed.
  - o `email: true(false)` - if set to `true`, the value will be checked and if this is not valid e-mail, an error message will be displayed.

### Searching - Single Field

Searching is way of querying data using different criteria. With this method we can perform a single field search.

This method uses *colModel* names and url parameters from jqGrid and so can be called only on already constructed grid.

Calling Convention:

```
jQuery("#grid_id").searchGrid( properties );
```

Where:

- *grid\_id* is the id of the parent grid
- *properties* is an array of settings in *name: value* pairs format.



## Properties

Property	Description	Default
top	the initial top position of search dialog	0
left	the initial left position of search dialog	0
width	the width of search dialog	300
height	the height of Search dialog	200
modal	sets dialog in modal mode	false
drag	sets the dialog to draggable	true
Find	the text of the button clicked to start the Find	"Find"
Clear	the text of the button when you click to clear search string	"Reset"
dirty	applicable only in navigator	false
checkInput	when set to true performs input validation according to the rules in editrules option in colModel	false

## Events

Event	Parameters	Description
onInitializeSearch	form_id	fires once when creating the data for searching.
beforeShowSearch	form_id	fires before showing the form
afterShowSearch	form_id	fires after showing the form

## Notes

If the top and left off-set properties are not set, the dialog appears at the upper left corner of the grid. Top and left off-sets are in relation to the viewing window, not the grid, so {top:10, left:10} will be indented slightly from the window, and may be nowhere near the grid.

To exclude a field from the search possibilities, set the *search* option in colModel to `false`. Example:

```
colModel[{name: 'somename'..., search:false}...]
```

When the find button is clicked, jqGrid adds three parameters to the url, in *name=value* pairs:

- *sField*: the 'searchField', the value comes from the *index* in colModel
- *sValue*: the 'searchString', the value is the entered value
- *sOper*: the 'searchOper', the value is the type of search - see sopt array, below

Translation string for the search options:

```
odata : ['equal', 'not equal', 'less', 'less or equal', 'greater', 'greater or equal', 'begins with', 'ends with', 'contains' ],
```

If you want to change or remove the order change it in `sopt`:

```
sopt: null // ['bw', 'eq', 'ne', 'lt', 'le', 'gt', 'ge', 'ew', 'cn']
```

by default all options are allowed. The codes are as follows:

```
eq - equal ( = )
ne - not equal ( <> )
lt - less than ( < )
le - less than or equal to ( <= )
gt - greater than ( > )
ge - greater than or equal to ( >= )
```

```
bw - begins with ( LIKE val% )
ew - ends with (LIKE %val )
cn - contain (LIKE %val% )
```

Typically this method is applied to the click action of a button or link. For example,

```
jQuery("#bsdata").click(function(){
    jQuery("#search").searchGrid( {sopt:['cn', 'bw', 'eq', 'ne', 'lt', 'gt', 'ew']} );
});
```

We can set common options for all search dialogs using the `$.jgrid.search` object with `$extend()`

The default values are:

```
$.jgrid.search = {
    caption: "Search...",
    Find: "Find",
    Reset: "Reset",
    odata : ['equal', 'not equal', 'less', 'less or equal', 'greater', 'greater or equal',
    'begins with', 'ends with', 'contains' ]
};
$.extend($.jgrid.search, {Find: 'Search'})
```

will replace the text of search button from Find to Search.

## Searching - Multiple Fields

This method can be called to construct an advanced search form for the grid, e.g.

```
<div id="mysearch"></div>
```

Calling Convention:

```
jQuery("#mysearch").filterGrid("#mygrid", {...})
```

where:

*grid\_id* is the id of the grid to which the search will be applied.

*parms* is an array of parameters (see below).

## Additional Methods

When using filterGrid we can use two additional privileged methods:

*triggerSearch* - triggers a search to the grid, for example,

```
var sg = jQuery("#mysearch").filterGrid(...) [0];
sg.triggerSearch();
```

*clearSearch* - clears the search form values and triggers the search with empty or default values.

```
sg.clearSearch();
```

## How this works

When the search is activated, an array of type name:value is posted to the server. Note that this array is added to the postData parameter. We post only fields that have an entered value. When we clear the search form, the values are deleted from the postData array. When posting to the server, we try to pass, not the name, but the index set in colModel. When the index is not found we use the name. Additionally, we add a search=true to the posted data.

## Parameters

Parameter	Description	Default
gridModel	<p>when set to <code>true</code>, we use the parameters from colModel to construct the search, using the following options from colModel: name, index, edittype, editoptions, search.</p> <p>Additional parameters can be set in colModel to meet the needs only of this method. These specific parameters are:  <i>defval</i>: default value for the search field this will be set as initial search.  <i>surl</i>: valid only if edittype:'select'; url from where we can get already-constructed select element - e.g., we expect the following html content (square brackets have been substituted for angle brackets so we can see the code):</p> <pre>[select] [option value='val1'] Value1 [/option] [option value='val2'] Value2 [/option] ... [option value='valn'] ValueN [/option] [/select]</pre> <p>Only fields with <code>search: true</code> are attached to the form. Hidden elements are not included.</p> <p>When <code>false</code> we should construct a filterModel (see below) to perform a search.</p>	false
gridNames	this option works only if gridModel is true. When set to <code>true</code> we use the names from colNames as labels for the search fields.	false
gridToolbar	<p>this option tries to size the input elements so that they match the initial width of the grid columns. Note that when set to <code>true</code> this does not place the search form on the toolbar. If we want to place the search fields above the columns so that they match the column widths, we should set <code>gridModel: true, gridNames:false, gridToolbar: true</code> and then if we have gridid with enabled toolbar - i.e <code>toolbar:[true,"top"]</code></p> <pre>jQuery("#t_"+gridid).filterGrid("#"+gridid,{gridModel: true, gridNames:false, gridToolbar: true});</pre>	false
filterModel	The filter model should be used when gridModel is set to <code>false</code>	[]

	<pre>filterModel [ ... {label:'TableField', name: 'colname', stype: 'select', defval: 'default_value', surl: 'someurl', sopt:{optins for the select}}, ... ]</pre> <p><i>label</i>: the label of the field (text description)  <i>name</i>: the name of the column - should equal of the name in colModel.  Note that we search on the index of that coulumn.  <i>stype</i>: type of input element - can be only 'text' or 'select'  <i>defval</i>: default value for the search input element.  <i>surl</i>: used only when stype is 'select'; this is a url from where we can  get an already-constructed select element - i.e. we expect the following  html content:</p> <pre>[select] [option value='val1'] Value1 [/option] [option value='val2'] Value2 [/option] ... [option value='valn'] ValueN [/option] [/select]</pre> <p><i>sopt</i>: valid options that can be applied to the element, the same as  editoptions from colModel.</p>	
formtype	defines how the form should be constructed. Can be 'horizontal' or 'vertical'	"horizontal"
autosearch	<p>When set to <code>true</code> the behavior is as follows:</p> <ul style="list-style-type: none"> <li>When the user input some value in the input element they can press enter and the search is activated.</li> <li>When a select box is used search is activated when the values of select is changed.</li> </ul> <p>When set to false we can use the button to perform the search.</p>	true
formclass	the class that can be applied to the form	"filterform"
tableclass	the class that can be applied to the table (the table is a child of form element)	"filtertable"
buttonclass	class that can be applied to the buttons	"filterbutton"
searchButton	the label of the button that performs the search. (Note - this label does not come from the language files, since the intention is to separate this method so that it can be used anywhere - i.e. without using jqGrid)	"Search"
clearButton	the label of the button that clears the already-entered values	"Clear"
enableSearch	enable/disable the search button	false
enableClear	enable/disable the clear button	false
beforeSearch	event which fires before a search	null
afterSearch	event which fires after the search is performed	null
beforeClear	event which fires before clearing entered values (i.e when clear button is clicked)	null

afterClear	event which fires after clearing entered values	null
url	a separate url for searching values	"
marksearched	when set to <code>true</code> , after a search every column to which search is applied is marked as searchable - e.g., in the upper left corner of the column header a marker is set to indicate that this column is part of the applied search. When we clear the values the markers disappear.	true

## Add Row

This method can be used to add data to the server.

This method uses `colModel` and `editurl` parameters from jqGrid

Calling Convention:

```
jQuery("#grid_id").addGridRow( "new", options );
```

The options are the same as those in [Edit row](#).

### Notes

jqGrid adds two parameters to the values that are posted to the server:

- `id=_empty` and
- `oper=add`

to identify to the server that the operation is an insert.

## Edit Row

This method is the same as inline editing except that the data is represented in form via modal dialog.

This method uses `colModel` and `editurl` properties from jqGrid

Calling Convention:

```
jQuery("#grid_id").editGridRow( rowid, properties );
```

where

- *grid\_id*: the *id* of the parent grid
- *rowid*: the *id* of the row to edit
- *properties*: an array of *name: value* pairs, including any of the following properties or events.

## Properties

Property	Description	Default
top	the initial top position of confirmation dialog	0
left	the initial left position of confirmation dialog	0
width	the width of confirmation dialog	300
height	the height of confirmation dialog	200
modal	sets dialog in modal mode	false
drag	the dialog is draggable	true
msg	message to display when deleting the row	"Delete selected row(s)"
addCaption	the caption of the dialog if the mode is adding	"Add Record"
editCaption	the caption of the dialog if the mode is editing	"Edit Record"
bSubmit	the text of the button when you click to delete	"Submit"
bCancel	the text of the button when you click to close dialog	"Cancel"
url	url where to post data. If set, replaces the editurl	
processData	Words displayed when posting data	"Processing..."
closeAfterAdd	when add mode, close the dialog after add record	false
clearAfterAdd	when add mode, clear the data after adding data	true
closeAfterEdit	when in edit mode, close the dialog after editing	
reloadAfterSubmit	reload grid data after posting	true
mtype	Defines the type of request to make ("POST" or "GET") when data is sent to the server	"POST"
editData	an array used to add content to the data posted to the server	empty

## Events

Event	Description	Default
onInitializeForm	fires once when creating the data for editing and adding. Receives, as parameter, the id of the constructed form.	null
beforeInitData	fires before initialize the form data. Receives, as parameter, the id of the constructed form.	null
beforeShowForm	fires before showing the form; receives as Parameter the id of the constructed form.	null
afterShowForm	fires after showing the form; receives as Parameter the id of the constructed form.	null
beforeSubmit	fires before the data is submitted to the server. Parameter is of type id=value1,value2,... When called the event can return array where the first parameter can be true or false and the second is the message of the error if any. Example: [false,"The value is not valid"]	null
onclickSubmit	fires after the submit button is clicked and the postdata is constructed. Parameters passed to this event is a options array of the method. The event should return array of type {} which then replaces the data of editData. See example below.	null
afterSubmit	fires after response has been received from server. Typically used to	null

	display status from server (e.g., the data is successfully saved or the save cancelled for server-side editing reasons). Receives as parameters the data returned from the request and an array of the posted values of type id=value1,value2	
--	---	--

## Notes & Examples

If the top and left off-set properties are not set, the dialog appears at the upper left corner of the grid. Top and left off-sets are in relation to the viewing window, not the grid, so {top:10, left:10} will be indented slightly from the window, and may be nowhere near the grid.

jqGrid adds two parameters to the values that are posted to the server:

- id=rowid and
- oper=edit

to identify to the server that the operation is an update.

We can set common options for all add and/or edit dialogs using the \$.jgrid.edit object with \$.extend().

The default values are:

```
jQuery.jgrid.edit = {
  addCaption: "Add Record",
  editCaption: "Edit Record",
  bSubmit: "Submit",
  bCancel: "Cancel",
  processData: "Processing...",
  msg: {
    required: "Field is required",
    number: "Please enter valid number!",
    minValue: "value must be greater than or equal to ",
    maxValue: "value must be less than or equal to"
  }
};
```

Using *onclickSubmit*:

This feature can be used to add data to that which is to be sent to the server.

**Static** method (can be used in navigator too)

```
jQuery("#grid_id").editGridRow("rowid",{editData:{myname:"myvalue"}});
```

Every time when the data is sent to the server this pair will be added to the postdata.

If we want to **dynamically** add data to that sent to the server, we can use something like the following:

```

onclickSubmit : function(eparams) {
    var retarr = {};
    // we can use all the grid methods here
    //to obtain some data
    var sr = jQuery("#grid_id").getGridParam('selrow');
    rowdata = jQuery("#grid_id").getRowData(sr);
    if(rowdata.somevalue=='aa') {
        retarr = {myname:"myvalue"};
    }
    return retarr;
}

```

If the condition is true the pair myname:myvalue will be sent to the server when you click submit.

## Delete Row

With this method we can perform a delete operation at server side.

This method uses colModel and editurl parameters from jqGrid

Calling Convention:

```
jQuery("#grid_id").delGridRow( row_id_s, options );
```

where

- *grid\_id*: the *id* of the parent grid
- *row\_id\_s*: the *id* of the row(s) to delete; can be a single value or list of ids separated by comma
- *options*: an array of *name: value* pairs, including any of the following properties or events.

## Properties

Property	Description	Default
top	the initial top position of confirmation dialog	0
left	the initial left position of confirmation dialog	0
width	the width of confirmation dialog	300
height	the height of confirmation dialog	200
modal	sets dialog in modal mode	false
drag	the dialog is draggable	true
msg	message to display when deleting the row	"Delete selected row(s)"
caption	the caption of the dialog	"Delete Record"
bSubmit	the text of the button when you click to delete	"Delete"
bCancel	the text of the button when you click to close dialog	"Cancel"
url	url where to post data. If set, replaces the editurl	
reloadAfterSubmit	reload grid data after posting	true
delData	an array used to add content to the data posted to the server	empty



## Events

Event	Description	Default
beforeShowForm	fires before showing the form; receives as Parameter the id of the constructed form.	null
afterShowForm	fires after showing the form; receives as Parameter the id of the constructed form.	null
beforeSubmit	fires before the data is submitted to the server. Parameter is of type id=value1,value2,... When called the event can return array where the first parameter can be true or false and the second is the message of the error if any. Example: [false,"The value is not valid"]	null
onclickSubmit	fires after the submit button is clicked and the postdata is constructed. Parameters passed to this event is a options array of the method. The event should return array of type {} which then replaces the data of <i>delData</i> . See example below.	null
afterSubmit	fires after response has been received from server. Typically used to display status from server (e.g., the data is successfully deleted or deletion cancelled for referential integrity reasons). Receives as parameters the data returned from the request and an array of the posted values of type id=value1,value2	null

## Notes & Examples

If the top and left off-set properties are not set, the dialog appears at the upper left corner of the grid. Top and left off-sets are in relation to the viewing window, not the grid, so {top:10, left:10} will be indented slightly from the window, and may be nowhere near the grid.

We can set common options for all delete dialogs using the \$.jgrid.del object with \$.extend().

The default values are:

```
jQuery.jgrid.del = {
  caption: "Delete",
  msg: "Delete selected record(s)?",
  bSubmit: "Delete",
  bCancel: "Cancel",
  processData: "Processing..."
};
```

Using *onclickSubmit*:

This feature can be used to add data to that which is to be sent to the server.

**Static** method (can be used in navigator too)

```
jQuery("#grid_id").delGridRow("rowid",{delData:{myname:"myvalue"}});
```

Every time when the data is sent to the server this pair will be added to the postdata.

If we want to **dynamically** add data to that sent to the server, we can use something like the following:

```
onclickSubmit : function(eparams) {  
    var retarr = {};  
    // we can use all the grid methods here  
    //to obtain some data  
    var sr = jQuery("#grid_id").getGridParam('selrow');  
    rowdata = jQuery("#grid_id").getRowData(sr);  
    if(rowdata.somevalue=='aa') {  
        retarr = {myname:"myvalue"};  
    }  
    return retarr;  
}
```

If the condition is true the pair myname:myvalue will be sent to the server when you click submit.

## Inline Editing

Inline editing is a quick way to update database information by supporting editing directly in the row of the grid, as shown in this example:

Input Types				
ID Number	Name	Stock	Ship via	Notes
12345	Desktop Computer	Yes	FedEx	note
23456	Laptop	Yes	InTime	Long text
34567	LCD Monitor	Yes	TNT	note3
45678	Speakers	No	ARAMEX	note
56789	Laser Printer	<input checked="" type="checkbox"/>	FedEx	note2
67890	Play Station	No	InTime	note3
76543	Mobile Telephone	Yes	TNT	note
87654	Server	Yes	ARAMEX	note2
98765	Matrix Printer	No	FedEx	note3

To do this we need to enable this feature. For more information refer to [Installation](#).

This feature simply modifies some of the properties, and uses the methods, of the parent grid.

## Properties

By default, columns are not editable so to use this option, we must add to the settings in the *colModel* for the columns we wish to be able to edit (it is not necessary to make all columns editable). There are four settings to consider:

- `editable`
- `edittype`
- `editoptions`, and
- `editrules`

For example,

```
{name:'stock', index:'stock', width:60,
  editable:true,
  edittype:"checkbox",
  editoptions: {value:"Yes:No"}},
```

***editable***: defines if this field is editable (or not). Default is false. To make a field editable, set this to true: `editable:true`

***edittype***: defines the type of of the editable field. Possible values: 'text', 'textarea', 'select', 'checkbox'. The default value is 'text'.

*editoptions*: an array of allowed options (attributes) for the chosen *edittype*

Details of *edittype* and *editoptions* appear below.

If we are going to save the results of the edit into a server-side database, we also need to specify the server-side method that is going to accept the edited data. This is set as a grid option: *editurl*

## What jqGrid does *edittype* is 'text'

When *edittype* is 'text', jqGrid constructs a input tag of type text:

```
<input type="text" ...../>
```

In *editoptions* we can set all the possible attributes for this field. For example,  
`editoptions: {size:10, maxlength: 15}`

will cause jqGrid to construct the following input

```
<input type="text" size="10" maxlength="15" />
```

In addition to the these settings, jqGrid adds the following:

- *id*: the id that is added to this element is a combination of the id of the row and the name - rowid\_name
- *name*: the name from colModel
- *value*: the contents of the cell.

Consider the example above and suppose that the *id* of the row is 12 and *name* is invdate then the result is:

```
<input type="text" id="12_invdate" name="invdate" size="10" maxlength="15" value="someval"/>
```

## *edittype* is 'textarea'

When *edittype* is 'textarea', jqGrid constructs a input tag of type textarea

```
<input type="textarea" .../>
```

In *editoptions* we can add additional attributes to this type. Typically, these govern the size of the box:  
`editoptions: {rows:"2",cols:"10"}`

To these attributes jqGrid adds *id* and *name* attributes just as for text type.

## *edittype* is 'checkbox'

When *edittype* is 'checkbox', jqGrid constructs a input tag as follows:

```
<input type="checkbox" .../>
```

*editoptions* is used to define the checked and unchecked values. The first value is checked. For example  
`editoptions: { value:"Yes:No" }`

defines a checkbox in which when the value is Yes the checkbox becomes checked, otherwise unchecked. This value is passed as parameter to the editurl.

To these attributes jqGrid adds *id* and *name* attributes just as for text type.

### ***edittype* is 'select'**

When *edittype* is 'select', jqGrid constructs a input tag as follows:

```
<select>
<option value='val1'> Value1 </option>
<option value='val2'> Value2 </option>
...
<option value='valn'> ValueN </option>
</select>
```

To construct this element, *editoptions* must contain an array with value:label pairs. In every pair, the value is separated from the label with a colon (:); pairs are separated with a semi-colon (;). For example,

```
editoption: { value: "FE:FedEx; IN:InTime; TN:TNT" }
```

will construct

```
<select>
<option value='FE'> FedEx </option>
<option value='IN'> InTime </option>
<option value='TN'> TNT </option>
</select>
```

To this element, jqGrid adds the *id* and *name* attributes as above.

Multiple selection of options in a select box is also possible:

```
editoptions: {multiple:true, ... }
```

## **Methods**

For inline editing, we have three additional methods (of the Grid API) available:

- editRow
- saveRow
- restoreRow

These methods can be called, of course, only on an already-constructed grid, from a button click or from an event of the grid itself:

```
onSelectRow: function(id){
    if(id && id!==lastSel){
        jQuery('#tbleditable').restoreRow(lastSel);
        lastSel=id;
    }
    jQuery('#tbleditable').editRow(id, true);
},
```

In this example, if another was row being edited and has not yet been saved, the original data will be restored and the row "closed" before "opening" the currently-selected row for editing (where *lastSel* was previously defined as a var).

## editRow

Calling convention:

```
editRow(rowid, keys, oneditfunc, succesfunc, url, extraparam, aftersavefunc, onerrorfunc)
```

where

- *rowid*: the id of the row to edit
- *keys*: when set to `true` we can use [Enter] key to save the row and [Esc] to cancel editing.
- *oneditfunc*: fires after successfully accessing the row for editing, prior to allowing user access to the input fields. The row's *id* is passed as a parameter to this function.

If *keys* is `true`, then the remaining settings -- *succesfunc*, *url*, *extraparam*, *aftersavefunc* and *onerrorfunc* -- are passed as parameters to the *saveRow* method when the [Enter] key is pressed (*saveRow* does not need to be defined as jqGrid calls it automatically). For more information see *saveRow* method below.

When this method is called on particular row, jqGrid reads the data for the editable fields and constructs the appropriate elements defined in *edittype* and *editoption*.

## saveRow

Calling convention:

```
saveRow (rowid, succesfunc, url, extraparam, aftersavefunc, onerrorfunc)
```

where

- *rowid*: the id of the row to save
- *succesfunc*: if defined, this function is called immediately after the request is successful. To this function is passed the data returned from the server. Depending on the data from server this function should return true or false.
- *url*: if defined, this parameter replaces the *editurl* parameter from options array.
- *extraparam*: an array of type *name: value*. When set these values are posted along with the other values to the server.
- *aftersavefunc*: if defined, this function is called after the data is saved to the server. Parameters passed to this function are the *rowid* and the result from the request.
- *onerrorfunc*: if defined, this function is called after the data is saved to the server. Parameters passed to this function are the *rowid* and the result from the request.

When this method is called, the data from the particular row is POSTED to the server in format *name: value*, where the *name* is a name from *colModel* and the *value* is the new value. jqGrid also adds, to the posted data, the pair *id: rowid*.

## restoreRow

Calling convention:

```
restoreRow(rowid)
```

where

- *rowid* is the row to restore

This method restores the data to original values before the editing of the row.

## Example

```

<html>
<head>
<script type="text/javascript">
jQuery(document).ready(function(){
    var lastsel2
    jQuery("#rowed5").jqGrid({
        datatype: "local",
        height: 250,
        colNames:['ID Number','Name', 'Stock', 'Ship via','Notes'],
        colModel:[
            {name:'id',index:'id', width:90, sorttype:"int", editable: true},
            {name:'name',index:'name', width:150,editable: true,editoptions:{size:"20",maxlength:"30"}},
            {name:'stock',index:'stock', width:60, editable: true,edittype:"checkbox",editoptions:
{value:"Yes:No"}},
            {name:'ship',index:'ship', width:90, editable: true, edittype:"select",
editoptions:{value:"FE:FedEx;IN:InTime;TN:TNT;AR:ARAMEX"}},
            {name:'note',index:'note', width:200, sortable:false,editable: true,edittype:"textarea",
editoptions:{rows:"2",cols:"10"}}
        ],
        onSelectRow: function(id){
            if(id && id!=lastsel2){
                jQuery('#rowed5').restoreRow(lastsel2);
                jQuery('#rowed5').editRow(id,true);
                lastsel2=id;
            }
        },
        editurl: "server.php",
        caption: "Input Types"
    });
    var mydata2 = [
        {id:"12345",name:"Desktop Computer",note:"note",stock:"Yes",ship:"FedEx"},
        {id:"23456",name:"Laptop",note:"Long text ",stock:"Yes",ship:"InTime"},
        {id:"34567",name:"LCD Monitor",note:"note3",stock:"Yes",ship:"TNT"},
        {id:"45678",name:"Speakers",note:"note",stock:"No",ship:"ARAMEX"},
        {id:"56789",name:"Laser Printer",note:"note2",stock:"Yes",ship:"FedEx"},
        {id:"67890",name:"Play Station",note:"note3",stock:"No", ship:"FedEx"},
        {id:"76543",name:"Mobile Telephone",note:"note",stock:"Yes",ship:"ARAMEX"},
        {id:"87654",name:"Server",note:"note2",stock:"Yes",ship:"TNT"},
        {id:"98765",name:"Matrix Printer",note:"note3",stock:"No", ship:"FedEx"}
    ];
    for(var i=0;i<mydata2.length;i++){
        jQuery("#rowed5").addRowData(i,mydata2[i]);
    }
};
</script>
</head>
<body>
<table id="rowed5" class="scroll"></table>
</body>
</html>

```

Will produce the following:

Input Types				
ID Number	Name	Stock	Ship via	Notes
12345	Desktop Computer	Yes	FedEx	note
23456	Laptop	Yes	InTime	Long text
34567	LCD Monitor	Yes	TNT	note3
45678	Speakers	No	ARAMEX	note
56789	Laser Printer	<input checked="" type="checkbox"/>	FedEx	note2
67890	Play Station	No	InTime	note3
76543	Mobile Telephone	Yes	TNT	note
87654	Server	Yes	ARAMEX	note2
98765	Matrix Printer	No	FedEx	note3



## Cell Editing

cellEditing supports key navigation and editing individual cells, with the following behaviour:

- When we click on a cell that is not editable, the cell is selected and we can use the up, down, left and right keys to navigate through the cells.
- If we move to a cell that is editable, we can press [Enter] to edit the cell. The cell is saved when we press [Enter] again, when we press [Tab], or when we click on another cell. If we press [ESC], the cell is not saved. When editing a cell, the cursor keys move only within the cell.
- When the cell content is changed, the cell becomes 'dirty' and there is a marker at the upper left corner of the cell.
- When we click on cell that is editable, then we go directly into edit mode.

To enable this feature, ensure grid.celledit.js is loaded. For more information refer to [Installation](#)

This feature uses the following [properties](#), [events](#) and [methods](#) of the parent grid.

### Properties

Property	Type	Description	Default
<a href="#">cellEdit</a>	boolean	Enables (disables) cell editing. When this option is set to true, <a href="#">Multi-select</a> is disabled, <i>onSelectRow</i> can not be used, and hovering is disabled (when mouseover on the rows).	true
cellsubmit	string	Determines where the contents of the cell are saved: 'remote' or 'clientArray'. <ul style="list-style-type: none"> <li>• If 'remote' the content is immediately saved to the server using the <i>cellurl</i> property, via ajax. The rowid and the cell content are added to the url as <i>name:value</i> pairs. For example, if we save the cell named <i>mycell</i>, {id: rowid, mycell: cellvalue} is added to the url.</li> <li>• If 'clientArray', no ajax request is made and the content of the changed cell can be obtained via the method <i>getChangedCells</i></li> </ul>	'remote'
cellurl	string	the url where the cell is to be saved	null

We can use all the available options in *colModel* that are used for [inline](#) and [form editing](#), including clientSide validation e.g., [editrules:{number:true...}](#)

### Events

Many of the following events use the parameters defined here:

- rowid - is the rowid
- cellname is the name of the cell (name from *colModel*)
- value - the value of the cell
- iRow - the index of the row (do not mix with rowid)
- iCol - the index of the column

Event	Parameters	Description
afterEditCell	rowid, cellname, value, iRow, iCol	applies only to a cell that is editable; this event fires after the cell is edited.
afterSaveCell	rowid, cellname, value, iRow, iCol	applies only to a cell that is editable; this event fires after the cell has been successfully saved. This is the ideal place to change other content.
afterSubmitCell	serverresponse, rowid, cellname, value, iRow, iCol	applies only to a cell that is editable; this event Fires after the cell and other data is posted to the server Should return array of type [success(boolean),message] when return [true,""] all is ok and the celcontent is saved [false,"Error message"] the a dialog apper with the "Error message" and the cell content is not saved. serverresponse is the response from the server. To use this we should apply serverresponse.responseText to obtain the text message from the server.
beforeEditCell	rowid, cellname, value, iRow, iCol	applies only to a cell that is editable; this event fires before editing the cell.
beforeSaveCell	rowid, cellname, value, iRow, iCol	applies only to a cell that is editable; this event fires before validation of values if any. This event can return the new value which value can replace the edited one beforeSaveCell : <pre>function(rowid,celname,value,iRow,iCol) { if( some_condition ) { return "new value"; } }</pre> The value will be replaced with "new value"
beforeSubmitCell	rowid, cellname, value ,iRow, iCol	applies only to a cell that is editable; this event fires before submit the cell content to the server (valid only if cellsubmit : 'remote'). Can return new array that will be posted to the server. beforeSubmitCell : <pre>function(rowid,celname,value,iRow,iCol) { if( some_condition ) { return {name1:value1,name2:value2} } else { return {} } }</pre> The returned array will be added to the cellurl posted data.
errorCell	serverresponse, status	fires if there is a server error; serverresponse is the response from the server. To use this we should apply serverresponse.responseText to obtain the text message from the server. status is the status of the error. If not set a modal dialog apper.
onSelectCell	rowid, celname, value, iRow, iCol	applies only to cells that are not editable; fires after the cell is selected

## Methods

Method	Parameters	Description
editCell	iRow, iCol	edit a cell with the row index iRow( do not mix with rowid) in index column iCol
getChangedCells	<i>method</i>	Returns an array of the changed cells depending on method (string, default 'all'). When 'all' this method returns all the changed rows; when 'dirty' returns only the changed cells with the id of the row
restoreCell	iRow, iCol	restores the edited content of cell with the row index iRow( do not

		mix with rowid) in index column iCol
saveCell	iRow, iCol	saves the cell with the row index iRow( do not mix with rowid) in index column iCol

## Multi-Selecting Items

Multi-selection is a way to select more than one row in grid so that some action can be performed on all of them at once. jqGrid allows more than one way of multi-selection.

There are two settings to consider:

- `multiselect`
- `multikey`

### Simple Multi-Select

The default value of *multiselect* is `false`, which disables this feature. When `multiselect` is set to `true` an additional column is added at left side of the grid. This adds 28px to the grid's width. When the grid is constructed the content of this column is filled with a check box element. When we select a row the check box's state becomes checked (the row can be clicked anywhere on the row, not just in the checkbox). When we select another row the previous row does not change its state. When we click on a row that is selected, the state becomes unchecked and the row is unselected.

Multi Select Example							
<input type="checkbox"/>	Inv No	Date	Client	Amount	Tax	Total	Notes
<input type="checkbox"/>	13	2007-10-06	Client 3	1000.00	0.00	1000.00	
<input type="checkbox"/>	12	2007-10-06	Client 2	700.00	140.00	840.00	
<input checked="" type="checkbox"/>	11	2007-10-06	Client 1	600.00	120.00	720.00	
<input type="checkbox"/>	10	2007-10-06	Client 2	100.00	20.00	120.00	
<input checked="" type="checkbox"/>	9	2007-10-06	Client 1	200.00	40.00	240.00	
<input type="checkbox"/>	8	2007-10-06	Client 3	200.00	0.00	200.00	
<input type="checkbox"/>	7	2007-10-05	Client 2	120.00	12.00	134.00	

1 / 2 10 13 Rows

As seen in the figure above, in the header layer we have a common check box. When we check this box all the rows will be selected. When we uncheck this box, all the rows are unchecked.

### Multi-Select With Key

Another feature of jqGrid is that we can define a key that must be pressed in order to make a multiselection. In other words, the selection is done only when the user holds down the defined key. To achieve this we should use *multikey* option in the options array. For example,

```
multikey: 'altKey'
```

In this case the multiselection is done only when the user holds down the "Alt" key. The possible values are: 'shiftKey', 'altKey', and 'ctrlKey'.

## Identifying the Selected Rows

To obtain selected rows we can use *getGridParam('selarrow')* method. Using our example we can write this

```
jQuery("#grid_id").getGridParam('selarrow');
```

which will return an array with the selected rows (i.e., ["11","9"] from the figure above). The values in array are the id's of the selected rows.

To retrieve a single row, the last one selected, we can use *getGridParam(selrow)*

```
jQuery("#grid_id").getGridParam('selrow');
```

This returns the id of the last selected row as a scalar value.

## Dynamically Enabling and Disabling Multi-select

To dynamically disable multiselect:

```
jQuery("#grid_id").setGridParam({multiselect:false}).hideCol('cb');
```

to enable multi-select:

```
jQuery("#grid_id").setGridParam({multiselect:true}).showCol('cb');
```

Where

- *grid\_id* is to be replaced by the name of your grid, but
- *cb* is a keyword, not to be replaced

To make this work, *multiselect* must be initially set to `true` in the jqGrid properties; only then can we enable and disable it using the code above.

## Subgrids

There are times when we need to be able to easily display (or edit) records that are the children of the records in the grid and, of course, we would want to show only those records that are related to the selected record in the grid, not all of them at once.

jqGrid offers three ways of handling child records:

1. a subGrid
2. a grid as a subGrid, and
3. Master/Detail Grids

### A Subgrid

Using a subGrid is the easiest method for displaying data from child records, as shown in this sample:

Subgrid Example							
	Inv No	Date	Client	Amount	Tax	Total	Notes
+	13	2007-10-06	Client 3	1000.00	0.00	1000.00	
-	12	2007-10-06	Client 2	700.00	140.00	840.00	
...	No	Item		Qty	Unit	Line Total	
	1	item 4		1.00	300.00	300.00	
	2	item 2		1.00	400.00	400.00	
+	11	2007-10-06	Client 1	600.00	120.00	720.00	
+	10	2007-10-06	Client 2	100.00	20.00	120.00	
+	9	2007-10-06	Client 1	200.00	40.00	240.00	
+	8	2007-10-06	Client 3	200.00	0.00	200.00	

1 / 2 10 13 Rows

Clicking on the plus or minus icons beside each "parent" record reveals or hides the associated "child" records.

But this approach does have limitations: data in a subgrid cannot be sorted, or edited, and the alignment of the data in the columns is always "left". If you need more power than what this offers, then consider using [a grid as a subgrid](#) or, even, [Master/Detail grids](#). But for a quick way to display details, follow the method described here.

### Defining a SubGrid

When defining a subgrid, three options need to be considered.

- subGrid
- subGridUrl
- subGridModel

**subGrid**

This is a boolean value which enables or disables the subgrid. If the grid is enabled a additional column at left side is added to the main grid. This column contains a 'plus' image which indicate that the user can click on it to expand the row. By default all rows are collapsed.

Default value for this option is `false`. To enable a subgrid set it to `true`.

**subGridUrl**

This option points to the file from which we get the data for the subgrid. jqGrid adds the id of the row to this url as parameter. If there is a need to pass additional parameters, use the `params` option in *subGridModel* (see below)

**subGridModel**

An array in which we describe the column model for the subgrid data. The syntax is

```
subGridModel : [
{ name : ['name_1','name_2',...,'name_n'],
width : [width_1,width_2,...,width_n] ,
params : [param_1,...,param_n]}
]
```

where

- *name*: an array containing the labels of the columns of the subgrid.
- *width*: an array containing the width of the columns. This array should have the same length as in name array.
- *params*: an array in which we can add a name from main grid's *colModel* to pass as additional parameter to the subGridUrl.

The subgrid model is described in `xmlReader` and `jsonReader`. For xml data, the mapping would follow this example

```
xmlReader : {
root: "rows",
row: "row",
page: "rows>page",
total: "rows>total",
records : "rows>records",
repeatitems: true,
cell: "cell",
id: "[id]",
subgrid: {root: "rows", row: "row", repeatitems: true, cell: "cell"}
}
```

and for json mapping, like the following:

```
jsonReader : {
root: "rows",
page: "page",
total: "total",
records: "records",
repeatitems: true,
cell: "cell",
id: "id",
subgrid: {root: "rows", repeatitems: true, cell: "cell"}
}
```

The mapping rules are the same as those in the basic grid.

For more information see the discussion of xml and JSON in [Data Types](#).

## An Example

Continuing to use the example from the tutorial, let's suppose that there is a need to display the line items for each invoice in a subgrid. The Java script code should look like this.

```
<script type="text/javascript">
jQuery(document).ready(function(){
  jQuery("#list").jqGrid({
    url:'example.php',
    datatype: 'xml',
    colNames:['Inv No', 'Date', 'Amount', 'Tax', 'Total', 'Notes'],
    colModel :[
      {name:'invid', index: 'invid', width: 55},
      {name:'invdate', index: 'invdate', width: 90},
      {name:'amount', index: 'amount', width: 80, align: 'right'},
      {name:'tax', index: 'tax', width: 80, align: 'right'},
      {name:'total', index: 'total', width: 80, align: 'right'},
      {name:'note', index: 'note', width: 150, sortable: false} ],
    pager: jQuery('#pager'),
    rowNum:10,
    rowList:[10,20,30],
    sortname: 'id',
    sortorder: "desc",
    viewrecords: true,
    imgpath: 'themes/basic/images',
    caption: "My first grid",
    subGrid: true,
    subGridUrl : "subgrid.php",
    subGridModel [ {
      name: ['No', 'Item', 'Qty', 'Unit', 'Line Total'],
      width : [55, 200, 80, 80, 80],
      params: ['invdate'] }
    ]
  });
});
</script>
```

The next step is to configure the subgrid.php file. The example is in PHP and MySQL

```
<?php
// get the id passed automatically to the request
$id = $_GET['id'];
// get the invoice data passed to this request via params array in
//subGridModel. We do not use it here - this is only demonstration
$date_inv = $_GET['invdate'];

// connect to the database
$db = mysql_connect($dbhost, $dbuser, $dbpassword) or die("Connection Error: " . mysql_error());

mysql_select_db($database) or die("Error connecting to db.");

// construct the query
$sql = "SELECT num, item, qty, unit FROM invlines WHERE id=".$id." ORDER BY item";
$result = mysql_query( $sql ) or die("Couldn't execute query." . mysql_error());
```



```
// set the header information
if ( strstr($_SERVER["HTTP_ACCEPT"],"application/xhtml+xml") ) {
    header("Content-type: application/xhtml+xml;charset=utf-8");
} else {
    header("Content-type: text/xml;charset=utf-8");
}

echo "<?xml version='1.0' encoding='utf-8'?>";
echo "<rows>";
// be sure to put text data in CDATA
while($row = mysql_fetch_array($result,MYSQL_ASSOC)) {
    echo "<row>";
    echo "<cell>". $row[num]. "</cell>";
    echo "<cell><![CDATA[" . $row[item]. "]]></cell>";
    echo "<cell>". $row[qty]. "</cell>";
    echo "<cell>". $row[unit]. "</cell>";
    echo "<cell>". number_format($row[qty]*$row[unit],2,'.',' '). "</cell>";
    echo "</row>";
}
echo "</rows>";

?>
```

After this, the grid will look like the example at the top of this page.

### Dynamically Enabling or Disabling a Subgrid

A subGrid can be enabled (or disabled) dynamically (to respond to changes in the data in the main grid, for example).

To disable a subgrid:

```
$("#grid_id").hideCol('subgrid');
```

to enable a subgrid:

```
$("#grid_id").showCol('subgrid');
```

Where

- *grid\_id* is to be replaced by the name of your grid, but
- *subgrid* is a keyword, not to be replaced

To make this work, *subGrid* must be initially set to `true` in the jqGrid properties; only then can we enable and disable it using the code above.

## A Grid as Subgrid

In this alternative to a subGrid, we use the subGrid functions of the main grid to create not a subGrid, but another grid, with all of the power and capacity of the main grid but appearing, as before, under the "parent" record with the same ability to reveal and hide it.

Grid as Subgrid							
	Inv No	Date	Client	Amount	Tax	Total	Notes
+	13	2007-10-06	Client 3	1000.00	0.00	1000.00	
-	12	2007-10-06	Client 2	700.00	140.00	840.00	
.....	No	Item	Qty	Unit	Line Total		
	1	item 4	1.00	300.00	300.00		
	2	item 2	1.00	400.00	400.00		
+	11	2007-10-06	Client 1	600.00	120.00	720.00	
+	10	2007-10-06	Client 2	100.00	20.00	120.00	
+	9	2007-10-06	Client 1	200.00	40.00	240.00	

1 / 2 8 13 Rows

Note that in this sample, the focus is on the second "child" row, something that cannot be done in a true subGrid, and that the numeric columns are now right-aligned.

## Defining a Grid as a subGrid

We use two events described in options array: *subGridRowExpanded* and *subGridRowColapsed* [note the unconventional spelling].

When these events are defined the population of the data in the subgrid is not executed. This way we can use the *subGridUrl* to get our custom data and put it into the expanded row. Having this it is easy to construct another grid which will act as subgrid.

Here is this technique. We again use our example.

```
<script type="text/javascript">
jQuery("#listsg11").jqGrid({
  url:'example.php',
  datatype: "xml",
  height: 200,
  colNames:['Inv No','Date', 'Amount','Tax','Total','Notes'],
  colModel :[
    {name:'invid',index:'invid', width:55},
    {name:'invdate',index:'invdate', width:90},
    {name:'amount',index:'amount', width:80, align:'right'},
    {name:'tax',index:'tax', width:80, align:'right'},
    {name:'total',index:'total', width:80,align:'right'},
    {name:'note',index:'note', width:150, sortable:false} ],
  rowNum:8,
  rowList:[8,10,20,30],
  imgpath: gridimgpath,
  pager: jQuery("#pager"),
  sortname: 'id',
  viewrecords: true,
  sortorder: "desc",
  subGrid: true,
  subGridRowExpanded: function(subgrid id, row id) {
    // we pass two parameters
    // subgrid_id is a id of the div tag created within a table
    // the row_id is the id of the row
    // If we want to pass additional parameters to the url we can use
    // the method getRowData(row_id) - which returns associative array in type name-value
    // here we can easy construct the following
```

```

var subgrid_table_id;
subgrid_table_id = subgrid_id+"_t";
jQuery("#"+subgrid_id).html("<table id='"+subgrid_table_id+"' class='scroll'></table>");
jQuery("#"+subgrid_table_id).jqGrid({
    url:"subgrid.php?q=2&id="+row_id,
    datatype: "xml",
    colNames: ['No','Item','Qty','Unit','Total'],
    colModel: [
        {name:"num",index:"num",width:80,key:true},
        {name:"item",index:"item",width:130},
        {name:"qty",index:"qty",width:80,align:"right"},
        {name:"unit",index:"unit",width:80,align:"right"},
        {name:"total",index:"total",width:100,align:"right",sortable:false}
    ],
    height: 100%,
    rowNum:20,
    imgpath: gridimgpath,
    sortname: 'num',
    sortorder: "asc"
});

```

Note that subGridRowColapsed is not defined. This is true because when the row is collapsed the contents of the div tag are removed.

## Master/Detail Grids

A third option is to present two separate grids and synchronize the contents of the second (the 'Detail' grid) with the selected row of the 'Master' grid.

Invoice Header						
Inv No	Date	Client	Amount	Tax	Total	Notes
13	2007-10-06	Client 3	1000.00	0.00	1000.00	
12	2007-10-06	Client 2	700.00	140.00	840.00	
11	2007-10-06	Client 1	600.00	120.00	720.00	
10	2007-10-06	Client 2	100.00	20.00	120.00	
9	2007-10-06	Client 1	200.00	40.00	240.00	
8	2007-10-06	Client 3	200.00	0.00	200.00	
7	2007-10-05	Client 2	120.00	12.00	134.00	
13 Rows						

Invoice Detail: 10					
<input type="checkbox"/>	No	Item	Qty	Unit	Line Total
<input type="checkbox"/>	2	item 4	1.00	70.00	70.00
<input type="checkbox"/>	1	item 5	3.00	10.00	30.00
2 Rows					

Again, the Detail grid is a full-feature grid: you can do whatever you want with it in terms of configuration and function.

## Defining Master/Details Grids

First, define two grids in your HTML; in our example, Invoice Header and Invoice Detail (the ids used here are not significant, you can call them whatever you want):

```
<table id="master" class="scroll"></table>
<div id="pagermaster" class="scroll" style="text-align:center;"></div>
<table id="detail" class="scroll"></table>
<div id="pagerdetail" class="scroll" style="text-align:center;"></div>
```

Then, in the definition of your Master grid, add the following, which says that whenever a row is selected in the Master grid, the Details grid is synchronized.

```
onSelectRow: function(id) {
  if(id == null) {
    id=0;
    if(jQuery("#details").getRecords()>0) {
jQuery("#details").setGridParam({url:"subgrid.php?q=1&id="+id,page:1}).trigger("reloadGrid");
    }
  } else {
    jQuery("#details").setGridParam(url:"subgrid.php?q=1&id="+id,page:1).trigger("reloadGrid");
  }
}
```

Notice this passes the *id* of the Master row to be used as a parameter in the url to retrieve the Details data. The value of the *setGridParam({url: subgrid.php?q=1... })* property, of course, will need to be changed to meet your needs.

Notice also how *setGridParam* is used to set two parameters of the grid at once (the *url* and the *page* number) and how triggering the grid reload is chained.

Now these grids can be defined and operated independently while still being co-ordinated.

## Tree Grid

To enable this feature, ensure grid.treegrid.js is loaded. For more information refer to [Installation](#)

Currently tree grid supports only the Nested Set model. Good articles describing this can be found here:

- <http://dev.mysql.com/tech-resources/articles/hierarchical-data.html>
- <http://www.sitepoint.com/article/hierarchical-data-database/>

This feature uses the following [properties](#), [events](#) and [methods](#) of the parent grid.

### Properties

Property	Type	Description	Default
treeGrid	boolean	Enables (disables) tree grid. When this option is set to true, the following features are disabled: <ul style="list-style-type: none"> <li>• subGrid</li> <li>• multiselect</li> <li>• pager elements -- buttons, etc. -- (but not the pager itself)</li> <li>• altRows</li> </ul>	true
treeReader	array	Array which extends the colModel defined in the basic grid. The fields described here are added to end of the colModel array and are hidden. This means that the data returned from the server should have values for these fields. For a full description of all valid values see <a href="#">treeReader properties</a> .	empty array

### Methods

All methods are public and can be used

In the methods below, *record* means the current record, which can be obtained via the *getInd* method

Method	Parameters	Description
collapseNode	record	collapse the node at specified record
collapseRow	record	collapses the current row
delTreeNode	rowid	Where rowid is the id of the row. Deletes the specified node and all child nodes of that node
expandNode	record	expand the node at the specified record
expandRow	record	expands the current row
getInd	object, rowid, rc	where object is the current set of grid rows (returned from <code>jQuery("grid_id").rows()</code> ; rowid is the id of the row; and rc should be

		set to true
getNodeAncestors	record	returns the ancestors of the specified record
getNodeDepth	record	returns the depth of the specified record
getNodeParent	record	returns the parent node of the specified record
getNodeChildren	record	returns the child nodes of the specified record; returns empty array if none
getRootNodes		returns an array of the current root nodes
isNodeLoaded	record	returns true if the node is already loaded
isVisibleNode	record	returns true or false if the node is visible or not
setTreeRow	rowid, data	this method is just like setRowData, but can be used when treeGrid is enabled. When we use tree grid we should use <i>setTreeRow</i> instead of <i>setRowData</i> (this will be improved in the future releases - autodetecting the mode and use only one method - setRowData)
SortTree	direction	direction is 'asc' or 'desc'; sorts the tree with the currently set sortname (sortname is from grid option)

## CSS Requirements

Treegrid requires some additions to the css. The current release of jqGrid includes these in the accompanying css files. If you are using custom css files, you will need to add these:

```
.tree-wrap
{
float: left;
position: relative;
height: 18px;
white-space: nowrap;
overflow: hidden;
}
.tree-minus
{
position: absolute;
height: 18px;
width: 16px;
overflow: hidden;
background: url(images/tree_minus.gif) no-repeat;
}
.tree-plus
{
position: absolute;
height: 18px;
width: 16px;
overflow: hidden;
background: url(images/tree_plus.gif) no-repeat;
}
.tree-leaf
{
position: absolute;
height: 18px;
width: 16px;
overflow: hidden;
background: url(images/tree_leaf.gif) no-repeat;
}
.treeclick
{
cursor: pointer;
}
```

## Cautions/Limitations

1. Currently adding nodes with `addRowData` is not supported.
2. Currently it is not recommended to combine inline editing and form editing with treegrid, or the expanded column will not be editable.
3. Adding nodes is currently not supported.
4. When we initialize the grid and the data is read, the datatype is automatically set to local. This is required because treegrid supports autoloading tree nodes. This means that, for speed or efficiency, you can load the data only for the root level first and load the data for a particular child node only when the operator clicks to expand that node. The grid will determine that there is no data and try to load the node from the server, but in this case the data that is sent to the server has to have additional parameters. Setting datatype to local permits intervening before the request is made to build the request correctly.

In this case, `postData` array would like this:

```
postData:{nodeid:rc.id,n_left:rc.lft,n_right:rc.rgt,n_level:rc.level}
```

In other words you can grab these values and do something like this to load the child nodes

```
SELECT category_name, level, lft, rgt FROM categories
WHERE lft > n_left AND rgt < n_right AND level = n_level +1
ORDER BY lft;
```

Once all the nodes are loaded we do not make any other request to the server

## Known bugs

1. In FF2 and IE when trying to resize the expandable column the tree images are shown - i.e - wrapping does not resize.

## Planned additions

1. `expandAll` and `collapseAll` methods
2. autoclosing tree nodes - when clicking on a node all other nodes at this level should be collapsed automatically and only the one clicked will be expanded
3. `addNode`, `removeNode` methods

## treeReader Properties

The `treeReader` property adds columns to the `colModel` property of the basic grid.

Syntax:

```
treeReader: [
  {property1:'value1'},
  {property2:'value2'},
  {...},
  ...
]
```

These properties, in alphabetic sequence, are the following:

Property	Type	Description	Default
expanded_field	string	true or false tells us if the tree at this level should be expanded when read from grid. If this field is true, child nodes should also be sent to the grid.	false
leaf_field	string	true or false	
left_field	numeric		
level_field	numeric		
right_field	numeric		

It is important to note here that the data returned from the server should be sorted in an appropriate way; for example

```
SELECT category_name, level, lft, rgt FROM categories ORDER BY lft;
```

*leaf\_field* is easy in a Nested set model since

```
if( rgt == lft+1 ) isLeaf = true; else isLeaf = false;
```



## User Modules

Tony, the developer of jqGrid, welcomes contributions from the user community to enhance the functions of jqGrid. All will receive acknowledgement here.

### Posting Data

**Author:** Paul Tiseo

**Module name:** grid.posttext.js

**Description:** The main purpose of this module is to manipulate the parameters passed to the to url via an array and to get user-defined data from the response. For user-defined data, please refer to Data Types.

A new option, postData, is added to the option array of the grid. By default this is an empty array. The values of this array are added via \$.extend to the ajax request.

**Installation:** To enable this module you should enable it in jquery.jqGrid.js.

#### Manipulating parameters

To manipulate the values of the array we can use the following methods:

**jQuery("#grid\_id").getPostData()** returns all parameters passed to the grid url. The returned value is array of type name:value.

**jQuery("#grid\_id").setPostData( newdata)** sets a new set of parameters overriding the existing ones.  
newdata should be array of type name:value. Example {myparam:"myvalue"} Note that the page, rowNum, sortorder, sortname parameters are not changed. To change these use setGridParam method.

**jQuery("#grid\_id").appendPostData( newdata)** replaces or appends new parameters to the array.  
newdata should be array of type name;value

**jQuery("#grid\_id").setPostDataItem( Key, Val)** sets new or replaces the value of the existing item in the array. Key is the name and Val is the value of the item.

**jQuery("#grid\_id").getPostDataItem( key)** returns the value of the requested item with name key

**jQuery("#grid\_id").removePostDataItem( key)** deletes a specified item with name = key from the array.

### Show/Hide Columns

**Author:** Piotr Roznicki [roznicki@o2.pl](mailto:roznicki@o2.pl)

**Module name:** modal dialog

**Description:** Display a modal window where the user can select which column to show and hide.

**Installation:** the new release of jquery.jqGrid.js defaults to this module being enabled, so ensure that grid.setcolumns.js and grid.setcolumns-min.js are copied to the appropriate folders. If you do not wish to include this function, make the appropriate change to jquery.jqGrid.js.

### Calling Convention:

```
jQuery("#mybutton").click(function() {
    jQuery("#grid_id").setColumns(params);
});
```

where *params* is an array of name: value pairs, including any of the following:

### Parameters

Property	Description	Default
top	the initial top position of the modal dialog	0
left	the initial left position of the modal dialog	0
width	the width of the modal dialog	200
height	the height of the modal dialog	185
modal	sets dialog in modal mode	false
drag	the dialog is draggable	true
beforeShowForm	a function that fires before showing the modal dialog (parameter is the id of the form)	null
afterShowForm	a function that fires after showing the modal dialog (parameter is the id of the form)	null

**Note:** To prevent showing or hiding columns that the developer does not want to show at all, a new option has been added to *colModel*: *hidedlg* (default false). If set to *true* this column will not appear in the modal dialog.

## Table to jqGrid

**Author:** Peter Romianowski [peter.romianowski@optivo.de](mailto:peter.romianowski@optivo.de)

**Module name:** tbltograd

**Description:** Convert existing html table to grid.

**Installation:** the new release of jquery.jqGrid.js defaults to this module being enabled, so ensure that grid.tbltograd.js and grid.tbltograd-min.js are copied to the appropriate folder. If you do not wish to include this function, make the appropriate change to jquery.jqGrid.js.

### Calling Convention:

```
tableToGrid(selector)
```

where selector(string) can be either the table's class or id

The html table should have the following structure:

```
<table class="mytable"> (or <table id="mytable">)
  <tr>
    <th> header 1 </th>
    <th> header 2 </th>
    ...
  </tr>
  <tbody>
    <tr>
      <td> data 1 </td>
      <td> data 1 </td>
      ...
    </tr>
    <tr>
      <td> data 1 </td>
      <td> data 1 </td>
      ...
    </tr>
    ...
  </tbody>
</table>
```