

# homework\_4\_kanutala\_santosh

*Santosh Kanutala*

*7/1/2018*

**\*\*My Github repository for my assignments can be found at below URL: (<https://github.com/santumagic/compscix-415-2assignments.git>)\*\***

```
library(tidyverse)
library(mdsr)
library(nycflights13)
```

**Section 5.6.7: #2, #4 and #6 only. Extra Credit: Do #5**

## QUESTION 2:

```
# First lets find the not cancelled flights.
not_cancelled <- flights %>%
  filter(!is.na(dep_delay), !is.na(arr_delay))

# given code for not_cancelled %>% count(dest)
not_cancelled %>%
  count(dest)
```

```
## # A tibble: 104 x 2
##   dest      n
##   <chr> <int>
## 1 ABQ    254
## 2 ACK    264
## 3 ALB    418
## 4 ANC      8
## 5 ATL   16837
## 6 AUS    2411
## 7 AVL    261
## 8 BDL    412
## 9 BGR    358
## 10 BHM    269
## # ... with 94 more rows
```

```
# new code for not_cancelled %>% count(dest) by group by and summarise
not_cancelled %>%
  group_by(dest) %>%
  summarise(n = n())
```

```
## # A tibble: 104 x 2
##   dest      n
##   <chr> <int>
## 1 ABQ    254
## 2 ACK    264
## 3 ALB    418
## 4 ANC      8
```

```
## 5 ATL 16837
## 6 AUS 2411
## 7 AVL 261
## 8 BDL 412
## 9 BGR 358
## 10 BHM 269
## # ... with 94 more rows
```

```
# given code for not_cancelled %>% count(tailnum, wt = distance)
not_cancelled %>%
  count(tailnum, wt = distance)
```

```
## # A tibble: 4,037 x 2
##   tailnum      n
##   <chr>    <dbl>
## 1 D942DN    3418
## 2 NOEGMQ 239143
## 3 N10156 109664
## 4 N102UW  25722
## 5 N103US  24619
## 6 N104UW  24616
## 7 N10575 139903
## 8 N105UW  23618
## 9 N107US  21677
## 10 N108UW  32070
## # ... with 4,027 more rows
```

```
# new code for not_cancelled %>% count(tailnum, wt = distance) group by and summarise
not_cancelled %>%
  group_by(tailnum) %>%
  summarize(n = sum(distance, na.rm = TRUE))
```

```
## # A tibble: 4,037 x 2
##   tailnum      n
##   <chr>    <dbl>
## 1 D942DN    3418
## 2 NOEGMQ 239143
## 3 N10156 109664
## 4 N102UW  25722
## 5 N103US  24619
## 6 N104UW  24616
## 7 N10575 139903
## 8 N105UW  23618
## 9 N107US  21677
## 10 N108UW  32070
## # ... with 4,027 more rows
```

#### QUESTION 4:

```
# number of cancelled flights per day
(cancelled_flights <- flights %>%
  filter(is.na(dep_time)) %>%
  count(day))
```


```
## # A tibble: 31 x 2
```

```
##      day      n
##    <int> <int>
##  1      1    246
##  2      2    250
##  3      3    109
##  4      4     82
##  5      5    226
##  6      6    296
##  7      7    318
##  8      8    921
##  9      9    593
## 10     10    535
## # ... with 21 more rows

# proportion of day cancelled flights vs aerage delays
(cancelled_flights <- flights %>%
  group_by(day) %>%
  summarize(prop_cancelled = sum(is.na(dep_time)) / n(),
            avg_delay = mean(dep_time, na.rm = TRUE)))
```

```
## # A tibble: 31 x 3
##       day prop_cancelled avg_delay
##   <int>         <dbl>     <dbl>
## 1     1           0.0223    1352.
## 2     2           0.0231    1345.
## 3     3           0.00972   1363.
## 4     4           0.00741   1342.
## 5     5           0.0208    1343.
## 6     6           0.0268    1346.
## 7     7           0.0289    1348.
## 8     8           0.0817    1342.
## 9     9           0.0546    1362.
## 10    10          0.0477    1349.
## # ... with 21 more rows
```

```
# plot for the relationship
ggplot(cancelled_flights, aes(x = prop_cancelled, y = avg_delay)) +
  geom_point() +
  geom_smooth()
```

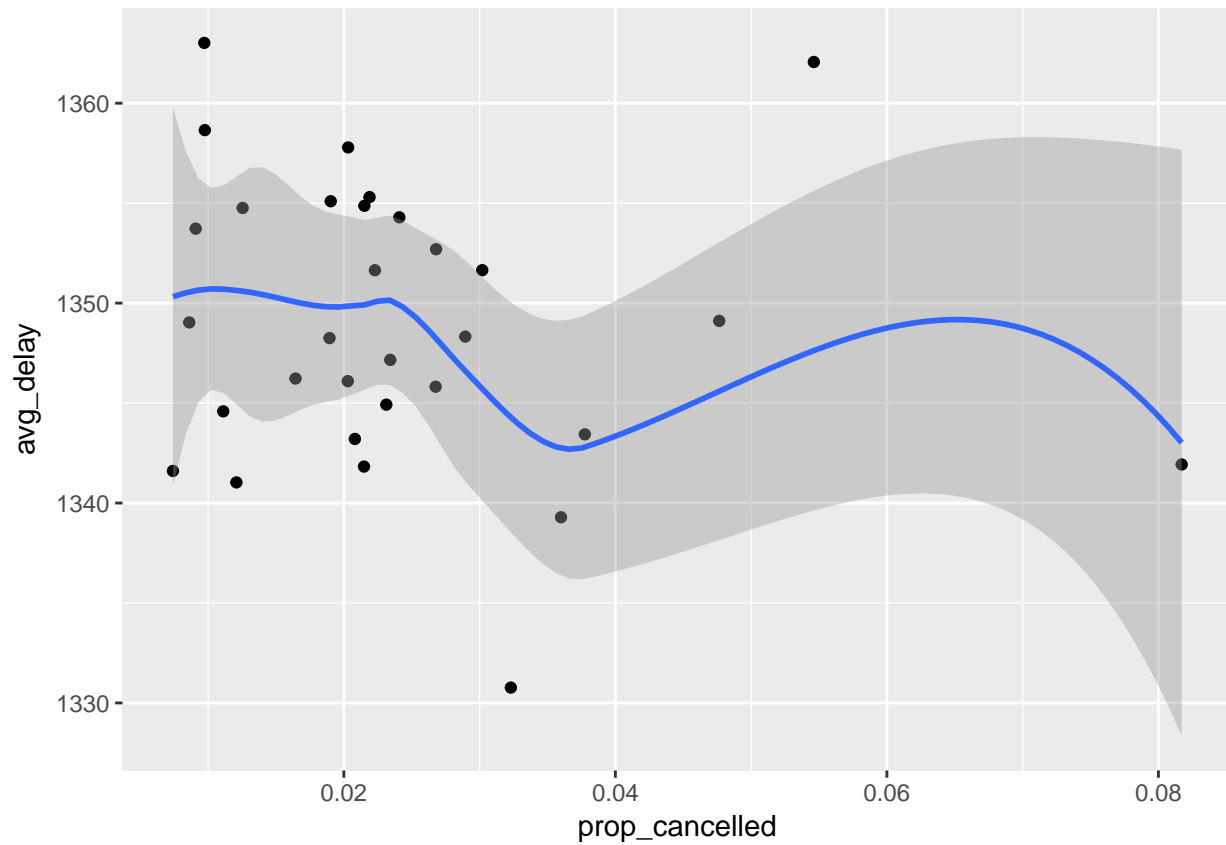

**QUESTION 6:**

**ANSWER 6:**

sort argument will sort the elements of count () in the descending order. After the results are extracted, we can use the sort to arrange the values.