Modus_X 3: bounded state with memory-conditioned recurrence

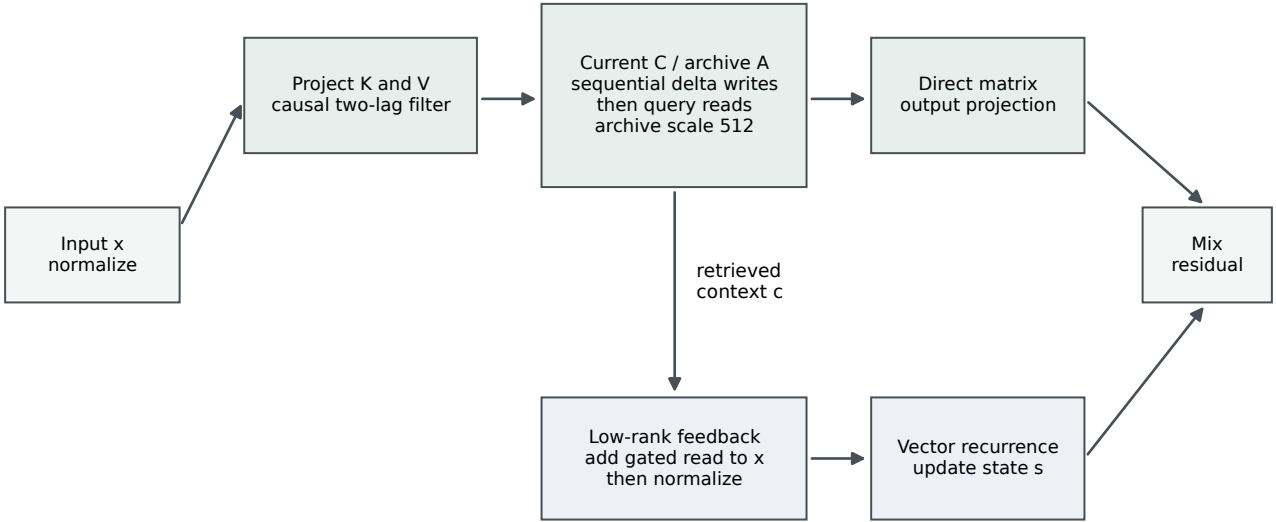

State: C, A, vector s, two prior projected keys and values.
Q, gates and router use the layer input. Matrix writes do not use the within-layer vector state.