


Experiment 1


Aim: Installing Ubuntu on windows and, compile and run first C program using gcc.

Theory:

1. Visit <https://ubuntu.com/wsl>

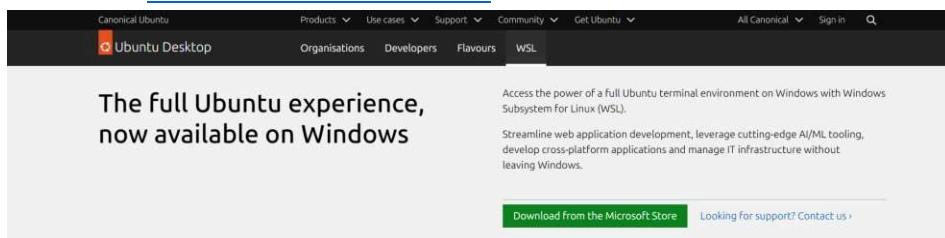

2. Click on download.

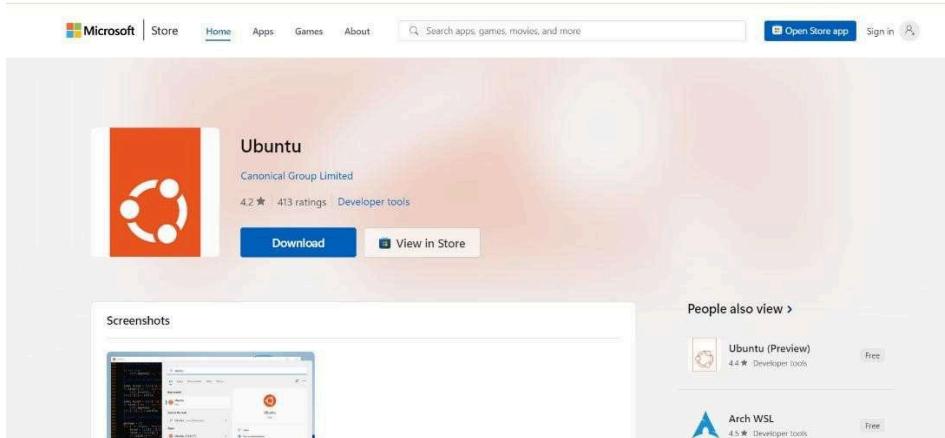

3. Download



4. Press any button to continue.

```

Ubuntu
Installing, this may take a few minutes...
WslRegisterDistribution failed with error: 0x8007019e
Error: 0x8007019e The Windows Subsystem for Linux is not installed. You can install by running 'wsl.exe --install'.
For more information please visit https://aka.ms/wslinstall
Press any key to continue...

C:\Windows\System32\wsl.exe
Downloading: Windows Subsystem for Linux 2.2.4
Installing: Windows Subsystem for Linux 2.2.4
Windows Subsystem for Linux 2.2.4 has been installed.
Installing Windows optional component: VirtualMachinePlatform

Deployment Image Servicing and Management tool
Version: 10.0.26100.1252

Image Version: 10.0.26120.1542

Enabling feature(s)
[=====100.0%=====]
The operation completed successfully.
The requested operation is successful. Changes will not be effective until the system is rebooted.
Checking for updates.
The most recent version of Windows Subsystem for Linux is already installed.
Press any key to exit...

```

5. Enter Username and Password

```

Installing, this may take a few minutes...
Please create a default UNIX user account. The username does not need to match your Windows username.
For more information visit: https://aka.ms/wslusers
Enter new UNIX username: vikram
New password:
Retype new password:
Sorry, passwords do not match.
passwd: Authentication token manipulation error
passwd: password unchanged
Try again? [y/N] y
New password:
Retype new password:
passwd: password updated successfully
Installation successful!
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

Welcome to Ubuntu 22.04.3 LTS (GNU/Linux 5.15.153.1-microsoft-standard-WSL2 x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage

```

6. type “nano vikram.c”.

7. write c program to congratulate.

```
GNU nano 6.2
#include<stdio.h>
int main()
{
    println("Congratulations Vikram Ranjan.")
}
```

8. press “ctrl+O” to save program.

9. press “ctrl+x” to exit editor.

10. Type gcc “filename.c” –o “new file name” to compile program.

11. Type ./” filename ” to run program.

```
vikram@DESKTOP-S5P315A:~$ nano vikram.c
vikram@DESKTOP-S5P315A:~$ gcc vikram.c -o vikram
vikram@DESKTOP-S5P315A:~$ ./vikram
Congratulations Vikram Ranjan.vikram@DESKTOP-S5P315A:~$ |
```

Learning Outcome:

Experiment 2

Aim: Open Ubuntu terminal and write the command for following operations and share the output screen.

Theory:

Commands:

1. Command to know your current working directory: pwd

```
sanyog@sANYOG-E4tE8NIS:~$ pwd  
/home/ sanyog  
sanyog@sANYOG-E4tE8NIS:~$ |
```

2. List all the files in the current directory: ls

```
sanyog@sANYOG-E4tE8NIS:~$ ls  
NewUbuntu hello hello.c  
sanyog@sANYOG-E4tE8NIS:~$ |
```

```
sanyog@sANYOG-E4tE8NIS:~$ ls -d */
NewUbuntu/
sanyog@sANYOG-E4tE8NIS:~$ |
```

5. List only files starting with “N” alphabet: ls N*.

```
sanyog@sANYOG-E4tE8NIS
vikram@DESKTOP-S5P315A:~$ ls N*
NewUbuntu:
new.txt

New_files:
first.txt
vikram@DESKTOP-S5P315A:~$ |
```

6. Using help command find the help on man command: man –help

```
vikram@DESKTOP-S5P315A:~$ man --help
Usage: man [OPTION...] [SECTION] PAGE...
      [-C, --config-file=FILE]      use this user configuration file
      [-d, --debug]                emit debugging messages
      [-D, --default]              reset all options to their default values
      [--warnings[=WARNINGS]]     enable warnings from groff

Main modes of operation:
      -f, --whatis                 equivalent to whatis
      -k, --apropos                equivalent to apropos
      -K, --global-apropos         search for text in all pages
      -l, --local-file              interpret PAGE argument(s) as local filename(s)
      -w, --where, --path, --location
                                    print physical location of man page(s)
      -W, --where-cat, --location-cat
                                    print physical location of cat file(s)

      -c, --catman                used by catman to reformat out of date cat pages
      -R, --recode=ENCODING        output source page encoded in ENCODING

Finding manual pages:
      -L, --locale=LOCALE          define the locale for this particular man search
      -m, --systems=SYSTEM          use manual pages from other systems
      -M, --manpath=PATH            set search path for manual pages to PATH

      -S, -s, --sections=LIST      use colon separated section list

      -e, --extension=EXTENSION    limit search to extension type EXTENSION

      -i, --ignore-case            look for pages case-insensitively (default)
      -I, --match-case             look for pages case-sensitively

      --regex                      show all pages matching regex
      --wildcard                   show all pages matching wildcard

      --names-only                 make --regex and --wildcard match page names only,
                                    not descriptions

      -a, --all                     find all matching manual pages
      -u, --update                  force a cache consistency check

      --no-subpages                don't try subpages, e.g. 'man foo bar' => 'man
```

```

Controlling formatted output:
-P, --pager=PAGER           use program PAGER to display output
-r, --prompt=STRING          provide the 'less' pager with a prompt

-7, --ascii                 display ASCII translation of certain latin1 chars
-E, --encoding=ENCODING     use selected output encoding
--no-hyphenation, --nh      turn off hyphenation
--no-justification, --nj    turn off justification
-p, --preprocessor=STRING   STRING indicates which preprocessors to run:
                            e - [n]eqn, p - pic, t - tbl,
g - grap, r - refer, v - vgrind

-t, --troff                 use groff to format pages
-T, --troff-device[=DEVICE] use groff with selected device

-H, --html[=BROWSER]         use www-browser or BROWSER to display HTML output
-X, --gxditview[=RESOLUTION] use groff and display through gxditview
                            (X11):
                            -X = -TX75, -X100 = -TX100, -X100-12 = -TX100-12
-Z, --ditroff                use groff and force it to produce ditroff

-?, --help                  give this help list
--usage                     give a short usage message
-V, --version                print program version

Mandatory or optional arguments to long options are also mandatory or optional
for any corresponding short options.

Report bugs to cjwtatson@debian.org.

```

7. Display the content of manual pages on ls command: man ls

```

LS(1)                               User Commands                               LS(1)

NAME
ls - list directory contents

SYNOPSIS
ls [OPTION]... [FILE]...

DESCRIPTION
List information about the FILES (the current directory by default).
Sort entries alphabetically if none of -cftuvSUX nor --sort is specified.
Mandatory arguments to long options are mandatory for short options too.

-a, --all
do not ignore entries starting with .

-A, --almost-all
do not list implied . and ..

--author
with -l, print the author of each file

-b, --escape
print C-style escapes for nongraphic characters

--block-size=SIZE
with -l, scale sizes by SIZE when printing them; e.g.,
'--block-size=M'; see SIZE format below

-B, --ignore-backups
do not list implied entries ending with ~

-c
with -lt: sort by, and show, ctime (time of last modification of
file status information); with -l: show ctime and sort by name;
otherwise: sort by ctime, newest first

-C
list entries by columns

--color[=WHEN]
colorize the output; WHEN can be 'always' (default if omitted),
'auto', or 'never'; more info below

-d, --directory
Manual page ls(1) line 1/242 17% (press h for help or q to quit)

```

8. Demonstrate the usage of "whatis" command:

```

vikram@DESKTOP-S5P315A:~$ whatis ls pwd mkdir
ls (1)                      - list directory contents
pwd (1)                     - print name of current/working directory
mkdir (1)                    - make directories
mkdir (2)                    - create a directory
vikram@DESKTOP-S5P315A:~$ |

```

9. Make directory named “OSLab/Experiment1”. OSLab and Experiment1 both: mkdir OSLab Experiment1


```
vikram@DESKTOP-S5P315A:~$ mkdir OSLab Experiment1
vikram@DESKTOP-S5P315A:~$ ls
C_programs  Experiment1  NewUbuntu  New_files  OSLab  hello  hello.c
vikram@DESKTOP-S5P315A:~$ ls -l
total 40
drwxr-xr-x 2 vikram vikram  4096 Sep  1 19:41 C_programs
drwxr-xr-x 2 vikram vikram  4096 Sep  1 20:58 Experiment1
drwxr-xr-x 2 vikram vikram  4096 Aug 22 20:50 NewUbuntu
drwxr-xr-x 2 vikram vikram  4096 Sep  1 19:39 New_files
drwxr-xr-x 2 vikram vikram  4096 Sep  1 20:58 OSLab
-rwxr-xr-x 1 vikram vikram 15960 Aug 22 20:47 hello
-rw-r--r-- 1 vikram vikram    65 Aug 22 20:47 hello.c
```

10. Write command to reach to “Experiment1” Directory: cd Experiment1.

```
vikram@DESKTOP-S5P315A:~/Experiment1$ cd ./Experiment1
vikram@DESKTOP-S5P315A:~/Experiment1$ |
```

11. Create a txt file named “TodaysMsg.txt” and write a greeting message in it.

```
vikram@DESKTOP-S5P315A:~/Experiment1$ nano TodaysMsg.txt
vikram@DESKTOP-S5P315A:~/Experiment1$ |
```

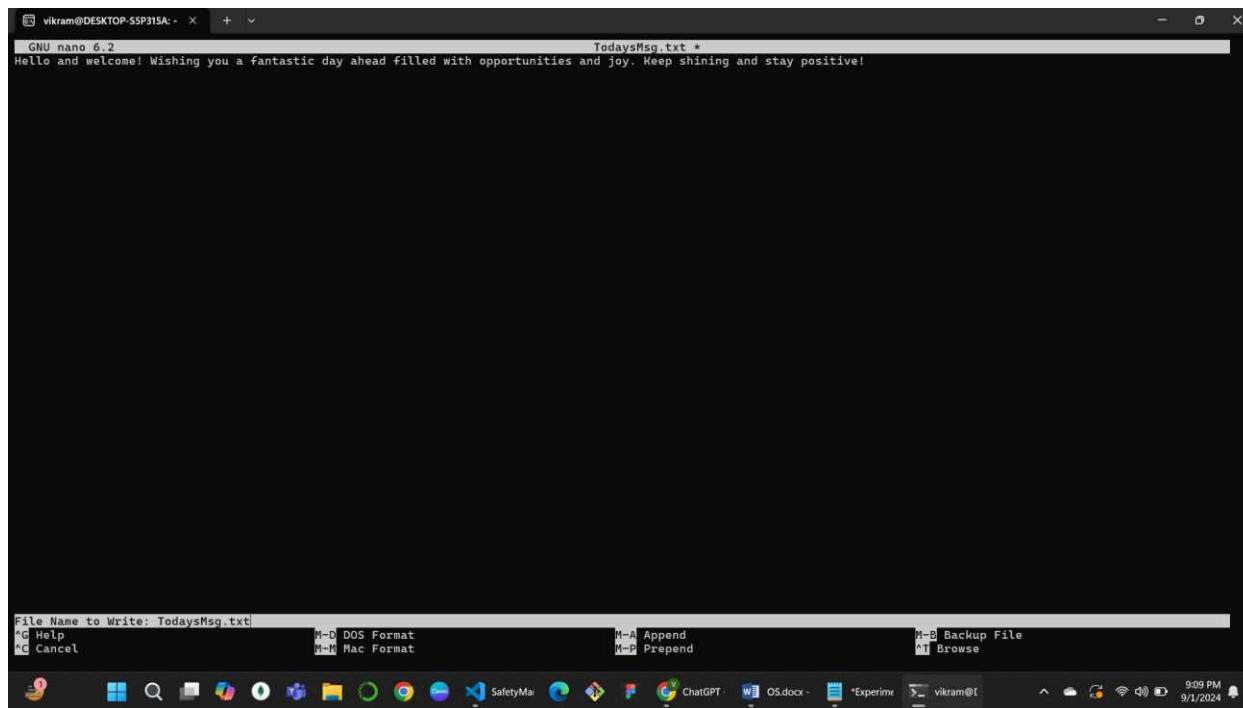

12. Copy this file “TodaysMsg.txt” to OSLab directory:cp ./TodaysMsg.txt/OSlab

```
vikram@DESKTOP-S5P315A:~/Experiment1$ nano TodaysMsg.txt
vikram@DESKTOP-S5P315A:~/Experiment1$ ls
TodaysMsg.txt
vikram@DESKTOP-S5P315A:~/Experiment1$ cp ./TodaysMsg.txt ../OSlab
vikram@DESKTOP-S5P315A:~/Experiment1$ cd ..
vikram@DESKTOP-S5P315A:~/OSlab$ ls
TodaysMsg.txt
vikram@DESKTOP-S5P315A:~/OSlab$ |
```

13. Delete the file “TodaysMsg.txt” from the Experiment1 Folder: rm

./Experiment1/TodaysMsg.txt

```
vikram@DESKTOP-S5P315A:~/OSlab$ cd ..
vikram@DESKTOP-S5P315A:~$ rm ./Experiment1/TodaysMsg.txt
vikram@DESKTOP-S5P315A:~$ cd ./Experiment1
vikram@DESKTOP-S5P315A:~/Experiment1$ ls
vikram@DESKTOP-S5P315A:~/Experiment1$ |
```

14. Delete the directory Experiment1: rmdir Experiment1

```
vikram@DESKTOP-S5P315A:~$ rmdir Experiment1
vikram@DESKTOP-S5P315A:~$ ls -l
total 36
drwxr-xr-x 2 vikram vikram 4096 Sep  1 19:41 C_programs
drwxr-xr-x 2 vikram vikram 4096 Aug 22 20:50 NewUbuntu
drwxr-xr-x 2 vikram vikram 4096 Sep  1 19:39 New_files
drwxr-xr-x 2 vikram vikram 4096 Sep  1 21:11 OSlab
-rw-r--r-- 1 vikram vikram 15960 Aug 22 20:47 hello
-rw-r--r-- 1 vikram vikram    65 Aug 22 20:47 hello.c
vikram@DESKTOP-S5P315A:~$ |
```

15. Create a text file named “Hello.txt” and write a suitable message in it.



16. Using touch command create files with names mon.txt, tues.txt, and wed.txt:

touch mon.txt tues.txt wed.txt.

```
vikram@DESKTOP-S5P315A:~$ touch mon.txt tues.txt wed.txt
vikram@DESKTOP-S5P315A:~$ ls
C_programs  NewUbuntu  OSlab  hello.c  tues.txt
Hello.txt    New_files   hello   mon.txt  wed.txt
vikram@DESKTOP-S5P315A:~$ |
```

17. Copy these newly created files to a folder named “dupfolder” after creating it. mkdir

```
dupfolder cp ./mon.txt ./wed.txt ./tues.txt ./dupfolder/
```

```
vikram@DESKTOP-S5P315A:~$ mkdir dupfolder
vikram@DESKTOP-S5P315A:~$ cp ./mon.txt ./wed.txt ./tues.txt ./dupfolder/
vikram@DESKTOP-S5P315A:~$ ls
C_programs  NewUbuntu  OSlab  hello   mon.txt  wed.txt
Hello.txt    New_files   dupfolder  hello.c  tues.txt
vikram@DESKTOP-S5P315A:~$ cd dupfolder
vikram@DESKTOP-S5P315A:~/dupfolder$ ls
mon.txt  tues.txt  wed.txt
vikram@DESKTOP-S5P315A:~/dupfolder$ |
```

18. Move Hello.txt to dupfolder: mv ./Hello.txt ./dupfolder/

```
vikram@DESKTOP-S5P315A:~/dupfolder$ cd ..
vikram@DESKTOP-S5P315A:~$ mv ./Hello.txt ./dupfolder/
vikram@DESKTOP-S5P315A:~$ ls
C_programs  New_files  dupfolder  hello.c  tues.txt
NewUbuntu   OSlab     hello      mon.txt  wed.txt
vikram@DESKTOP-S5P315A:~$ cd ./dupfolder
vikram@DESKTOP-S5P315A:~/dupfolder$ ls
Hello.txt  mon.txt  tues.txt  wed.txt
vikram@DESKTOP-S5P315A:~/dupfolder$ |
```

19. Count number of words in the Hello.txt file: wc -w Hello.txt

```
vikram@DESKTOP-S5P315A:~/dupfolder$ wc -w Hello.txt
6 Hello.txt
vikram@DESKTOP-S5P315A:~/dupfolder$ |
```

20. Create two files with identical content, change one alphabet in one of these and compare them using cmp command: cmp ./file1.txt ./file2.txt

```
vikram@DESKTOP-S5P315A:~/dupfolder$ nano file1.txt
vikram@DESKTOP-S5P315A:~/dupfolder$ nano file2.txt
vikram@DESKTOP-S5P315A:~/dupfolder$ cd file1.txt
-bash: cd: file1.txt: Not a directory
vikram@DESKTOP-S5P315A:~/dupfolder$ cd ./file1.txt
-bash: cd: ./file1.txt: Not a directory
vikram@DESKTOP-S5P315A:~/dupfolder$ ls
Hello.txt  file1.txt  file2.txt  mon.txt  tues.txt  wed.txt
vikram@DESKTOP-S5P315A:~/dupfolder$ nano file1.txt
vikram@DESKTOP-S5P315A:~/dupfolder$ cmp file1 file2
cmp: file1: No such file or directory
vikram@DESKTOP-S5P315A:~/dupfolder$ cmp ./file1.txt ./file2.txt
./file1.txt ./file2.txt differ: byte 11, line 1
vikram@DESKTOP-S5P315A:~/dupfolder$ |
```

Learning Outcome:

Experiment 3

Aim

Perform following shell script based programs a.

Write a Shell Program to swap the two integers.

- b. Create a shell script that checks if a specific directory exists. If it does, the script should back up all files from that directory into a specified backup directory. The script should then loop through the files in the backup directory and list all files that were successfully copied. If the directory does not exist, the script should print an error
- c. Write a shell script to check if a given number is a prime number or not
- d. Write a shell script to greet the user as per the time whenever he/ she opens terminal.

Theory:

- a. Write a Shell Program to swap the two

```
#!/bin/bash

echo 'Enter First Number:'
read a
echo "Enter Second Number:"
read b

echo "Before swapping: a=$a,b=$b"

temp=$a
a=$b
b=$temp

echo "After swapping a=$a, b=$b"
```

```
sanyog@sANYOG-E4tE8NIS:~$ nano swap.sh
sanyog@sANYOG-E4tE8NIS:~$ chmod u+x swap.sh
sanyog@sANYOG-E4tE8NIS:~$ ./swap.sh
Enter First Number:
2
Enter Second Number:
3
Before swapping: a=2,b=3
After swapping a=3, b=2
```

- b. Create a shell script that checks if a specific directory exists. If it does, the script should back up all files from that directory into a specified backup directory. The script should then loop through the files in the backup directory and list all files that were successfully copied. If the directory does not exist, the script should print an error message.

```
sanyog@sANYOG-E4tE8NIS:~$ nano backup.sh
#!/bin/bash

echo "Enter the source directory path: "
read src_dir

echo "Enter the backup directory path: "
read backup_dir

if [ -d "$src_dir" ]; then
    if [ ! -d "$backup_dir" ]; then
        mkdir -p "$backup_dir"
    fi
    cp -r "$src_dir"/* "$backup_dir"
    echo "Files backed up successfully. Listing files in the backup directory:"

    for file in "$backup_dir"/*; do
        if [ -f "$file" ]; then
            echo "Copied: $(basename \"$file\")"
        fi
    done
else
    echo "Error: Source directory does not exist."
fi
sanyog@sANYOG-E4tE8NIS$ ./backup.sh
Enter the source directory path:
./dsa
Enter the backup directory path:
new_backup1
Files backed up successfully. Listing files in the backup directory:
Copied: Knapsack
Copied: Knapsack.c
Copied: quick_sort.c
Copied: quicksort
```

c. Write a shell script to check if a given number is a prime number or

```
#!/bin/bash

is_prime() {

num=$1
if [ $num -le 1 ]; then
    echo "$num is not a prime number."
    return
fi

for ((i=2; i*i<=num; i++)); do
    if [ $((num % i)) -eq 0 ]; then
        echo "$num is not a prime number."
        return
    fi
done

echo "$num is a prime number."
}

echo "Enter a number: "
read number

is_prime $number
```

```
sanyog@SANYOG-E4tE8NIS:~$ nano backup.sh
sanyog@SANYOG-E4tE8NIS:~$ nano is_prime.sh
sanyog@SANYOG-E4tE8NIS:~$ chmod u+x is_prime.sh
sanyog@SANYOG-E4tE8NIS:~$ ./is_prime.sh
Enter a number:
3
3 is a prime number.
sanyog@SANYOG-E4tE8NIS:~$ |
```

d. Write a shell script to greet the user as per the time whenever he/ she opens terminal.

```
sanyog@SANYOG-E4tE8NIS:~$ nano is_prime.sh
sanyog@SANYOG-E4tE8NIS:~$ nano greet.sh
sanyog@SANYOG-E4tE8NIS:~$ chmod u+x greet.sh
sanyog@SANYOG-E4tE8NIS:~$ ./greet.sh
Good Evening, sanyog
```

```
#!/bin/bash

hour=$(date +"%H")

if [ $hour -ge 5 ] && [ $hour -lt 12 ]; then
    echo "Good Morning, $(whoami)!"
elif [ $hour -ge 12 ] && [ $hour -lt 17 ]; then
    echo "Good Afternoon, $(whoami)!"
else
    echo "Good Evening, $(whoami)!"
fi
```

```
Good Evening, sanyog!
sanyog@SANYOG-E4tE8NIS:~$ |
```

Learning Outcome:

Experiment 4

Aim : Write a c program to implement the following scheduling algorithms. First come first serve

- a) Round Robin Scheduling
- b) Shortest job first
- c) Shortest Job remaining first.

Theory:

- a. First come first serve

```

GNU nano 6.2
#include <stdio.h>
int main() {
    int n, i;
    int bt[20], wt[20], tat[20];
    float avg_wt = 0, avg_tat = 0;

    printf("Enter total number of processes: ");
    scanf("%d", &n);

    printf("Enter the burst time for each process:\n");
    for (i = 0; i < n; i++) {
        printf("Process %d: ", i + 1);
        scanf("%d", &bt[i]);
    }

    wt[0] = 0;

    for (i = 1; i < n; i++) {
        wt[i] = wt[i - 1] + bt[i - 1];
    }
    for (i = 0; i < n; i++) {
        tat[i] = wt[i] + bt[i];
    }
    printf("\nProcess\tBurst Time\tWaiting Time\tTurnaround Time\n");

    for (i = 0; i < n; i++) {
        printf("%d\t%d\t%d\t%d\n", i + 1, bt[i], wt[i], tat[i]);
        avg_wt += wt[i];
        avg_tat += tat[i];
    }
    avg_wt /= n;
    avg_tat /= n;
    printf("\nAverage Waiting Time: %.2f", avg_wt);
    printf("\nAverage Turnaround Time: %.2f\n", avg_tat);

    return 0;
}

```

```

sanyog@SANYOG-E4tE8NIS:~$ nano fcfs.c
sanyog@SANYOG-E4tE8NIS:~$ gcc fcfs.c -o fcfs
sanyog@SANYOG-E4tE8NIS:~$ ./fcfs
Enter total number of processes: 4
Enter the burst time for each process:
Process 1: 12
Process 2: 10
Process 3: 5
Process 4: 6

Process Burst Time      Waiting Time      Turnaround Time
1          12              0                12
2          10              12               22
3          5               22               27
4          6               27               33

Average Waiting Time: 15.25
Average Turnaround Time: 23.50
sanyog@SANYOG-E4tE8NIS:~$ |

```

b. Round Robin

```

S#include <stdio.h>
int main() {
    int n, i, j, time, quantum;
    int bt[20], wt[20], tat[20], remaining[20];
    float avg_wt = 0, avg_tat = 0;
    printf("Enter total number of processes: ");
    scanf("%d", &n);
    printf("Enter time quantum: ");
    scanf("%d", &quantum);
    printf("Enter the burst time for each process:\n");
    for (i = 0; i < n; i++) {
        printf("Process %d: ", i + 1);
        scanf("%d", &bt[i]);
        remaining[i] = bt[i];
    }
    time = 0;
    while (1) {
        int done = 1;
        for (i = 0; i < n; i++) {
            if (remaining[i] > 0) {
                done = 0;
                if (remaining[i] > quantum) {
                    time += quantum;
                    remaining[i] -= quantum;
                } else {
                    time += remaining[i];
                    wt[i] = time - bt[i];
                    tat[i] = time;
                    remaining[i] = 0;
                }
            }
        }
        if (done) {
            break;
        }
    }
    printf("\nProcess\tBurst Time\tWaiting Time\tTurnaround Time\n");
    for (i = 0; i < n; i++) {
        avg_wt += wt[i];
        avg_tat += tat[i];
        printf("%d\t%d\t%d\t%d\n", i + 1, bt[i], wt[i], tat[i]);
    }
    avg_wt /= n;
    avg_tat /= n;
    printf("\nAverage Waiting Time: %.2f", avg_wt);
    printf("\nAverage Turnaround Time: %.2f\n", avg_tat);
    return 0;
}

```

```
sanyog@SANYOG-E4tE8NIS:~$ nano roundrobin.c
sanyog@SANYOG-E4tE8NIS:~$ gcc roundrobin.c -o rr
sanyog@SANYOG-E4tE8NIS:~$ ./rr
Enter total number of processes: 4
Enter time quantum: 2
Enter the burst time for each process:
Process 1: 8
Process 2: 9
Process 3: 4
Process 4: 3

Process Burst Time Waiting Time Turnaround Time
1          8            13        21
2          9            15        24
3          4            10        14
4          3            12        15

Average Waiting Time: 12.50
Average Turnaround Time: 18.50
sanyog@SANYOG-E4tE8NIS:~$ |
```

c. Shortest job first

```

#include <stdio.h>

void findWaitingTime(int processes[], int n, int bt[], int wt[]) {
    wt[0] = 0;
    for (int i = 1; i < n; i++) {
        wt[i] = wt[i - 1] + bt[i - 1];
    }
}

void findTurnAroundTime(int processes[], int n, int bt[], int wt[], int tat[]) {
    for (int i = 0; i < n; i++) {
        tat[i] = bt[i] + wt[i];
    }
}

void findavgTime(int processes[], int n, int bt[]) {
    int wt[20], tat[20];
    findWaitingTime(processes, n, bt, wt);
    findTurnAroundTime(processes, n, bt, wt, tat);
    float total_wt = 0, total_tat = 0;
    printf("\nProcess\tBurst Time\tWaiting Time\tTurnaround Time\n");
    for (int i = 0; i < n; i++) {
        total_wt += wt[i];
        total_tat += tat[i];
        printf("%d\t%d\t%d\t%d\n", processes[i], bt[i], wt[i], tat[i]);
    }
    printf("\nAverage Waiting Time: %.2f", total_wt / n);
    printf("\nAverage Turnaround Time: %.2f\n", total_tat / n);
}

void sortProcesses(int processes[], int n, int bt[]) {
    for (int i = 0; i < n - 1; i++) {
        for (int j = 0; j < n - i - 1; j++) {
            if (bt[j] > bt[j + 1]) {
                int temp = bt[j];
                bt[j] = bt[j + 1];
                bt[j + 1] = temp;
                int tempProcess = processes[j];
                processes[j] = processes[j + 1];
                processes[j + 1] = tempProcess;
            }
        }
    }
}

int main() {
    int n, processes[20], bt[20];
    printf("Enter total number of processes: ");
    scanf("%d", &n);
    printf("Enter the burst time for each process:\n");
    for (int i = 0; i < n; i++) {
        processes[i] = i + 1;
        printf("Process %d: ", processes[i]);
        scanf("%d", &bt[i]);
    }
    sortProcesses(processes, n, bt);
    findavgTime(processes, n, bt);
    return 0;
}

```

```
sanyog@SANYOG-E4tE8NIS:~$ nano sjf.c
sanyog@SANYOG-E4tE8NIS:~$ gcc sjf.c -o sjf
sanyog@SANYOG-E4tE8NIS:~$ ./sjf
Enter total number of processes: 4
Enter the burst time for each process:
Process 1: 12
Process 2: 5
Process 3: 8
Process 4: 9

Process Burst Time Waiting Time Turnaround Time
2      5            0          5
3      8            5          13
4      9            13         22
1      12           22         34

Average Waiting Time: 10.00
Average Turnaround Time: 18.50
sanyog@SANYOG-E4tE8NIS:~$ |
```

d. Shortest Job remaining first.

```
#include <stdio.h>

void findWaitingTime(int processes[], int n, int bt[], int wt[]) {
    int rt[20];
    for (int i = 0; i < n; i++) rt[i] = bt[i];

    int complete = 0, t = 0, min_index, min_time = 10000;

    while (complete != n) {
        for (int i = 0; i < n; i++) {
            if (rt[i] > 0 && rt[i] < min_time) {
                min_time = rt[i];
                min_index = i;
            }
        }
        rt[min_index]--;
        min_time = rt[min_index] > 0 ? rt[min_index] : 10000;

        if (rt[min_index] == 0) {
            complete++;
            wt[min_index] = t + 1 - bt[min_index];
        }
        t++;
    }
}

void findTurnAroundTime(int processes[], int n, int bt[], int wt[], int tat[]) {
    for (int i = 0; i < n; i++) {
        tat[i] = bt[i] + wt[i];
    }
}
```

```

void findavgTime(int processes[], int n, int bt[]) {
    int wt[20], tat[20];
    findWaitingTime(processes, n, bt, wt);
    findTurnAroundTime(processes, n, bt, wt, tat);

    float total_wt = 0, total_tat = 0;
    printf("\nProcess\tBurst Time\tWaiting Time\tTurnaround Time\n");
    for (int i = 0; i < n; i++) {
        total_wt += wt[i];
        total_tat += tat[i];
        printf("%d\t%d\t%d\t%d\n", processes[i], bt[i], wt[i], tat[i]);
    }
    printf("\nAverage Waiting Time: %.2f", total_wt / n);
    printf("\nAverage Turnaround Time: %.2f\n", total_tat / n);
}

int main() {
    int n, processes[20], bt[20];
    printf("Enter total number of processes: ");
    scanf("%d", &n);
    printf("Enter the burst time for each process:\n");
    for (int i = 0; i < n; i++) {
        processes[i] = i + 1;
        printf("Process %d: ", processes[i]);
        scanf("%d", &bt[i]);
    }
    findavgTime(processes, n, bt);
    return 0;
}

```

```

sanyog@SANYOG-E4tE8NIS:~$ nano sjrf.c
sanyog@SANYOG-E4tE8NIS:~$ gcc sjrf.c -o sjrf
sanyog@SANYOG-E4tE8NIS:~$ ./sjrf
Enter total number of processes: 6
Enter the burst time for each process:
Process 1: 10
Process 2: 3
Process 3: 6
Process 4: 8
Process 5: 2
Process 6: 9

      Process  Burst Time    Waiting Time   Turnaround Time
1          10            28              38
2          3             2               5
3          6             5               11
4          8             11              19
5          2             0               2
6          9             19              28

Average Waiting Time: 10.83
Average Turnaround Time: 17.17

```

Learning Outcome:

Experiment 5

Aim: Process Management a) fork() b) execv() c) execlp() d) wait() and e) sleep()

Theory:

A. Program to implement the fork function using C.

```
#include <stdio.h>
#include <unistd.h>
#include <sys/types.h>

int main() {
    pid_t pid;
    pid = fork();

    if (pid < 0) {
        fprintf(stderr, "Fork failed\n");
        return 1;
    }
    else if (pid == 0) {
        printf("This is the child process. PID: %d\n", getpid());
    }
    else {
        printf("This is the parent process. PID: %d, Child PID: %d\n", getpid(),
               pid);
    }
    return 0;
}
```

OUTPUT

```
sanyog@SANYOG-E4tE8NIS:~/OSlab$ nano fork.c
sanyog@SANYOG-E4tE8NIS:~/OSlab$ gcc fork.c -o fork
sanyog@SANYOG-E4tE8NIS:~/OSlab$ ./fork
This is the parent process. PID: 498, Child PID: 499
This is the child process. PID: 499
sanyog@SANYOG-E4tE8NIS:~/OSlab$ |
```

B. Program to implement execv function using C.

```
#include <stdio.h>
#include <unistd.h>

int main() {
    char *args[] = {"./execy", "-l", NULL}; // Arguments for
    execv("ls", args);
    printf("Before execv\n");

    // Execute the ls -l command using
    if (execv(args[0], args) == -1) {
        execv perror("execv failed"); // If execv fails, print an error
    }
    printf("This line will not be executed if execv

succeeds\n");
    return 0;
}
```

OUTPUT

```
sanyog@SANYOG-E4tE8NIS:~/OSlab$ nano execy.c
sanyog@SANYOG-E4tE8NIS:~/OSlab$ gcc execy.c -o execy
sanyog@SANYOG-E4tE8NIS:~/OSlab$ ./execy
Before execv
total 84
-rwxr-xr-x 1 sanyog sanyog 16232 Oct 28 20:30 Banker
-rw-r--r-- 1 sanyog sanyog 2267 Oct 28 20:30 Banker.c
-rw-r--r-- 1 sanyog sanyog 120 Sep 1 21:11 TodaysMsg.txt
-rwxr-xr-x 1 sanyog sanyog 16096 Nov 7 11:49 execy
-rw-r--r-- 1 sanyog sanyog 393 Nov 7 11:48 execy.c
-rwxr-xr-x 1 sanyog sanyog 16128 Nov 7 11:45 fork
-rw-r--r-- 1 sanyog sanyog 680 Nov 7 11:44 fork.c
-rwxr-xr-x 1 sanyog sanyog 16368 Oct 28 20:23 semaphore
-rw-r--r-- 1 sanyog sanyog 1740 Oct 28 20:23 semaphore.c
sanyog@SANYOG-E4tE8NIS:~/OSlab$ |
```

C. Program to implement execlp function. #include <stdio.h> #include <unistd.h>

```
int main() {  printf("Before execlp\n");
if (execlp("ls", "ls", "-l", NULL) == -1) {
    perror("execlp failed"); // If execlp fails, print an error
}
printf("This line will not be executed if execlp
succeeds\n");
return 0;
}
```

OUTPUT

```
sanyog@SANYOG-E4tE8NIS:~/OSlab$ nano execlp.c
sanyog@SANYOG-E4tE8NIS:~/OSlab$ gcc execlp.c -o execlp
sanyog@SANYOG-E4tE8NIS:~/OSlab$ ./execlp
Before execlp
total 104
-rwxr-xr-x 1 sanyog sanyog 16232 Oct 28 20:30 Banker
-rw-r--r-- 1 sanyog sanyog 2267 Oct 28 20:30 Banker.c
-rw-r--r-- 1 sanyog sanyog 120 Sep 1 21:11 TodaysMsg.txt
-rwxr-xr-x 1 sanyog sanyog 16048 Nov 7 11:51 execlp
-rw-r--r-- 1 sanyog sanyog 341 Nov 7 11:51 execlp.c
-rwxr-xr-x 1 sanyog sanyog 16096 Nov 7 11:49 execy
-rw-r--r-- 1 sanyog sanyog 393 Nov 7 11:48 execy.c
-rwxr-xr-x 1 sanyog sanyog 16128 Nov 7 11:45 fork
-rw-r--r-- 1 sanyog sanyog 680 Nov 7 11:44 fork.c
-rwxr-xr-x 1 sanyog sanyog 16368 Oct 28 20:23 semaphore
-rw-r--r-- 1 sanyog sanyog 1740 Oct 28 20:23 semaphore.c
sanyog@SANYOG-E4tE8NIS:~/OSlab$ |
```

D. Program to implement wait function using C.

```
#include <stdio.h>
#include <unistd.h>
#include <sys/wait.h>

int main() {
    pid_t pid;
    // Create a new process
    pid = fork();

    if (pid < 0) {
        // If fork() returns a negative value, creation of child process was unsuccessful
        sprintf(stderr, "Fork failed\n");
        return 1;
    }
    else if (pid == 0) {      // Child process
        printf("Child process: PID = %d\n", getpid());
        sleep(2); // Simulate some work in the child process
        printf("Child process is done\n");
    }
    else {
        // Parent process
        printf("Parent process: PID = %d, waiting for child to finish...\n", getpid());
        wait(NULL); // Wait for the child process to finish
        printf("Parent process:
Child process has finished\n");

        return 0;
    }
}
```

OUTPUT

```
Parent process: PID = 738, waiting for child to finish...
Child process: PID = 739
Child process is done
Parent process: Child process has finished
sanyog@SANYOG-E4tE8NIS:~/OSlab$ |
```

- E. Program to implement sleep function using
C. #include <stdio.h> #include <unistd.h>

```
int main() { printf("Program
starts\n"); // Pause the program for sleep(5);
seconds
    printf("5 seconds have passed\n");
    return 0;
}
```

OUTPUT

```
Program starts
5 seconds have passed
sanyog@SANYOG-E4tE8NIS:~/OSlab$ |
```

Learning Outcome

Experiment 6

Aim: Write a program to implement reader/writer problems using semaphore.

Theory:

Program

```
#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>

typedef int process;

struct node {
    process p;
    struct node* next;
};

struct Queue {
    struct node* front;
    struct node* rear;
};

void initQueue(struct Queue* q) {
    q->front = NULL;
    q->rear = NULL;
}
```

```

newNode->next =
NULL;
if (q->rear == NULL)    q-
>front = q->rear = newNode;
} else {
q->rear->next = newNode;
q->rear = newNode;
}
}

int isEmpty(struct Queue* q)

{
return (q->front == NULL);
}

process dequeue(struct Queue* q)
if (isEmpty(q)) {
{
return -1;
}
struct node* temp = q->front;
process p = temp->p;
q->front = q->front-
>next;
if (q->front == NULL)
q->rear = NULL;
}
{
free(temp);
return p;
}

struct semaphore
struct Queue q;
{int value;
};

void P(struct semaphore* s, process currentProcess)
if (s->value == 1) {
{s->value = 0; } else
{
enqueue(&s->q, printf("Process
%d is going to sleep.\n", currentProcess); sleep(1);
}currentProcess);
}

void V(struct semaphore* s)
if (isEmpty(&s->q)) {    s-
>value = 1; } else {
}

```

```

process p = dequeue(&s->q);
    if (p != -1) {
        printf("Process %d is waking up.\n", p);
    }
}

int main() {
    printf("This is Sanyog sharma!!\n");

    struct semaphore
    sem.value = 1;
    sem;
    initQueue(&sem.q);
    process p1 = 1;
    process p2 = 2;  process
    p3 = 3;

    P(&sem, p1);
    P(&sem, p2);
    P(&sem, p3);

    V(&sem);
    V(&sem);
    V(&sem);

    return 0;
}

```

Output

```

sanyog@SANYOG-E4tE8NIS:~/OSLab$ nano semaphore.c
sanyog@SANYOG-E4tE8NIS:~/OSLab$ gcc semaphore.c -o semaphore
sanyog@SANYOG-E4tE8NIS:~/OSLab$ ./semaphore
This is sanyog
Process 2 is going to sleep.
Process 3 is going to sleep.
Process 2 is waking up.
Process 3 is waking up.
sanyog@SANYOG-E4tE8NIS:~/OSLab$ gcc semaphore.c -o semaphore

```

Learning Outcome:

Experiment 7

Aim: Write a program to implement Banker's algorithm for deadlock avoidance.

Theory:

Program

```
#include <stdio.h>

int n, m;

int checkSafeState(int available[], int max[][10], int allocation[][10], int need[][10], int safeSequence[]) {
    int work[10], finish[10] = {0};
    int count = 0;
    for (int i = 0; i < m; i++) {
        work[i] = available[i];
    }

    while (count < n) {
        int found = 0;
        for (int i = 0; i < n; i++) {
            if (finish[i] == 0) {
                int j;
                for (j = 0; j < m; j++) {
                    if (need[i][j] > work[j]) {
                        break;
                    }
                }
                if (j == m) {
                    for (int k = 0; k < m; k++) {
                        work[k] += allocation[i][k];
                    }
                    finish[i] = 1;
                    safeSequence[count] = i;
                    count++;
                }
            }
        }
    }
}
```

```

        }
        safeSequence[count++] = i;
        finish[i] = 1;
    found = 1;
    }
}
}

if (!found) {
return 0;
}
}

return 1;
}

void calculateNeed(int max[][10], int allocation[][10], int need[][10]) {
for (int i = 0; i < n; i++) { for (int j = 0; j < m; j++) {
    need[i][j] = max[i][j] - allocation[i][j];
}
}
}

int main() {
    int allocation[10][10], max[10][10], available[10], need[10][10];
    int safeSequence[10];

    printf("Enter the number of processes:
scanf("%d", &n);
"); printf("Enter the number of resources:
");

    scanf("%d", &m);

    for (int j = 0; j < m; j++)
        printf("Enter the allocation
{      scanf("%d", &allocation[i][j]);
        matrix:\n");
    } for (int i = 0; i < n; i++) {

        printf("Enter the maximum
for (int j = 0; j < m; j++) {
        matrix:\n");
        for (int i = 0; i < n; i++) {
            scanf("%d", &max[i][j]);
        }
    }

    printf("Enter the available
resources:\n");
}
}

```

```

for (int i = 0; i < m; i++)
    scanf("%d", &available[i]);
}

calculateNeed(max, allocation,
if (checkSafeState(available, max, allocation, need, safeSequence))
need);
{ printf("System is in a safe state.\nSafe sequence is: ")
    for (int i = 0; i < n; i++) {
        printf("%d ", safeSequence[i]);
    }
} else {
    printf("System is not in a safe
} state.\n");
return 0;
}

```

Output:

```

sanyog@SANYOG-E4tE8NIS:~/OSlab$ ./Banker
Enter the number of processes: 3
Enter the number of resources: 2
Enter the allocation matrix:
1 0
1 1
0 1
Enter the maximum matrix:
2 1
2 1
1 2
Enter the available resources:
1
0
System is in a safe state.
Safe sequence is: 1 2 0 sanyog@SANYOG-E4tE8NIS:~/OSlab$ ./Banker
Enter the number of processes: 3
Enter the number of resources: 2
Enter the allocation matrix:
0 1
2 0
3 0
Enter the maximum matrix:
7 5
3 2
9 0
Enter the available resources:
3
3
System is not in a safe state.
sanyog@SANYOG-E4tE8NIS:~/OSlab$ |

```

Learning Outcome:

Experiment 8

Aim: Implementation of the following Memory Allocation Methods for fixed partition a. First Fit b. Worst Fit c. Best Fit.

Theory:

Program

```
#include <stdio.h>

void firstFit(int blockSize[], int m, int processSize[], int n)
int allocation[n];  for (int i = 0; i < n; i++)
{   allocation[i] = -1; // Initially no block is assigned to any
    } process
        for (int i = 0; i < n; i++)      for (int j
= 0; j < m; j++) {           if (blockSize[j]
>= processSize[i]) {
            allocation[i] = j; // Assign block j to process
            blockSize[j] -= processSize[i]; // Reduce available memory in this block
break;
        }
    }
printf("\nFirst Fit Allocation:\n");
printf("Process No.\tProcess Size\tBlock No.\n");
for (int i = 0; i < n; i++)
{   printf("%d\t%d\t", i + 1, processSize[i]);
    if (allocation[i] != -1)
        printf("%d\n", allocation[i] + 1);
else
```

```

        printf("Not
}
}     Allocated\n");

void bestFit(int blockSize[], int m, int processSize[], int n)
int allocation[n];  for (int i = 0; i < n; i++)
{   allocation[i] = -1; // Initially no block is assigned to any
}   process

for (int i = 0; i < n; i++)      int
bestIdx = -1;      for (int j = 0; j < m;
{ {     if (blockSize[j] >= processSize[i])
{
    if (bestIdx == -1 || blockSize[j] < blockSize[bestIdx]) {
bestIdx = j;
}
}
}

if (bestIdx != -1) {
allocation[i] = bestIdx;
blockSize[bestIdx] -= processSize[i];
}

Allocation:\n");
printf("Process No.\tProcess Size\tBlock No.\n");
for (int i = 0; i < n; i++) {

printf("%d\t%d\t", i + 1, processSize[i]);
if (allocation[i] != -1)

printf("%d\n", allocation[i] + 1);
else
printf("Not Allocated\n");
}
}

void worstFit(int blockSize[], int m, int processSize[], int n)
int allocation[n];  for (int i = 0; i < n; i++)
{   allocation[i] = -1; // Initially no block is assigned to any
}   process

for (int i = 0; i < n; i++) {      int
worstIdx = -1;      for (int j = 0; j < m;
j++) {     if (blockSize[j] >=
processSize[i]) {
    if (worstIdx == -1 || blockSize[j] > blockSize[worstIdx])
worstIdx = j;
}
}
}

```

```

        }
    }

    if (worstIdx != -1) {
        allocation[i] = worstIdx;
        blockSize[worstIdx] -= processSize[i];
    } printf("Process No.\tProcess Size\tBlock No.\n");
} for (int i = 0; i < n; i++) {
    printf("%d\t%d\t", i + 1, processSize[i]);
printf("\nWorst Fit

Allocation:\n");

if (allocation[i] != -1)
printf("%d\n", allocation[i] + 1);
else
    printf("Not Allocated\n");
}

int main() { int blockSize[] = {100, 500, 200,
300, 600}; int processSize[] = {212, 417, 112,
426}; int m = sizeof(blockSize) /
sizeof(blockSize[0]);
int n = sizeof(processSize) / sizeof(processSize[0]);

int blockSize1[m], blockSize2[m], blockSize3[m];

// Copy the original block sizes for each

method

for (int i = 0; i < m; i++) {
    blockSize1[i] = blockSize[i];
} blockSize2[i] = blockSize[i];
blockSize3[i] = blockSize[i];
firstFit(blockSize1, m, processSize,
bestFit(blockSize2, m, processSize, n);
n);
worstFit(blockSize3, m, processSize, n);
return 0;
}

```

OUTPUT

```
sanyog@SANYOG-E4tE8NIS:~/OSlab$ nano Mem_Alloc.c
sanyog@SANYOG-E4tE8NIS:~/OSlab$ gcc Mem_Alloc.c -o Mem_Alloc
sanyog@SANYOG-E4tE8NIS:~/OSlab$ ./Mem_Alloc
```

First Fit Allocation:

Process No.	Process Size	Block No.
1	212	2
2	417	5
3	112	2
4	426	Not Allocated

Best Fit Allocation:

Process No.	Process Size	Block No.
1	212	4
2	417	2
3	112	3
4	426	5

Worst Fit Allocation:

Process No.	Process Size	Block No.
1	212	5
2	417	2
3	112	5
4	426	Not Allocated

```
sanyog@SANYOG-E4tE8NIS:~/OSlab$
```

Learning Outcome