

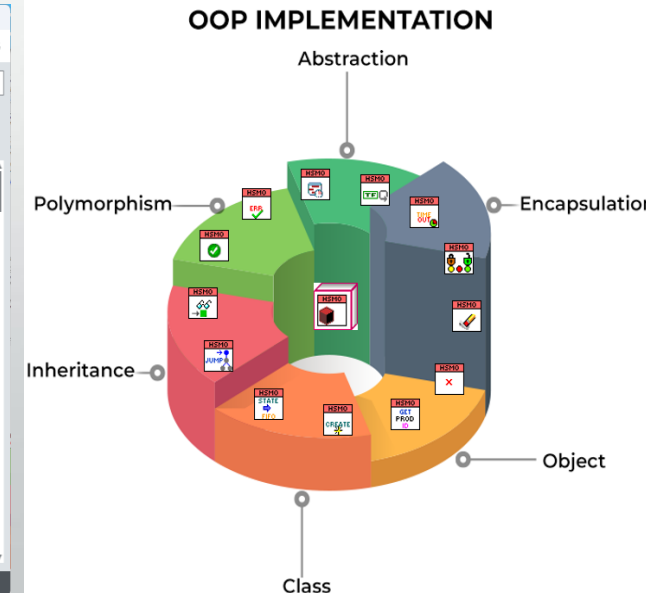
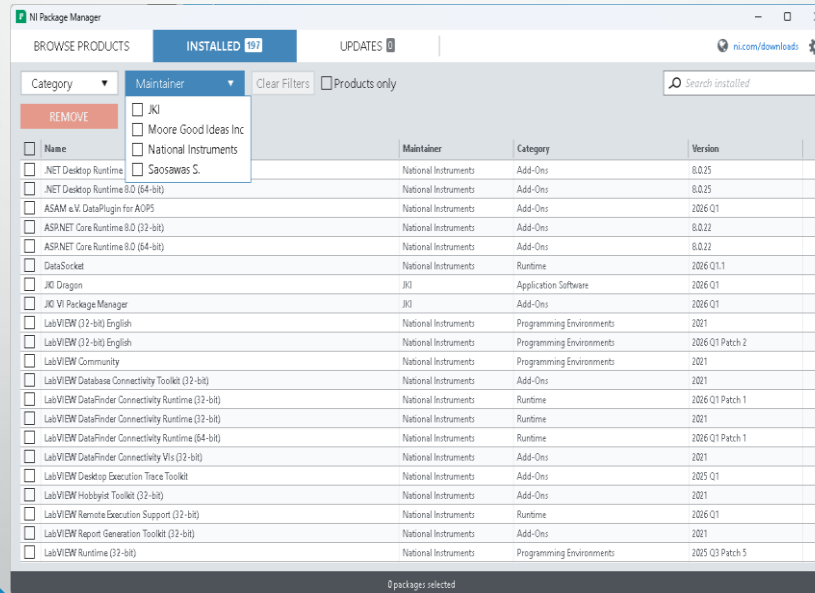
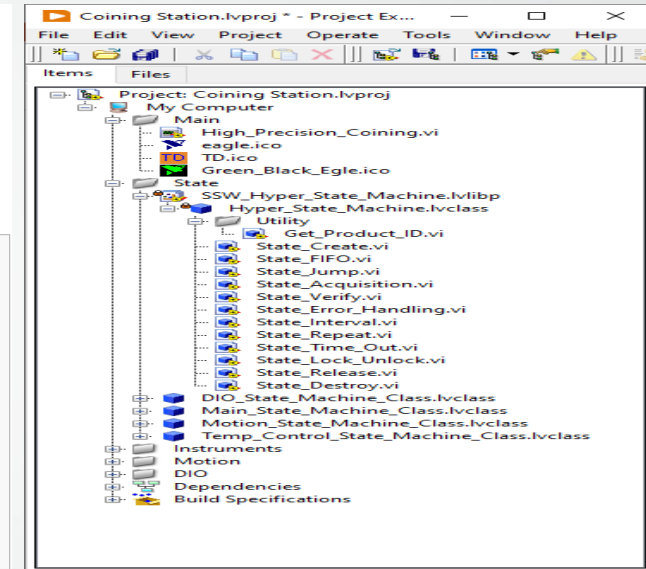


Hierarchical State Machine Object (HSMO)



- ❖ Background
- ❖ Framework Installation
- ❖ Framework Remove
- ❖ Object Oriented Programming
- ❖ Shortcut Menu & Class Member
- ❖ Design Pattern
- ❖ Implementation
- ❖ Benefit

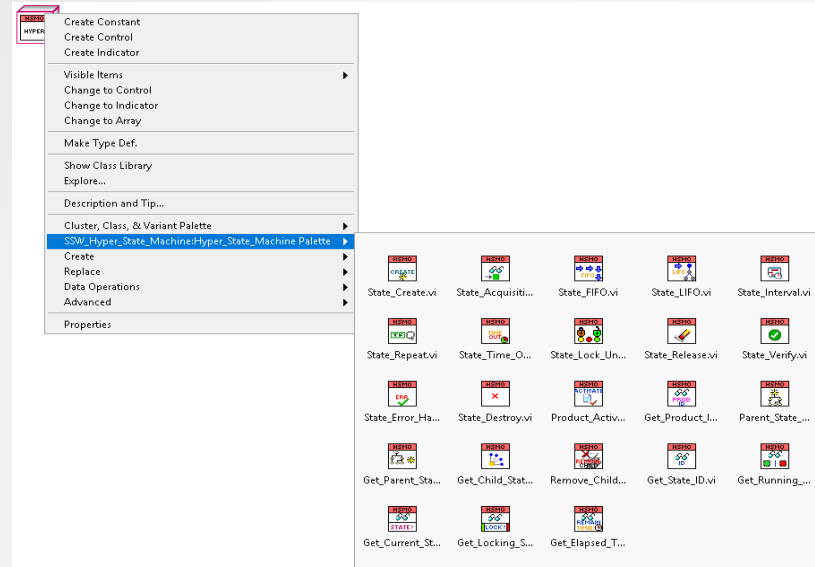

Hierarchical State Machine Object (HSMO)

❖ Background




- The complex hardware application have the mixed multiple transfer rate of data communication and multiple timing requirement base on hardware efficiency ?
- The regular method of parallelize execution or multithreading is using multiple sub program (sub vi) to separate task for each device such as Clone, Actor framework, vi template, sub panel, FGV/Action Engine,etc
- Yes, above method is the good one of programming technique but it's require more memory usage, more class member and more sub vi is very complicate to maintain on larger application.
- This Framework we design with less memory usage and single space management by State Machine and handling with Case Structure base on OOP , which Base Class is the Precompile and Implement to all delivered class, each Base Class has independent Timing and State Mechanism
- Replace the delay function with "State Interval" behavior, it's the key point of this framework, the multiple instance is using individual "State Interval" to keep each timing of hardware requirement and do not impact to each other State on parallel execution or multithreading

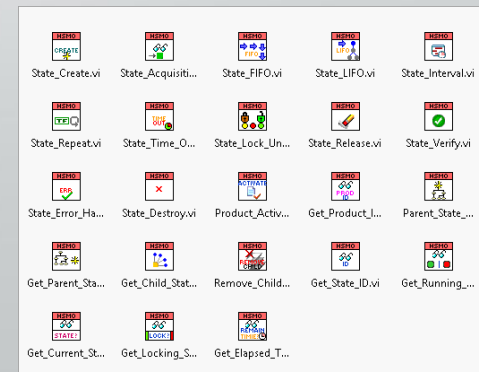



Hierarchical State Machine Object (HSMO)

❖ Framework Installation

hyper-state-machine-framework_1.0.0-0_windows_all.nipkg

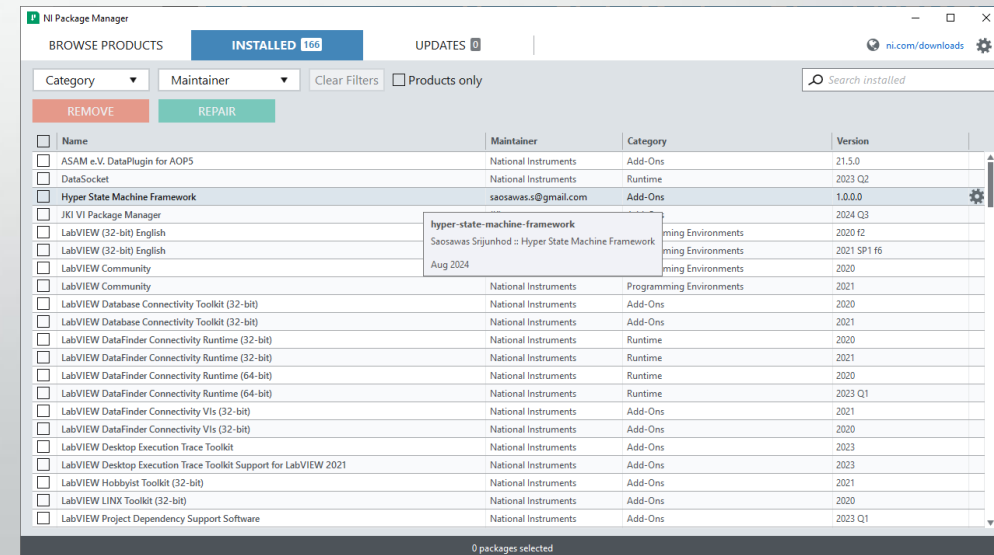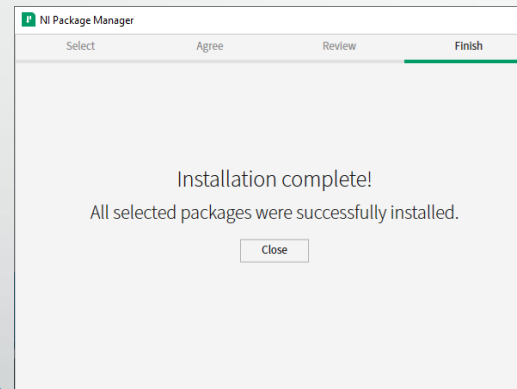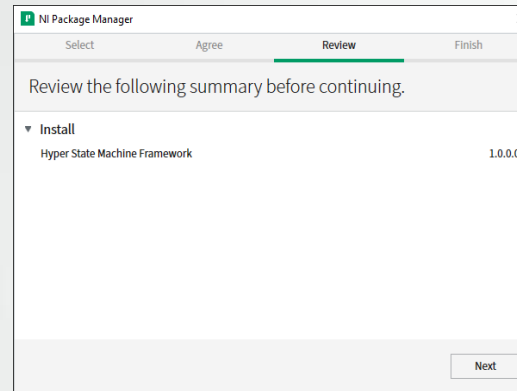


 Framework Remove

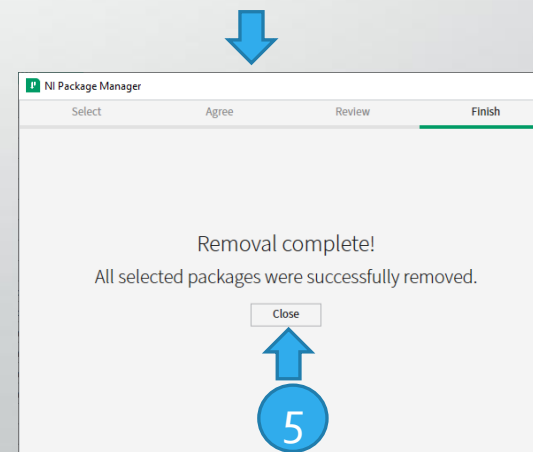

Hierarchical State Machine Object (HSMO)

❖ Object Oriented Programming (OOP)

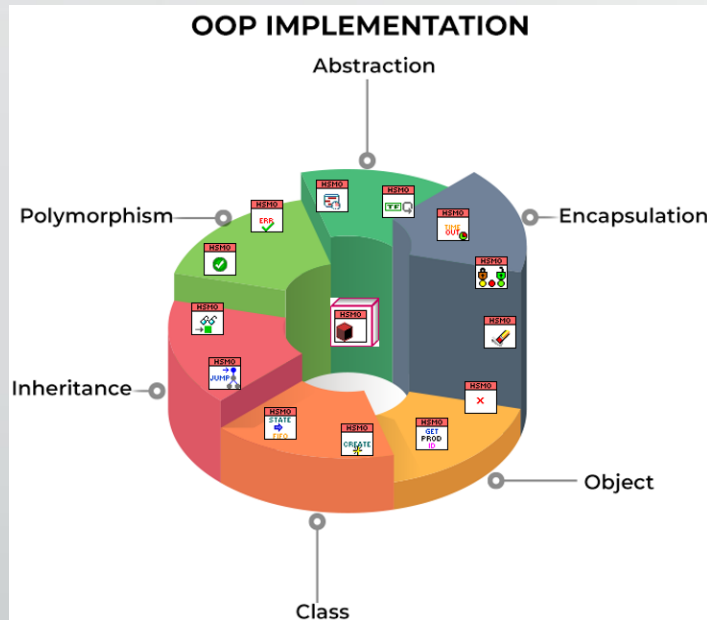

❖ Abstraction :

Data abstraction is a design pattern in which data are visible only to semantically related functions, so as to prevent misuse. The success of data abstraction leads to frequent incorporation of data hiding as a design principle in object oriented and pure functional programming.

❖ Inheritance :

inheritance. This allows classes to be arranged in a hierarchy that represents "is-a-type-of" relationships. For example, class Employee might inherit from class Person. All the data and methods available to the parent class also appear in the child class with the same names. For example, class Person might define variables "first_name" and "last_name" with method "make_full_name()". These will also be available in class Employee, which might add the variables "position" and "salary". This technique allows easy re-use of the same procedures and data definitions, in addition to potentially mirroring real-world relationships in an intuitive way. Rather than utilizing database tables and programming subroutines, the developer utilizes objects the user may be more familiar with: objects from their application domain.

❖ Encapsulation :

Encapsulation prevents external code from being concerned with the internal workings of an object. This facilitates code refactoring, for example allowing the author of the class to change how objects of that class represent their data internally without changing any external code (as long as "public" method calls work the same way). It also encourages programmers to put all the code that is concerned with a certain set of data in the same class, which organizes it for easy comprehension by other programmers. Encapsulation is a technique that encourages decoupling.

❖ Polymorphism :

polymorphism – is when calling code can be independent of which class in the supported hierarchy it is operating on – the parent class or one of its descendants. Meanwhile, the same operation name among objects in an inheritance hierarchy may behave differently.

For example, objects of type Circle and Square are derived from a common class called Shape. The Draw function for each type of Shape implements what is necessary to draw itself while calling code can remain indifferent to the particular type of Shape being drawn.


This is another type of abstraction that simplifies code external to the class hierarchy and enables strong separation of concerns.

❖ Object is an Instant of Class


❖ In object-oriented programming, a class is a template definition of the methods and variables in a particular kind of object. Thus, an object is a specific instance of a class; it contains real values instead of variables. The class is one of the defining ideas of object-oriented programming.

Hierarchical State Machine Object (HSMO)

Project

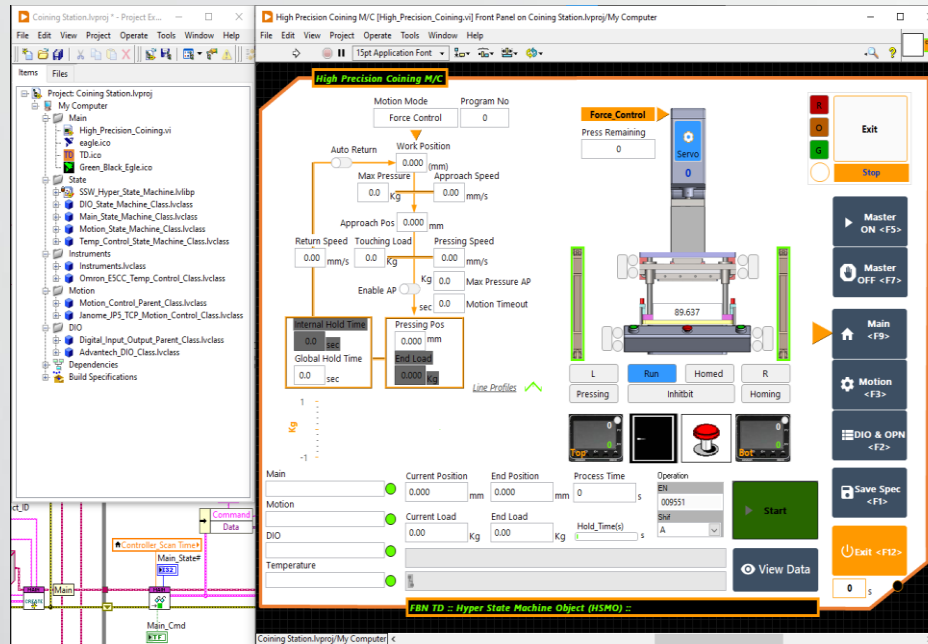


Dynamic Dispatching


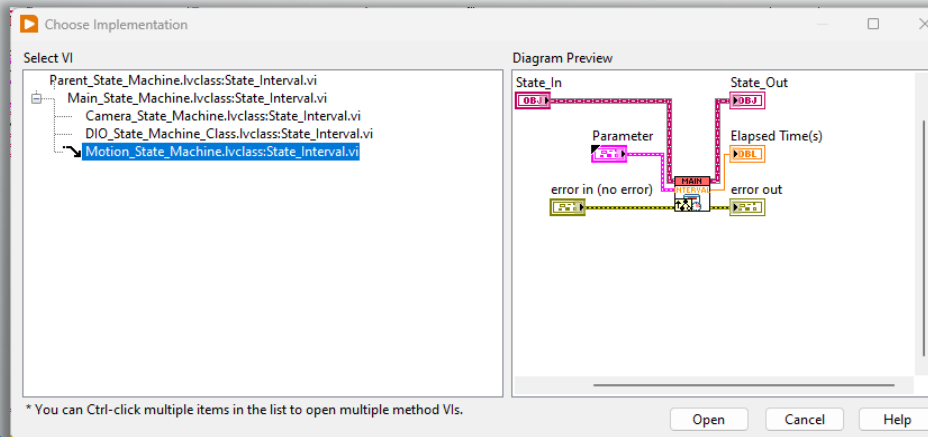


Coding

Implementation)

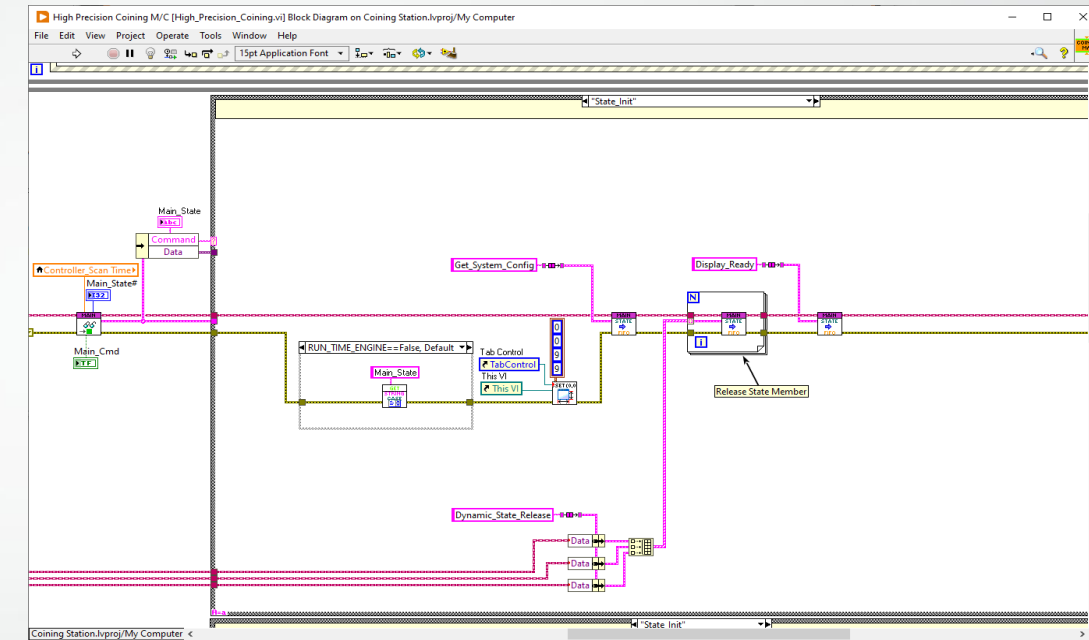

Method Overriding

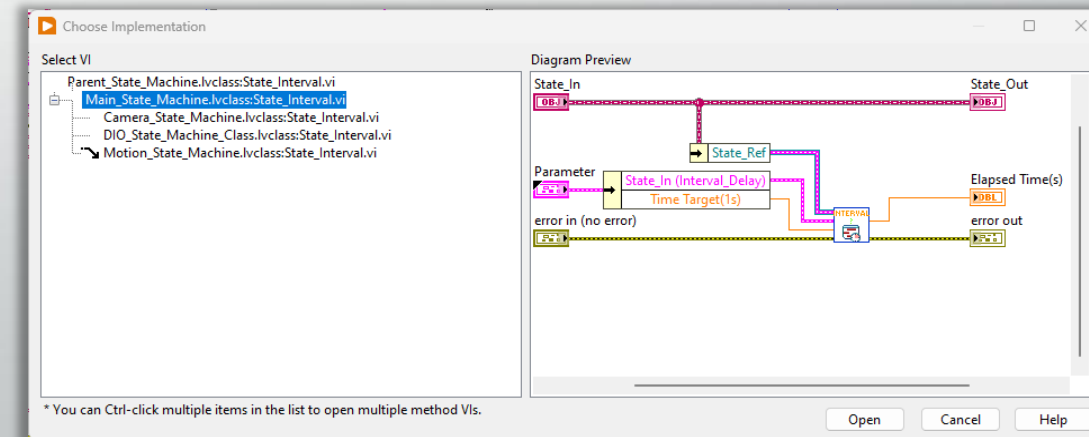


Hierarchical State Machine Object (HSMO)

SSW_Hyper_State_Machine.lvlib:Hyper_State_Machine.lvclass

No description available.

SSW_Hyper_State_Machine.lvlib:Hyper_State_Machine.lvclass (SSW_Hyper_State_Machine.lvlib:Hyper_State_Machine)

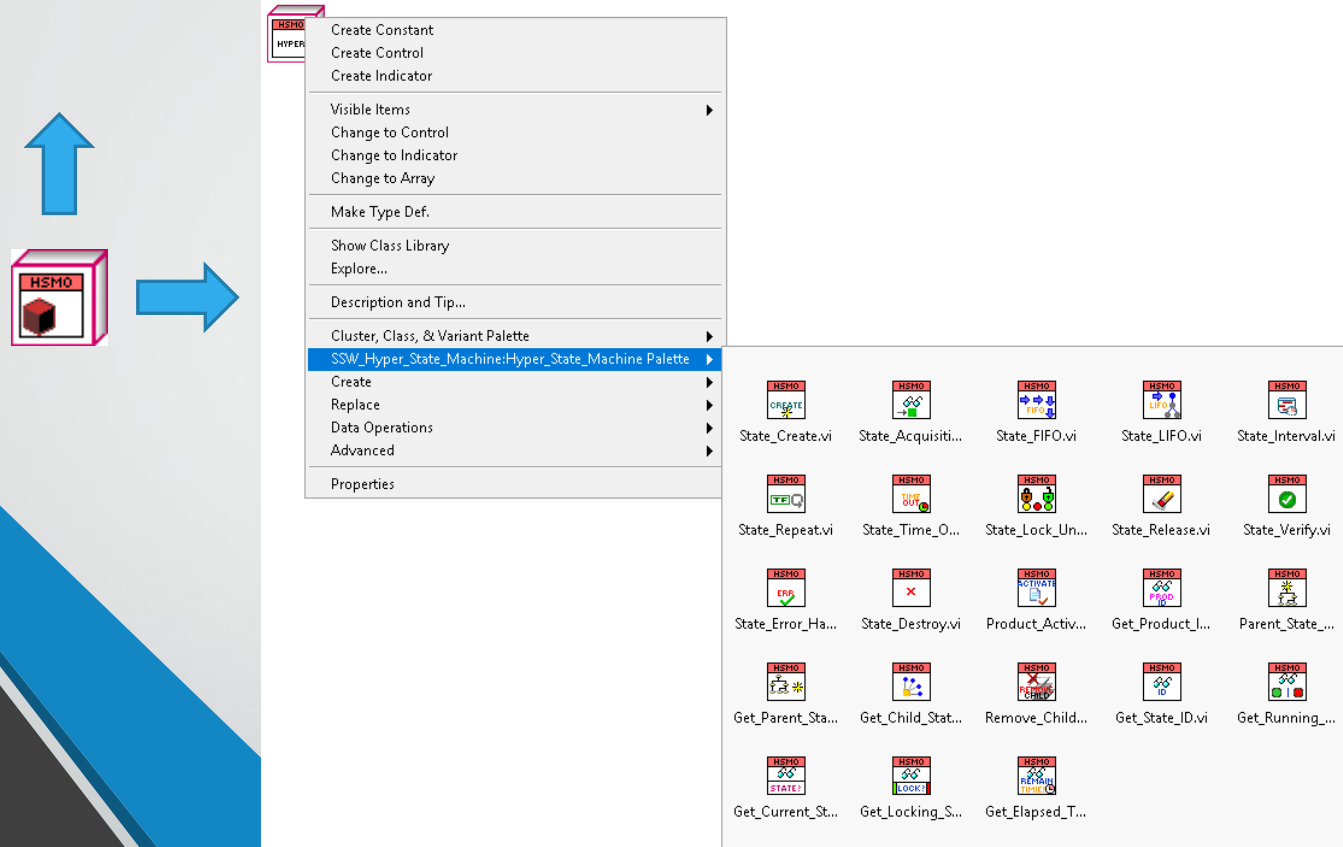

❖ Shortcut Menu

❖ Class Member (23)

- Get_Product_ID
- Get_Running_State
- Get_Child_State
- Get_Paent_State
- Get_Current_State
- Get_Elapsed_Time
- Get_Locking_State
- Get_State_ID
- Parent_State_Change
- Product_Activate
- Remove_Child_State
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy

Hierarchical State Machine Object (HSMO)

❖ Shortcut Menu

The image shows a context menu for an HSMO object. The menu options are:

- Create Constant
- Create Control
- Create Indicator
- Visible Items
 - Change to Control
 - Change to Indicator
 - Change to Array
- Make Type Def.
- Show Class Library
 - Explore...
- Description and Tip...
- Cluster, Class, & Variant Palette
 - SSW_Hyper_State_Machine:Hyper_State_Machine Palette
- Create
- Replace
- Data Operations
- Advanced
- Properties

The palette displays various HSMO objects, each with a unique icon and name:


Icon	Name
CREATE	State_Create.vi
Acquisition	State_Acquisiti...
FIFO	State_FIFO.vi
LIFO	State_LIFO.vi
Interval	State_Interval.vi
Repeat	State_Repeat.vi
Time Out	State_Time_O...
Lock	State_Lock_Un...
Release	State_Release.vi
Verify	State_Verify.vi
Error	State_Error_Ha...
Destroy	State_Destroy.vi
Product	Product_Activ...
Get Product	Get_Product_L...
Parent State	Parent_State_...
Get Parent State	Get_Parent_Sta...
Get Child State	Get_Child_Sta...
Remove Child	Remove_Child...
Get State ID	Get_State_ID.vi
Get Running	Get_Running_...
Get Current State	Get_Current_St...
Get Locking State	Get_Locking_S...
Get Elapsed Time	Get_Elapsed_T...

Hierarchical State Machine Object (HSMO)



Class Member (23)


- [Get_Product_ID](#)
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

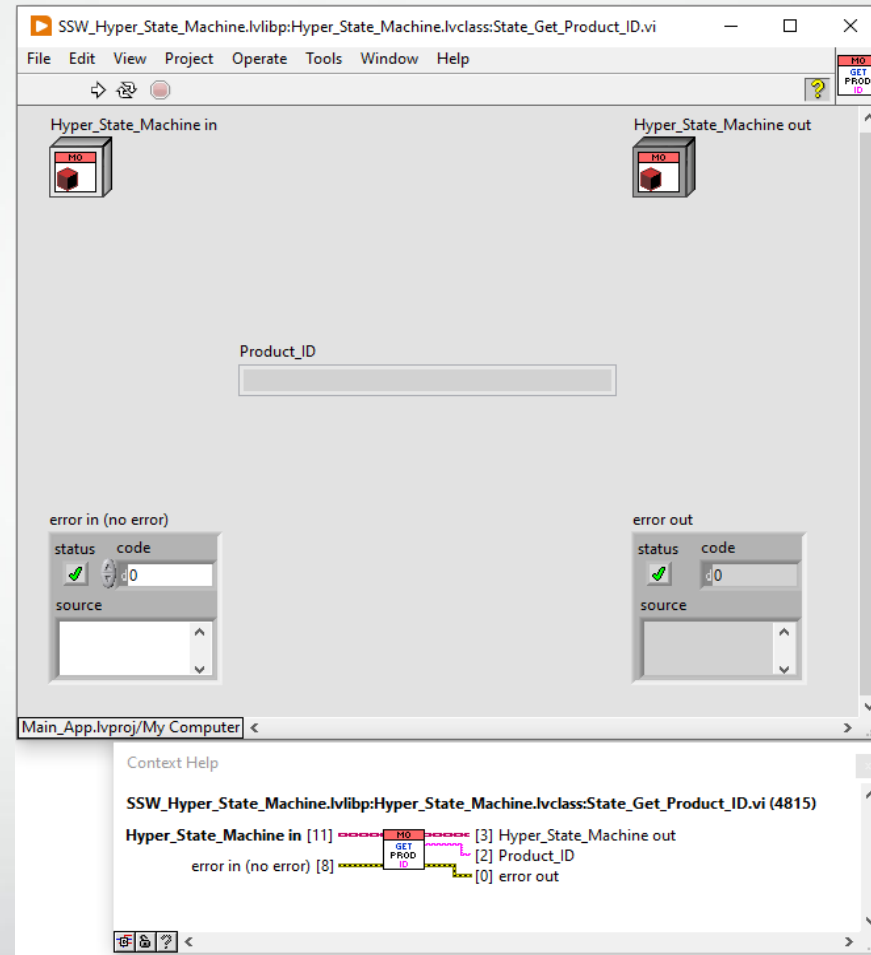

Method :




Get HSMO Product ID for License Activate in State_Create Method



Hierarchical State Machine Object (HSMO)


- [Get_Product_ID](#)
- [State_Create](#)
- [State_FIFO](#)
- [State_LIFO](#)
- [State_Acquisition](#)
- [State_Error_Handling](#)
- [State_Interval](#)
- [State_Repeat](#)
- [State_Time_Out](#)
- [State_Lock_Unlock](#)
- [State_Verify](#)
- [State_Release](#)
- [State_Destroy](#)
- [Product_Activate](#)
- [Parent_State_Override](#)
- [Get_Parent_State](#)
- [Get_Child_State](#)
- [Remove_Child_State](#)
- [Get_State_ID](#)
- [Get_Running_State](#)
- [Get_Current_State](#)
- [Get_Locking_State](#)
- [Get_Elapsed_Time](#)

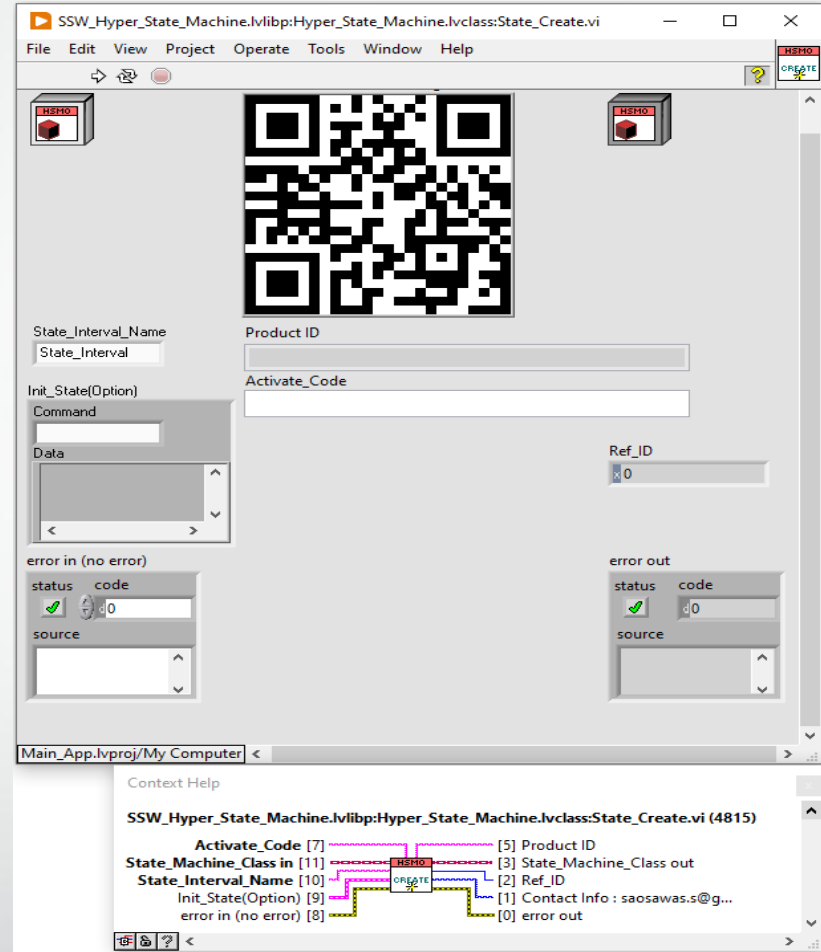

Method :



 Create HSMO




Hierarchical State Machine Object (HSMO)



Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

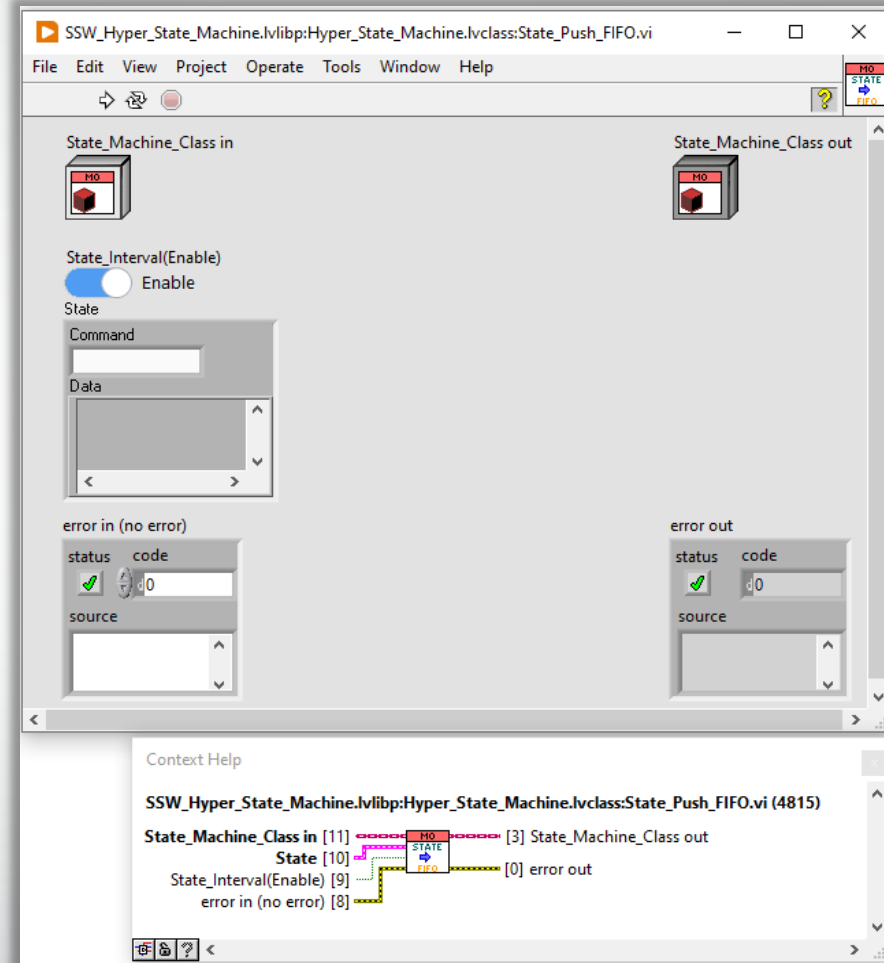

Method :




Append HSMO as FIFO (First In First Out)



Hierarchical State Machine Object (HSMO)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

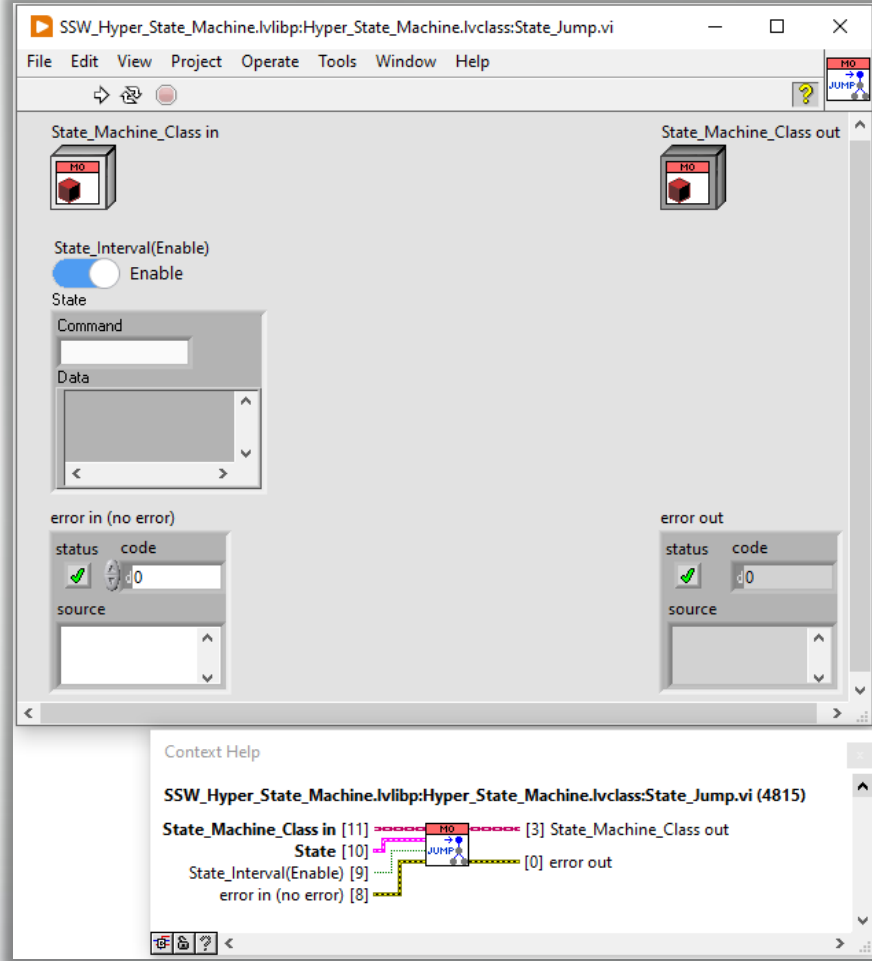

Method :



➤ Insert HSMO as Front most (Last In First Out)




Hierarchical State Machine Object (HSMO)



Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

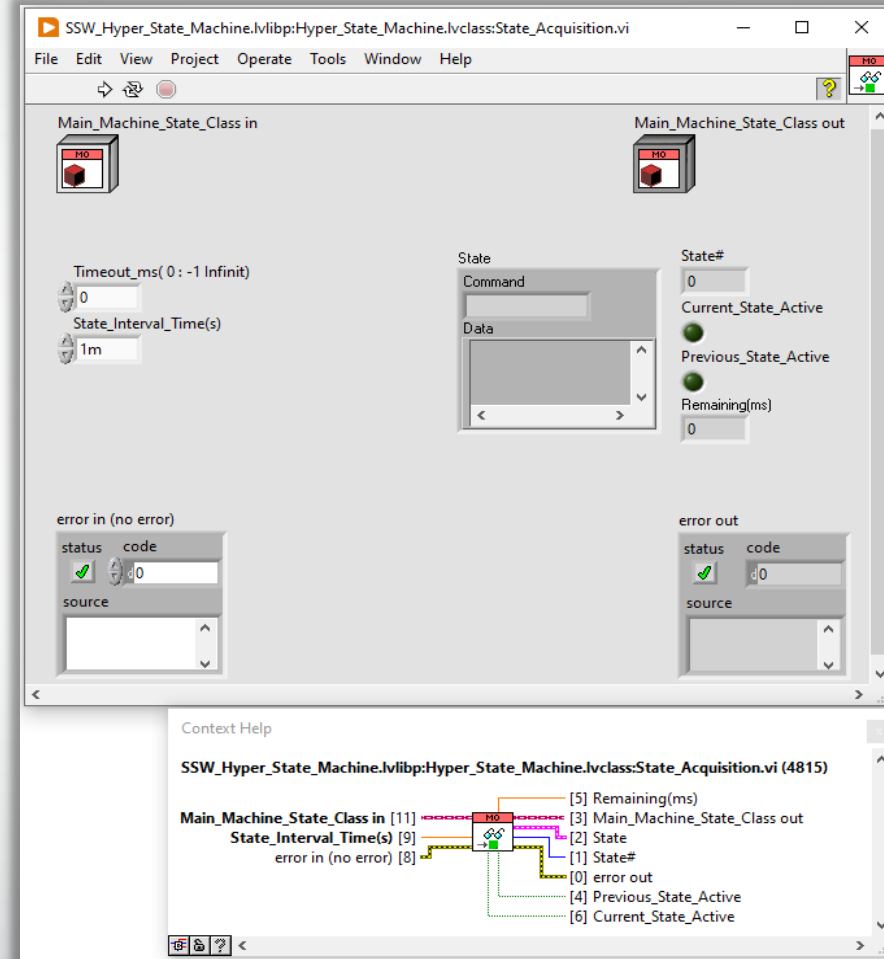

Method :




Get Current State and Removal




Hierarchical State Machine Object (HSMO)

- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- [State_Error_Handling](#)
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

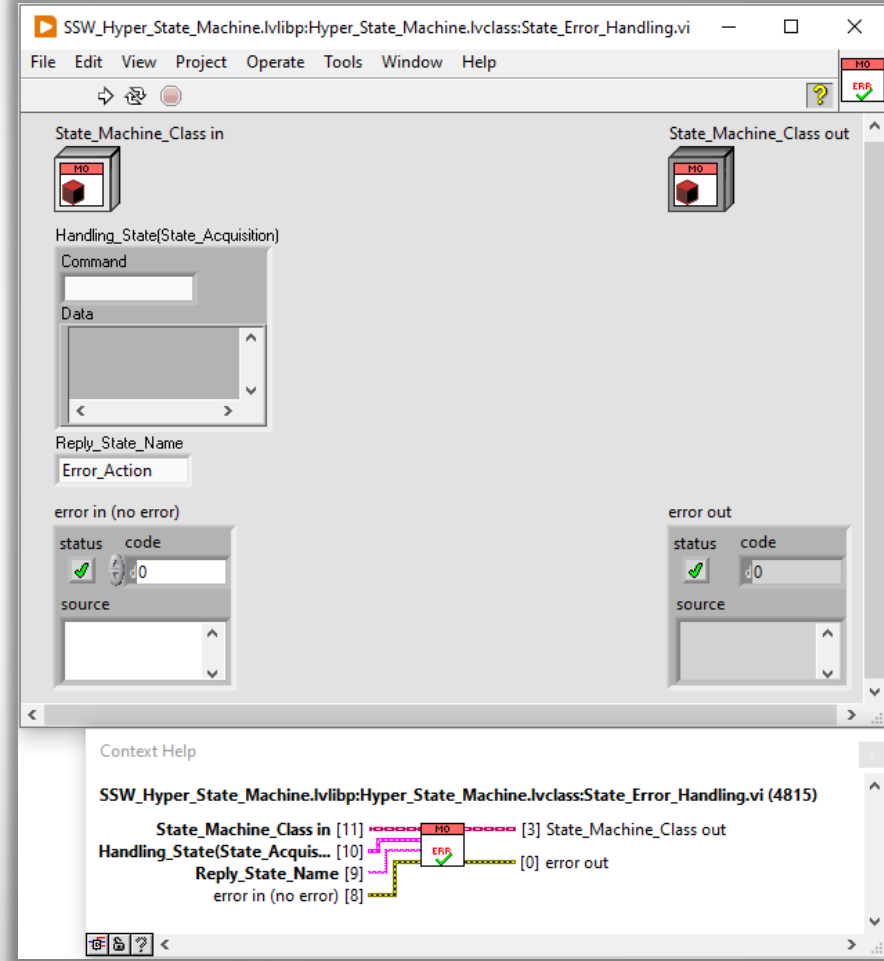


Error Handling of HSMO Member Class and Un define Method Detection



Hierarchical State Machine Object (HSMO)

❖ Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

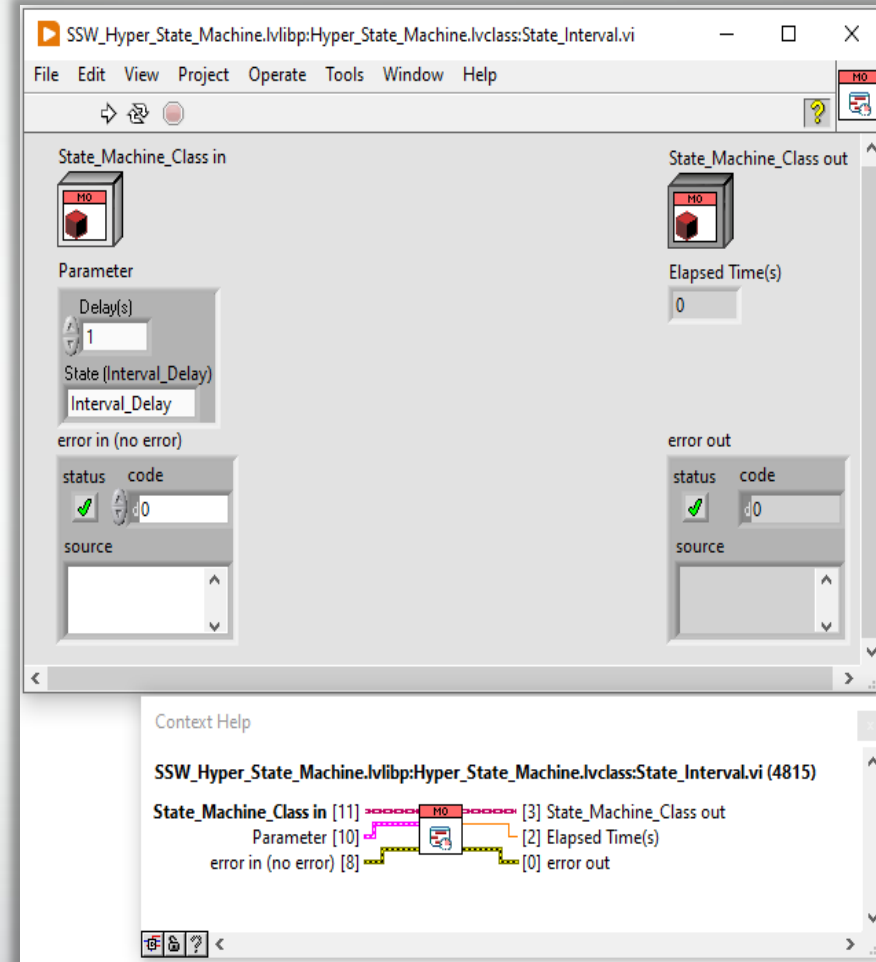

Method :



Repeat HSMO Target State with Specify Timing Target



Hierarchical State Machine Object (HSMO)

Class Member (23)

- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

SSW_Hyper_State_Machine.lvlib:Hyper_State_Machine.lvclass:State_Repeat.vi

File Edit View Project Operate Tools Window Help

State_Machine_Class in

State_Machine_Class out

Parameter

Action (True)

State_In

error in (no error)

status code

source

error out

status code

source

Context Help

SSW_Hyper_State_Machine.lvlib:Hyper_State_Machine.lvclass:State_Repeat.vi (4815)

State_Machine_Class in [11] → [3] State_Machine_Class out

Parameter [10] → [0] error out


error in (no error) [8] → [0] error out



Method :




Repeat HSMO Target State with Condition of Flag (True/False)




Hierarchical State Machine Object (HSMO)

- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

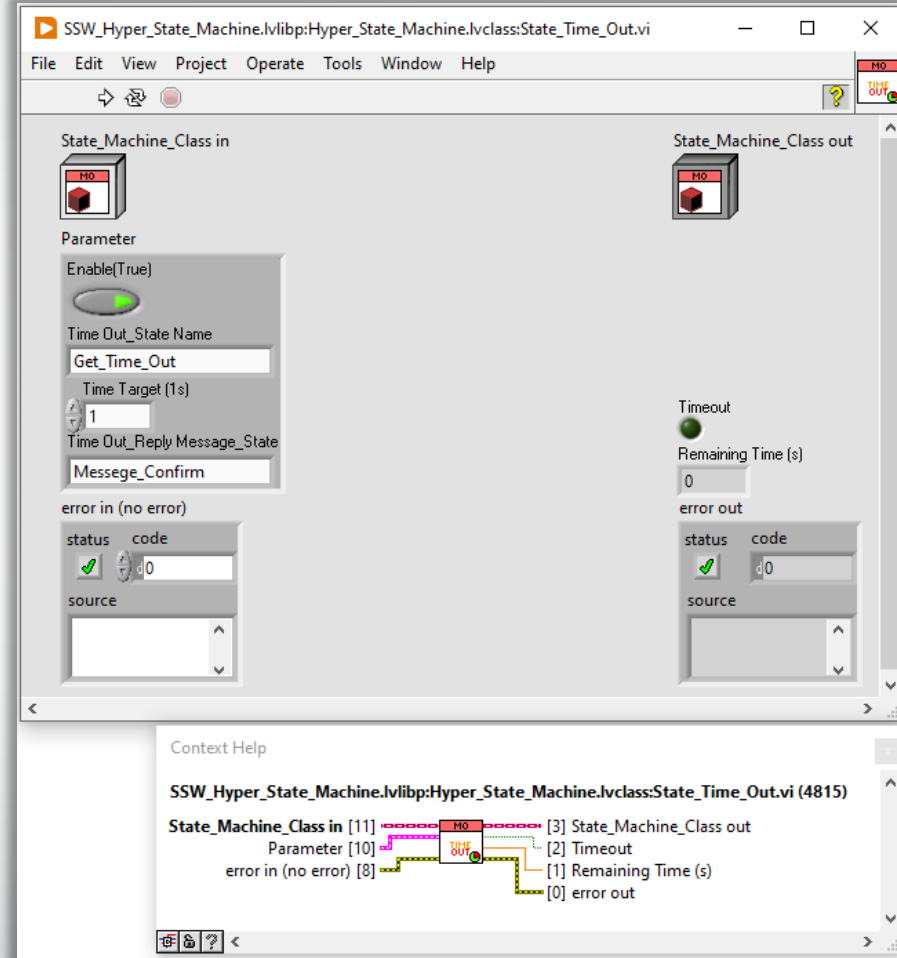


- Repeat & Monitoring HSMO Target State with Timeout
Target and Condition of Flag (True/False) , if Target State is
Timeout Active the Destination Action is activate



Hierarchical State Machine Object (HSMO)

❖ Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

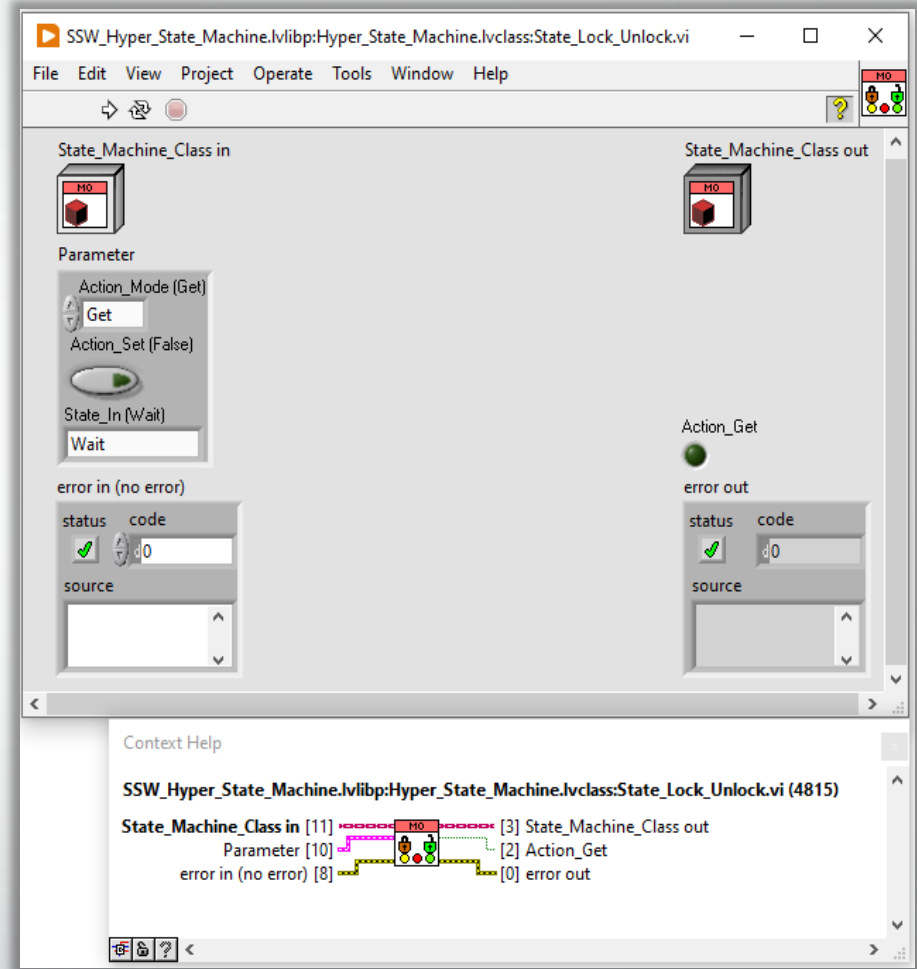

Method :




Lock or Unlock HSMO Target State, If Current State is Locking it's Waiting until the Unlock Command active



Hierarchical State Machine Object (HSMO)

❖ Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

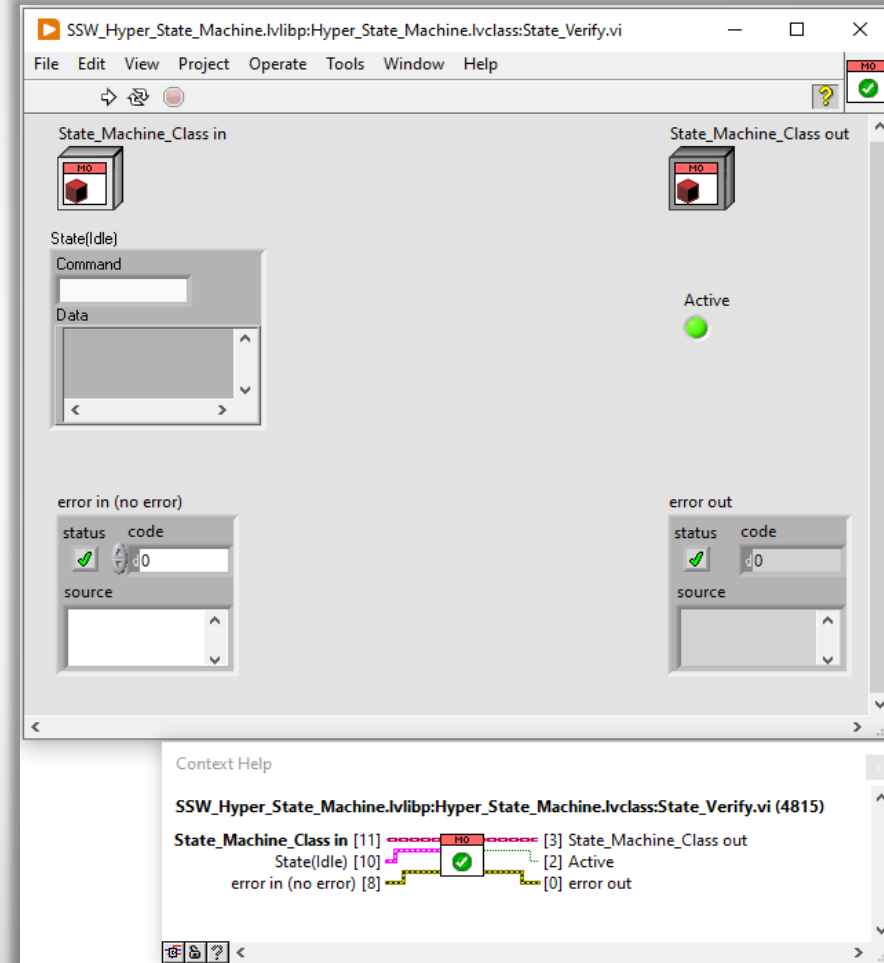

Method :



HSMO Self detection of un define State or Action to prevent malfunction




Hierarchical State Machine Object (HSMO)



Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

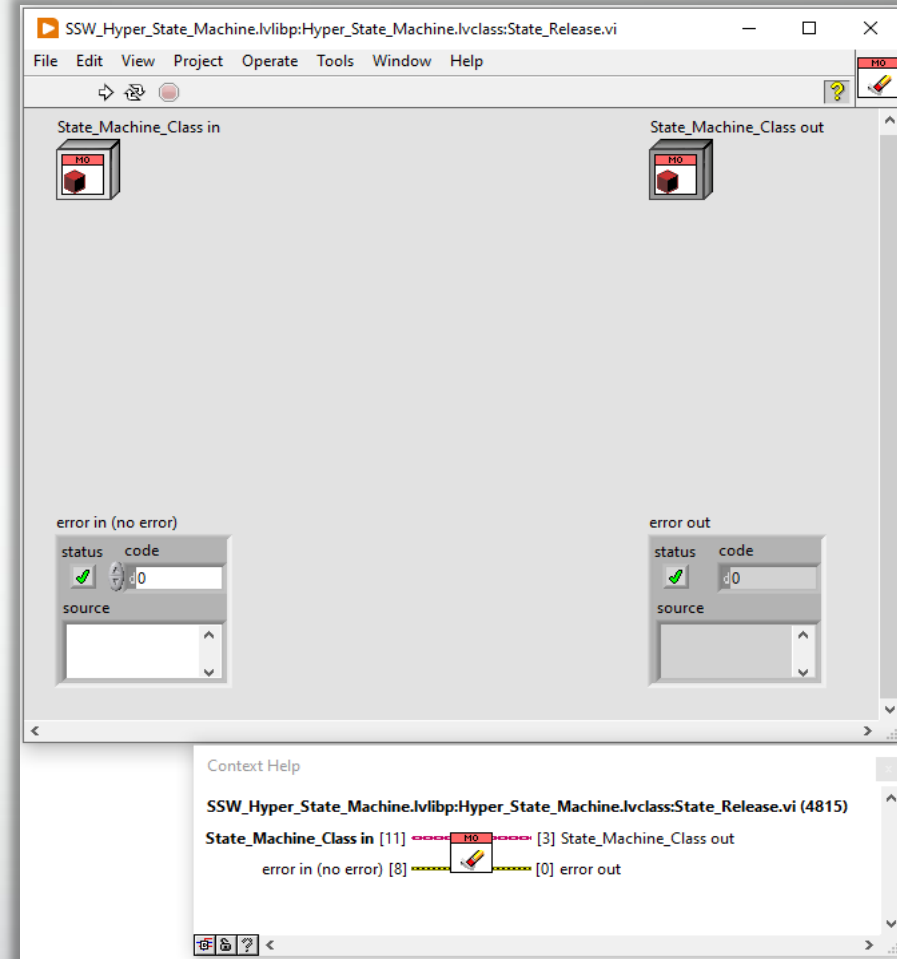

Method :



HSMO Release or Buffer Flushing




Hierarchical State Machine Object (HSMO)



Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

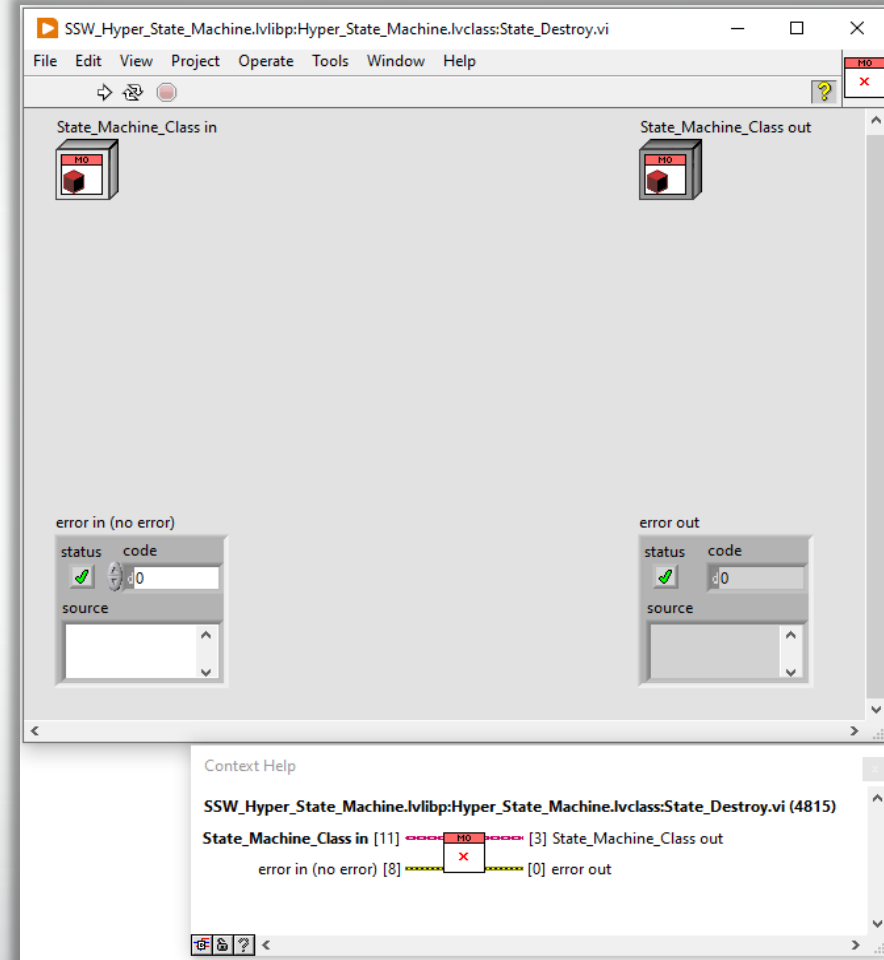

Method :



Delete HSMO




Hierarchical State Machine Object (HSMO)



Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

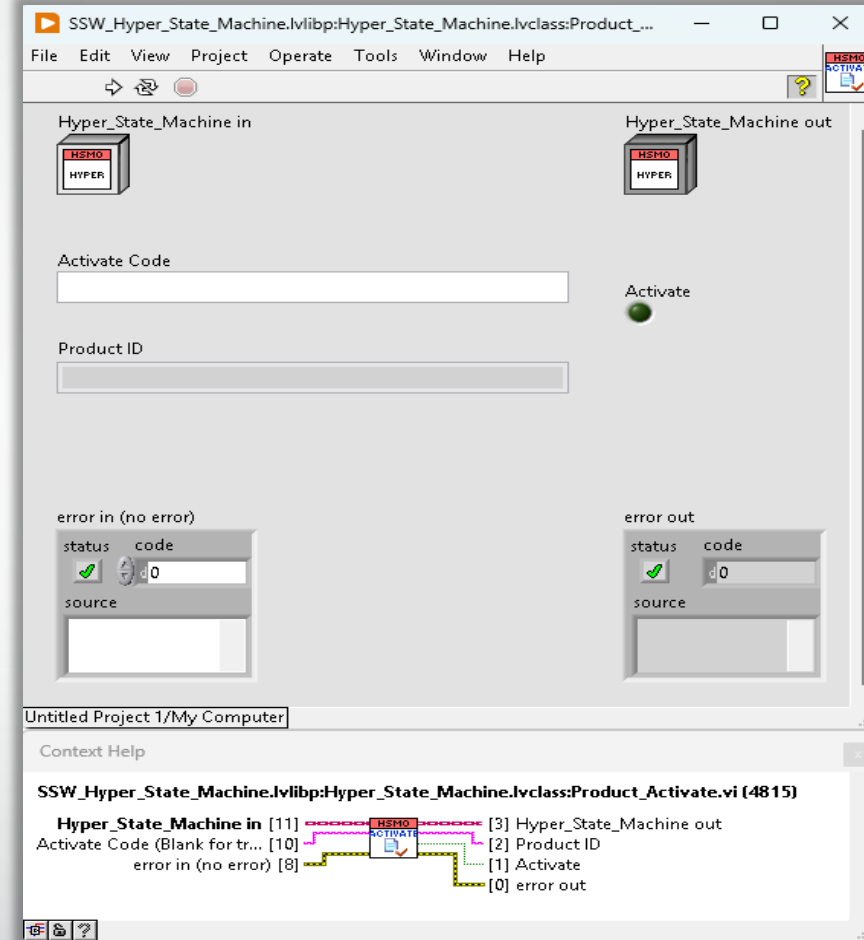

Method :




Delete HSMO



Hierarchical State Machine Object (HSMO)


- ❖ Class Member (23)
- Get_Product_ID
 - State_Create
 - State_FIFO
 - State_LIFO
 - State_Acquisition
 - State_Error_Handling
 - State_Interval
 - State_Repeat
 - State_Time_Out
 - State_Lock_Unlock
 - State_Verify
 - State_Release
 - State_Destroy
 - Product_Activate
 - Parent State Override
 - Get_Parent_State
 - Get_Child_State
 - Remove_Child_State
 - Get_State_ID
 - Get_Running_State
 - Get_Current_State
 - Get_Locking_State
 - Get_Elapsed_Time

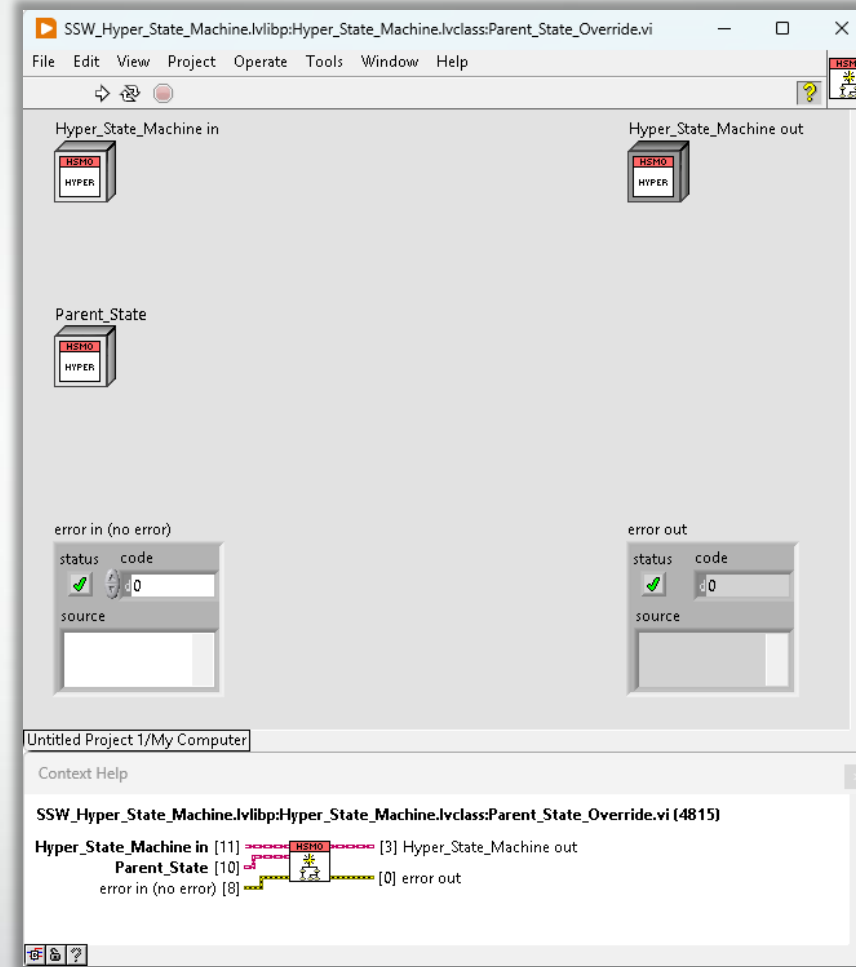

❖ Method :




➤ Override the Original Parent State to Other Parent



Hierarchical State Machine Object (HSMO)

Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

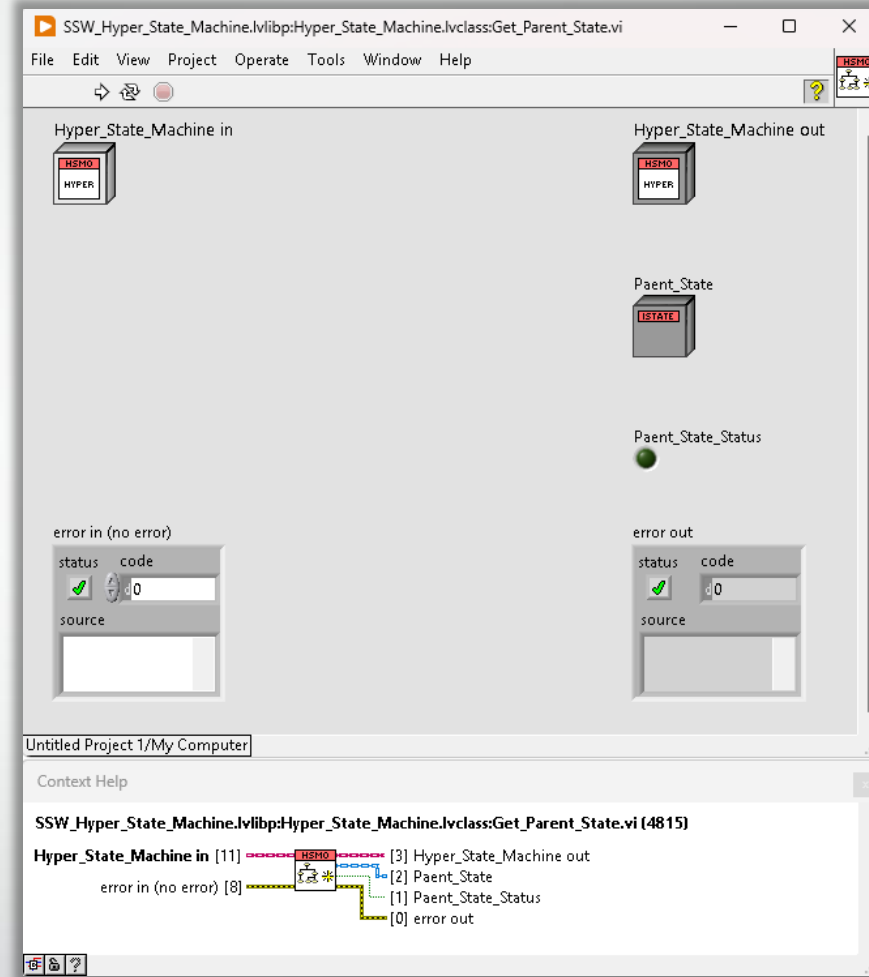

Method :



Get Parent State of Current Child State




Hierarchical State Machine Object (HSMO)



Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

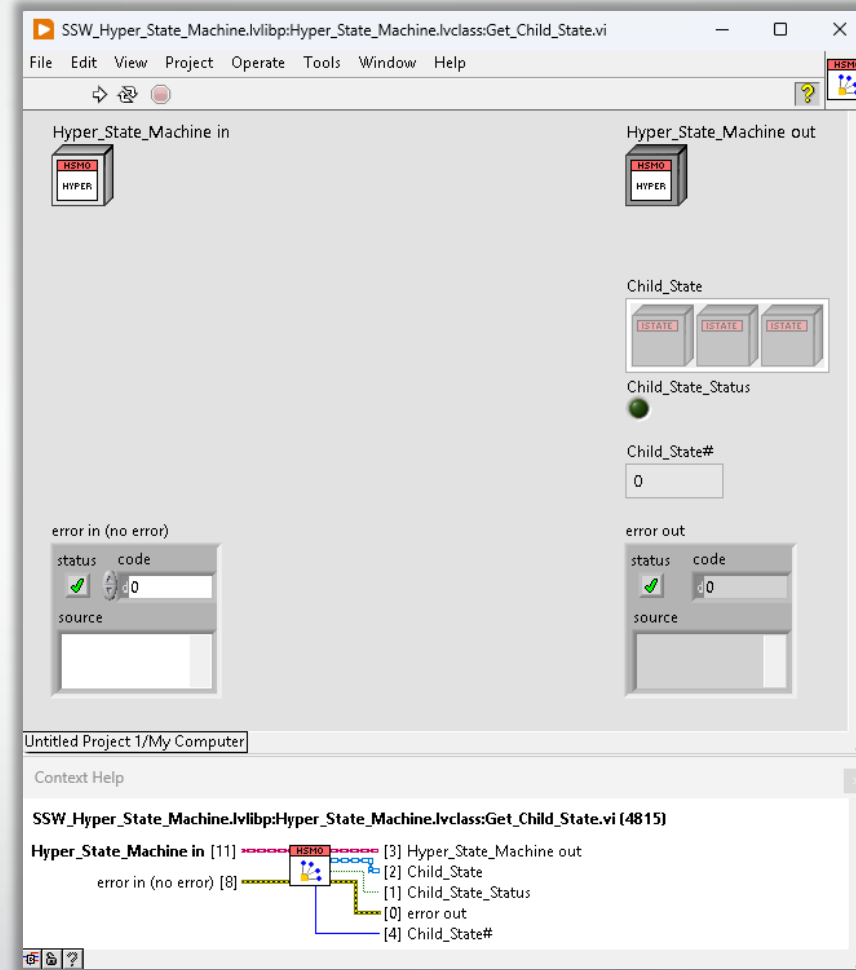

Method :




Get Child State Member of Current State (Parent)



Hierarchical State Machine Object (HSMO)

Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

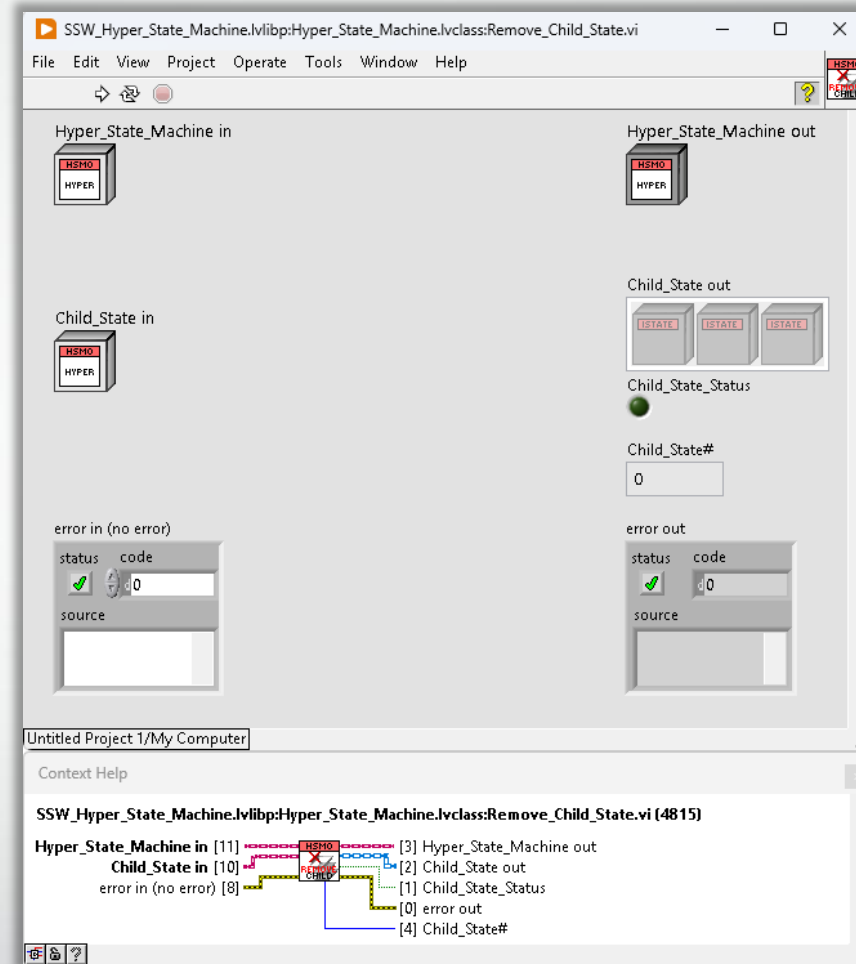

Method :




Remove Child State Member (*This State is only Internal use and Protected Scope*)



Hierarchical State Machine Object (HSMO)

Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

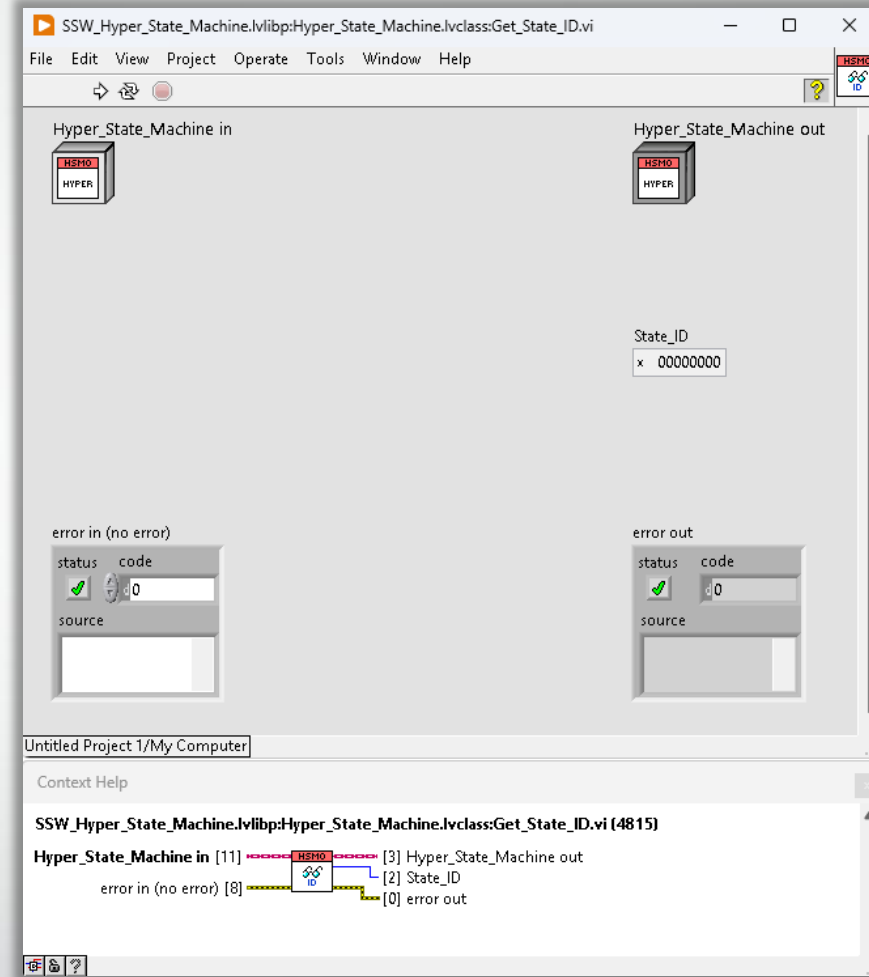

Method :




Get Current State ID (Unique ID of Created State , This is Special Feature of DVR)



Hierarchical State Machine Object (HSMO)


- ❖ Class Member (23)
- Get_Product_ID
 - State_Create
 - State_FIFO
 - State_LIFO
 - State_Acquisition
 - State_Error_Handling
 - State_Interval
 - State_Repeat
 - State_Time_Out
 - State_Lock_Unlock
 - State_Verify
 - State_Release
 - State_Destroy
 - Product_Activate
 - Parent_State_Override
 - Get_Parent_State
 - Get_Child_State
 - Remove_Child_State
 - Get_State_ID
 - Get_Running_State
 - Get_Current_State
 - Get_Locking_State
 - Get_Elapsed_Time

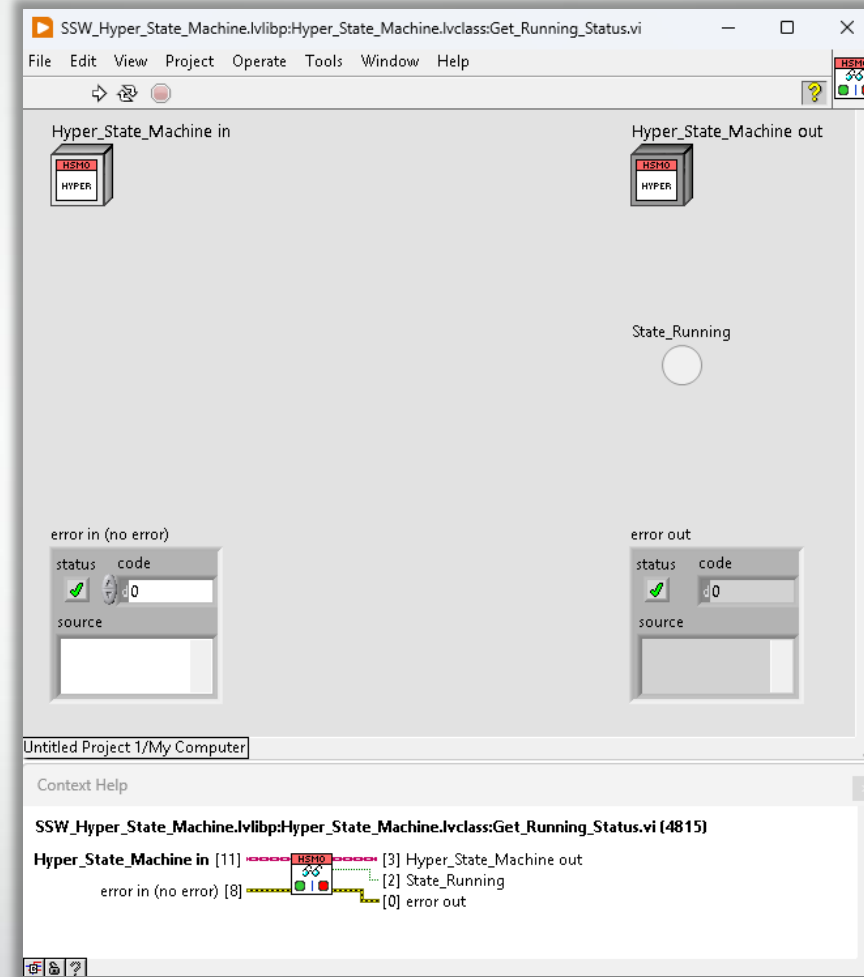

Method :




Get Current State Status is Pending Run(True) or Stopped (False)




Hierarchical State Machine Object (HSMO)

- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- [Get_Current_State](#)
- Get_Locking_State
- Get_Elapsed_Time

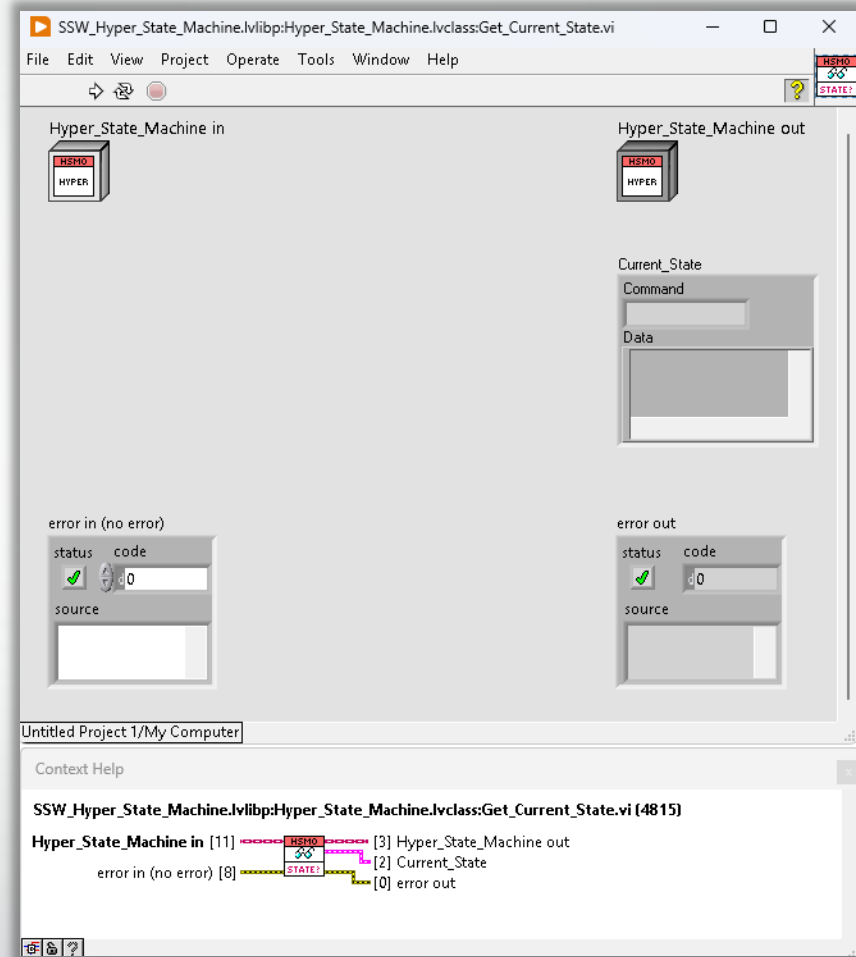


- Monitoring the Current (do not remove out state)



Hierarchical State Machine Object (HSMO)

Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

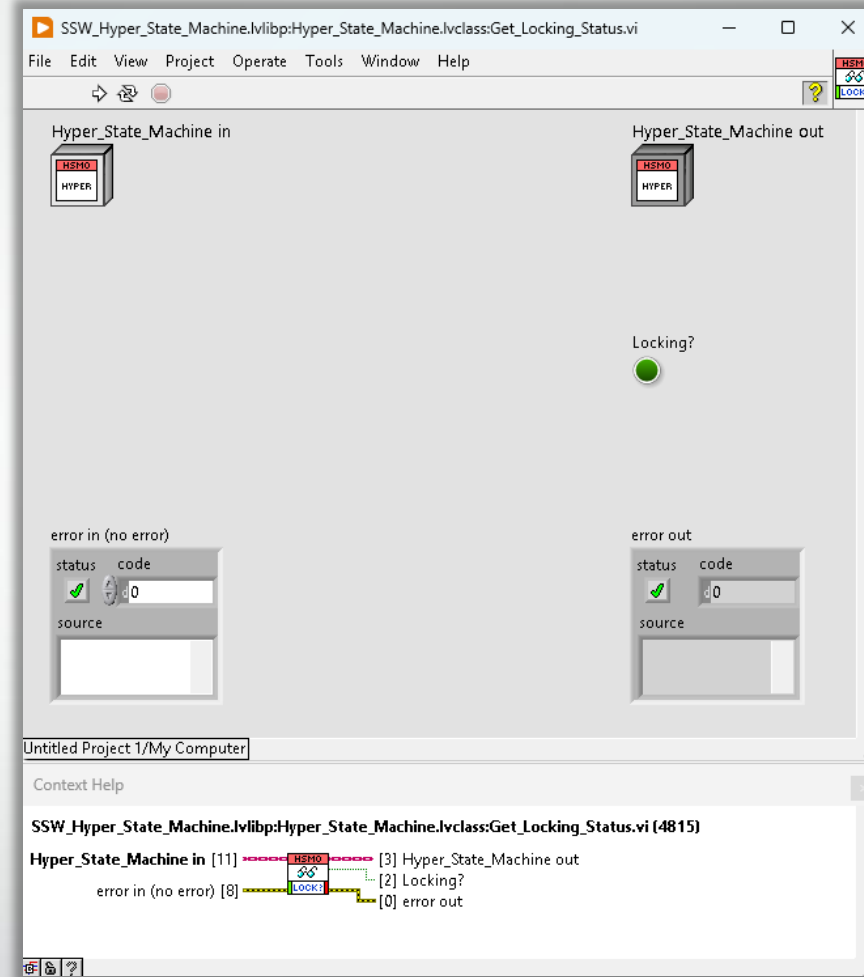

Method :



Get Current State is Locking or Free




Hierarchical State Machine Object (HSMO)



Class Member (23)


- Get_Product_ID
- State_Create
- State_FIFO
- State_LIFO
- State_Acquisition
- State_Error_Handling
- State_Interval
- State_Repeat
- State_Time_Out
- State_Lock_Unlock
- State_Verify
- State_Release
- State_Destroy
- Product_Activate
- Parent_State_Override
- Get_Parent_State
- Get_Child_State
- Remove_Child_State
- Get_State_ID
- Get_Running_State
- Get_Current_State
- Get_Locking_State
- Get_Elapsed_Time

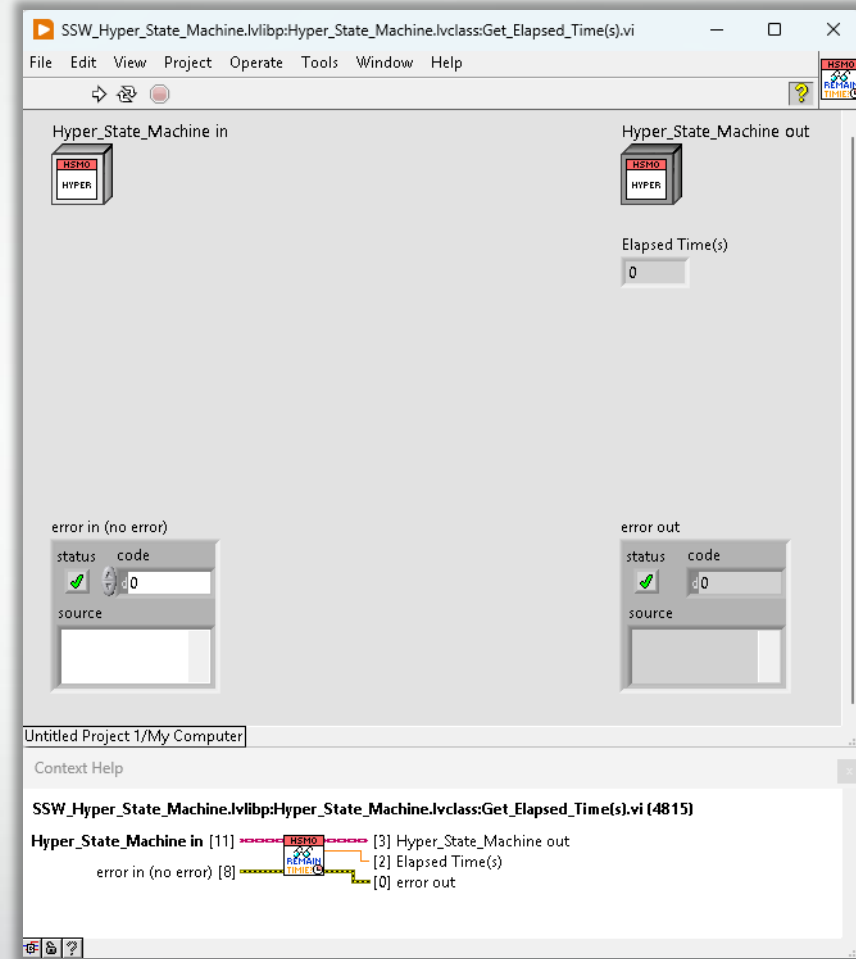

Method :



Get Current Elapsed Timing when State_Time_Out or State_Interval is Active



Hierarchical State Machine Object (HSMO)

❖ Design Pattern



Object Create

Action

Acquisition

Execution



Error Handling

Object Destroy



Class Member

User Command

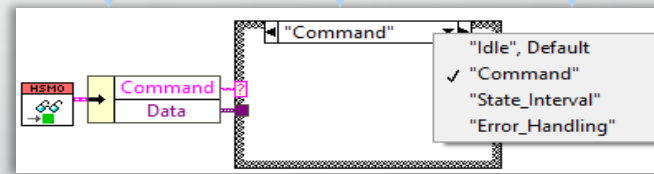


Implementation



The screenshot displays the LabVIEW environment with the 'Test_Multiple_Class_Multiple_State' project open. The front panel shows a multi-state machine with the following states and indicators:


- Commander:** Commander, Commander_Elapsed Time(s), State1_Time_Act, Commander_Active, Commander_Remaining(s).
- Image Acquisition:** Image Acquisition, Image Acquisition_Elapsed Time(s), Image Acquisition_Time_Act, Image Acquisition_Active, Image Acquisition_Remaining(s).
- Motion Control:** Motion Control, Motion Control_Elapsed Time(s), Motion Control_Time_Act, Motion Control_Active, Motion Control_Remaining(s).
- DIO:** DIO, DIO_Elapsed Time(s), DIO_Time_Act, DIO_Active, DIO_Remaining(s).
- Data Logging:** Data Logging, Data Logging_Elapsed Time(s), Data Logging_Time_Act, Data Logging_Active, Data Logging_Remaining(s).
- Common State:** Common, Common_Elapsed Time(s), Common_Time_Act, Common_Active, Common_Remaining(s).
- Base Class:** Base Class, Base Class_Elapsed Time(s), Base Class_Time_Act, Base Class_Active, Base Class_Remaining(s).

The block diagram shows the state machine logic, including transitions and state-specific actions. A red 'EMO' button is visible in the block diagram. The 'Action Manager' at the bottom right shows 'No Action' selected, and the 'System_Wait_Time' is set to 25m. The 'Execute rate(Hz)' is 0.




Hierarchical State Machine Object (HSMO)

❖ Benefit

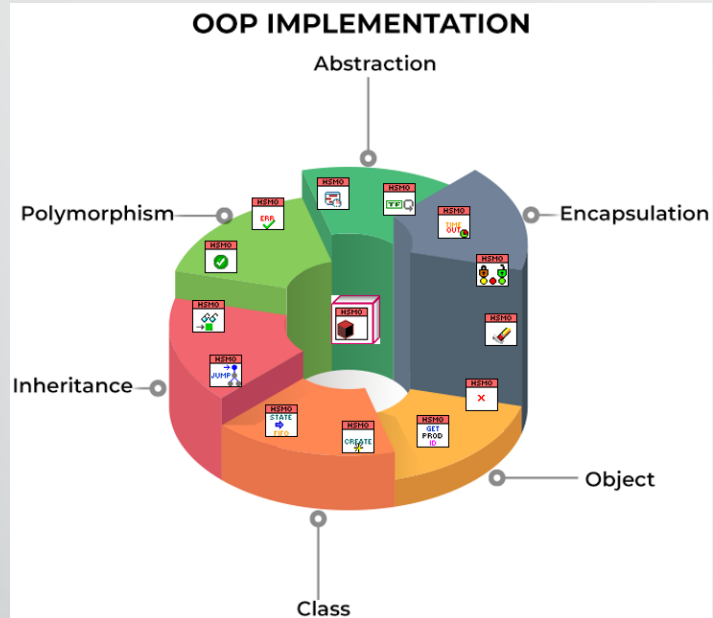

Dynamic Dispatching Implementation

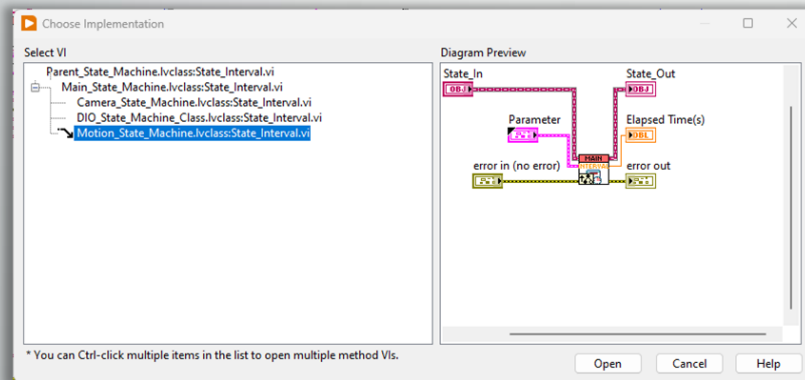

❖ Reduce Develop Time :

Code reusability, an important feature of Object-Oriented Programming (OOP), is enabled through inheritance, polymorphism, and information hiding. With inheritance, an object can be extended and code from the parent object can be reused or overloaded in the child object. For example we use one (Parent Class) and after that using Inheritance behavior form Parent Class to many Delivered Class and every property and Method of Parent Class is automatic transfer to Delivered class

Note : The Traditional Software Programming using Duplicate Code when we need more function and this is take time to debug or hard to maintain coding.

❖ Automatic Method Handling :

Dynamic Dispatching : Abstract parent class is automatic handle of many delivered class, with this behavior we able to Simulation Software without actual hardware by using Abstract Parent Class and switch to Actual hardware when ready (Hardware Abstraction)

❖ Low Resource and Fast Execution :

➤ This library is the Precompile code , it's low memory usage require and fast execution

❖ Multi Execution Rate Support :


➤ All state task has the individual clock and mechanism managements, so we can mixed of low transfer rate and hi transfer rate device together.

❖ Asset Protection :

➤ This Framework is protected with standard license activate method , user can applied to protect own asset when machine or system is deliver to customer

❖ Large Scale Application Support :

OOP it's powerful and flexible of Programming Corroborate , Team Member is able to work with same Parent Class or Using Override Method to Make new Method that Inheritance from Parent Class with is not impact to other class and if Parent Class is has new method the Delivered Class is has new method also



Thank you