МИНОБРНАУКИ РОССИИ

Федеральное государственное бюджетное

образовательное учреждение высшего образования

«Российский государственный университет

им. А.Н. Косыгина (Технологии. Дизайн. Искусство)»

Кафедра Информационных технологий и компьютерного дизайна

Отчет по курсовой работе

По дисциплине «Управление данными»

По теме:

«Разработка базы данных для хранения персональных данных»

Выполнил(а):

Сапожникова К.А. ЭИ-122

Проверили:

Косолапов Р.К.

Новиков А.Н.

Москва 2025

СОДЕРЖАНИЕ

Введение 3

Глава 1. Теоретические основы реляционных баз данных и SQL 5

1.1.Основы реляционных баз данных 5

1.2.Язык структурированных запросов sql 7

Глава 2. СУБД PostgreSQL и средства её администрирования 11

2.1. Общая характеристика PostgreSQL 11

2.2. pgAdmin 4 как графическая оболочка 12

Глава 3. Разработка и реализация базы данных 15

3.1. Описание предметной области 15

3.2. Структура базы данных 18

3.3. Реализация базы данных в PostgreSQL 33

3.4. Представления (VIEW) 38

Заключение 42

Список литературы 44

Приложения 45

ВВЕДЕНИЕ

Современные информационные технологии немыслимы без эффективного хранения и управления данными. В условиях стремительного роста объёмов информации, повышения требований к скорости её обработки и обеспечению надёжного доступа, особую значимость приобретают системы управления базами данных (СУБД). Эти системы лежат в основе практически всех цифровых сервисов — от небольших веб-приложений до масштабных корпоративных решений[1].

Целью данной курсовой работы является изучение теоретических и практических аспектов построения реляционных баз данных, освоение языка SQL и ознакомление с возможностями одной из самых популярных СУБД с открытым исходным кодом — PostgreSQL. Также в рамках работы рассматриваются вопросы использования графической оболочки pgAdmin 4, позволяющей удобно управлять базами данных, а в практической части выполняется проектирование и реализация собственной базы данных для конкретной предметной области.

Для достижения поставленной цели в работе решаются следующие задачи:

1. Изучить теоретические основы реляционных баз данных, нормализации данных и язык SQL;
2. Ознакомиться с функциональностью СУБД PostgreSQL и интерфейсом pgAdmin 4;
3. Выполнить анализ предметной области и построить концептуальную модель базы данных;
4. Разработать структуру базы данных: определить таблицы, связи между ними, ключи и ограничения;
5. Реализовать физическую модель базы данных с использованием SQL;

6. Реализовать представления (VIEW) для анализа и обобщения данных;
7. Проверить работоспособность базы данных с помощью тестовых данных и SQL-запросов.

Результатом курсовой работы является готовая база данных, отвечающая требованиям надёжности, целостности и масштабируемости, а также приобретение навыков проектирования и администрирования современных СУБ

ГЛАВА 1. ТЕОРЕТИЧЕСКИЕ ОСНОВЫ РЕЛЯЦИОННЫХ БАЗ ДАННЫХ И SQL

1.1. Основы реляционных баз данных

База данных (БД) — это организованная совокупность данных, предназначенная для хранения, поиска и управления информацией.

Основные характеристики БД:

- Структурированность – данные организованы в соответствии с определённой моделью.
- Независимость – данные отделены от программ, которые их используют.
- Целостность – обеспечение корректности и непротиворечивости данных.
- Безопасность – защита от несанкционированного доступа.

Базы данных могут быть:

- Реляционными (табличными),
- Нереляционными (NoSQL: документные, графовые, ключ-значение и др.).

Рассмотрим более подробнее реляционную модель данных.

Реляционная модель данных была предложена Эдгаром Коддом в 1970 году. Её основная идея заключается в представлении данных в виде таблиц (отношений)[2].

Основные понятия

- Отношение (таблица) – структура, состоящая из строк (кортежей) и столбцов (атрибутов).
- Атрибут (поле) – столбец таблицы, содержащий данные определённого типа.
- Кортеж (запись) – строка таблицы, представляющая отдельный объект.
- Домен – множество допустимых значений для атрибута.

Преимущества реляционной модели:

- Простота и понятность структуры.
- Гибкость при выполнении запросов (SQL).
- Надёжность и поддержка целостности данных.

Для обеспечения связей между таблицами и уникальности записей используются ключи.

Первичный ключ (Primary Key, PK)

Это атрибут (или набор атрибутов), который однозначно идентифицирует каждую запись в таблице и не может содержать NULL значения.

Пример: id в таблице Students[3].

Внешний ключ (Foreign Key, FK)

Это атрибут, который ссылается на первичный ключ другой таблицы и обеспечивает связь между таблицами и целостность данных.

Пример: student_id в таблице Grades, ссылающийся на id в Students[3].

Нормализация данных

Нормализация — это процесс упорядочивания структуры базы данных с целью устранения избыточности данных и обеспечения логической целостности. Основная задача нормализации заключается в разбиении больших таблиц на меньшие, логически связанные таблицы, что позволяет минимизировать дублирование информации и избежать потенциальных аномалий при добавлении, удалении и изменении данных[4].

Процесс нормализации включает прохождение через несколько нормальных форм (НФ):

Первая нормальная форма (1НФ) требует, чтобы все атрибуты в таблице были атомарными, то есть содержали неделимые значения. Это исключает повторяющиеся группы в одном поле[4]. Например, если один студент имеет несколько номеров телефона, то каждый из них должен быть записан в отдельной строке связанной таблицы Contacts, а не в виде полей Phone1, Phone2 и т.д.

Вторая нормальная форма (2НФ) основывается на первой, но добавляет условие: все неключевые атрибуты должны зависеть от всего составного первичного ключа, а не только от его части. Это особенно важно в таблицах, где используется составной ключ. Например, если в таблице с ключом (student_id, course_id) присутствует поле student_name, то оно должно быть вынесено в отдельную таблицу, поскольку зависит только от student_id.

Третья нормальная форма (3НФ) исключает транзитивные зависимости, то есть ситуации, когда один неключевой атрибут зависит от другого неключевого атрибута. Классический пример: если в таблице Students указаны group_id и group_name, то group_name логически связан с group_id, а не напрямую с student_id. Следовательно, информацию о группах следует хранить в отдельной таблице Groups.

Цель нормализации заключается в сокращении объёма дублируемых данных, упрощении модификации структуры и обеспечении логической согласованности данных в системе.

1.2. Язык структурированных запросов SQL

Язык структурированных запросов (Structured Query Language, SQL) является основным средством взаимодействия с реляционными базами данных. С его помощью можно создавать, модифицировать и управлять данными и структурами таблиц, а также выполнять запросы различной сложности.

SQL делится на несколько подъязыков:

DDL — язык определения данных (Data Definition Language)

DDL включает в себя команды, предназначенные для создания, изменения и удаления объектов базы данных, таких как таблицы, представления, индексы и ограничения[5]. Основные команды DDL:

- CREATE — создание новых объектов;
- ALTER — изменение существующих объектов (например, добавление нового столбца);
- DROP — удаление объектов базы данных.

Пример:

```
CREATE TABLE Students (
    id INT PRIMARY KEY,
    name VARCHAR(100),
    group_id INT
);
```
[5]

В этом примере с помощью команды DDL CREATE TABLE создаётся новая таблица Students с тремя столбцами: id (целое число, первичный ключ), name (строка до 100 символов) и group_id (целое число). Таблица предназначена для хранения данных о студентах, где каждый имеет уникальный идентификатор, имя и номер группы.

DML — язык манипулирования данными (Data Manipulation Language)

Этот подъязык используется для непосредственной работы с данными в таблицах:

- SELECT — извлечение данных;
- INSERT — добавление новых записей;
- UPDATE — изменение существующих данных;

- DELETE — удаление записей[5].

Пример:

```
INSERT INTO Students (id, name, group_id)
VALUES (1, 'Иванов И.И.', 101)
;
```

В этом примере команда DML INSERT INTO добавляет новую запись в таблицу Students. Конкретно вставляется строка с данными: id = 1, name = 'Иванов И.И.' и group_id = 101. Таким образом, в таблице появляется запись о студенте с идентификатором 1, именем "Иванов И.И." из группы 101.

Фильтрация, сортировка и агрегация

SQL позволяет отфильтровывать данные по определённым условиям с помощью WHERE, а также сортировать результаты (ORDER BY) и группировать записи (GROUP BY, HAVING).

Пример фильтрации и группировки:

```
SELECT group_id, COUNT(*) AS student_count
FROM Students
GROUP BY group_id
HAVING COUNT(*) > 10
;
```

В этом примере SQL-запрос выбирает данные из таблицы Students: сначала группирует записи по полю group_id, подсчитывая количество студентов в каждой группе (и называя этот расчёт student_count), а затем оставляет только те группы, где число студентов превышает 10. В результате выводятся идентификаторы групп и количество студентов в них, но только для крупных групп.

Соединения таблиц (JOIN)

Для извлечения информации из нескольких связанных таблиц используется механизм соединений:

- INNER JOIN — извлекает только те записи, для которых найдено соответствие в обеих таблицах;
- LEFT JOIN — включает все записи из левой таблицы, даже если нет соответствия в правой;
- RIGHT JOIN и FULL JOIN — аналогично, но с акцентом на правую таблицу или на объединение всех записей[6].

Пример

```
SELECT Students.name, Groups.group_name
FROM Students
INNER JOIN Groups ON Students.group_id = Groups.id
;
```

В этом примере SQL-запрос использует INNER JOIN для выборки данных из двух связанных таблиц — Students и Groups. Запрос извлекает имена студентов (Students.name) и названия их групп (Groups.group_name), соединяя таблицы по условию Students.group_id = Groups.id. В результат попадают только те записи, где есть соответствие между group_id в таблице студентов и id в таблице групп, то есть выводятся студенты, которые числятся в существующих группах.

Подзапросы

SQL поддерживает вложенные запросы, которые позволяют сначала получить промежуточные результаты, а затем использовать их в основном запросе. Это мощный инструмент для построения сложной логики выборки. Пример запроса выбора группы с физикой.

```
SELECT name
FROM Students
WHERE group_id = (
    SELECT id FROM Groups WHERE group_name = 'Физика');
```

ГЛАВА 2. СУБД POSTGRESQL И СРЕДСТВА ЕЁ АДМИНИСТРИРОВАНИЯ

2.1. Общая характеристика PostgreSQL

История развития

PostgreSQL — это объектно-реляционная система управления базами данных с открытым исходным кодом, развивающаяся более трёх десятилетий. Проект был начат в середине 1980-х годов в Калифорнийском университете в Беркли под руководством профессора Майкла Стоунбрейкера. Первоначально система называлась Ingres, но в дальнейшем проект эволюционировал в Postgres (от "post-Ingres"), а затем получил поддержку языка SQL и стал называться PostgreSQL [7].

Первая версия PostgreSQL появилась в 1996 году. С тех пор СУБД активно развивается, а её сообщество включает в себя тысячи разработчиков и организаций по всему миру. PostgreSQL считается одной из самых надёжных, гибких и расширяемых баз данных в мире и широко применяется как в научных, так и в коммерческих проектах[7].

Основные особенности

PostgreSQL отличается рядом характеристик, которые делают её привлекательной как для начинающих разработчиков, так и для крупных корпораций:

- Поддержка ACID — обеспечивает надёжность транзакций и согласованность данных.
- Расширяемость — PostgreSQL позволяет пользователям создавать собственные типы данных, операторы, индексы, языки процедур и подключаемые модули.
- Поддержка объектно-ориентированной модели — реализованы наследование таблиц, перегрузка функций и другие элементы ООП.

- Надёжность и безопасность — реализована поддержка репликации, резервного копирования, WAL-журналирования и шифрования соединений.
- Совместимость с SQL-стандартами — PostgreSQL поддерживает большую часть стандарта SQL:2008.
- Поддержка JSON и XML — система может обрабатывать как структурированные, так и полуструктурированные данные.
- Поддержка полнотекстового поиска — особенно полезно при работе с большими объёмами текстовой информации.

Расширения PostgreSQL

Одним из сильнейших преимуществ PostgreSQL является система расширений. Ниже приведены два особенно популярных расширения:

- PostGIS — расширение, добавляющее поддержку географических объектов. Оно делает PostgreSQL полноценной СУБД для геоинформационных систем (ГИС), позволяя выполнять пространственные запросы и работать с картографическими данными.
- pg_partman — инструмент для автоматического партиционирования таблиц. Особенно полезен при работе с большими массивами данных, когда нужно разделить таблицу на логические сегменты (по дате, числовому диапазону и т.д.).

2.2. pgAdmin 4 как графическая оболочка

Установка и интерфейс

pgAdmin 4 — это официальная графическая оболочка для управления СУБД PostgreSQL. Она представляет собой кроссплатформенное веб-приложение, доступное в виде настольной или серверной версии. Установка pgAdmin достаточно проста: достаточно скачать установочный файл с официального сайта и следовать инструкциям мастера установки [8].

После запуска пользователю предоставляется удобный веб-интерфейс. Главная панель отображает дерево объектов: серверы, базы данных, схемы, таблицы, функции и т.д. Интерфейс pgAdmin предоставляет интуитивно понятный доступ ко всем возможностям PostgreSQL.

Создание и управление базами данных

Создание базы данных в pgAdmin производится через графическое меню[8]. Пользователь выбирает сервер, затем нажимает «Create → Database», вводит название и, при необходимости, задаёт владельца и кодировку. Все параметры можно гибко настраивать как при создании, так и при последующем редактировании.

В рамках базы данных pgAdmin предоставляет возможность:

- Управлять схемами и таблицами;
- Задавать ограничения (constraints) и индексы;
- Изменять структуру таблиц;
- Работать с правами доступа и ролями.

Особое внимание уделено безопасности и администрированию: доступ к каждому объекту можно ограничить, а действия пользователей отслеживаются с помощью журналов.

Выполнение SQL-запросов

Встроенный SQL-редактор pgAdmin позволяет писать и выполнять запросы к базе данных. Он поддерживает подсветку синтаксиса, автодополнение, сохранение истории и шаблонов запросов.

Панель результатов удобно разделена: пользователь видит текст запроса, таблицу результатов, статистику выполнения и возможные ошибки. Кроме того,

доступны инструменты анализа запросов, такие как «Explain» и «Explain Analyze», позволяющие оптимизировать производительность.

Работа с представлениями, индексами, функциями

pgAdmin предоставляет полноценный доступ к работе с логическими объектами базы данных:

- Представления (views) — создаются из SQL-запросов и позволяют упрощать повторяющиеся выборки данных [8]. Пользователь может создавать как простые, так и материализованные представления.
- Индексы — pgAdmin даёт возможность создавать различные типы индексов (B-Tree, Hash, GiST, GIN и др.) для ускорения запросов. Интерфейс показывает, к каким таблицам относятся индексы и как они влияют на производительность.
- Функции (functions) — важный элемент PostgreSQL. С помощью pgAdmin можно писать функции на SQL, PL/pgSQL, Python (через расширение PL/Python) и других языках. Интерфейс позволяет легко просматривать, тестировать и отлаживать функции.

ГЛАВА 3. РАЗРАБОТКА И РЕАЛИЗАЦИЯ БАЗЫ ДАННЫХ

3.1. Описание предметной области

В условиях цифровизации и роста объёмов персональной информации всё большую актуальность приобретает создание универсальных информационных систем, способных централизованно хранить, структурировать и анализировать различные аспекты повседневной деятельности человека. Одним из возможных решений является разработка базы данных, обеспечивающей учёт персональных данных пользователя в разных сферах — от образования и финансов до задач и формирования полезных привычек.

В рамках данной курсовой работы рассматривается предметная область, охватывающая четыре ключевых направления:

- Управление учебной активностью: пользователь может создавать курсы, добавлять к ним темы, отслеживать прогресс прохождения и оценки;
- Финансовый учёт: фиксация доходов и расходов с классификацией по категориям и анализ финансового баланса;
- Управление привычками: фиксация целей и логов выполнения привычек, контроль регулярности и эффективности;
- Задачи и планирование: постановка задач, их категоризация, приоритизация и контроль выполнения.

Каждое направление моделируется с помощью отдельных сущностей (таблиц), имеющих связи между собой. Центральным элементом системы является пользователь, к которому относятся все остальные данные. Это позволяет организовать персонализированный и безопасный доступ к информации.

Для каждой подсистемы в базе данных предусмотрены таблицы справочников (например, категории расходов, статусы курсов), основные

сущности (курсы, задачи, привычки и финансы), а также механизмы автоматического контроля целостности данных — ограничения, триггеры и представления. Такой подход обеспечивает гибкость, масштабируемость и высокую степень нормализации, исключающую дублирование данных.

Таким образом, предметная область охватывает управление и анализ различных аспектов повседневной активности пользователя с помощью единой реляционной базы данных. Это решение может быть полезно как для индивидуального использования, так и в качестве основы для более сложных информационных систем (например, мобильных приложений или онлайн-сервисов самоорганизации).

1. Учебная деятельность (курсы)

Позволяет пользователю регистрировать обучающие курсы, разбитые на отдельные темы. Для каждой темы можно указать:

- Название,
- Учебный материал,
- Дату завершения,
- Оценку.

Каждый курс имеет статус (запланирован, в процессе, завершён), который автоматически обновляется на основе прогресса по темам.

Цель подсистемы: организация и мониторинг личного обучения.

2. Финансовый учёт

Предназначена для фиксации доходов и расходов пользователя. Финансовые операции делятся на категории (например, "Зарплата", "Питание"), которые в свою очередь относятся к типам: доход или расход.

Система проверяет корректность введённой суммы (например, доход не может быть отрицательным). Поддерживается создание агрегированных отчётов по месяцам и годам.

Цель подсистемы: учёт финансов и анализ бюджета.

3. Привычки

Пользователь может создавать полезные привычки, указывать их категорию, частоту (ежедневно, еженедельно и др.), дату начала и окончания. Для отслеживания выполнения привычек ведётся лог — пользователь отмечает факт выполнения в конкретную дату.

Цель подсистемы: формирование и отслеживание полезных привычек.

4. Задачи (TODO-лист)

Система позволяет пользователю управлять задачами:

- Указывать категорию, приоритет и дату исполнения,
- Отслеживать статус (запланировано, в процессе, выполнено),
- Вести пометки и автоматически фиксировать дату выполнения при отметке "выполнено".

Цель подсистемы: управление повседневными делами и задачами.

5. Поездки

Отдельная подсистема позволяет планировать поездки: указывать направления, даты, категорию (работа, отпуск и др.), расходы, заметки. Это расширяет возможности ведения личного дневника и бюджета.

Цель подсистемы: учёт личных и деловых поездок, связанных с другими событиями жизни.

6. Пользователь

Все подсистемы связаны через центральную сущность User**,** которая представляет собой конкретного пользователя системы. Каждая сущность (курс, задача, привычка, транзакция и др.) привязана к конкретному пользователю через внешний ключ user_id.

Связи между сущностями

Все основные таблицы в разных схемах содержат внешний ключ user_id, что обеспечивает логическую связанность данных на уровне пользователя. Между таблицами внутри схем реализованы связи "один ко многим". Например:

- Один курс (courses) связан с несколькими темами (course_topics).
- Одна категория расходов (finance_categories) может быть использована во многих операциях (finances).
- Один маршрут (trip_routes) может иметь несколько расходов (trip_expenses).

Связи поддерживаются с помощью внешних ключей, что гарантирует целостность данных и предотвращает логические ошибки.

3.2. Структура базы данных

Информационная система реализована в реляционной СУБД PostgreSQL и организована по схемам, каждая из которых отвечает за свой функциональный блок: user, course, finance, todo, habits, trips. Это позволяет изолировать предметные области и поддерживать чистую архитектуру.

ER-диаграмма

Схема Users

Пользователь (user) — центральная сущность, от которой идут связи ко всем остальным объектам системы. хранит информацию о пользователях. Поля: user_id (PK), name, email, created_at, updated_at. ER-диаграмма схемы пользователей изображена на Рисунке 1.

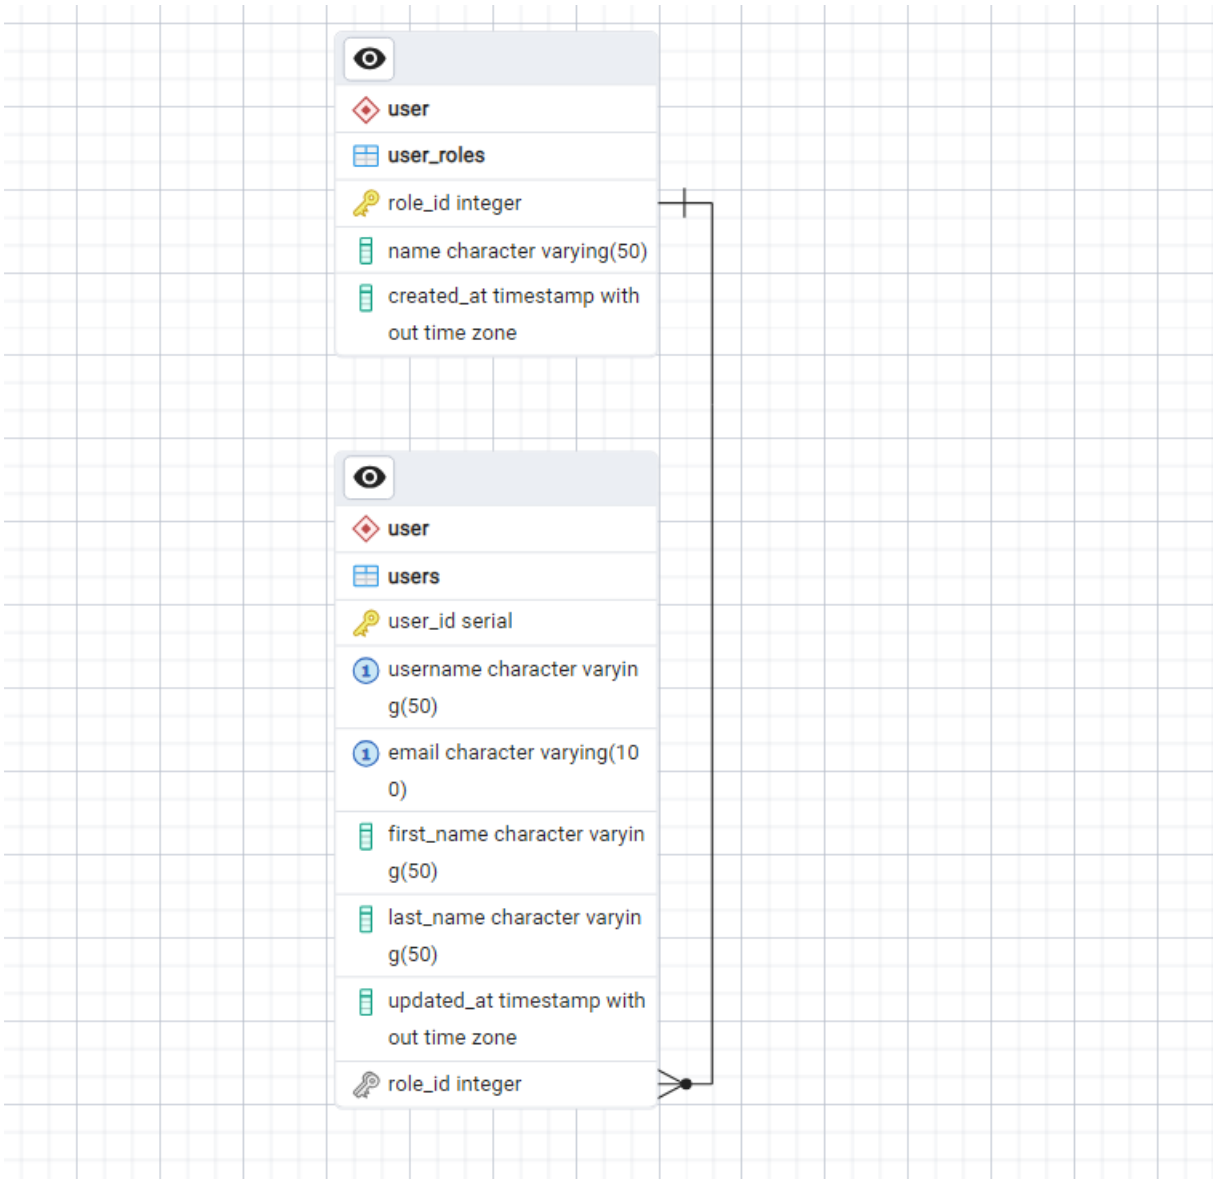

Рисунок 1 – ER-Диаграмма схемы Users

Представленный фрагмент ER-диаграммы демонстрирует организацию данных о пользователях и их ролях в системе.

1. Структура данных

Система реализована в виде двух нормализованных таблиц:

- `user_roles` - справочник ролей пользователей
- `users` - основная таблица с информацией о пользователях

2. Типы данных

Для хранения идентификаторов используются:

- `integer` для ролей
- `serial` с автоинкрементом для пользователей

Текстовые данные хранятся в полях типа `character varying` с ограничением длины:

- 50 символов для имен и названий
- 100 символов для электронной почты

3. Временные метки

- Таблица `user_roles` содержит поле `created_at` типа `timestamp without time zone`
- В таблице `users` реализовано поле `updated_at` того же типа

4. Связи между таблицами

Отношение между таблицами организовано через поле `role_id` в таблице `users`

Данный пример иллюстрирует стандартный подход к организации пользовательских данных в реляционных базах данных, демонстрируя:

1. Четкое разделение сущностей
2. Использование соответствующих типов данных
3. Применение временных меток для учета изменений
4. Установление связей между таблицами

Схема course

На Рисунке 2 изображена ER-диаграмма, которая наглядно демонстрирует структуру схемы, разработанной для управления учебными курсами. Данная схема отражает ключевые сущности и их взаимосвязи, необходимые для организации и контроля образовательного процесса.

Отображенные сущности и их назначение

1. course_statuses — содержит статусы курсов (например, "активный", "завершенный", "в разработке"), что позволяет систематизировать их по состоянию.

2. course — основная таблица, хранящая информацию о курсах: идентификатор, название, описание, даты создания и обновления, а также ссылку на статус.

3. course_topics — включает темы курсов, их учебные материалы, оценки и даты завершения, что обеспечивает детализацию содержания и отслеживание прогресса.

Взаимосвязи

- Поле `status_id` в таблице `course` связывает курс с его статусом из `course_statuses`.

- Поле `course_id` в таблице `course_topics` устанавливает связь между курсом и его темами, позволяя организовать иерархическую структуру данных.

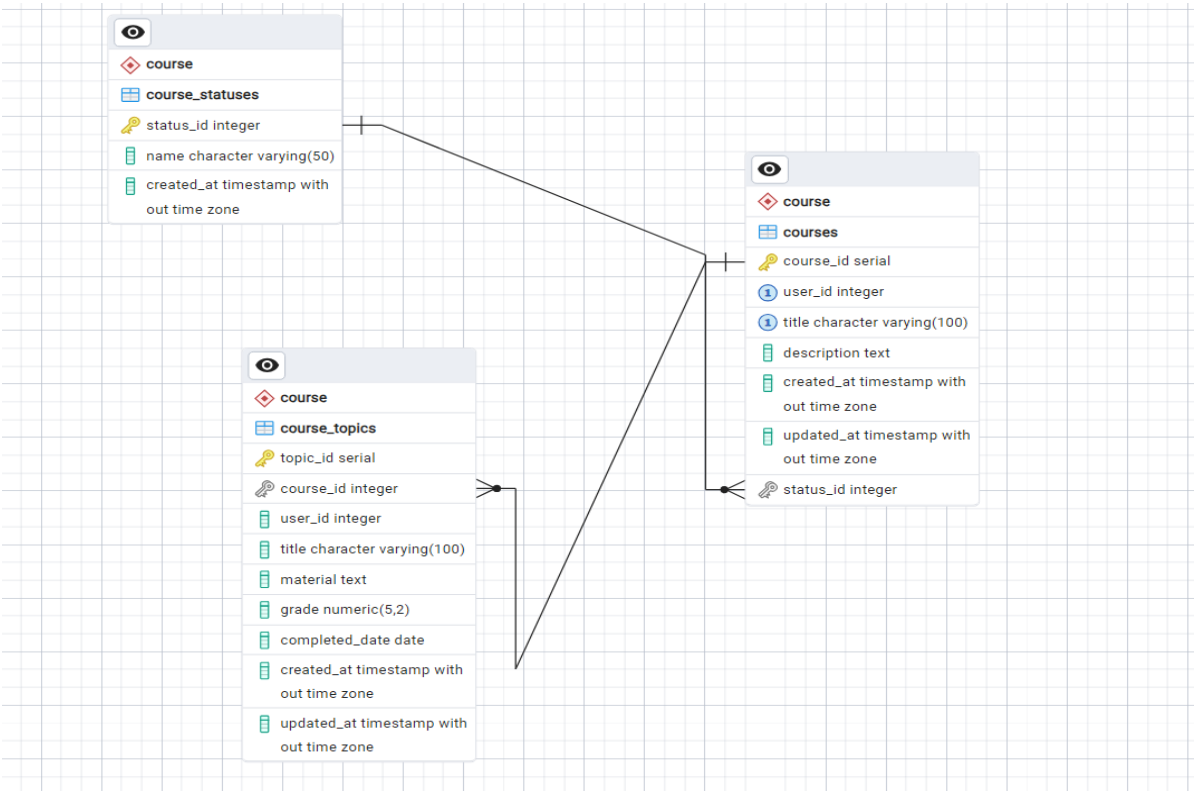

Рисунок 2 – ER-Диаграмма схемы Course

Схема finance

На Рисунке 3 изображена ER-диаграмма, отображающая структуру схемы для системы управления финансами. Данная схема демонстрирует ключевые сущности и их взаимосвязи, необходимые для учета доходов и расходов, категоризации финансовых операций и анализа денежных потоков.

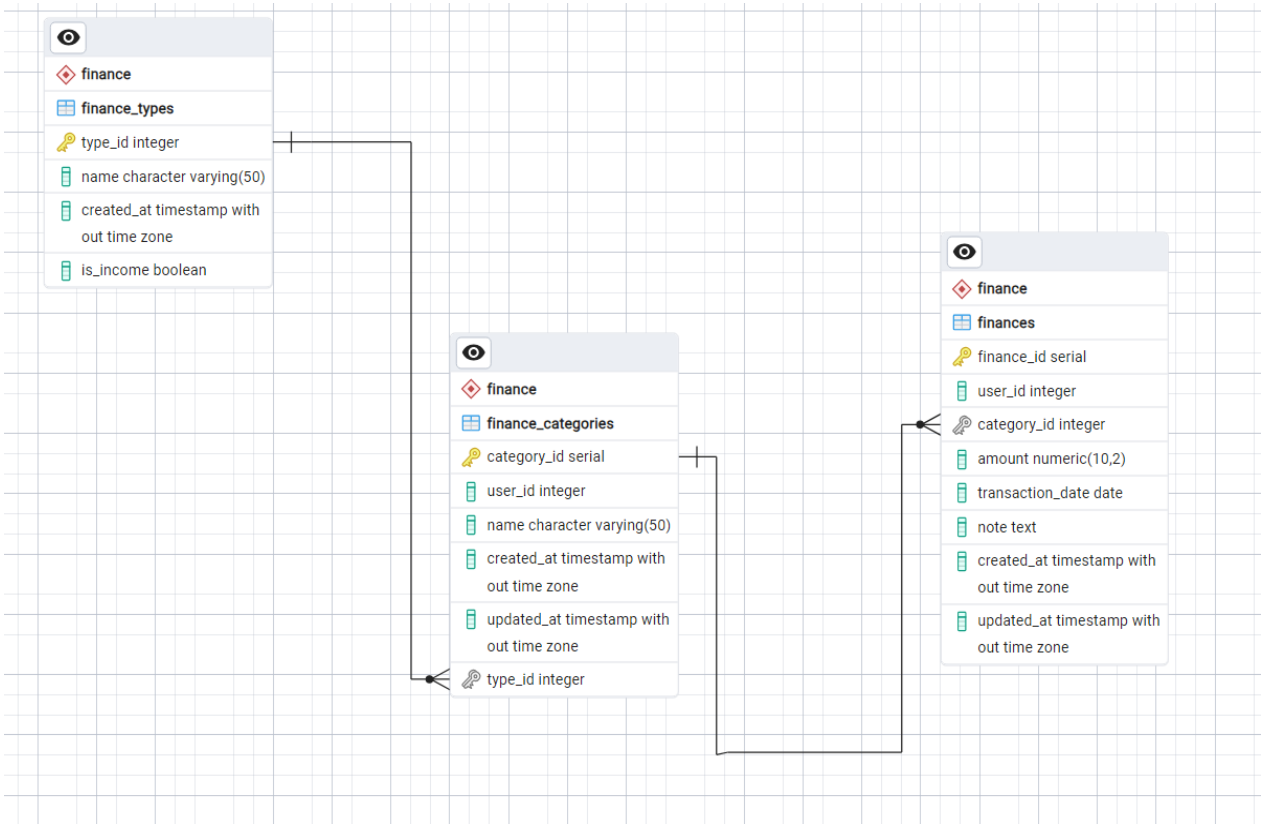

Рисунок 3 – ER-Диаграмма схемы Finance

Отображенные сущности и их назначение

1. finance_types — определяет тип финансовой операции: доход (`is_income = true`) или расход (`is_income = false`). Это позволяет разделять транзакции на две основные группы.

2. finance_categories — содержит категории финансовых операций (например, "Зарплата", "Продукты", "Транспорт"), что помогает структурировать учет по назначению платежей. Связь с `finance_types` (`type_id`) указывает, к какому типу (доход/расход) относится категория.

3. finances — основная таблица, хранящая данные о финансовых операциях: сумму (`amount`), дату (`transaction_date`), примечание (`note`), а также связи с категорией (`category_id`) и пользователем (`user_id`).

Взаимосвязи между сущностями

- Поле `type_id` в таблице `finance_categories` связывает категорию с типом операции (`income` или `expense`) из `finance_types`.
- Поле `category_id` в таблице `finances` указывает на категорию транзакции, обеспечивая детализацию учета.
- Поле `user_id` присутствует в `finance_categories` и `finances`, что позволяет разграничивать данные между пользователями (актуально для многопользовательских систем).

Схема todo

Настоящая ER-диаграмма на Рисунке 4 представляет структуру базы данных системы управления задачами (Todo-системы). Схема наглядно демонстрирует ключевые сущности и их взаимосвязи, обеспечивающие полноценный функционал для организации, категоризации и отслеживания выполнения задач.

Отображенные сущности и их назначение

1.task_priorities - содержит уровни приоритетов задач (например, "высокий", "средний", "низкий"), что позволяет эффективно управлять очередностью выполнения

2. todo_categories - хранит категории задач (например, "работа", "личное", "учеба"), обеспечивая их систематизацию по тематическим группам

3.task_statuses - определяет возможные статусы задач (например, "к выполнению", "в процессе", "завершено"), предоставляя инструменты для контроля прогресса

4. tasks (основная таблица) содержит:

- Описание задачи (task)
- Срок выполнения (due_date)
- Флаг завершения (is_completed)
- Дату фактического завершения (completed_date)
- Связи с приоритетом, категорией и статусом

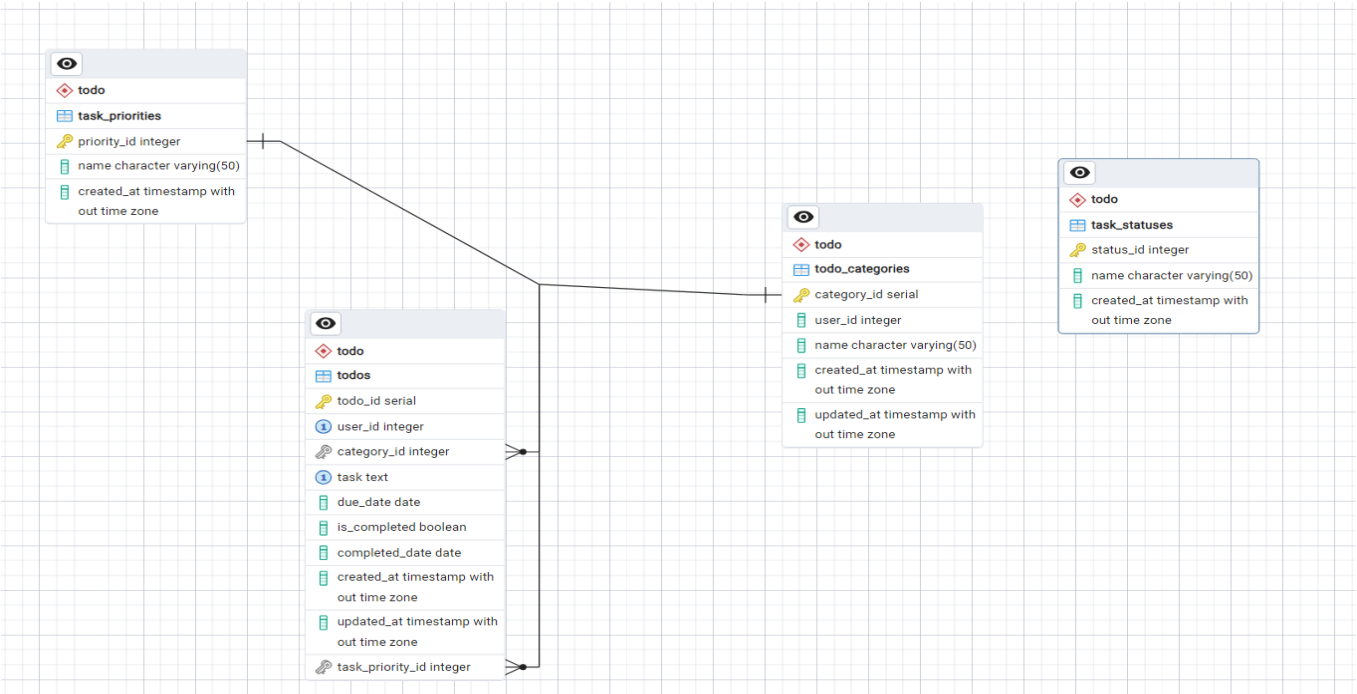

Рисунок 4 – ER-Диаграмма схемы ToDo

Взаимосвязи между сущностями

- Поле task_priority_id связывает задачу с уровнем ее приоритета
- Поле category_id обеспечивает принадлежность задачи к определенной категории

- Поле user_id во всех основных таблицах позволяет разграничивать данные между пользователями
- Статусы задач (task_statuses) могут быть интегрированы в систему через дополнительное поле в таблице tasks

Схема habits

Представленная ER-диаграмма на Рисунке 5 иллюстрирует структуру схемы данных для системы отслеживания привычек. Данная схема демонстрирует комплексный подход к организации данных, необходимых для формирования, классификации и мониторинга персональных привычек.

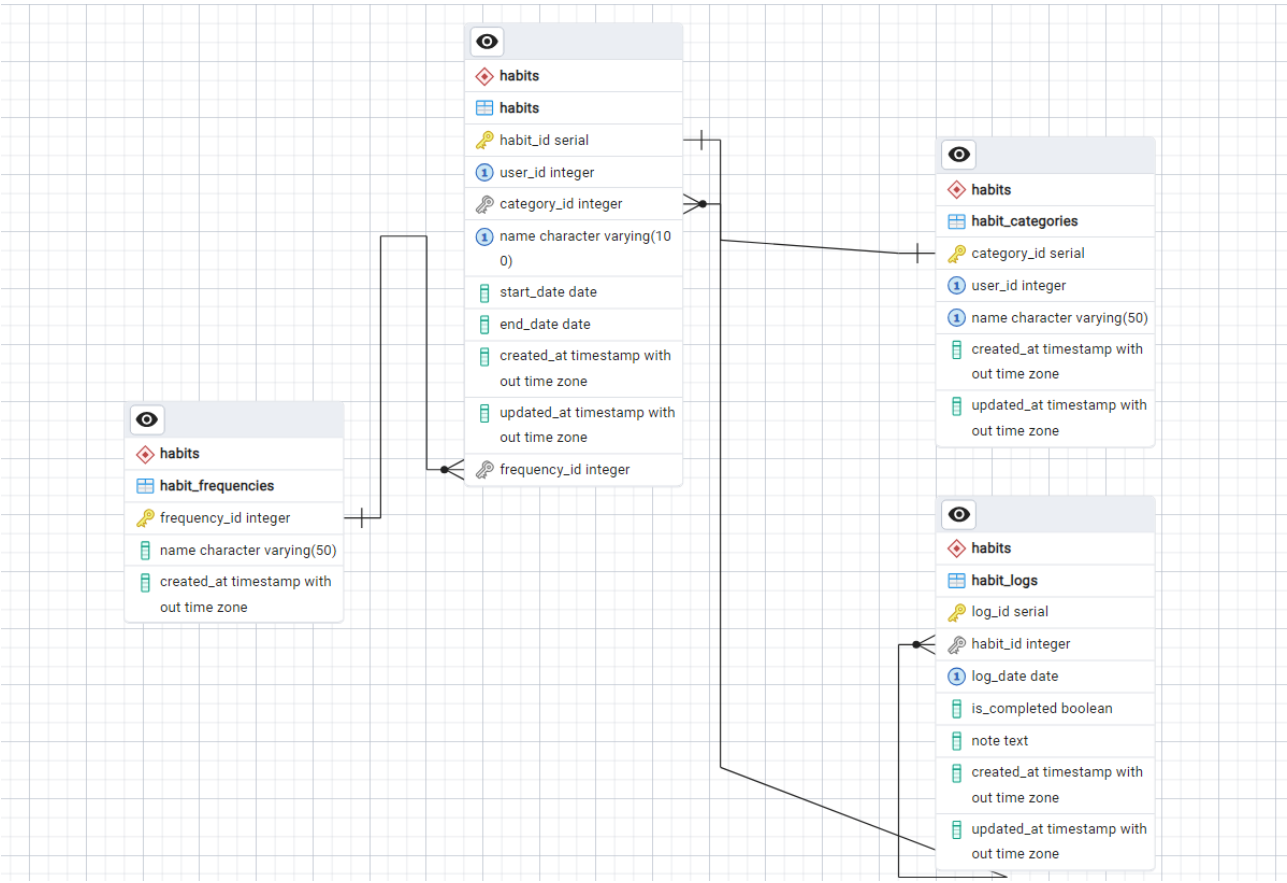

Рисунок 5 – ER-Диаграмма схемы Habits

Ключевые сущности и их функциональное назначение

1. habits(основная таблица): Содержит базовые параметры привычки: название (name), даты начала и окончания (start_date, end_date), включает связь с категорией (category_id) и частотой выполнения (frequency_id), обеспечивает персональную принадлежность через user_id

2. habit_categories: Позволяет классифицировать привычки по тематическим группам (например, "Здоровье", "Продуктивность", "Спорт"), поддерживает индивидуальные настройки для каждого пользователя

3. habit_frequencies: Определяет периодичность выполнения привычек (ежедневно, еженедельно, по рабочим дням и т.д.), стандартизирует варианты повторений для всего приложения

4. habit_logs: Фиксирует историю выполнения привычек с указанием даты (log_date) и статуса (is_completed), позволяет добавлять заметки (note) для анализа прогресса, обеспечивает связь с конкретной привычкой через habit_id

Взаимосвязи между сущностями:

- Иерархическая структура: habits → habit_logs (один-ко-многим)
- Классификационные связи: habits → habit_categories (многие-к-одному)
- Параметрические связи: habits → habit_frequencies (многие-к-одному)
- Персональная привязка через user_id во всех основных таблицах

Схема демонстрирует комплексный подход к организации данных, что особенно важно для систем персонального развития, где требуется не только фиксация действий, но и их анализ с возможностью последующей корректировки.

Схема trips

Представленная ER-диаграмма на Рисунке 6 отображает структуру базы данных системы управления путешествиями. Схема включает четыре ключевые сущности, обеспечивающие комплексный учет данных о поездках.

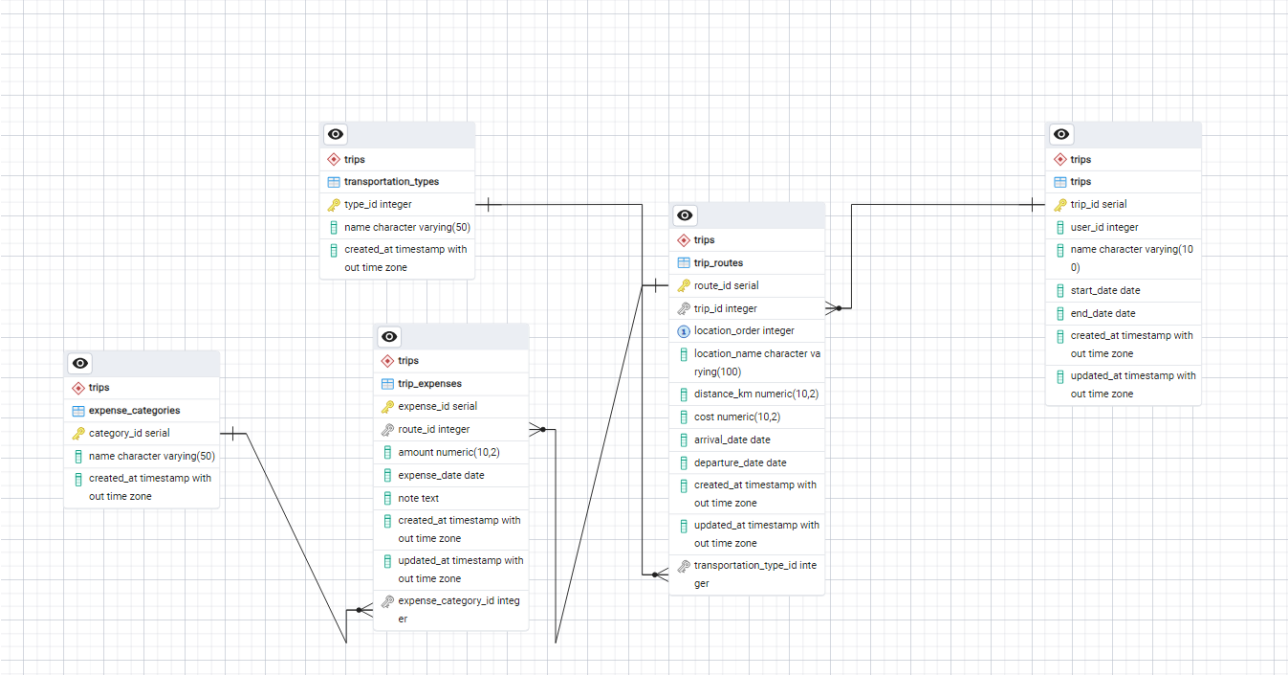

Рисунок 6 – ER-Диаграмма схемы Trips

Центральной сущностью системы является таблица trips, которая хранит основную информацию о путешествиях: уникальный идентификатор, ссылку на пользователя, название поездки, даты начала и окончания, а также временные метки создания и обновления записи. Эта таблица связана с другими сущностями системы через внешние ключи.

- Для учета транспортных средств в системе предусмотрена сущность transportation_types, содержащая перечень типов транспорта с уникальными идентификаторами и названиями. Данная таблица используется для классификации способов передвижения в рамках поездки.

- Детализация маршрутов реализована через сущность trip_locations, которая фиксирует последовательность посещаемых пунктов. В таблице хранится информация о порядке следования, названии локации, расстояниях,

стоимости переездов, датах прибытия и отъезда, а также ссылка на тип используемого транспорта.

- Финансовый аспект путешествий учитывается в сущности trip_expenses, предназначенной для регистрации расходов. Таблица содержит данные о сумме затрат, дате расхода, текстовом описании и категории, к которой относится расход, позволяя анализировать финансовую составляющую поездки.

Взаимосвязи между сущностями организованы таким образом, что таблица trips является центральным узлом системы, связанным с транспортными типами через trip_locations, и с финансовыми записями через trip_expenses. Такая структура обеспечивает целостность данных и позволяет получать согласованную информацию обо всех аспектах путешествия.

После детального рассмотрения ER-диаграмм схем таблиц, включая "users", "course", "finance", "todo", "trips" и "habits", можно сделать вывод, что представленные ER-диаграммы представляют собой всесторонние и логически структурированные основы для персональной базы данных. Каждая сущность подробно описана с указанием ключевых атрибутов, таких как "user_id", "name", "created_at" и других, а также их типов данных (например, integer, character varying, timestamp with time zone), что обеспечивает четкость и согласованность данных. Взаимосвязи между таблицами, такие как связи между "users" и "course", "finance" и "habits", а также "trips" отражают функциональные зависимости и иерархию данных, что делает схему пригодной для реализации в реальных приложениях. Такая организация позволяет эффективно управлять персональными данными, обеспечивая их целостность и доступность. Для более детального анализа структуры, включая визуальное представление связей и атрибутов, рекомендуется обратиться к приложению Б.1, где представлена полная ER-диаграмма.

Список таблиц (имя, описание)

Представленная Таблица А.1 содержит систематизированный перечень ключевых сущностей базы данных с их кратким описанием. Данная структура отражает логику организации информации в разрабатываемой системе и охватывает основные функциональные модули

Анализ структуры базы данных позволяет сделать вывод о её продуманной, модульной и масштабируемой архитектуре. Все таблицы логически распределены по отдельным схемам, каждая из которых отвечает за конкретную предметную область: user — пользователи, course — образовательные процессы, finance — финансовые операции, todo — задачи, habits — привычки, trips — поездки. Такое разбиение обеспечивает не только удобство разработки и сопровождения системы, но и возможность независимого масштабирования каждого функционального блока.

Каждая из предметных областей реализована с применением принципов нормализации до третьей нормальной формы. Это выражается в выделении справочных таблиц (например, course_statuses, task_priorities, finance_types, habit_frequencies), наличии чётких связей между сущностями через внешние ключи, а также в использовании ограничений целостности (NOT NULL, CHECK, DEFAULT, UNIQUE и др.).

Первичные и внешние ключи

В процессе проектирования базы данных особое внимание уделялось реализации механизма обеспечения целостности и связности данных посредством первичных **и** внешних ключей. Использование ключевых ограничений позволило формализовать связи между таблицами, обеспечить уникальность записей и установить логическую и структурную согласованность между сущностями в различных схемах.

Первичные ключи

Каждая таблица в разработанной базе данных содержит первичный ключ — уникальный идентификатор записи. В большинстве случаев это поле с типом SERIAL или INTEGER, автоматически увеличивающееся при добавлении новых данных. Наличие первичного ключа обеспечивает однозначную идентификацию объектов и служит опорной точкой для построения внешних связей.

Примеры первичных ключей

1. user_id в таблице user.users — идентификатор пользователя;
2. course_id в таблице course.courses — уникальный код курса;
3. finance_id в таблице finance.finances — идентификатор финансовой операции;
4. habit_id в таблице habits.habits — идентификатор привычки;
5. todo_id в таблице todo.todos — код задачи;
6. trip_route_id в таблице trips.trip_routes — идентификатор маршрута поездки.

Каждый из этих идентификаторов используется как точка входа для внешних таблиц и участвует в построении межтабличных связей.

Внешние ключи

Внешние ключи реализованы во всех логически зависимых таблицах и отражают отношения «один ко многим» или «многие к одному». Они обеспечивают ссылочную целостность, предотвращая появление «висячих» или несогласованных записей в подчинённых таблицах.

Ключевые примеры внешних связей:

1. В таблице course.course_topics поля course_id и user_id ссылаются соответственно на таблицы course.courses и user.users, обеспечивая привязку каждой темы к конкретному курсу и пользователю.

2. В finance.finances поле category_id является внешним ключом к таблице finance.finance_categories, а user_id — к user.users.

3. В habits.habits поле category_id связано с habits.habit_categories, а frequency_id — с habits.habit_frequencies.

4. В todo.todos присутствуют внешние ключи к таблицам todo_categories, task_priorities и task_statuses, что позволяет унифицировать классификацию задач.

5. В trips.trip_expenses внешние ключи trip_route_id и expense_category_id обеспечивают привязку расхода к определённому маршруту и категории.

Функциональное значение использования ключей

Благодаря применению первичных и внешних ключей, в проектируемой базе данных достигнута:

1. Однозначная идентификация всех сущностей;
2. Структурная связность между модулями (учебные курсы, финансы, задачи, привычки, поездки);
3. Гарантия согласованности и непротиворечивости данных;
4. Возможность каскадного обновления и удаления при необходимости (при использовании on delete cascade и аналогичных механизмов).

В качестве дополнительной меры, во многих таблицах реализованы ограничения типа CHECK, исключающие недопустимые значения, например: отрицательные оценки, пустые поля, даты вне диапазона, что в совокупности с ключевыми ограничениями усиливает надёжность хранимой информации.

Типы данных

При проектировании базы данных был осуществлён тщательный подбор типов данных для каждого поля, что обеспечивает корректное хранение

информации и эффективное использование ресурсов. В таблице 1 представлены основные типы данных, используемые в базе, с указанием их назначения.

Таблица 1 – Типы данных в персональной базе данных

Тип данных	**Использование**
integer	Идентификаторы, флаги и счётчики.
varchar(n)	Названия и короткие текстовые поля (например, name).
text	Длинные описания и заметки (description, material, note).
numeric(p,s)	Точные значения: оценки, суммы (numeric(10,2), numeric(5,2)).
boolean	Флаги (is_completed).
timestamp	Метки времени (created_at, updated_at).
date	Календарные даты (например, start_date, transaction_date).

Ограничения

В базе данных реализованы следующие типы ограничений:

- NOT NULL — используется для обязательных полей, например, user_id, title, transaction_date.
- UNIQUE — уникальность названий внутри одного пользователя (habits.name, finance_categories.name и др.).
- DEFAULT — часто используется CURRENT_TIMESTAMP для created_at и updated_at.
- CHECK — проверка значений.

Примеры:

- grade BETWEEN 0 AND 5 в course_topics.
- amount <> 0 в finances.
- start_date <= end_date в trips и habits.

FOREIGN KEY — все связи между таблицами реализованы через внешние ключи

3.3. Реализация базы данных в PostgreSQL

При разработке структуры базы данных использовался системный подход, учитывающий все требования предметной области. Для каждой сущности создавались отдельные таблицы с четко определенными связями между ними.

Основные принципы проектирования:

1. Нормализация данных - все таблицы приведены к 3НФ для минимизации избыточности
2. Типизация полей - строгое соответствие типов данных хранимой информации
3. Целостность данных - реализована через систему ограничений
4. Масштабируемость - структура позволяет легко добавлять новые функции

Рассмотрим пример создания таблицы `course.course_topics`, которая хранит информацию о темах учебных курсов:

```
CREATE TABLE course.course_topics (
    topic_id integer NOT NULL,
    course_id integer NOT NULL,
    user_id integer NOT NULL,
    title character varying(100) NOT NULL,
    material text,
    grade numeric(5,2),
    completed_date date,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    CONSTRAINT course_topics_grade_check CHECK (((grade >= 0) AND
(grade <= 5)))
);
```

В данном примере создаётся таблица course.course_topics в PostgreSQL, которая хранит информацию о темах учебных курсов. В таблице определены следующие поля:

- topic_id (целое число, обязательное) – уникальный идентификатор темы;
- course_id (целое число, обязательное) – ID курса, к которому относится тема;
- user_id (целое число, обязательное) – ID пользователя (например, преподавателя или студента);
- title (строка до 100 символов, обязательное) – название темы;
- material (текст) – учебный материал по теме;
- grade (число с точностью до 2 знаков) – оценка за тему (ограничена диапазоном от 0 до 5 через CHECK);
- completed_date (дата) – когда тема была завершена;
- created_at и updated_at (метки времени) – автоматически заполняются текущей датой и временем при создании и обновлении записи.

Таблица обеспечивает целостность данных через ограничения (NOT NULL, CHECK) и поддерживает масштабируемость за счёт чёткой структуры.

Разработанные скрипты для создания таблиц обеспечивают надежную основу для хранения и управления персональными данными, учитывая необходимые ограничения и типы данных. Для детального ознакомления со всеми скриптами создания таблиц рекомендуется обратиться к приложению Б.1.

Ключевые особенности:

- Поле `topic_id` - первичный ключ (в сочетании с последовательностью)
- Поля `course_id` и `user_id` - внешние ключи для связи с другими таблицами
- Ограничение `CHECK` гарантирует, что оценки будут в диапазоне от 0 до 5

- Автоматическое заполнение временных меток при создании и обновлении записей

Управление идентификаторами

Для генерации уникальных идентификаторов используются последовательности:

```
CREATE SEQUENCE course.course_topics_topic_id_seq
    START WITH 1 INCREMENT BY 1;
ALTER SEQUENCE course.course_topics_topic_id_seq OWNED BY course.course_topics.topic_id
;
```

В этом примере создаётся последовательность course.course_topics_topic_id_seq для автоматической генерации уникальных идентификаторов в таблице course.course_topics. Последовательность начинается с 1 (START WITH 1) и увеличивается на 1 при каждом использовании (INCREMENT BY 1). Связь с полем topic_id таблицы устанавливается через OWNED BY, что гарантирует, что последовательность будет управлять значениями этого столбца. Это обеспечивает автоматическое присвоение уникальных ID при добавлении новых записей.

Такой подход обеспечивает:

- Автоматическое увеличение идентификаторов
- Отсутствие конфликтов при параллельной вставке
- Простоту интеграции с прикладным кодом

Система связей между таблицами

Для поддержания целостности данных реализована система внешних ключей:

```
ALTER TABLE course.course_topics
ADD CONSTRAINT fk_course_id FOREIGN KEY (course_id)
REFERENCES course.courses(course_id)
;
```

В этом примере к таблице course.course_topics добавляется ограничение внешнего ключа fk_course_id, которое связывает поле course_id с первичным

ключом course_id в таблице courses. Это гарантирует, что в course_topics можно добавить только те курсы, которые существуют в основной таблице courses, поддерживая целостность данных и предотвращая некорректные ссылки между таблицами.

Преимущества

- Гарантированная согласованность данных
- Автоматическая проверка ссылочной целостности
- Каскадное обновление и удаление (при необходимости)

Тестовое наполнение базы данных

Для проверки работоспособности системы создан комплекс тестовых данных, демонстрирующих все возможные сценарии работы.

Пример добавления категории задач:

```
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at)
VALUES (1, 1, 'Работа', CURRENT_TIMESTAMP, CURRENT_TIMESTAMP
);
```

В примере добавляется новая категория задач "Работа" в таблицу todo.todo_categories с указанием ID пользователя и временными метками создания/обновления. Во втором примере создаётся задача "Написать отчёт" с дедлайном 12.06.2025 и средним приоритетом (ID=2), которая относится к ранее созданной категории.

Добавление задачи с приоритетом:

```
INSERT INTO todo.todos (
    todo_id, user_id, category_id, task, due_date,
    is_completed,    completed_date,    created_at,    updated_at, task_priority_id
) VALUES (
    1, 1, 1, 'Написать отчёт', '2025-06-12',
    FALSE, NULL, CURRENT_TIMESTAMP, CURRENT_TIMESTAMP, 2
);
```

Добавляется конкретная задача "Написать отчёт" с дедлайном 12.06.2025, которая относится к созданной категории и имеет средний приоритет

(task_priority_id=2), при этом задача помечена как невыполненная (is_completed=FALSE).

Финансовые операции:

```
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id)
VALUES (1, 1, 'Зарплата', CURRENT_TIMESTAMP, CURRENT_TIMESTAMP, 1
);

INSERT INTO finance.finances (
    finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at
) VALUES (
    1, 1, 1, 100000.00, '2025-06-10', 'Аванс', CURRENT_TIMESTAMP, CURRENT_TIMESTAMP
);
```

В примере демонстрируется заполнение финансовых данных: сначала создаётся категория "Зарплата" типа "Доход" (type_id=1), затем добавляется транзакция на 100000 рублей с датой 10.06.2025 и комментарием "Аванс".

Учебные материалы:

```
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id)
VALUES (1, 1, 'Основы SQL', 'Курс по работе с БД PostgreSQL', CURRENT_TIMESTAMP, CURRENT_TIMESTAMP, 1);


INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at)

VALUES (1, 1, 1, 'SELECT-запросы', 'Материалы по SELECT', 4.5, '2025-06-01', CURRENT_TIMESTAMP, CURRENT_TIMESTAMP
);
```

В учебном разделе сначала регистрируется курс "Основы SQL" с описанием, после чего добавляется тема "SELECT-запросы" с учебными материалами и оценкой 4.5, которая была завершена 01.06.2025. Все записи включают актуальные временные метки и привязку к пользователю.

Проверка бизнес-логики

Тестовые данные позволяют проверить:

1. Корректность работы ограничений (CHECK)

2. Автоматическое заполнение полей (DEFAULT)

3. Работу триггеров (если они есть)

4. Соблюдение ссылочной целостности

5. Правильность типов данных

Особое внимание уделено

1. Проверке диапазона оценок (0-5)
2. Контролю дат (completed_date не может быть раньше created_at)
3. Валидации финансовых сумм (положительные значения)

Такая структура базы данных обеспечивает надежное хранение информации и позволяет эффективно реализовывать бизнес-логику приложения.

3.4. Представления (VIEW)

Представления (views) в системе управления базами данных PostgreSQL представляют собой виртуальные таблицы, сформированные на основе результатов SQL-запросов. Они используются для упрощения доступа к агрегированной информации, повышения читаемости запросов, обеспечения логической абстракции, а также для организации аналитической отчётности.

В разработанной базе данных реализован ряд представлений, направленных на решение прикладных задач, таких как анализ успеваемости, отслеживание образовательного прогресса, а также финансовая аналитика.

1. Представление course.course_grades — анализ итоговой оценки по курсам

Назначение

Представление предназначено для расчёта средней оценки пользователя по каждому курсу на основании данных о завершённых темах. Дополнительно предоставляется информация о статусе курса и его описании.

SQL-код создания представления

```
CREATE VIEW course.course_grades AS
SELECT
    c.course_id,
    c.user_id,
    c.title,
    c.description,
    cs.name AS status,
    AVG(ct.grade) AS final_grade
FROM course.courses c
LEFT JOIN course.course_topics ct ON c.course_id = ct.course_id
JOIN course.course_statuses cs ON c.status_id = cs.status_id
GROUP BY c.course_id, c.user_id, c.title, c.description, cs.name
;
```

Пояснение

Представление объединяет таблицы курсов, тем и статусов, вычисляя среднюю итоговую оценку (AVG(grade)) по каждой записи. Использование соединения LEFT JOIN позволяет отразить в выборке даже те курсы, по которым ещё не назначены темы.

2. Представление course.course_progress — отслеживание прогресса по курсам

Назначение

Данное представление служит для оценки степени выполнения пользователем каждого из курсов. Оно отображает общее количество тем, число завершённых тем и процент завершения.

SQL-код создания представления

```
CREATE VIEW course.course_progress AS
SELECT
    c.course_id,
    c.user_id,
```

```
    c.title,
    COUNT(ct.topic_id) AS total_topics,
    COUNT(ct.completed_date) AS completed_topics,
    ROUND(
        (COUNT(ct.completed_date)::decimal                          /
NULLIF(COUNT(ct.topic_id), 0)) * 100,
        2
    ) AS completion_percentage
FROM course.courses c
LEFT JOIN course.course_topics ct ON c.course_id = ct.course_id
GROUP BY c.course_id, c.user_id, c.title
;
```

Пояснение

Представление агрегирует данные по каждой теме в курсе, определяя степень завершённости обучения. Для корректной обработки деления на ноль используется конструкция NULLIF(...). Округление значения процента до двух знаков обеспечивается функцией ROUND.

3. Представление finance.financial_summary — финансовая сводка пользователя

Назначение

Представление предназначено для формирования ежемесячной финансовой отчётности пользователей. Включает информацию об объёме доходов, расходов и итоговом балансе по каждому пользователю за месяц.

SQL-код создания представления

```
CREATE VIEW finance.financial_summary AS
SELECT
    user_id,
    EXTRACT(YEAR FROM transaction_date) AS year,
    EXTRACT(MONTH FROM transaction_date) AS month,
    SUM(CASE WHEN amount > 0 THEN amount ELSE 0 END) AS total_income,
    SUM(CASE  WHEN  amount  <  0  THEN  -amount  ELSE  0  END)  AS
total_expense,
    SUM(amount) AS balance
FROM finance.finances
GROUP BY user_id, year, month
;
```

Пояснение

С использованием функций EXTRACT и условных конструкций CASE WHEN, представление агрегирует финансовые данные по каждому пользователю. Доходы и расходы выделяются в отдельные столбцы, итоговый баланс рассчитывается как сумма всех операций за указанный период.

Общие выводы по использованию представлений

Реализация представлений в базе данных обеспечивает следующие преимущества:

- Повышение читаемости и повторного использования SQL-запросов;
- Упрощение формирования пользовательской и аналитической отчётности;
- Организация логического уровня абстракции для работы с данными;
- Снижение вероятности ошибок при выборках за счёт инкапсуляции логики.

Представления являются неотъемлемой частью структуры разрабатываемой базы данных, выполняя роль связующего звена между хранимыми данными и аналитическим выводом информации.

ЗАКЛЮЧЕНИЕ

В рамках курсовой работы была спроектирована и реализована полнофункциональная база данных для хранения и управления персональными данными пользователя. Разработка охватывает ключевые аспекты повседневной цифровой активности: учёба (курсы и темы), личные финансы, привычки, задачи (to-do) и планирование поездок. Все эти данные логически структурированы и связаны с единым пользователем системы.

В ходе работы была достигнута поставленная цель — создание реляционной базы данных, обладающей высокой степенью нормализации, гибкостью запросов и логической целостностью. Для реализации использовалась объектно-реляционная СУБД PostgreSQL, что позволило применить триггеры, функции, представления и механизмы ограничений. Проект получил модульную архитектуру за счёт разделения на схемы, что упрощает масштабирование и администрирование.

Практическое значение данной работы заключается в создании универсального шаблона персональной информационной системы, который может быть использован в реальных условиях — как личный помощник, трекер задач, расходов, обучения и привычек. Он также может служить основой для мобильного приложения, облачного сервиса или настольной системы самоорганизации.

В перспективе система может быть расширена за счёт:

- внедрения ролей пользователей и авторизации;
- разработки API для интеграции с внешними сервисами (мессенджеры, календарь, банк);
- реализации веб-интерфейса с использованием современных фреймворков;
- добавления системы уведомлений и анализа данных (например, динамика расходов, прогресс в обучении и т.п.).

Таким образом, проделанная работа не только позволяет закрепить теоретические знания по управлению данными, но и демонстрирует навыки проектирования комплексных СУБД с ориентацией на реальную практику

СПИСОК ЛИТЕРАТУРЫ

1. Головастикова Т.А. Проектирование информационных систем. — М.: Юрайт, 2021. — 292 с.
2. Силбершатц А., Корт Х., Сударианн С. Базы данных. Основы. — М.: Вильямс, 2020. — 1248 с.
3. Бойко В.В. Основы баз данных. — СПб.: Питер, 2022. — 432 с.
4. Градов А.П. SQL и реляционные базы данных: учебник. — М.: ДМК Пресс, 2021. — 368 с.
5. Федотов И.Н. SQL на практике. — М.: Эксмо, 2020. — 256 с.
6. Макарова Н.В. Реляционные базы данных и SQL. — М.: Форум, 2022. — 304 с.
7. PostgreSQL: официальная документация [Электронный ресурс]. — URL: https://www.postgresql.org/docs/ (дата обращения: 10.06.2025).
8. Тарасов И.Б. PostgreSQL и pgAdmin: настройка, администрирование и работа с БД. — М.: БХВ-Петербург, 2020. — 884 с.

ПРИЛОЖЕНИЯ

ПРИЛОЖЕНИЕ А

Систематизированный перечень ключевых сущностей базы данных с их кратким описанием

Таблица А.1 – Перечень ключевых сущеонстей базы данных

Таблица	Описание
user.users	Хранит учетные записи пользователей. Содержит основные идентификаторы, персональные данные и даты создания.
course.courses	Содержит информацию о курсах, созданных пользователями: название, описание, статус выполнения, даты.
course.course_topics	Темы, относящиеся к определённому курсу. Содержит заголовок, материал, дату завершения, оценку, идентификаторы курса и пользователя.
course.course_statuses	Справочная таблица со статусами курсов (например: «Запланировано», «В процессе», «Завершено»).
finance.finances	Основная таблица учета финансовых операций. Хранит сумму,

	дату, категорию, тип операции, примечание и пользователя.
Таблица	Описание
finance.finance_types	Справочник типов финансовых операций: доход или расход (is_income = true/false).
finance. finance_categories	Категории, к которым относятся финансовые операции (например, «Продукты», «Зарплата»). Привязаны к типу и пользователю.
todo.todos	Задачи пользователя с описанием, сроком выполнения, статусом, приоритетом, отметкой о завершении и категорией.
todo.todo_categories	Категории задач (например: «Учеба», «Дом», «Работа»). Пользователь может задавать собственные.
todo.task_statuses	Справочник статусов задач: «Запланировано», «В процессе», «Завершено».
todo.task_priorities	Справочник приоритетов задач: «Низкий», «Средний», «Высокий».
habits.habits	Привычки пользователя (например, «Читать», «Спорт»), с

	датой начала/окончания и периодичностью.
Таблица	Описание
habits.habit_logs	Журнал выполнения привычек. Отмечает, была ли привычка выполнена в конкретную дату.
habits.habit_categories	Категории привычек, задаваемые пользователем.
habits.habit_frequencies	Справочник частот выполнения привычек: «Ежедневно», «Еженедельно» и т.д.
trips.trip_routes	Таблица, содержащая информацию о маршрутах поездок. Включает название маршрута, начальную и конечную точки, даты, описание, используемый вид транспорта (связан через внешний ключ).
trips.trip_expenses	Таблица учета расходов, связанных с конкретными поездками. Включает категорию расхода (expense_category_id), сумму, дату, пользователя, а также связь с маршрутом (trip_route_id).

trips.expense_categories	Справочник категорий расходов в поездках: «Еда», «Транспорт», «Проживание» и т.д.
trips.transportation_types	Справочная таблица видов транспорта: например, «Автобус», «Поезд», «Авиа», «Авто» и т.д. Используется в trip_routes для указания средства передвижения.

ПРИЛОЖЕНИЕ Б

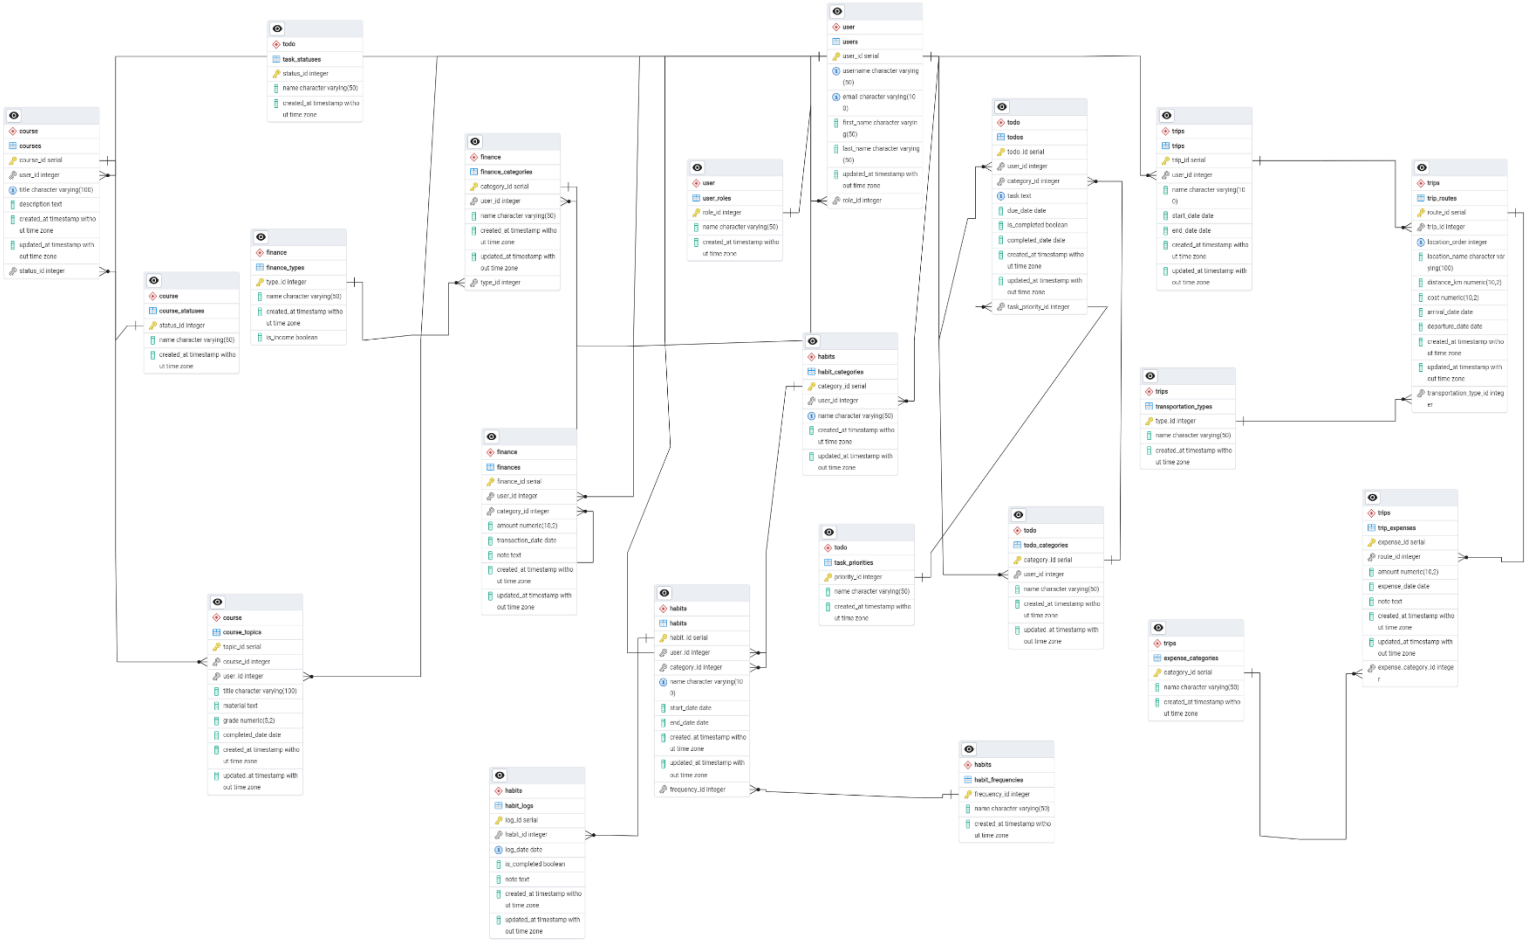

Рис.Б.1 – ER-Диаграмма Персональной базы данных

ПРИЛОЖЕНИЕ В

В.1 Скрипты создания таблиц(CREATE TABLE)

```
CREATE TABLE finance.finance_types (
    type_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    is_income boolean DEFAULT false NOT NULL
);

CREATE TABLE finance.finances (
    finance_id integer NOT NULL,
    user_id integer NOT NULL,
    category_id integer NOT NULL,
    amount numeric(10,2) NOT NULL,
    transaction_date date NOT NULL,
    note text,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    CONSTRAINT    finances_check_amount    CHECK    ((amount    <>
(0)::numeric))
);

CREATE TABLE finance.finance_categories (
    category_id integer NOT NULL,
    user_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    type_id integer NOT NULL
);

CREATE TABLE course.course_statuses (
    status_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE course.courses (
    course_id integer NOT NULL,
    user_id integer NOT NULL,
    title character varying(100) NOT NULL,
    description text,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
```

```
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    status_id integer NOT NULL
);

CREATE TABLE course.course_topics (
    topic_id integer NOT NULL,
    course_id integer NOT NULL,
    user_id integer NOT NULL,
    title character varying(100) NOT NULL,
    material text,
    grade numeric(5,2),
    completed_date date,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    CONSTRAINT   course_topics_grade_check   CHECK   (((grade   >=
(0)::numeric) AND (grade <= (5)::numeric)))
);

CREATE TABLE todo.task_statuses (
    status_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE todo.task_priorities (
    priority_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE todo.todo_categories (
    category_id integer NOT NULL,
    user_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE todo.todos (
    todo_id integer NOT NULL,
    user_id integer NOT NULL,
    category_id integer,
    task text NOT NULL,
    due_date date,
    is_completed boolean DEFAULT false,
    completed_date date,
```

```
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    task_priority_id integer NOT NULL
);

CREATE TABLE trips.expense_categories (
    category_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE trips.transportation_types (
    type_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE trips.trip_routes (
    route_id integer NOT NULL,
    trip_id integer NOT NULL,
    location_order integer NOT NULL,
    location_name character varying(100) NOT NULL,
    distance_km numeric(10,2),
    cost numeric(10,2),
    arrival_date date,
    departure_date date,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    transportation_type_id integer NOT NULL,
    CONSTRAINT    trip_routes_check    CHECK    ((arrival_date    <=
departure_date)),
    CONSTRAINT    trip_routes_cost_check    CHECK    ((cost    >=
(0)::numeric)),
    CONSTRAINT  trip_routes_date_check  CHECK  ((arrival_date  <=
departure_date))
);
```

ПРИЛОЖЕНИЕ Д

Д.1 Исходный код SQL

```
--
-- PostgreSQL database dump
--

-- Dumped from database version 16.3
-- Dumped by pg_dump version 16.3

-- Started on 2025-06-16 15:38:18

SET statement_timeout = 0;
SET lock_timeout = 0;
SET idle_in_transaction_session_timeout = 0;
SET client_encoding = 'UTF8';
SET standard_conforming_strings = on;
SELECT pg_catalog.set_config('search_path', '', false);
SET check_function_bodies = false;
SET xmloption = content;
SET client_min_messages = warning;
SET row_security = off;

--
-- TOC entry 6 (class 2615 OID 28704)
-- Name: course; Type: SCHEMA; Schema: -; Owner: postgres
--

CREATE SCHEMA course;


ALTER SCHEMA course OWNER TO postgres;

--
-- TOC entry 8 (class 2615 OID 28708)
-- Name: finance; Type: SCHEMA; Schema: -; Owner: postgres
--

CREATE SCHEMA finance;


ALTER SCHEMA finance OWNER TO postgres;

--
-- TOC entry 10 (class 2615 OID 28706)
-- Name: habits; Type: SCHEMA; Schema: -; Owner: postgres
--

CREATE SCHEMA habits;
```

```
ALTER SCHEMA habits OWNER TO postgres;

--
-- TOC entry 9 (class 2615 OID 28709)
-- Name: todo; Type: SCHEMA; Schema: -; Owner: postgres
--

CREATE SCHEMA todo;


ALTER SCHEMA todo OWNER TO postgres;

--
-- TOC entry 11 (class 2615 OID 28705)
-- Name: trips; Type: SCHEMA; Schema: -; Owner: postgres
--

CREATE SCHEMA trips;


ALTER SCHEMA trips OWNER TO postgres;

--
-- TOC entry 7 (class 2615 OID 28707)
-- Name: user; Type: SCHEMA; Schema: -; Owner: postgres
--

CREATE SCHEMA "user";


ALTER SCHEMA "user" OWNER TO postgres;

--
-- TOC entry 274 (class 1255 OID 27192)
-- Name: update_course_status(); Type: FUNCTION; Schema: course;
Owner: postgres
--

CREATE FUNCTION course.update_course_status() RETURNS trigger
    LANGUAGE plpgsql
    AS $$
DECLARE
    new_status integer;
    all_completed boolean;
    any_started boolean;
BEGIN
    SELECT COUNT(*) = SUM(CASE WHEN completed_date IS NOT NULL THEN
1 ELSE 0 END)
    INTO all_completed
    FROM course.course_topics
    WHERE course_id = NEW.course_id;
```

```
    SELECT COUNT(*) > 0
    INTO any_started
    FROM course.course_topics
    WHERE course_id = NEW.course_id AND completed_date IS NOT NULL;

    IF all_completed THEN
        new_status := 3;
    ELSIF any_started THEN
        new_status := 2;
    ELSE
        new_status := 1;
    END IF;

    IF (SELECT status_id FROM course.courses WHERE course_id =
NEW.course_id) != new_status THEN
        UPDATE course.courses
        SET status_id = new_status,
            updated_at = CURRENT_TIMESTAMP
        WHERE course_id = NEW.course_id;
    END IF;

    RETURN NEW;
END;
$$;


ALTER FUNCTION course.update_course_status() OWNER TO postgres;

--
-- TOC entry 5170 (class 0 OID 0)
-- Dependencies: 274
-- Name: FUNCTION update_course_status(); Type: COMMENT; Schema:
course; Owner: postgres
--

COMMENT ON FUNCTION course.update_course_status() IS 'Обновляет
status_id в таблице courses на основе завершения тем в course_topics:
''Запланировано'' (нет тем), ''Завершено'' (все темы завершены), ''В
процессе'' (иначе). Вызывается триггером
course_topics_status_trigger после вставки или обновления
completed_date.';


--
-- TOC entry 262 (class 1255 OID 27770)
-- Name: check_finance_amount(); Type: FUNCTION; Schema: finance;
Owner: postgres
--

CREATE FUNCTION finance.check_finance_amount() RETURNS trigger
```

```
    LANGUAGE plpgsql
    AS $$
DECLARE
    is_income boolean;
BEGIN
    SELECT ft.is_income INTO is_income
    FROM finance.finance_categories fc  -- Добавляем схему finance
    JOIN finance.finance_types ft ON fc.type_id = ft.type_id
    WHERE fc.category_id = NEW.category_id;

    IF is_income AND NEW.amount <= 0 THEN
        RAISE EXCEPTION 'Amount must be positive for income
category';
    ELSIF NOT is_income AND NEW.amount >= 0 THEN
        RAISE EXCEPTION 'Amount must be negative for expense
category';
    END IF;
    RETURN NEW;
END;
$$;


ALTER FUNCTION finance.check_finance_amount() OWNER TO postgres;

--
-- TOC entry 5171 (class 0 OID 0)
-- Dependencies: 262
-- Name: FUNCTION check_finance_amount(); Type: COMMENT; Schema:
finance; Owner: postgres
--

COMMENT ON FUNCTION finance.check_finance_amount() IS 'Проверяет
корректность суммы в таблице finances: положительная для доходов
(type.name = ''Доход''), отрицательная для расходов (type.name =
''Расход''). Вызывается триггером finances_amount_trigger перед
вставкой или обновлением записи.';


--
-- TOC entry 261 (class 1255 OID 26924)
-- Name: update_updated_at(); Type: FUNCTION; Schema: public; Owner:
postgres
--

CREATE FUNCTION public.update_updated_at() RETURNS trigger
    LANGUAGE plpgsql
    AS $$
BEGIN
    NEW.updated_at = CURRENT_TIMESTAMP;
    RETURN NEW;
END;
```

```
$$;


ALTER FUNCTION public.update_updated_at() OWNER TO postgres;

--
-- TOC entry 5172 (class 0 OID 0)
-- Dependencies: 261
-- Name: FUNCTION update_updated_at(); Type: COMMENT; Schema:
public; Owner: postgres
--

COMMENT ON FUNCTION public.update_updated_at() IS 'Обновляет поле
updated_at на CURRENT_TIMESTAMP при изменении записи в таблицах
users, finances, todos, courses и других. Вызывается триггерами
updated_at_trigger перед обновлением записей.';


--
-- TOC entry 260 (class 1255 OID 26708)
-- Name: set_completed_date(); Type: FUNCTION; Schema: todo; Owner:
postgres
--

CREATE FUNCTION todo.set_completed_date() RETURNS trigger
    LANGUAGE plpgsql
    AS $$
BEGIN
    IF NEW.is_completed = TRUE AND OLD.is_completed = FALSE THEN
        NEW.completed_date = CURRENT_DATE;
    END IF;
    RETURN NEW;
END;
$$;


ALTER FUNCTION todo.set_completed_date() OWNER TO postgres;

--
-- TOC entry 5173 (class 0 OID 0)
-- Dependencies: 260
-- Name: FUNCTION set_completed_date(); Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON FUNCTION todo.set_completed_date() IS 'Устанавливает поле
completed_date в таблице todos на текущую дату (CURRENT_DATE), если
is_completed изменяется на TRUE. Вызывается триггером
todos_completed_date_trigger перед обновлением записи.';
```

```
SET default_tablespace = '';

SET default_table_access_method = heap;

--
-- TOC entry 252 (class 1259 OID 27694)
-- Name: course_statuses; Type: TABLE; Schema: course; Owner:
postgres
--

CREATE TABLE course.course_statuses (
    status_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE course.course_statuses OWNER TO postgres;

--
-- TOC entry 5174 (class 0 OID 0)
-- Dependencies: 252
-- Name: TABLE course_statuses; Type: COMMENT; Schema: course;
Owner: postgres
--

COMMENT ON TABLE course.course_statuses IS 'Справочная таблица для
статусов курсов (Запланировано, В процессе, Завершено).';


--
-- TOC entry 5175 (class 0 OID 0)
-- Dependencies: 252
-- Name: COLUMN course_statuses.status_id; Type: COMMENT; Schema:
course; Owner: postgres
--

COMMENT ON COLUMN course.course_statuses.status_id IS 'Уникальный
идентификатор статуса';


--
-- TOC entry 5176 (class 0 OID 0)
-- Dependencies: 252
-- Name: COLUMN course_statuses.name; Type: COMMENT; Schema: course;
Owner: postgres
--

COMMENT ON COLUMN course.course_statuses.name IS 'Название статуса
(например, Запланировано, Завершено)';
```

```
--
-- TOC entry 5177 (class 0 OID 0)
-- Dependencies: 252
-- Name: COLUMN course_statuses.created_at; Type: COMMENT; Schema:
course; Owner: postgres
--

COMMENT ON COLUMN course.course_statuses.created_at IS 'Дата и время
создания записи';


--
-- TOC entry 240 (class 1259 OID 26808)
-- Name: course_topics; Type: TABLE; Schema: course; Owner: postgres
--

CREATE TABLE course.course_topics (
    topic_id integer NOT NULL,
    course_id integer NOT NULL,
    user_id integer NOT NULL,
    title character varying(100) NOT NULL,
    material text,
    grade numeric(5,2),
    completed_date date,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    CONSTRAINT   course_topics_grade_check   CHECK   (((grade   >=
(0)::numeric) AND (grade <= (5)::numeric)))
);


ALTER TABLE course.course_topics OWNER TO postgres;

--
-- TOC entry 5178 (class 0 OID 0)
-- Dependencies: 240
-- Name: TABLE course_topics; Type: COMMENT; Schema: course; Owner:
postgres
--

COMMENT ON TABLE course.course_topics IS 'Таблица для хранения тем
курсов пользователей';


--
-- TOC entry 5179 (class 0 OID 0)
-- Dependencies: 240
```

```
-- Name: COLUMN course_topics.topic_id; Type: COMMENT; Schema: course; Owner: postgres
--

COMMENT ON COLUMN course.course_topics.topic_id IS 'Уникальный идентификатор темы (первичный ключ)';


--
-- TOC entry 5180 (class 0 OID 0)
-- Dependencies: 240
-- Name: COLUMN course_topics.course_id; Type: COMMENT; Schema: course; Owner: postgres
--

COMMENT ON COLUMN course.course_topics.course_id IS 'Идентификатор курса, к которому относится тема (внешний ключ)';


--
-- TOC entry 5181 (class 0 OID 0)
-- Dependencies: 240
-- Name: COLUMN course_topics.user_id; Type: COMMENT; Schema: course; Owner: postgres
--

COMMENT ON COLUMN course.course_topics.user_id IS 'Идентификатор пользователя, которому принадлежит тема (внешний ключ)';


--
-- TOC entry 5182 (class 0 OID 0)
-- Dependencies: 240
-- Name: COLUMN course_topics.title; Type: COMMENT; Schema: course; Owner: postgres
--

COMMENT ON COLUMN course.course_topics.title IS 'Название темы';


--
-- TOC entry 5183 (class 0 OID 0)
-- Dependencies: 240
-- Name: COLUMN course_topics.material; Type: COMMENT; Schema: course; Owner: postgres
--

COMMENT ON COLUMN course.course_topics.material IS 'Материалы темы (например, текст лекций или ссылки)';
```

```
--
-- TOC entry 5184 (class 0 OID 0)
-- Dependencies: 240
-- Name: COLUMN course_topics.grade; Type: COMMENT; Schema: course;
Owner: postgres
--

COMMENT ON COLUMN course.course_topics.grade IS 'Оценка за тему (от
0 до 5)';


--
-- TOC entry 5185 (class 0 OID 0)
-- Dependencies: 240
-- Name: COLUMN course_topics.completed_date; Type: COMMENT; Schema:
course; Owner: postgres
--

COMMENT ON COLUMN course.course_topics.completed_date IS 'Дата
завершения темы';


--
-- TOC entry 5186 (class 0 OID 0)
-- Dependencies: 240
-- Name: COLUMN course_topics.created_at; Type: COMMENT; Schema:
course; Owner: postgres
--

COMMENT ON COLUMN course.course_topics.created_at IS 'Дата и время
создания темы';


--
-- TOC entry 5187 (class 0 OID 0)
-- Dependencies: 240
-- Name: COLUMN course_topics.updated_at; Type: COMMENT; Schema:
course; Owner: postgres
--

COMMENT ON COLUMN course.course_topics.updated_at IS 'Дата и время
последнего обновления темы';


--
-- TOC entry 238 (class 1259 OID 26793)
-- Name: courses; Type: TABLE; Schema: course; Owner: postgres
--

CREATE TABLE course.courses (
    course_id integer NOT NULL,
```

```
    user_id integer NOT NULL,
    title character varying(100) NOT NULL,
    description text,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    status_id integer NOT NULL
);


ALTER TABLE course.courses OWNER TO postgres;

--
-- TOC entry 5188 (class 0 OID 0)
-- Dependencies: 238
-- Name: TABLE courses; Type: COMMENT; Schema: course; Owner:
postgres
--

COMMENT ON TABLE course.courses IS 'Таблица для хранения курсов
пользователей';


--
-- TOC entry 5189 (class 0 OID 0)
-- Dependencies: 238
-- Name: COLUMN courses.course_id; Type: COMMENT; Schema: course;
Owner: postgres
--

COMMENT ON COLUMN course.courses.course_id IS 'Уникальный
идентификатор курса (первичный ключ)';


--
-- TOC entry 5190 (class 0 OID 0)
-- Dependencies: 238
-- Name: COLUMN courses.user_id; Type: COMMENT; Schema: course;
Owner: postgres
--

COMMENT ON COLUMN course.courses.user_id IS 'Идентификатор
пользователя, которому принадлежит курс (внешний ключ)';


--
-- TOC entry 5191 (class 0 OID 0)
-- Dependencies: 238
-- Name: COLUMN courses.title; Type: COMMENT; Schema: course; Owner:
postgres
```

```
--

COMMENT ON COLUMN course.courses.title IS 'Название курса (уникально
в рамках пользователя)';


--
-- TOC entry 5192 (class 0 OID 0)
-- Dependencies: 238
-- Name: COLUMN courses.description; Type: COMMENT; Schema: course;
Owner: postgres
--

COMMENT ON COLUMN course.courses.description IS 'Описание курса';


--
-- TOC entry 5193 (class 0 OID 0)
-- Dependencies: 238
-- Name: COLUMN courses.created_at; Type: COMMENT; Schema: course;
Owner: postgres
--

COMMENT ON COLUMN course.courses.created_at IS 'Дата и время
создания курса';


--
-- TOC entry 5194 (class 0 OID 0)
-- Dependencies: 238
-- Name: COLUMN courses.updated_at; Type: COMMENT; Schema: course;
Owner: postgres
--

COMMENT ON COLUMN course.courses.updated_at IS 'Дата и время
последнего обновления курса';


--
-- TOC entry 5195 (class 0 OID 0)
-- Dependencies: 238
-- Name: COLUMN courses.status_id; Type: COMMENT; Schema: course;
Owner: postgres
--

COMMENT ON COLUMN course.courses.status_id IS 'Идентификатор статуса
курса (ссылка на course_statuses)';


--
-- TOC entry 257 (class 1259 OID 27744)
```

```
-- Name: course_grades; Type: VIEW; Schema: course; Owner: postgres
--

CREATE VIEW course.course_grades AS
 SELECT c.course_id,
    c.user_id,
    c.title,
    c.description,
    cs.name AS status,
    avg(ct.grade) AS final_grade
   FROM ((course.courses c
     LEFT JOIN course.course_topics ct ON ((c.course_id =
ct.course_id)))
     JOIN course.course_statuses cs ON ((c.status_id =
cs.status_id)))
  GROUP BY c.course_id, c.user_id, c.title, c.description, cs.name;


ALTER VIEW course.course_grades OWNER TO postgres;

--
-- TOC entry 5196 (class 0 OID 0)
-- Dependencies: 257
-- Name: VIEW course_grades; Type: COMMENT; Schema: course; Owner:
postgres
--

COMMENT ON VIEW course.course_grades IS 'Представление, вычисляющее
среднюю оценку (final_grade) по темам для каждого курса из таблицы
courses. Включает course_id, user_id, title, description и status
(из course_statuses). Используется для анализа успеваемости.';


--
-- TOC entry 248 (class 1259 OID 26899)
-- Name: course_progress; Type: VIEW; Schema: course; Owner:
postgres
--

CREATE VIEW course.course_progress AS
 SELECT c.course_id,
    c.user_id,
    c.title,
    count(ct.topic_id) AS total_topics,
    count(ct.completed_date) AS completed_topics,
    (((count(ct.completed_date))::double precision /
(NULLIF(count(ct.topic_id), 0))::double precision) * (100)::double
precision) AS completion_percentage
   FROM (course.courses c
     LEFT JOIN course.course_topics ct ON ((c.course_id =
ct.course_id)))
```

```
  GROUP BY c.course_id, c.user_id, c.title;


ALTER VIEW course.course_progress OWNER TO postgres;

--
-- TOC entry 5197 (class 0 OID 0)
-- Dependencies: 248
-- Name: VIEW course_progress; Type: COMMENT; Schema: course; Owner:
postgres
--

COMMENT ON VIEW course.course_progress IS 'Представление,
показывающее прогресс выполнения курсов: общее количество тем
(total_topics), завершенные темы (completed_topics) и процент
завершения (completion_percentage). Используется для отслеживания
прогресса пользователей.';


--
-- TOC entry 239 (class 1259 OID 26807)
-- Name: course_topics_topic_id_seq; Type: SEQUENCE; Schema: course;
Owner: postgres
--

CREATE SEQUENCE course.course_topics_topic_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE course.course_topics_topic_id_seq OWNER TO postgres;

--
-- TOC entry 5198 (class 0 OID 0)
-- Dependencies: 239
--  Name:  course_topics_topic_id_seq;  Type:  SEQUENCE  OWNED  BY;
Schema: course; Owner: postgres
--

ALTER SEQUENCE course.course_topics_topic_id_seq OWNED BY
course.course_topics.topic_id;


--
-- TOC entry 5199 (class 0 OID 0)
-- Dependencies: 239
```

```
-- Name: SEQUENCE course_topics_topic_id_seq; Type: COMMENT; Schema: course; Owner: postgres
--

COMMENT ON SEQUENCE course.course_topics_topic_id_seq IS 'Последовательность для генерации уникальных идентификаторов (topic_id) в таблице course_topics, хранящей темы курсов.';


--
-- TOC entry 237 (class 1259 OID 26792)
-- Name: courses_course_id_seq; Type: SEQUENCE; Schema: course; Owner: postgres
--

CREATE SEQUENCE course.courses_course_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE course.courses_course_id_seq OWNER TO postgres;

--
-- TOC entry 5200 (class 0 OID 0)
-- Dependencies: 237
-- Name: courses_course_id_seq; Type: SEQUENCE OWNED BY; Schema: course; Owner: postgres
--

ALTER SEQUENCE course.courses_course_id_seq OWNED BY course.courses.course_id;


--
-- TOC entry 5201 (class 0 OID 0)
-- Dependencies: 237
-- Name: SEQUENCE courses_course_id_seq; Type: COMMENT; Schema: course; Owner: postgres
--

COMMENT ON SEQUENCE course.courses_course_id_seq IS 'Последовательность для генерации уникальных идентификаторов (course_id) в таблице courses, хранящей информацию о курсах пользователей.';


--
```

```
-- TOC entry 224 (class 1259 OID 26513)
-- Name: finance_categories; Type: TABLE; Schema: finance; Owner:
postgres
--

CREATE TABLE finance.finance_categories (
    category_id integer NOT NULL,
    user_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    type_id integer NOT NULL
);


ALTER TABLE finance.finance_categories OWNER TO postgres;

--
-- TOC entry 5202 (class 0 OID 0)
-- Dependencies: 224
-- Name: TABLE finance_categories; Type: COMMENT; Schema: finance;
Owner: postgres
--

COMMENT ON TABLE finance.finance_categories IS 'Таблица для хранения
категорий финансовых операций пользователей';


--
-- TOC entry 5203 (class 0 OID 0)
-- Dependencies: 224
--  Name:  COLUMN  finance_categories.category_id;  Type:  COMMENT;
Schema: finance; Owner: postgres
--

COMMENT   ON   COLUMN   finance.finance_categories.category_id   IS
'Уникальный идентификатор категории (первичный ключ)';


--
-- TOC entry 5204 (class 0 OID 0)
-- Dependencies: 224
-- Name: COLUMN finance_categories.user_id; Type: COMMENT; Schema:
finance; Owner: postgres
--

COMMENT    ON    COLUMN    finance.finance_categories.user_id    IS
'Идентификатор пользователя, которому принадлежит категория (внешний
ключ)';
```

```
--
-- TOC entry 5205 (class 0 OID 0)
-- Dependencies: 224
-- Name: COLUMN finance_categories.name; Type: COMMENT; Schema:
finance; Owner: postgres
--

COMMENT ON COLUMN finance.finance_categories.name IS 'Название
категории (уникально в рамках пользователя)';


--
-- TOC entry 5206 (class 0 OID 0)
-- Dependencies: 224
-- Name: COLUMN finance_categories.created_at; Type: COMMENT;
Schema: finance; Owner: postgres
--

COMMENT ON COLUMN finance.finance_categories.created_at IS 'Дата и
время создания категории';


--
-- TOC entry 5207 (class 0 OID 0)
-- Dependencies: 224
-- Name: COLUMN finance_categories.updated_at; Type: COMMENT;
Schema: finance; Owner: postgres
--

COMMENT ON COLUMN finance.finance_categories.updated_at IS 'Дата и
время последнего обновления категории';


--
-- TOC entry 5208 (class 0 OID 0)
-- Dependencies: 224
-- Name: COLUMN finance_categories.type_id; Type: COMMENT; Schema:
finance; Owner: postgres
--

COMMENT ON COLUMN finance.finance_categories.type_id IS
'Идентификатор типа категории (ссылка на finance_types)';


--
-- TOC entry 223 (class 1259 OID 26512)
-- Name: finance_categories_category_id_seq; Type: SEQUENCE; Schema:
finance; Owner: postgres
--
```

```
CREATE SEQUENCE finance.finance_categories_category_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE finance.finance_categories_category_id_seq OWNER TO
postgres;

--
-- TOC entry 5209 (class 0 OID 0)
-- Dependencies: 223
-- Name: finance_categories_category_id_seq; Type: SEQUENCE OWNED
BY; Schema: finance; Owner: postgres
--

ALTER SEQUENCE finance.finance_categories_category_id_seq OWNED BY
finance.finance_categories.category_id;


--
-- TOC entry 5210 (class 0 OID 0)
-- Dependencies: 223
-- Name: SEQUENCE finance_categories_category_id_seq; Type: COMMENT;
Schema: finance; Owner: postgres
--

COMMENT ON SEQUENCE finance.finance_categories_category_id_seq IS
'Последовательность для генерации уникальных идентификаторов
(category_id) в таблице finance_categories, хранящей
пользовательские категории финансовых операций.';


--
-- TOC entry 249 (class 1259 OID 27221)
-- Name: finance_types; Type: TABLE; Schema: finance; Owner:
postgres
--

CREATE TABLE finance.finance_types (
    type_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT
CURRENT_TIMESTAMP,
    is_income boolean DEFAULT false NOT NULL
);
```

```
ALTER TABLE finance.finance_types OWNER TO postgres;

--
-- TOC entry 5211 (class 0 OID 0)
-- Dependencies: 249
-- Name: TABLE finance_types; Type: COMMENT; Schema: finance; Owner:
postgres
--

COMMENT ON TABLE finance.finance_types IS 'Справочная таблица для
типов финансовых операций (Доход, Расход). ';


--
-- TOC entry 5212 (class 0 OID 0)
-- Dependencies: 249
-- Name: COLUMN finance_types.type_id; Type: COMMENT; Schema:
finance; Owner: postgres
--

COMMENT ON COLUMN finance.finance_types.type_id IS 'Уникальный
идентификатор типа';


--
-- TOC entry 5213 (class 0 OID 0)
-- Dependencies: 249
-- Name: COLUMN finance_types.name; Type: COMMENT; Schema: finance;
Owner: postgres
--

COMMENT ON COLUMN finance.finance_types.name IS 'Название типа
(например, Доход, Расход)';


--
-- TOC entry 5214 (class 0 OID 0)
-- Dependencies: 249
-- Name: COLUMN finance_types.created_at; Type: COMMENT; Schema:
finance; Owner: postgres
--

COMMENT ON COLUMN finance.finance_types.created_at IS 'Дата и время
создания записи';


--
-- TOC entry 226 (class 1259 OID 26527)
-- Name: finances; Type: TABLE; Schema: finance; Owner: postgres
--
```

```
CREATE TABLE finance.finances (
    finance_id integer NOT NULL,
    user_id integer NOT NULL,
    category_id integer NOT NULL,
    amount numeric(10,2) NOT NULL,
    transaction_date date NOT NULL,
    note text,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    CONSTRAINT    finances_check_amount    CHECK    ((amount    <>
(0)::numeric))
);


ALTER TABLE finance.finances OWNER TO postgres;

--
-- TOC entry 5215 (class 0 OID 0)
-- Dependencies: 226
-- Name: TABLE finances; Type: COMMENT; Schema: finance; Owner:
postgres
--

COMMENT ON TABLE finance.finances IS 'Таблица для учета финансовых
операций пользователей';


--
-- TOC entry 5216 (class 0 OID 0)
-- Dependencies: 226
-- Name: COLUMN finances.finance_id; Type: COMMENT; Schema: finance;
Owner: postgres
--

COMMENT ON COLUMN finance.finances.finance_id IS 'Уникальный
идентификатор финансовой операции (первичный ключ)';


--
-- TOC entry 5217 (class 0 OID 0)
-- Dependencies: 226
-- Name: COLUMN finances.user_id; Type: COMMENT; Schema: finance;
Owner: postgres
--

COMMENT ON COLUMN finance.finances.user_id IS 'Идентификатор
пользователя, совершившего операцию (внешний ключ)';
```

```
--
-- TOC entry 5218 (class 0 OID 0)
-- Dependencies: 226
-- Name: COLUMN finances.category_id; Type: COMMENT; Schema: finance; Owner: postgres
--

COMMENT ON COLUMN finance.finances.category_id IS 'Идентификатор категории операции (внешний ключ)';


--
-- TOC entry 5219 (class 0 OID 0)
-- Dependencies: 226
-- Name: COLUMN finances.amount; Type: COMMENT; Schema: finance; Owner: postgres
--

COMMENT ON COLUMN finance.finances.amount IS 'Сумма операции, положительная для доходов, отрицательная для расходов';


--
-- TOC entry 5220 (class 0 OID 0)
-- Dependencies: 226
-- Name: COLUMN finances.transaction_date; Type: COMMENT; Schema: finance; Owner: postgres
--

COMMENT ON COLUMN finance.finances.transaction_date IS 'Дата совершения операции';


--
-- TOC entry 5221 (class 0 OID 0)
-- Dependencies: 226
-- Name: COLUMN finances.note; Type: COMMENT; Schema: finance; Owner: postgres
--

COMMENT ON COLUMN finance.finances.note IS 'Заметка или комментарий к операции';


--
-- TOC entry 5222 (class 0 OID 0)
-- Dependencies: 226
-- Name: COLUMN finances.created_at; Type: COMMENT; Schema: finance; Owner: postgres
--
```

```
COMMENT ON COLUMN finance.finances.created_at IS 'Дата и время
создания записи об операции';


--
-- TOC entry 5223 (class 0 OID 0)
-- Dependencies: 226
-- Name: COLUMN finances.updated_at; Type: COMMENT; Schema: finance;
Owner: postgres
--

COMMENT ON COLUMN finance.finances.updated_at IS 'Дата и время
последнего обновления записи';


--
-- TOC entry 225 (class 1259 OID 26526)
-- Name: finances_finance_id_seq; Type: SEQUENCE; Schema: finance;
Owner: postgres
--

CREATE SEQUENCE finance.finances_finance_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE finance.finances_finance_id_seq OWNER TO postgres;

--
-- TOC entry 5224 (class 0 OID 0)
-- Dependencies: 225
-- Name: finances_finance_id_seq; Type: SEQUENCE OWNED BY; Schema:
finance; Owner: postgres
--

ALTER SEQUENCE finance.finances_finance_id_seq OWNED BY
finance.finances.finance_id;


--
-- TOC entry 5225 (class 0 OID 0)
-- Dependencies: 225
-- Name: SEQUENCE finances_finance_id_seq; Type: COMMENT; Schema:
finance; Owner: postgres
--
```

```
COMMENT ON SEQUENCE finance.finances_finance_id_seq IS 'Последовательность для генерации уникальных идентификаторов (finance_id) в таблице finances, хранящей финансовые операции пользователей.';


--
-- TOC entry 259 (class 1259 OID 28710)
-- Name: financial_summary; Type: VIEW; Schema: finance; Owner: postgres
--

CREATE VIEW finance.financial_summary AS
 SELECT user_id,
    EXTRACT(year FROM transaction_date) AS year,
    EXTRACT(month FROM transaction_date) AS month,
    sum(
        CASE
            WHEN (amount > (0)::numeric) THEN amount
            ELSE (0)::numeric
        END) AS total_income,
    sum(
        CASE
            WHEN (amount < (0)::numeric) THEN (- amount)
            ELSE (0)::numeric
        END) AS total_expense,
    sum(amount) AS balance
   FROM finance.finances f
  GROUP BY user_id, (EXTRACT(year FROM transaction_date)), (EXTRACT(month FROM transaction_date));


ALTER VIEW finance.financial_summary OWNER TO postgres;

--
-- TOC entry 5226 (class 0 OID 0)
-- Dependencies: 259
-- Name: VIEW financial_summary; Type: COMMENT; Schema: finance; Owner: postgres
--

COMMENT ON VIEW finance.financial_summary IS 'Представление, агрегирующее доходы (total_income), расходы (total_expense) и баланс (balance) по пользователям за месяц и год на основе таблицы finances.';


--
-- TOC entry 232 (class 1259 OID 26711)
-- Name: habit_categories; Type: TABLE; Schema: habits; Owner: postgres
```

```
--

CREATE TABLE habits.habit_categories (
    category_id integer NOT NULL,
    user_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE habits.habit_categories OWNER TO postgres;

--
-- TOC entry 5227 (class 0 OID 0)
-- Dependencies: 232
-- Name: TABLE habit_categories; Type: COMMENT; Schema: habits;
Owner: postgres
--

COMMENT ON TABLE habits.habit_categories IS 'Таблица для хранения
категорий привычек пользователей';


--
-- TOC entry 5228 (class 0 OID 0)
-- Dependencies: 232
-- Name: COLUMN habit_categories.category_id; Type: COMMENT; Schema:
habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_categories.category_id IS 'Уникальный
идентификатор категории (первичный ключ)';


--
-- TOC entry 5229 (class 0 OID 0)
-- Dependencies: 232
-- Name: COLUMN habit_categories.user_id; Type: COMMENT; Schema:
habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_categories.user_id IS 'Идентификатор
пользователя, которому принадлежит категория (внешний ключ)';


--
-- TOC entry 5230 (class 0 OID 0)
-- Dependencies: 232
```

```
-- Name: COLUMN habit_categories.name; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_categories.name IS 'Название категории (уникально в рамках пользователя)';


--
-- TOC entry 5231 (class 0 OID 0)
-- Dependencies: 232
-- Name: COLUMN habit_categories.created_at; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_categories.created_at IS 'Дата и время создания категории';


--
-- TOC entry 5232 (class 0 OID 0)
-- Dependencies: 232
-- Name: COLUMN habit_categories.updated_at; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_categories.updated_at IS 'Дата и время последнего обновления категории';


--
-- TOC entry 231 (class 1259 OID 26710)
-- Name: habit_categories_category_id_seq; Type: SEQUENCE; Schema: habits; Owner: postgres
--

CREATE SEQUENCE habits.habit_categories_category_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE habits.habit_categories_category_id_seq OWNER TO postgres;

--
-- TOC entry 5233 (class 0 OID 0)
-- Dependencies: 231
```

```
-- Name: habit_categories_category_id_seq; Type: SEQUENCE OWNED BY;
Schema: habits; Owner: postgres
--

ALTER SEQUENCE habits.habit_categories_category_id_seq OWNED BY
habits.habit_categories.category_id;


--
-- TOC entry 5234 (class 0 OID 0)
-- Dependencies: 231
-- Name: SEQUENCE habit_categories_category_id_seq; Type: COMMENT;
Schema: habits; Owner: postgres
--

COMMENT ON SEQUENCE habits.habit_categories_category_id_seq IS
'Последовательность для генерации уникальных идентификаторов
(category_id) в таблице habit_categories, хранящей категории
привычек пользователей.';


--
-- TOC entry 255 (class 1259 OID 27718)
-- Name: habit_frequencies; Type: TABLE; Schema: habits; Owner:
postgres
--

CREATE TABLE habits.habit_frequencies (
    frequency_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE habits.habit_frequencies OWNER TO postgres;

--
-- TOC entry 5235 (class 0 OID 0)
-- Dependencies: 255
-- Name: TABLE habit_frequencies; Type: COMMENT; Schema: habits;
Owner: postgres
--

COMMENT ON TABLE habits.habit_frequencies IS 'Справочная таблица для
частоты привычек (Ежедневно, Каждые два дня, Еженедельно,
Ежемесячно). ';


--
-- TOC entry 5236 (class 0 OID 0)
-- Dependencies: 255
```

```
-- Name: COLUMN habit_frequencies.frequency_id; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_frequencies.frequency_id IS 'Уникальный идентификатор частоты';


--
-- TOC entry 5237 (class 0 OID 0)
-- Dependencies: 255
-- Name: COLUMN habit_frequencies.name; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_frequencies.name IS 'Название частоты (например, Ежедневно, Еженедельно)';


--
-- TOC entry 5238 (class 0 OID 0)
-- Dependencies: 255
-- Name: COLUMN habit_frequencies.created_at; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_frequencies.created_at IS 'Дата и время создания записи';


--
-- TOC entry 236 (class 1259 OID 26744)
-- Name: habit_logs; Type: TABLE; Schema: habits; Owner: postgres
--

CREATE TABLE habits.habit_logs (
    log_id integer NOT NULL,
    habit_id integer NOT NULL,
    log_date date NOT NULL,
    is_completed boolean DEFAULT false,
    note text,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP,
    updated_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE habits.habit_logs OWNER TO postgres;

--
-- TOC entry 5239 (class 0 OID 0)
```

```
-- Dependencies: 236
-- Name: TABLE habit_logs; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON TABLE habits.habit_logs IS 'Таблица для хранения логов выполнения привычек';


--
-- TOC entry 5240 (class 0 OID 0)
-- Dependencies: 236
-- Name: COLUMN habit_logs.log_id; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_logs.log_id IS 'Уникальный идентификатор лога (первичный ключ)';


--
-- TOC entry 5241 (class 0 OID 0)
-- Dependencies: 236
-- Name: COLUMN habit_logs.habit_id; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_logs.habit_id IS 'Идентификатор привычки, к которой относится лог (внешний ключ)';


--
-- TOC entry 5242 (class 0 OID 0)
-- Dependencies: 236
-- Name: COLUMN habit_logs.log_date; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_logs.log_date IS 'Дата лога выполнения привычки';


--
-- TOC entry 5243 (class 0 OID 0)
-- Dependencies: 236
-- Name: COLUMN habit_logs.is_completed; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_logs.is_completed IS 'Флаг выполнения привычки в указанную дату (true/false)';
```

```
--
-- TOC entry 5244 (class 0 OID 0)
-- Dependencies: 236
-- Name: COLUMN habit_logs.note; Type: COMMENT; Schema: habits;
Owner: postgres
--

COMMENT ON COLUMN habits.habit_logs.note IS 'Заметка или комментарий
к логу';


--
-- TOC entry 5245 (class 0 OID 0)
-- Dependencies: 236
-- Name: COLUMN habit_logs.created_at; Type: COMMENT; Schema:
habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_logs.created_at IS 'Дата и время
создания лога';


--
-- TOC entry 5246 (class 0 OID 0)
-- Dependencies: 236
-- Name: COLUMN habit_logs.updated_at; Type: COMMENT; Schema:
habits; Owner: postgres
--

COMMENT ON COLUMN habits.habit_logs.updated_at IS 'Дата и время
последнего обновления лога';


--
-- TOC entry 235 (class 1259 OID 26743)
-- Name: habit_logs_log_id_seq; Type: SEQUENCE; Schema: habits;
Owner: postgres
--

CREATE SEQUENCE habits.habit_logs_log_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE habits.habit_logs_log_id_seq OWNER TO postgres;
```

```
--
-- TOC entry 5247 (class 0 OID 0)
-- Dependencies: 235
-- Name: habit_logs_log_id_seq; Type: SEQUENCE OWNED BY; Schema: habits; Owner: postgres
--

ALTER SEQUENCE habits.habit_logs_log_id_seq OWNED BY habits.habit_logs.log_id;


--
-- TOC entry 5248 (class 0 OID 0)
-- Dependencies: 235
-- Name: SEQUENCE habit_logs_log_id_seq; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON SEQUENCE habits.habit_logs_log_id_seq IS 'Последовательность для генерации уникальных идентификаторов (log_id) в таблице habit_logs, хранящей записи о выполнении привычек.';


--
-- TOC entry 234 (class 1259 OID 26726)
-- Name: habits; Type: TABLE; Schema: habits; Owner: postgres
--

CREATE TABLE habits.habits (
    habit_id integer NOT NULL,
    user_id integer NOT NULL,
    category_id integer NOT NULL,
    name character varying(100) NOT NULL,
    start_date date NOT NULL,
    end_date date,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP,
    updated_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP,
    frequency_id integer NOT NULL,
    CONSTRAINT habits_check CHECK ((start_date <= end_date))
);


ALTER TABLE habits.habits OWNER TO postgres;

--
-- TOC entry 5249 (class 0 OID 0)
-- Dependencies: 234
```

```
-- Name: TABLE habits; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON TABLE habits.habits IS 'Таблица для хранения привычек пользователей';


--
-- TOC entry 5250 (class 0 OID 0)
-- Dependencies: 234
-- Name: COLUMN habits.habit_id; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habits.habit_id IS 'Уникальный идентификатор привычки (первичный ключ)';


--
-- TOC entry 5251 (class 0 OID 0)
-- Dependencies: 234
-- Name: COLUMN habits.user_id; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habits.user_id IS 'Идентификатор пользователя, которому принадлежит привычка (внешний ключ)';


--
-- TOC entry 5252 (class 0 OID 0)
-- Dependencies: 234
-- Name: COLUMN habits.category_id; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habits.category_id IS 'Идентификатор категории привычки (внешний ключ)';


--
-- TOC entry 5253 (class 0 OID 0)
-- Dependencies: 234
-- Name: COLUMN habits.name; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON COLUMN habits.habits.name IS 'Название привычки (уникально в рамках пользователя)';
```

```
--
-- TOC entry 5254 (class 0 OID 0)
-- Dependencies: 234
-- Name: COLUMN habits.start_date; Type: COMMENT; Schema: habits;
Owner: postgres
--

COMMENT ON COLUMN habits.habits.start_date IS 'Дата начала
выполнения привычки';


--
-- TOC entry 5255 (class 0 OID 0)
-- Dependencies: 234
-- Name: COLUMN habits.end_date; Type: COMMENT; Schema: habits;
Owner: postgres
--

COMMENT ON COLUMN habits.habits.end_date IS 'Дата окончания
выполнения привычки (может быть NULL)';


--
-- TOC entry 5256 (class 0 OID 0)
-- Dependencies: 234
-- Name: COLUMN habits.created_at; Type: COMMENT; Schema: habits;
Owner: postgres
--

COMMENT ON COLUMN habits.habits.created_at IS 'Дата и время создания
привычки';


--
-- TOC entry 5257 (class 0 OID 0)
-- Dependencies: 234
-- Name: COLUMN habits.updated_at; Type: COMMENT; Schema: habits;
Owner: postgres
--

COMMENT ON COLUMN habits.habits.updated_at IS 'Дата и время
последнего обновления привычки';


--
-- TOC entry 5258 (class 0 OID 0)
-- Dependencies: 234
-- Name: COLUMN habits.frequency_id; Type: COMMENT; Schema: habits;
Owner: postgres
--
```

```
COMMENT ON COLUMN habits.habits.frequency_id IS 'Идентификатор частоты привычки (ссылка на habit_frequencies)';


--
-- TOC entry 233 (class 1259 OID 26725)
-- Name: habits_habit_id_seq; Type: SEQUENCE; Schema: habits; Owner: postgres
--

CREATE SEQUENCE habits.habits_habit_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE habits.habits_habit_id_seq OWNER TO postgres;

--
-- TOC entry 5259 (class 0 OID 0)
-- Dependencies: 233
-- Name: habits_habit_id_seq; Type: SEQUENCE OWNED BY; Schema: habits; Owner: postgres
--

ALTER SEQUENCE habits.habits_habit_id_seq OWNED BY habits.habits.habit_id;


--
-- TOC entry 5260 (class 0 OID 0)
-- Dependencies: 233
-- Name: SEQUENCE habits_habit_id_seq; Type: COMMENT; Schema: habits; Owner: postgres
--

COMMENT ON SEQUENCE habits.habits_habit_id_seq IS 'Последовательность для генерации уникальных идентификаторов (habit_id) в таблице habits, хранящей привычки пользователей.';


--
-- TOC entry 251 (class 1259 OID 27686)
-- Name: task_priorities; Type: TABLE; Schema: todo; Owner: postgres
--

CREATE TABLE todo.task_priorities (
    priority_id integer NOT NULL,
```

```
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE todo.task_priorities OWNER TO postgres;

--
-- TOC entry 5261 (class 0 OID 0)
-- Dependencies: 251
-- Name: TABLE task_priorities; Type: COMMENT; Schema: todo; Owner:
postgres
--

COMMENT ON TABLE todo.task_priorities IS 'Справочная таблица для
приоритетов задач (Низкий, Средний, Высокий).';


--
-- TOC entry 5262 (class 0 OID 0)
-- Dependencies: 251
-- Name: COLUMN task_priorities.priority_id; Type: COMMENT; Schema:
todo; Owner: postgres
--

COMMENT ON COLUMN todo.task_priorities.priority_id IS 'Уникальный
идентификатор приоритета';


--
-- TOC entry 5263 (class 0 OID 0)
-- Dependencies: 251
-- Name: COLUMN task_priorities.name; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON COLUMN todo.task_priorities.name IS 'Название приоритета
(например, Низкий, Средний)';


--
-- TOC entry 5264 (class 0 OID 0)
-- Dependencies: 251
-- Name: COLUMN task_priorities.created_at; Type: COMMENT; Schema:
todo; Owner: postgres
--

COMMENT ON COLUMN todo.task_priorities.created_at IS 'Дата и время
создания записи';
```

```
--
-- TOC entry 250 (class 1259 OID 27678)
-- Name: task_statuses; Type: TABLE; Schema: todo; Owner: postgres
--

CREATE TABLE todo.task_statuses (
    status_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE todo.task_statuses OWNER TO postgres;

--
-- TOC entry 5265 (class 0 OID 0)
-- Dependencies: 250
-- Name: TABLE task_statuses; Type: COMMENT; Schema: todo; Owner:
postgres
--

COMMENT ON TABLE todo.task_statuses IS 'Справочная таблица для
статусов задач (Запланировано, В процессе, Завершено).';


--
-- TOC entry 5266 (class 0 OID 0)
-- Dependencies: 250
-- Name: COLUMN task_statuses.status_id; Type: COMMENT; Schema:
todo; Owner: postgres
--

COMMENT ON COLUMN todo.task_statuses.status_id IS 'Уникальный
идентификатор статуса';


--
-- TOC entry 5267 (class 0 OID 0)
-- Dependencies: 250
-- Name: COLUMN task_statuses.name; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON COLUMN todo.task_statuses.name IS 'Название статуса
(например, Запланировано, В процессе)';


--
-- TOC entry 5268 (class 0 OID 0)
-- Dependencies: 250
```

```
-- Name: COLUMN task_statuses.created_at; Type: COMMENT; Schema:
todo; Owner: postgres
--

COMMENT ON COLUMN todo.task_statuses.created_at IS 'Дата и время
создания записи';


--
-- TOC entry 228 (class 1259 OID 26675)
-- Name: todo_categories; Type: TABLE; Schema: todo; Owner: postgres
--

CREATE TABLE todo.todo_categories (
    category_id integer NOT NULL,
    user_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE todo.todo_categories OWNER TO postgres;

--
-- TOC entry 5269 (class 0 OID 0)
-- Dependencies: 228
-- Name: TABLE todo_categories; Type: COMMENT; Schema: todo; Owner:
postgres
--

COMMENT ON TABLE todo.todo_categories IS 'Таблица для хранения
категорий задач пользователей';


--
-- TOC entry 5270 (class 0 OID 0)
-- Dependencies: 228
-- Name: COLUMN todo_categories.category_id; Type: COMMENT; Schema:
todo; Owner: postgres
--

COMMENT ON COLUMN todo.todo_categories.category_id IS 'Уникальный
идентификатор категории (первичный ключ)';


--
-- TOC entry 5271 (class 0 OID 0)
-- Dependencies: 228
```

```
-- Name: COLUMN todo_categories.user_id; Type: COMMENT; Schema:
todo; Owner: postgres
--

COMMENT ON COLUMN todo.todo_categories.user_id IS 'Идентификатор
пользователя, которому принадлежит категория (внешний ключ)';


--
-- TOC entry 5272 (class 0 OID 0)
-- Dependencies: 228
-- Name: COLUMN todo_categories.name; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON COLUMN todo.todo_categories.name IS 'Название категории
(уникально в рамках пользователя)';


--
-- TOC entry 5273 (class 0 OID 0)
-- Dependencies: 228
-- Name: COLUMN todo_categories.created_at; Type: COMMENT; Schema:
todo; Owner: postgres
--

COMMENT ON COLUMN todo.todo_categories.created_at IS 'Дата и время
создания категории';


--
-- TOC entry 5274 (class 0 OID 0)
-- Dependencies: 228
-- Name: COLUMN todo_categories.updated_at; Type: COMMENT; Schema:
todo; Owner: postgres
--

COMMENT ON COLUMN todo.todo_categories.updated_at IS 'Дата и время
последнего обновления категории';


--
-- TOC entry 227 (class 1259 OID 26674)
-- Name: todo_categories_category_id_seq; Type: SEQUENCE; Schema:
todo; Owner: postgres
--

CREATE SEQUENCE todo.todo_categories_category_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
```

```
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE todo.todo_categories_category_id_seq OWNER TO
postgres;

--
-- TOC entry 5275 (class 0 OID 0)
-- Dependencies: 227
-- Name: todo_categories_category_id_seq; Type: SEQUENCE OWNED BY;
Schema: todo; Owner: postgres
--

ALTER SEQUENCE todo.todo_categories_category_id_seq OWNED BY
todo.todo_categories.category_id;


--
-- TOC entry 5276 (class 0 OID 0)
-- Dependencies: 227
-- Name: SEQUENCE todo_categories_category_id_seq; Type: COMMENT;
Schema: todo; Owner: postgres
--

COMMENT ON SEQUENCE todo.todo_categories_category_id_seq IS
'Последовательность для генерации уникальных идентификаторов
(category_id) в таблице todo_categories, хранящей категории задач
пользователей.';


--
-- TOC entry 230 (class 1259 OID 26689)
-- Name: todos; Type: TABLE; Schema: todo; Owner: postgres
--

CREATE TABLE todo.todos (
    todo_id integer NOT NULL,
    user_id integer NOT NULL,
    category_id integer,
    task text NOT NULL,
    due_date date,
    is_completed boolean DEFAULT false,
    completed_date date,
    created_at timestamp without time zone DEFAULT
CURRENT_TIMESTAMP,
    updated_at timestamp without time zone DEFAULT
CURRENT_TIMESTAMP,
    task_priority_id integer NOT NULL
);
```

```
ALTER TABLE todo.todos OWNER TO postgres;

--
-- TOC entry 5277 (class 0 OID 0)
-- Dependencies: 230
-- Name: TABLE todos; Type: COMMENT; Schema: todo; Owner: postgres
--

COMMENT ON TABLE todo.todos IS 'Таблица для хранения задач
пользователей';


--
-- TOC entry 5278 (class 0 OID 0)
-- Dependencies: 230
-- Name: COLUMN todos.todo_id; Type: COMMENT; Schema: todo; Owner:
postgres
--

COMMENT ON COLUMN todo.todos.todo_id IS 'Уникальный идентификатор
задачи (первичный ключ)';


--
-- TOC entry 5279 (class 0 OID 0)
-- Dependencies: 230
-- Name: COLUMN todos.user_id; Type: COMMENT; Schema: todo; Owner:
postgres
--

COMMENT ON COLUMN todo.todos.user_id IS 'Идентификатор пользователя,
которому принадлежит задача (внешний ключ)';


--
-- TOC entry 5280 (class 0 OID 0)
-- Dependencies: 230
-- Name: COLUMN todos.category_id; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON COLUMN todo.todos.category_id IS 'Идентификатор категории
задачи (внешний ключ, может быть NULL)';


--
-- TOC entry 5281 (class 0 OID 0)
-- Dependencies: 230
```

```
-- Name: COLUMN todos.task; Type: COMMENT; Schema: todo; Owner:
postgres
--

COMMENT ON COLUMN todo.todos.task IS 'Описание задачи';


--
-- TOC entry 5282 (class 0 OID 0)
-- Dependencies: 230
-- Name: COLUMN todos.due_date; Type: COMMENT; Schema: todo; Owner:
postgres
--

COMMENT ON COLUMN todo.todos.due_date IS 'Дата выполнения задачи
(может быть NULL)';


--
-- TOC entry 5283 (class 0 OID 0)
-- Dependencies: 230
-- Name: COLUMN todos.is_completed; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON COLUMN todo.todos.is_completed IS 'Флаг завершения задачи
(true/false)';


--
-- TOC entry 5284 (class 0 OID 0)
-- Dependencies: 230
-- Name: COLUMN todos.completed_date; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON COLUMN todo.todos.completed_date IS 'Дата завершения
задачи (устанавливается триггером при is_completed=true)';


--
-- TOC entry 5285 (class 0 OID 0)
-- Dependencies: 230
-- Name: COLUMN todos.created_at; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON COLUMN todo.todos.created_at IS 'Дата и время создания
задачи';
```

```
--
-- TOC entry 5286 (class 0 OID 0)
-- Dependencies: 230
-- Name: COLUMN todos.updated_at; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON COLUMN todo.todos.updated_at IS 'Дата и время последнего
обновления задачи';


--
-- TOC entry 5287 (class 0 OID 0)
-- Dependencies: 230
-- Name: COLUMN todos.task_priority_id; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON COLUMN todo.todos.task_priority_id IS 'Идентификатор
приоритета задачи (ссылка на task_priorities)';


--
-- TOC entry 229 (class 1259 OID 26688)
-- Name: todos_todo_id_seq; Type: SEQUENCE; Schema: todo; Owner:
postgres
--

CREATE SEQUENCE todo.todos_todo_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE todo.todos_todo_id_seq OWNER TO postgres;

--
-- TOC entry 5288 (class 0 OID 0)
-- Dependencies: 229
-- Name: todos_todo_id_seq; Type: SEQUENCE OWNED BY; Schema: todo;
Owner: postgres
--

ALTER SEQUENCE todo.todos_todo_id_seq OWNED BY todo.todos.todo_id;


--
-- TOC entry 5289 (class 0 OID 0)
```

```
-- Dependencies: 229
-- Name: SEQUENCE todos_todo_id_seq; Type: COMMENT; Schema: todo;
Owner: postgres
--

COMMENT ON SEQUENCE todo.todos_todo_id_seq IS 'Последовательность
для генерации уникальных идентификаторов (todo_id) в таблице todos,
хранящей задачи пользователей.';


--
-- TOC entry 254 (class 1259 OID 27710)
-- Name: expense_categories; Type: TABLE; Schema: trips; Owner:
postgres
--

CREATE TABLE trips.expense_categories (
    category_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE trips.expense_categories OWNER TO postgres;

--
-- TOC entry 5290 (class 0 OID 0)
-- Dependencies: 254
-- Name: TABLE expense_categories; Type: COMMENT; Schema: trips;
Owner: postgres
--

COMMENT ON TABLE trips.expense_categories IS 'Справочная таблица для
категорий расходов поездок (Еда, Транспорт и т.д.). ';


--
-- TOC entry 5291 (class 0 OID 0)
-- Dependencies: 254
-- Name: COLUMN expense_categories.category_id; Type: COMMENT;
Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.expense_categories.category_id IS
'Уникальный идентификатор категории';


--
-- TOC entry 5292 (class 0 OID 0)
-- Dependencies: 254
```

```
-- Name: COLUMN expense_categories.name; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.expense_categories.name IS 'Название категории (например, Еда, Транспорт)';


--
-- TOC entry 5293 (class 0 OID 0)
-- Dependencies: 254
-- Name: COLUMN expense_categories.created_at; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.expense_categories.created_at IS 'Дата и время создания записи';


--
-- TOC entry 258 (class 1259 OID 27818)
-- Name: expense_categories_category_id_seq; Type: SEQUENCE; Schema: trips; Owner: postgres
--

CREATE SEQUENCE trips.expense_categories_category_id_seq
    START WITH 16
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE trips.expense_categories_category_id_seq OWNER TO postgres;

--
-- TOC entry 5294 (class 0 OID 0)
-- Dependencies: 258
-- Name: expense_categories_category_id_seq; Type: SEQUENCE OWNED BY; Schema: trips; Owner: postgres
--

ALTER SEQUENCE trips.expense_categories_category_id_seq OWNED BY trips.expense_categories.category_id;


--
-- TOC entry 253 (class 1259 OID 27702)
-- Name: transportation_types; Type: TABLE; Schema: trips; Owner: postgres
```

```
--

CREATE TABLE trips.transportation_types (
    type_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE trips.transportation_types OWNER TO postgres;

--
-- TOC entry 5295 (class 0 OID 0)
-- Dependencies: 253
-- Name: TABLE transportation_types; Type: COMMENT; Schema: trips;
Owner: postgres
--

COMMENT ON TABLE trips.transportation_types IS 'Справочная таблица
для типов транспорта (Самолет, Поезд, Автобус и т.д.). ';


--
-- TOC entry 5296 (class 0 OID 0)
-- Dependencies: 253
-- Name: COLUMN transportation_types.type_id; Type: COMMENT; Schema:
trips; Owner: postgres
--

COMMENT ON COLUMN trips.transportation_types.type_id IS 'Уникальный
идентификатор типа';


--
-- TOC entry 5297 (class 0 OID 0)
-- Dependencies: 253
-- Name: COLUMN transportation_types.name; Type: COMMENT; Schema:
trips; Owner: postgres
--

COMMENT ON COLUMN trips.transportation_types.name IS 'Название типа
(например, Самолет, Поезд)';


--
-- TOC entry 5298 (class 0 OID 0)
-- Dependencies: 253
-- Name: COLUMN transportation_types.created_at; Type: COMMENT;
Schema: trips; Owner: postgres
--
```

```
COMMENT ON COLUMN trips.transportation_types.created_at IS 'Дата и
время создания записи';


--
-- TOC entry 244 (class 1259 OID 26859)
-- Name: trip_routes; Type: TABLE; Schema: trips; Owner: postgres
--

CREATE TABLE trips.trip_routes (
    route_id integer NOT NULL,
    trip_id integer NOT NULL,
    location_order integer NOT NULL,
    location_name character varying(100) NOT NULL,
    distance_km numeric(10,2),
    cost numeric(10,2),
    arrival_date date,
    departure_date date,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    transportation_type_id integer NOT NULL,
    CONSTRAINT    trip_routes_check    CHECK    ((arrival_date    <=
departure_date)),
    CONSTRAINT    trip_routes_cost_check    CHECK    ((cost    >=
(0)::numeric)),
    CONSTRAINT  trip_routes_date_check  CHECK  ((arrival_date  <=
departure_date))
);


ALTER TABLE trips.trip_routes OWNER TO postgres;

--
-- TOC entry 5299 (class 0 OID 0)
-- Dependencies: 244
-- Name: TABLE trip_routes; Type: COMMENT; Schema: trips; Owner:
postgres
--

COMMENT  ON  TABLE  trips.trip_routes  IS  'Таблица  для  хранения
маршрутов поездок';


--
-- TOC entry 5300 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.route_id; Type: COMMENT; Schema: trips;
Owner: postgres
--
```

```
COMMENT ON COLUMN trips.trip_routes.route_id IS 'Уникальный идентификатор маршрута (первичный ключ)';


--
-- TOC entry 5301 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.trip_id; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.trip_id IS 'Идентификатор поездки, к которой относится маршрут (внешний ключ)';


--
-- TOC entry 5302 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.location_order; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.location_order IS 'Порядковый номер локации в маршруте (уникально в рамках поездки)';


--
-- TOC entry 5303 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.location_name; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.location_name IS 'Название локации';


--
-- TOC entry 5304 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.distance_km; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.distance_km IS 'Расстояние между локациями маршрута в километрах';


--
-- TOC entry 5305 (class 0 OID 0)
```

```
-- Dependencies: 244
-- Name: COLUMN trip_routes.cost; Type: COMMENT; Schema: trips;
Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.cost IS 'Стоимость перемещения
(в валюте пользователя)';


--
-- TOC entry 5306 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.arrival_date; Type: COMMENT; Schema:
trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.arrival_date IS 'Дата прибытия
в локацию';


--
-- TOC entry 5307 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.departure_date; Type: COMMENT; Schema:
trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.departure_date IS 'Дата отбытия
из локации (может быть NULL)';


--
-- TOC entry 5308 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.created_at; Type: COMMENT; Schema:
trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.created_at IS 'Дата и время
создания маршрута';


--
-- TOC entry 5309 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.updated_at; Type: COMMENT; Schema:
trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.updated_at IS 'Дата и время
последнего обновления маршрута';
```

```
--
-- TOC entry 5310 (class 0 OID 0)
-- Dependencies: 244
-- Name: COLUMN trip_routes.transportation_type_id; Type: COMMENT;
Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_routes.transportation_type_id IS
'Идентификатор типа транспорта (ссылка на transportation_types)';


--
-- TOC entry 242 (class 1259 OID 26846)
-- Name: trips; Type: TABLE; Schema: trips; Owner: postgres
--

CREATE TABLE trips.trips (
    trip_id integer NOT NULL,
    user_id integer NOT NULL,
    name character varying(100) NOT NULL,
    start_date date NOT NULL,
    end_date date,
    created_at timestamp without time zone DEFAULT
CURRENT_TIMESTAMP,
    updated_at timestamp without time zone DEFAULT
CURRENT_TIMESTAMP,
    CONSTRAINT trips_check CHECK ((start_date <= end_date))
);


ALTER TABLE trips.trips OWNER TO postgres;

--
-- TOC entry 5311 (class 0 OID 0)
-- Dependencies: 242
-- Name: TABLE trips; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON TABLE trips.trips IS 'Таблица для хранения поездок
пользователей';


--
-- TOC entry 5312 (class 0 OID 0)
-- Dependencies: 242
-- Name: COLUMN trips.trip_id; Type: COMMENT; Schema: trips; Owner:
postgres
--
```

```
COMMENT ON COLUMN trips.trips.trip_id IS 'Уникальный идентификатор поездки (первичный ключ)';


--
-- TOC entry 5313 (class 0 OID 0)
-- Dependencies: 242
-- Name: COLUMN trips.user_id; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trips.user_id IS 'Идентификатор пользователя, которому принадлежит поездка (внешний ключ)';


--
-- TOC entry 5314 (class 0 OID 0)
-- Dependencies: 242
-- Name: COLUMN trips.name; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trips.name IS 'Название поездки';


--
-- TOC entry 5315 (class 0 OID 0)
-- Dependencies: 242
-- Name: COLUMN trips.start_date; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trips.start_date IS 'Дата начала поездки';


--
-- TOC entry 5316 (class 0 OID 0)
-- Dependencies: 242
-- Name: COLUMN trips.end_date; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trips.end_date IS 'Дата окончания поездки (может быть NULL)';


--
-- TOC entry 5317 (class 0 OID 0)
-- Dependencies: 242
-- Name: COLUMN trips.created_at; Type: COMMENT; Schema: trips; Owner: postgres
```

```
--

COMMENT ON COLUMN trips.trips.created_at IS 'Дата и время создания
записи о поездке';


--
-- TOC entry 5318 (class 0 OID 0)
-- Dependencies: 242
-- Name: COLUMN trips.updated_at; Type: COMMENT; Schema: trips;
Owner: postgres
--

COMMENT ON COLUMN trips.trips.updated_at IS 'Дата и время последнего
обновления записи';


--
-- TOC entry 245 (class 1259 OID 26873)
-- Name: trip_costs; Type: VIEW; Schema: trips; Owner: postgres
--

CREATE VIEW trips.trip_costs AS
 SELECT t.trip_id,
    t.user_id,
    t.name,
    t.start_date,
    t.end_date,
    sum(tr.cost) AS total_cost
   FROM (trips.trips t
     LEFT JOIN trips.trip_routes tr ON ((t.trip_id = tr.trip_id)))
  GROUP BY t.trip_id, t.user_id, t.name, t.start_date, t.end_date;


ALTER VIEW trips.trip_costs OWNER TO postgres;

--
-- TOC entry 247 (class 1259 OID 26880)
-- Name: trip_expenses; Type: TABLE; Schema: trips; Owner: postgres
--

CREATE TABLE trips.trip_expenses (
    expense_id integer NOT NULL,
    route_id integer NOT NULL,
    amount numeric(10,2) NOT NULL,
    expense_date date NOT NULL,
    note text,
    created_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
    updated_at    timestamp    without    time    zone    DEFAULT
CURRENT_TIMESTAMP,
```

```
    expense_category_id integer NOT NULL,
    CONSTRAINT trip_expenses_amount_check CHECK ((amount > (0)::numeric))
);


ALTER TABLE trips.trip_expenses OWNER TO postgres;

--
-- TOC entry 5319 (class 0 OID 0)
-- Dependencies: 247
-- Name: COLUMN trip_expenses.expense_id; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_expenses.expense_id IS 'Уникальный идентификатор расхода (первичный ключ)';


--
-- TOC entry 5320 (class 0 OID 0)
-- Dependencies: 247
-- Name: COLUMN trip_expenses.route_id; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_expenses.route_id IS 'Идентификатор маршрута, к которому относится расход (внешний ключ)';


--
-- TOC entry 5321 (class 0 OID 0)
-- Dependencies: 247
-- Name: COLUMN trip_expenses.amount; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_expenses.amount IS 'Сумма расхода (в валюте пользователя)';


--
-- TOC entry 5322 (class 0 OID 0)
-- Dependencies: 247
-- Name: COLUMN trip_expenses.expense_date; Type: COMMENT; Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_expenses.expense_date IS 'Дата расхода';
```

```
--
-- TOC entry 5323 (class 0 OID 0)
-- Dependencies: 247
-- Name: COLUMN trip_expenses.note; Type: COMMENT; Schema: trips;
Owner: postgres
--

COMMENT ON COLUMN trips.trip_expenses.note IS 'Заметка или
комментарий к расходу';


--
-- TOC entry 5324 (class 0 OID 0)
-- Dependencies: 247
-- Name: COLUMN trip_expenses.created_at; Type: COMMENT; Schema:
trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_expenses.created_at IS 'Дата и время
создания записи о расходе';


--
-- TOC entry 5325 (class 0 OID 0)
-- Dependencies: 247
-- Name: COLUMN trip_expenses.updated_at; Type: COMMENT; Schema:
trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_expenses.updated_at IS 'Дата и время
последнего обновления записи';


--
-- TOC entry 5326 (class 0 OID 0)
-- Dependencies: 247
-- Name: COLUMN trip_expenses.expense_category_id; Type: COMMENT;
Schema: trips; Owner: postgres
--

COMMENT ON COLUMN trips.trip_expenses.expense_category_id IS
'Идентификатор категории расхода (ссылка на expense_categories)';


--
-- TOC entry 246 (class 1259 OID 26879)
-- Name: trip_expenses_expense_id_seq; Type: SEQUENCE; Schema:
trips; Owner: postgres
--
```

```
CREATE SEQUENCE trips.trip_expenses_expense_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE trips.trip_expenses_expense_id_seq OWNER TO postgres;

--
-- TOC entry 5327 (class 0 OID 0)
-- Dependencies: 246
-- Name: trip_expenses_expense_id_seq; Type: SEQUENCE OWNED BY;
Schema: trips; Owner: postgres
--

ALTER SEQUENCE trips.trip_expenses_expense_id_seq OWNED BY
trips.trip_expenses.expense_id;


--
-- TOC entry 5328 (class 0 OID 0)
-- Dependencies: 246
-- Name: SEQUENCE trip_expenses_expense_id_seq; Type: COMMENT;
Schema: trips; Owner: postgres
--

COMMENT ON SEQUENCE trips.trip_expenses_expense_id_seq IS
'Последовательность для генерации уникальных идентификаторов
(expense_id) в таблице trip_expenses, хранящей расходы на маршруты
поездок.';


--
-- TOC entry 243 (class 1259 OID 26858)
-- Name: trip_routes_route_id_seq; Type: SEQUENCE; Schema: trips;
Owner: postgres
--

CREATE SEQUENCE trips.trip_routes_route_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE trips.trip_routes_route_id_seq OWNER TO postgres;
```

```
--
-- TOC entry 5329 (class 0 OID 0)
-- Dependencies: 243
-- Name: trip_routes_route_id_seq; Type: SEQUENCE OWNED BY; Schema:
trips; Owner: postgres
--

ALTER SEQUENCE trips.trip_routes_route_id_seq OWNED BY
trips.trip_routes.route_id;


--
-- TOC entry 5330 (class 0 OID 0)
-- Dependencies: 243
-- Name: SEQUENCE trip_routes_route_id_seq; Type: COMMENT; Schema:
trips; Owner: postgres
--

COMMENT ON SEQUENCE trips.trip_routes_route_id_seq IS
'Последовательность для генерации уникальных идентификаторов
(route_id) в таблице trip_routes, хранящей этапы маршрутов
поездок.';


--
-- TOC entry 241 (class 1259 OID 26845)
-- Name: trips_trip_id_seq; Type: SEQUENCE; Schema: trips; Owner:
postgres
--

CREATE SEQUENCE trips.trips_trip_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE trips.trips_trip_id_seq OWNER TO postgres;

--
-- TOC entry 5331 (class 0 OID 0)
-- Dependencies: 241
-- Name: trips_trip_id_seq; Type: SEQUENCE OWNED BY; Schema: trips;
Owner: postgres
--

ALTER SEQUENCE trips.trips_trip_id_seq OWNED BY trips.trips.trip_id;
```

```
--
-- TOC entry 5332 (class 0 OID 0)
-- Dependencies: 241
-- Name: SEQUENCE trips_trip_id_seq; Type: COMMENT; Schema: trips;
Owner: postgres
--

COMMENT ON SEQUENCE trips.trips_trip_id_seq IS 'Последовательность
для генерации уникальных идентификаторов (trip_id) в таблице trips,
хранящей информацию о поездках пользователей.';


--
-- TOC entry 256 (class 1259 OID 27726)
-- Name: user_roles; Type: TABLE; Schema: user; Owner: postgres
--

CREATE TABLE "user".user_roles (
    role_id integer NOT NULL,
    name character varying(50) NOT NULL,
    created_at timestamp without time zone DEFAULT CURRENT_TIMESTAMP
);


ALTER TABLE "user".user_roles OWNER TO postgres;

--
-- TOC entry 5333 (class 0 OID 0)
-- Dependencies: 256
-- Name: TABLE user_roles; Type: COMMENT; Schema: user; Owner:
postgres
--

COMMENT ON TABLE "user".user_roles IS 'Справочная таблица для ролей
пользователей';


--
-- TOC entry 5334 (class 0 OID 0)
-- Dependencies: 256
-- Name: COLUMN user_roles.role_id; Type: COMMENT; Schema: user;
Owner: postgres
--

COMMENT ON COLUMN "user".user_roles.role_id IS 'Уникальный
идентификатор роли';


--
-- TOC entry 5335 (class 0 OID 0)
```

```
-- Dependencies: 256
-- Name: COLUMN user_roles.name; Type: COMMENT; Schema: user; Owner:
postgres
--

COMMENT ON COLUMN "user".user_roles.name IS 'Название роли
(например, Администратор, Пользователь)';


--
-- TOC entry 5336 (class 0 OID 0)
-- Dependencies: 256
-- Name: COLUMN user_roles.created_at; Type: COMMENT; Schema: user;
Owner: postgres
--

COMMENT ON COLUMN "user".user_roles.created_at IS 'Дата и время
создания записи';


--
-- TOC entry 222 (class 1259 OID 26496)
-- Name: users; Type: TABLE; Schema: user; Owner: postgres
--

CREATE TABLE "user".users (
    user_id integer NOT NULL,
    username character varying(50) NOT NULL,
    email character varying(100) NOT NULL,
    first_name character varying(50),
    last_name character varying(50),
    updated_at timestamp without time zone DEFAULT
CURRENT_TIMESTAMP,
    role_id integer NOT NULL,
    CONSTRAINT users_email_check CHECK (((email)::text ~* '^[A-Za-
z0-9._%+-]+@[A-Za-z0-9.-]+\.[A-Za-z]{2,}$'::text))
);


ALTER TABLE "user".users OWNER TO postgres;

--
-- TOC entry 5337 (class 0 OID 0)
-- Dependencies: 222
-- Name: TABLE users; Type: COMMENT; Schema: user; Owner: postgres
--

COMMENT ON TABLE "user".users IS 'Таблица для хранения информации о
пользователях системы';
```

```
--
-- TOC entry 5338 (class 0 OID 0)
-- Dependencies: 222
-- Name: COLUMN users.user_id; Type: COMMENT; Schema: user; Owner:
postgres
--

COMMENT ON COLUMN "user".users.user_id IS 'Уникальный идентификатор
пользователя (первичный ключ)';


--
-- TOC entry 5339 (class 0 OID 0)
-- Dependencies: 222
-- Name: COLUMN users.username; Type: COMMENT; Schema: user; Owner:
postgres
--

COMMENT ON COLUMN "user".users.username IS 'Уникальное имя
пользователя (не допускает дубликатов)';


--
-- TOC entry 5340 (class 0 OID 0)
-- Dependencies: 222
-- Name: COLUMN users.email; Type: COMMENT; Schema: user; Owner:
postgres
--

COMMENT ON COLUMN "user".users.email IS 'Электронная почта
пользователя (уникальная, формат проверяется регулярным
выражением)';


--
-- TOC entry 5341 (class 0 OID 0)
-- Dependencies: 222
-- Name: COLUMN users.first_name; Type: COMMENT; Schema: user;
Owner: postgres
--

COMMENT ON COLUMN "user".users.first_name IS 'Имя пользователя';


--
-- TOC entry 5342 (class 0 OID 0)
-- Dependencies: 222
-- Name: COLUMN users.last_name; Type: COMMENT; Schema: user; Owner:
postgres
--
```

```
COMMENT ON COLUMN "user".users.last_name IS 'Фамилия пользователя';


--
-- TOC entry 5343 (class 0 OID 0)
-- Dependencies: 222
-- Name: COLUMN users.updated_at; Type: COMMENT; Schema: user;
Owner: postgres
--

COMMENT ON COLUMN "user".users.updated_at IS 'Дата и время
последнего обновления записи';


--
-- TOC entry 5344 (class 0 OID 0)
-- Dependencies: 222
-- Name: COLUMN users.role_id; Type: COMMENT; Schema: user; Owner:
postgres
--

COMMENT ON COLUMN "user".users.role_id IS 'Идентификатор роли
пользователя (ссылка на user_roles)';


--
-- TOC entry 221 (class 1259 OID 26495)
-- Name: users_user_id_seq; Type: SEQUENCE; Schema: user; Owner:
postgres
--

CREATE SEQUENCE "user".users_user_id_seq
    AS integer
    START WITH 1
    INCREMENT BY 1
    NO MINVALUE
    NO MAXVALUE
    CACHE 1;


ALTER SEQUENCE "user".users_user_id_seq OWNER TO postgres;

--
-- TOC entry 5345 (class 0 OID 0)
-- Dependencies: 221
-- Name: users_user_id_seq; Type: SEQUENCE OWNED BY; Schema: user;
Owner: postgres
--

ALTER SEQUENCE "user".users_user_id_seq OWNED BY
"user".users.user_id;
```

```
--
-- TOC entry 5346 (class 0 OID 0)
-- Dependencies: 221
-- Name: SEQUENCE users_user_id_seq; Type: COMMENT; Schema: user;
Owner: postgres
--

COMMENT ON SEQUENCE "user".users_user_id_seq IS 'Последовательность
для генерации уникальных идентификаторов (user_id) в таблице users,
хранящей информацию о пользователях системы.';


--
-- TOC entry 4835 (class 2604 OID 26811)
-- Name: course_topics topic_id; Type: DEFAULT; Schema: course;
Owner: postgres
--

ALTER TABLE ONLY course.course_topics ALTER COLUMN topic_id SET
DEFAULT nextval('course.course_topics_topic_id_seq'::regclass);


--
-- TOC entry 4832 (class 2604 OID 26796)
-- Name: courses course_id; Type: DEFAULT; Schema: course; Owner:
postgres
--

ALTER TABLE ONLY course.courses ALTER COLUMN course_id SET DEFAULT
nextval('course.courses_course_id_seq'::regclass);


--
-- TOC entry 4809 (class 2604 OID 26516)
-- Name: finance_categories category_id; Type: DEFAULT; Schema:
finance; Owner: postgres
--

ALTER TABLE ONLY finance.finance_categories ALTER COLUMN category_id
SET                                                          DEFAULT
nextval('finance.finance_categories_category_id_seq'::regclass);


--
-- TOC entry 4812 (class 2604 OID 26530)
-- Name: finances finance_id; Type: DEFAULT; Schema: finance; Owner:
postgres
--
```

```
ALTER TABLE ONLY finance.finances ALTER COLUMN finance_id SET
DEFAULT nextval('finance.finances_finance_id_seq'::regclass);


--
-- TOC entry 4822 (class 2604 OID 26714)
-- Name: habit_categories category_id; Type: DEFAULT; Schema:
habits; Owner: postgres
--

ALTER TABLE ONLY habits.habit_categories ALTER COLUMN category_id
SET                                                        DEFAULT
nextval('habits.habit_categories_category_id_seq'::regclass);


--
-- TOC entry 4828 (class 2604 OID 26747)
-- Name: habit_logs log_id; Type: DEFAULT; Schema: habits; Owner:
postgres
--

ALTER TABLE ONLY habits.habit_logs ALTER COLUMN log_id SET DEFAULT
nextval('habits.habit_logs_log_id_seq'::regclass);


--
-- TOC entry 4825 (class 2604 OID 26729)
-- Name: habits habit_id; Type: DEFAULT; Schema: habits; Owner:
postgres
--

ALTER TABLE ONLY habits.habits ALTER COLUMN habit_id SET DEFAULT
nextval('habits.habits_habit_id_seq'::regclass);


--
-- TOC entry 4815 (class 2604 OID 26678)
-- Name: todo_categories category_id; Type: DEFAULT; Schema: todo;
Owner: postgres
--

ALTER TABLE ONLY todo.todo_categories ALTER COLUMN category_id SET
DEFAULT nextval('todo.todo_categories_category_id_seq'::regclass);


--
-- TOC entry 4818 (class 2604 OID 26692)
-- Name: todos todo_id; Type: DEFAULT; Schema: todo; Owner: postgres
--
```

```
ALTER TABLE ONLY todo.todos ALTER COLUMN todo_id SET DEFAULT
nextval('todo.todos_todo_id_seq'::regclass);


--
-- TOC entry 4853 (class 2604 OID 27819)
-- Name: expense_categories category_id; Type: DEFAULT; Schema:
trips; Owner: postgres
--

ALTER TABLE ONLY trips.expense_categories ALTER COLUMN category_id
SET                                                          DEFAULT
nextval('trips.expense_categories_category_id_seq'::regclass);


--
-- TOC entry 4844 (class 2604 OID 26883)
-- Name: trip_expenses expense_id; Type: DEFAULT; Schema: trips;
Owner: postgres
--

ALTER TABLE ONLY trips.trip_expenses ALTER COLUMN expense_id SET
DEFAULT nextval('trips.trip_expenses_expense_id_seq'::regclass);


--
-- TOC entry 4841 (class 2604 OID 26862)
-- Name: trip_routes route_id; Type: DEFAULT; Schema: trips; Owner:
postgres
--

ALTER TABLE ONLY trips.trip_routes ALTER COLUMN route_id SET DEFAULT
nextval('trips.trip_routes_route_id_seq'::regclass);


--
-- TOC entry 4838 (class 2604 OID 26849)
-- Name: trips trip_id; Type: DEFAULT; Schema: trips; Owner: postgres
--

ALTER TABLE ONLY trips.trips ALTER COLUMN trip_id SET DEFAULT
nextval('trips.trips_trip_id_seq'::regclass);


--
-- TOC entry 4807 (class 2604 OID 26499)
-- Name: users user_id; Type: DEFAULT; Schema: user; Owner: postgres
--

ALTER TABLE ONLY "user".users ALTER COLUMN user_id SET DEFAULT
nextval('"user".users_user_id_seq'::regclass);
```

```
--
-- TOC entry 5159 (class 0 OID 27694)
-- Dependencies: 252
-- Data for Name: course_statuses; Type: TABLE DATA; Schema: course;
Owner: postgres
--

INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (1, 'Запланировано', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (2, 'В процессе', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (3, 'Завершено', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (4, 'Приостановлено', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (5, 'Отменено', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (6, 'В ожидании', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (7, 'Планируется', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (8, 'В разработке', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (9, 'Тестируется', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (10, 'Архив', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (11, 'Проверяется', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (12, 'Одобрено', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (13, 'Запущено', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (14, 'Ожидает оценки', '2025-05-13 12:24:28.911238');
INSERT INTO course.course_statuses (status_id, name, created_at)
VALUES (15, 'Завершено с отличием', '2025-05-13 12:24:28.911238');


--
-- TOC entry 5149 (class 0 OID 26808)
-- Dependencies: 240
-- Data for Name: course_topics; Type: TABLE DATA; Schema: course;
Owner: postgres
--

INSERT INTO course.course_topics (topic_id, course_id, user_id,
title, material, grade, completed_date, created_at, updated_at)
VALUES (1, 1, 3, 'Введение в алгоритмы', 'Основные понятия, сложность
```

алгоритмов', 4.50, '2025-01-15', '2025-01-10 09:00:00', '2025-01-15 12:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (2, 1, 3, 'Сортировки', 'Пузырьковая, быстрая, сортировка слиянием', 4.75, '2025-01-22', '2025-01-17 09:00:00', '2025-01-22 12:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (3, 1, 3, 'Поиск в графах', 'BFS, DFS, алгоритм Дейкстры', 5.00, '2025-01-29', '2025-01-24 09:00:00', '2025-01-29 12:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (4, 1, 3, 'Динамическое программирование', 'Задача о рюкзаке, числа Фибоначчи', 4.25, '2025-02-05', '2025-01-31 09:00:00', '2025-02-05 12:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (5, 1, 3, 'Жадные алгоритмы', 'Алгоритм Хаффмана, задача о выборе заявок', 4.50, '2025-02-12', '2025-02-07 09:00:00', '2025-02-12 12:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (6, 2, 4, 'Основы HTML', 'Структура документа, теги', NULL, NULL, '2025-02-01 10:00:00', '2025-02-01 10:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (7, 2, 4, 'CSS для начинающих', 'Селекторы, свойства, box model', NULL, NULL, '2025-02-08 10:00:00', '2025-02-08 10:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (8, 2, 4, 'Адаптивный дизайн', 'Медиазапросы, flexbox, grid', 3.75, '2025-02-15', '2025-02-10 10:00:00', '2025-02-15 12:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (9, 2, 4, 'Основы UX/UI', 'Принципы юзабилити, прототипирование', NULL, NULL, '2025-02-17 10:00:00', '2025-02-17 10:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (10, 3, 5, 'Введение в ML', 'Основные понятия, типы задач', 4.00, '2025-03-01', '2025-02-20 11:00:00', '2025-03-01 13:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (11, 3, 5, 'Линейная регрессия', 'Метод наименьших квадратов', 4.25, '2025-03-08', '2025-03-03 11:00:00', '2025-03-08 13:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (12, 3, 5, 'Классификация', 'Логистическая регрессия, SVM', 4.50, '2025-03-15', '2025-03-10 11:00:00', '2025-03-15 13:00:00');

```
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (13, 3, 5, 'Деревья решений', 'Построение и интерпретация', NULL, NULL, '2025-03-17 11:00:00', '2025-03-17 11:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (14, 4, 6, 'Синтаксис Python', 'Переменные, операторы, типы данных', 4.75, '2025-03-10', '2025-03-01 14:00:00', '2025-03-10 16:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (15, 4, 6, 'Функции', 'Определение, аргументы, возврат значений', 4.50, '2025-03-17', '2025-03-12 14:00:00', '2025-03-17 16:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (16, 4, 6, 'Работа с файлами', 'Чтение и запись файлов', 4.25, '2025-03-24', '2025-03-19 14:00:00', '2025-03-24 16:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (17, 4, 6, 'ООП в Python', 'Классы, объекты, наследование', NULL, NULL, '2025-03-26 14:00:00', '2025-03-26 14:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (18, 5, 7, 'Личный бюджет', 'Доходы и расходы, планирование', 3.50, '2025-04-05', '2025-04-01 15:00:00', '2025-04-05 17:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (19, 5, 7, 'Инвестиции', 'Основные инструменты, риски', 4.00, '2025-04-12', '2025-04-07 15:00:00', '2025-04-12 17:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (20, 5, 7, 'Кредиты и займы', 'Виды кредитов, переплата', NULL, NULL, '2025-04-14 15:00:00', '2025-04-14 15:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (21, 6, 10, 'Основы сетей', 'Модель OSI, TCP/IP', NULL, NULL, '2025-04-20 16:00:00', '2025-04-20 16:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (22, 6, 10, 'IP-адресация', 'Классы адресов, подсети', 4.25, '2025-04-27', '2025-04-22 16:00:00', '2025-04-27 18:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (23, 7, 11, 'Введение в Java', 'Установка JDK, Hello World', 4.50, '2025-05-01', '2025-04-25 17:00:00', '2025-05-01 19:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (24, 7, 11, 'Типы данных', 'Примитивные типы, объекты', 4.75, '2025-05-08', '2025-05-03 17:00:00', '2025-05-08 19:00:00');
```

```
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (25, 7, 11, 'Управляющие конструкции', 'Условия, циклы', 4.25, '2025-05-15', '2025-05-10 17:00:00', '2025-05-15 19:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (26, 8, 12, 'Основы UX', 'User research, personas', 4.00, '2025-05-05', '2025-05-01 18:00:00', '2025-05-05 20:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (27, 8, 12, 'Инструменты дизайна', 'Figma, Sketch, Adobe XD', 4.50, '2025-05-12', '2025-05-07 18:00:00', '2025-05-12 20:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (28, 9, 13, 'Античное искусство', 'Древняя Греция и Рим', 4.75, '2025-05-10', '2025-05-05 19:00:00', '2025-05-10 21:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (29, 9, 13, 'Возрождение', 'Леонардо, Микеланджело, Рафаэль', 5.00, '2025-05-17', '2025-05-12 19:00:00', '2025-05-17 21:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (30, 10, 14, 'Основы экономики', 'Спрос и предложение', 4.25, '2025-05-15', '2025-05-10 20:00:00', '2025-05-15 22:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (31, 10, 14, 'Макроэкономика', 'ВВП, инфляция, безработица', NULL, NULL, '2025-05-17 20:00:00', '2025-05-17 20:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (32, 11, 15, 'Введение в Data Science', 'Обзор области, инструменты', 4.50, '2025-05-20', '2025-05-15 09:00:00', '2025-05-20 11:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (33, 12, 17, 'Основы DevOps', 'CI/CD, контейнеризация', NULL, NULL, '2025-05-22 10:00:00', '2025-05-22 10:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (34, 13, 18, 'Интерфейс Photoshop', 'Панели инструментов, слои', 3.75, '2025-05-25', '2025-05-20 11:00:00', '2025-05-25 13:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (35, 14, 19, 'SMM стратегии', 'Контент-план, таргетинг', 4.00, '2025-05-27', '2025-05-22 12:00:00', '2025-05-27 14:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (36, 15, 20, 'Введение в мобильную разработку', 'Платформы, инструменты', NULL, NULL, '2025-05-29 13:00:00', '2025-05-29 13:00:00');
```

```
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (37, 16, 22, 'Основы управления проектами', 'Методологии, планирование', 4.25, '2025-06-01', '2025-05-27 14:00:00', '2025-06-01 16:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (38, 17, 23, '3D моделирование для начинающих', 'Интерфейс Blender', 4.50, '2025-06-03', '2025-05-29 15:00:00', '2025-06-03 17:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (39, 18, 24, 'Основы психологии общения', 'Вербальная и невербальная коммуникация', NULL, NULL, '2025-06-05 16:00:00', '2025-06-05 16:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (40, 19, 25, 'Кибербезопасность', 'Основные угрозы, защита', 4.75, '2025-06-07', '2025-06-02 17:00:00', '2025-06-07 19:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (41, 20, 26, 'Введение в Power BI', 'Интерфейс, подключение данных', 4.00, '2025-06-09', '2025-06-04 18:00:00', '2025-06-09 20:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (42, 21, 27, 'Основы SQL', 'SELECT, JOIN, GROUP BY', 4.50, '2025-06-11', '2025-06-06 19:00:00', '2025-06-11 21:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (43, 22, 28, 'Фишинг и социальная инженерия', 'Методы защиты', NULL, NULL, '2025-06-13 20:00:00', '2025-06-13 20:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (44, 23, 29, 'Введение в Unity', 'Интерфейс, создание сцены', 3.75, '2025-06-15', '2025-06-10 21:00:00', '2025-06-15 23:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (45, 24, 30, 'Физика движения', 'Кинематика, динамика', 4.25, '2025-06-17', '2025-06-12 22:00:00', '2025-06-17 00:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (46, 25, 31, 'Основы бухгалтерии', 'Баланс, отчет о прибылях', NULL, NULL, '2025-06-19 23:00:00', '2025-06-19 23:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (47, 26, 32, 'CSS анимации', 'Transitions, keyframes', 4.50, '2025-06-21', '2025-06-16 00:00:00', '2025-06-21 02:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (48, 27, 33, 'Архитектурные паттерны', 'MVC, MVVM,
```

микросервисы', 4.75, '2025-06-23', '2025-06-18 01:00:00', '2025-06-23 03:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (49, 28, 35, 'Типографика в вебе', 'Шрифты, кернинг, интерлиньяж', NULL, NULL, '2025-06-25 02:00:00', '2025-06-25 02:00:00');
INSERT INTO course.course_topics (topic_id, course_id, user_id, title, material, grade, completed_date, created_at, updated_at) VALUES (50, 29, 38, 'SEO оптимизация контента', 'Ключевые слова, метатеги', 4.00, '2025-06-27', '2025-06-22 03:00:00', '2025-06-27 05:00:00');

--
-- TOC entry 5147 (class 0 OID 26793)
-- Dependencies: 238
-- Data for Name: courses; Type: TABLE DATA; Schema: course; Owner: postgres
--

INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (1, 3, 'Алгоритмы', 'Изучение структур данных', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (3, 5, 'Машинное обучение', 'Введение в ML', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (5, 7, 'Финансовая грамотность', 'Курс по управлению личными финансами', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (7, 11, 'Java с нуля', 'Базовые знания Java', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (8, 12, 'UX/UI дизайн', 'Проектирование интерфейсов', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (9, 13, 'История искусств', 'Погружение в историю искусств', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (10, 14, 'Экономика для всех', 'Экономические основы', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (11, 15, 'Data Science',

'Наука о данных', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (14, 19, 'Маркетинг в соцсетях', 'Продвижение в Instagram и TikTok', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (17, 23, '3D-моделирование', 'Создание 3D моделей', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (18, 24, 'Психология общения', 'Навыки эффективного общения', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (28, 35, 'Типография', 'Работа со шрифтами и текстом', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (30, 39, 'JavaScript основы', 'Курс по JS с практикой', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (31, 41, 'Технический английский', 'Термины и лексика для IT', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (32, 42, 'Философия', 'Основы философии', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (33, 43, 'Бизнес-анализ', 'Сбор и анализ требований', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (34, 45, 'Машинное зрение', 'Компьютерное зрение', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (35, 48, 'Интерпретация данных', 'Работа с датасетами', '2025-06-13 17:30:08.289376', '2025-06-13 17:30:08.289376', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (36, 45, 'Разработка REST API', 'Создание API с использованием Flask и Django', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (37, 35, 'NoSQL базы данных', 'Хранение и обработка данных в MongoDB и Firebase', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 1);

INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (38, 9, 'Креативное письмо', 'Развитие навыков литературного письма', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (39, 19, 'Фреймворк Django', 'Создание веб-приложений с Django', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (40, 32, 'Работа с API Telegram', 'Интеграция с мессенджерами', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (41, 29, 'UI-анимации', 'Эффекты и плавность в интерфейсах', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (42, 42, 'Продвинутый Excel', 'Формулы, сводные таблицы и макросы', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (43, 36, 'Курс по TypeScript', 'Работа с типизацией в JavaScript', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (44, 18, 'Публичные выступления', 'Уверенность перед аудиторией', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (45, 25, 'Soft Skills в IT', 'Мягкие навыки: коммуникация, управление временем', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (46, 46, 'Работа с JSON и XML', 'Форматы обмена данными', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (47, 2, 'Разработка на Kotlin', 'Мобильная разработка для Android', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (48, 29, 'Архитектура клиент-сервер', 'Обмен данными между клиентом и сервером', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (49, 39, 'Машинное обучение в финансах', 'Прогнозирование и анализ финансов с помощью ML', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (50, 6, 'Нейросети с

нуля', 'Базовые принципы нейросетей и их обучение', '2025-06-13 17:31:21.720938', '2025-06-13 17:31:21.720938', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (2, 4, 'Веб-дизайн', 'Создание сайтов', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (4, 6, 'Основы Python', 'Изучение программирования на Python', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (6, 10, 'Сетевые технологии', 'Настройка сетей и протоколов', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 2);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (12, 17, 'Введение в DevOps', 'Автоматизация процессов разработки', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (13, 18, 'Photoshop для новичков', 'Работа с изображениями', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (16, 22, 'Проектный менеджмент', 'Управление проектами', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (15, 20, 'Разработка мобильных приложений', 'Создание Android и iOS приложений', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (19, 25, 'Информационная безопасность', 'Защита информации', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (20, 26, 'Power BI для аналитиков', 'Визуализация данных', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (21, 27, 'Базы данных MySQL', 'Администрирование баз данных', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (22, 28, 'Кибербезопасность', 'Безопасность в интернете', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (23, 29, 'Игровая разработка', 'Создание игр на Unity', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);

```
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (24, 30, 'Физика для гуманитариев', 'Физика простыми словами', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (25, 31, 'Финансовый учет', 'Бухгалтерский учет', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 1);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (26, 32, 'Стилизация CSS', 'Оформление интерфейсов', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (27, 33, 'Архитектура ПО', 'Моделирование архитектуры', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);
INSERT INTO course.courses (course_id, user_id, title, description, created_at, updated_at, status_id) VALUES (29, 38, 'SEO-оптимизация', 'Продвижение сайтов', '2025-06-13 17:30:08.289376', '2025-06-13 17:51:17.527082', 3);


--
-- TOC entry 5133 (class 0 OID 26513)
-- Dependencies: 224
-- Data for Name: finance_categories; Type: TABLE DATA; Schema: finance; Owner: postgres
--

INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (17, 30, 'Зарплата', '2025-05-13 19:08:15.817536', '2025-06-13 19:03:24.993625', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (19, 34, 'Продукты', '2025-05-13 19:08:15.817536', '2025-06-13 19:03:24.993625', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (23, 35, 'Продукты', '2025-05-13 19:08:15.817536', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (28, 37, 'Продукты', '2025-05-13 19:08:15.817536', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (30, 25, 'Продукты', '2025-05-13 19:08:15.817536', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (32, 27, 'Зарплата', '2025-05-13 19:08:15.817536', '2025-06-13 19:04:31.435453', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (34, 39, 'Зарплата', '2025-05-13 19:08:15.817536', '2025-06-13 19:04:31.435453', 1);
```

```
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (36, 28, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-06-13 19:04:31.435453', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (37, 42, 'Продукты', '2025-
05-13 19:08:15.817536', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (39, 21, 'Продукты', '2025-
05-13 19:08:15.817536', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (1, 1, 'Зарплата', '2025-
05-13 15:15:21.231663', '2025-05-13 12:02:13.848552', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (3, 3, 'Фриланс', '2025-05-
13 00:28:47.342729', '2025-05-13 12:02:13.848552', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (4, 4, 'Коммунальные
услуги', '2025-05-13 09:28:55.49417', '2025-05-13 12:02:13.848552',
2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (8, 8, 'Фриланс', '2025-05-
13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (10, 10, 'Инвестиции',
'2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 3);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (12, 12, 'Дивиденды', '2025-
05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 14);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (14, 14, 'Премия', '2025-
05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 15);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (15, 15, 'Одежда', '2025-
05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (18, 2, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (20, 10, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (21, 12, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (22, 12, 'Продукты', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (24, 8, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 1);
```

```
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (25, 6, 'Продукты', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (26, 11, 'Продукты', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (27, 14, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (29, 1, 'Продукты', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (31, 3, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (33, 4, 'Продукты', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (35, 15, 'Продукты', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (38, 4, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (40, 5, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (42, 13, 'Зарплата', '2025-
05-13 19:08:15.817536', '2025-05-13 19:08:15.817536', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (73, 1, 'Аренда жилья',
'2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (75, 3, 'Медицина', '2025-
06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (76, 4, 'Спорт', '2025-06-
13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (78, 6, 'Техника', '2025-
06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (79, 7, 'Подарки', '2025-
06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (80, 8, 'Хобби', '2025-06-
13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name,
created_at, updated_at, type_id) VALUES (82, 10, 'Кафе', '2025-06-
13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
```

```
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (83, 11, 'Такси', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (84, 12, 'Одежда', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (86, 14, 'Ремонт', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (87, 15, 'Домашние животные', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (88, 1, 'Фриланс', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (90, 3, 'Сбережения', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 4);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (91, 4, 'Кредиты', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 5);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (92, 5, 'Пожертвования', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 6);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (94, 7, 'Подарки', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 8);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (95, 8, 'Штрафы', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 9);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (96, 9, 'Налоги', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 10);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (97, 10, 'Страховка', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 11);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (98, 11, 'Аренда', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 12);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (99, 12, 'Комиссии', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 13);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (100, 13, 'Дивиденды', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 14);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (101, 14, 'Премии', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 15);
```

INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (102, 15, 'Бонусы', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (103, 1, 'Подписки', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (104, 2, 'Музыка', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (105, 3, 'Игры', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (41, 44, 'Продукты', '2025-05-13 19:08:15.817536', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (74, 45, 'Образование', '2025-06-13 19:01:10.287568', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (77, 46, 'Книги', '2025-06-13 19:01:10.287568', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (81, 47, 'Кино', '2025-06-13 19:01:10.287568', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (85, 48, 'Косметика', '2025-06-13 19:01:10.287568', '2025-06-13 19:04:31.435453', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (89, 49, 'Инвестиции', '2025-06-13 19:01:10.287568', '2025-06-13 19:04:31.435453', 3);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (93, 22, 'Возврат долга', '2025-06-13 19:01:10.287568', '2025-06-13 19:04:31.435453', 7);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (2, 34, 'Продукты', '2025-05-13 18:32:20.637705', '2025-06-13 19:05:54.367848', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (5, 18, 'Бонусы', '2025-05-13 11:33:49.707702', '2025-06-13 19:05:54.367848', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (6, 22, 'Зарплата', '2025-05-13 12:24:28.911238', '2025-06-13 19:05:54.367848', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (7, 50, 'Продукты', '2025-05-13 12:24:28.911238', '2025-06-13 19:05:54.367848', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (9, 22, 'Транспорт', '2025-05-13 12:24:28.911238', '2025-06-13 19:05:54.367848', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (11, 27, 'Коммунальные

услуги', '2025-05-13 12:24:28.911238', '2025-06-13 19:05:54.367848', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (13, 14, 'Развлечения', '2025-05-13 12:24:28.911238', '2025-06-13 19:05:54.367848', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (106, 4, 'Путешествия', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (107, 5, 'Фитнес', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (108, 6, 'Красота', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (109, 7, 'Дети', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (110, 8, 'Автомобиль', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (111, 9, 'Бизнес', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (112, 10, 'Акции', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 3);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (113, 11, 'Облигации', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 3);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (114, 12, 'Недвижимость', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 3);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (115, 13, 'Криптовалюта', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 3);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (116, 14, 'Фонды', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 3);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (117, 15, 'Бизнес-проекты', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 1);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (118, 1, 'Обучение', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (119, 2, 'Курсы', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (120, 3, 'Конференции', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);

```
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (121, 4, 'Семинары', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);
INSERT INTO finance.finance_categories (category_id, user_id, name, created_at, updated_at, type_id) VALUES (122, 5, 'Вебинары', '2025-06-13 19:01:10.287568', '2025-06-13 19:01:10.287568', 2);


--
-- TOC entry 5156 (class 0 OID 27221)
-- Dependencies: 249
-- Data for Name: finance_types; Type: TABLE DATA; Schema: finance; Owner: postgres
--

INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (2, 'Расход', '2025-05-13 12:02:13.848552', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (3, 'Инвестиции', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (4, 'Сбережения', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (5, 'Кредит', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (6, 'Пожертвования', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (7, 'Возврат долга', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (8, 'Подарок', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (9, 'Штраф', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (10, 'Налоги', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (11, 'Страховка', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (12, 'Аренда', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (13, 'Комиссия', '2025-05-13 12:24:28.911238', false);
```

```
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (14, 'Дивиденды', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (15, 'Премия', '2025-05-13 12:24:28.911238', false);
INSERT INTO finance.finance_types (type_id, name, created_at, is_income) VALUES (1, 'Доход', '2025-05-13 12:02:13.848552', true);


--
-- TOC entry 5135 (class 0 OID 26527)
-- Dependencies: 226
-- Data for Name: finances; Type: TABLE DATA; Schema: finance; Owner: postgres
--

INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (194, 30, 2, -120.50, '2025-06-16', 'Продукты', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (195, 31, 4, -75.30, '2025-06-17', 'Кафе', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (196, 32, 7, -350.00, '2025-06-18', 'Коммуналка', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (197, 33, 9, -200.00, '2025-06-19', 'Транспорт', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (198, 34, 11, -45.90, '2025-06-20', 'Кофе', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (1, 1, 1, 1500.00, '2025-01-15', 'Оклад за январь', '2025-01-15 00:00:47.57304', '2025-05-13 01:08:12.8578');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (2, 2, 2, -500.00, '2025-02-10', 'Покупка еды на неделю', '2025-02-10 00:00:04.303631', '2025-05-13 01:08:12.8578');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (3, 3, 3, 2000.00, '2025-03-05', 'Проект для клиента', '2025-03-05 00:00:01.742209', '2025-05-13 01:08:12.8578');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (4,
```

```
4, 4, -300.00, '2025-04-20', 'Оплата света и воды', '2025-04-20 00:00:32.445042', '2025-05-13 01:08:12.8578');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (5, 5, 5, 1000.00, '2025-05-01', 'Годовая премия', '2025-05-01 00:00:41.248741', '2025-05-13 01:08:12.8578');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (199, 35, 13, -600.00, '2025-06-21', 'Одежда', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (200, 36, 15, -90.20, '2025-06-22', 'Книги', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (201, 37, 2, -150.00, '2025-06-23', 'Кино', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (202, 38, 4, -85.40, '2025-06-24', 'Продукты', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (203, 39, 7, -400.00, '2025-06-25', 'Коммуналка', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (204, 40, 9, -250.00, '2025-06-26', 'Такси', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (205, 41, 11, -55.60, '2025-06-27', 'Обед', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (206, 42, 13, -180.00, '2025-06-28', 'Канцелярия', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (207, 43, 15, -95.30, '2025-06-29', 'Продукты', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (208, 44, 2, -500.00, '2025-06-30', 'Коммуналка', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (6, 6, 6, 50000.00, '2025-05-06', 'Зарплата за май', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
```

```
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (7, 7, 7, -1500.00, '2025-05-07', 'Покупка продуктов', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (8, 8, 8, 20000.00, '2025-05-08', 'Оплата за проект', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (9, 9, 9, -800.00, '2025-05-09', 'Проездной', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (10, 10, 10, 10000.00, '2025-05-10', 'Инвестиции в акции', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (11, 11, 11, -3000.00, '2025-05-11', 'Оплата за квартиру', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (12, 12, 12, 5000.00, '2025-05-12', 'Дивиденды от акций', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (13, 13, 13, -2000.00, '2025-05-13', 'Кино и ужин', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (14, 14, 14, 15000.00, '2025-05-14', 'Квартальная премия', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (15, 15, 15, -2500.00, '2025-05-15', 'Покупка обуви', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (16, 3, 39, -2842.94, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (17, 3, 39, -1172.13, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (18, 4, 33, -2807.43, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (19,
```

```
4, 33, -2688.26, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (20,
4, 38, 9128.10, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (21,
4, 38, 6126.86, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (22,
5, 30, -1863.29, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (23,
5, 30, -1882.75, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (24,
5, 40, 7574.33, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (25,
5, 40, 5228.22, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (26,
6, 6, 7985.04, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (27,
6, 6, 8742.48, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (28,
6, 25, -2455.33, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (29,
6, 25, -2002.71, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (30,
7, 7, -2836.90, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (31,
7, 7, -2101.38, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
```

```
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (32,
7, 32, 6134.99, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (33,
7, 32, 9730.05, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (34,
8, 19, -2600.81, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (35,
8, 19, -1030.88, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (36,
8, 24, 9587.16, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (37,
8, 24, 6638.79, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (38,
9, 34, 7756.03, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (39,
9, 34, 9569.53, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (40,
9, 37, -2438.93, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (41,
9, 37, -1483.36, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (42,
10, 20, 8479.71, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (43,
10, 20, 6563.07, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (44,
```

10, 23, -1024.86, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (45, 10, 23, -2947.31, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (46, 11, 17, 6525.83, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (47, 11, 17, 8936.35, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (48, 11, 26, -2631.98, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (49, 11, 26, -2160.12, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (50, 12, 21, 9011.75, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (51, 12, 21, 5547.85, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (52, 12, 22, -1899.39, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (53, 12, 22, -2577.31, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (54, 13, 28, -1071.13, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (55, 13, 28, -1885.11, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (56, 13, 42, 9939.18, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');

INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (57, 13, 42, 5334.12, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (58, 14, 27, 8021.73, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (59, 14, 27, 7594.96, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (60, 14, 41, -1333.13, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (61, 14, 41, -1913.79, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (209, 45, 4, -350.00, '2025-07-01', 'Транспорт', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (210, 46, 7, -65.80, '2025-07-02', 'Кофе', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (211, 47, 9, -220.00, '2025-07-03', 'Обед', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (212, 48, 11, -110.20, '2025-07-04', 'Продукты', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (213, 49, 13, -450.00, '2025-07-05', 'Коммуналка', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (214, 50, 15, -300.00, '2025-07-06', 'Транспорт', '2025-06-13 19:22:12.096738', '2025-06-13 19:22:12.096738');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (62, 15, 35, -1562.88, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (63,

15, 35, -2961.60, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (64, 15, 36, 8960.80, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (65, 15, 36, 8174.58, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:08:15.817536', '2025-05-13 19:08:15.817536');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (66, 1, 1, 7886.95, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (67, 1, 1, 9045.37, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (68, 2, 2, -1909.78, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (69, 2, 2, -1973.18, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (70, 6, 6, 8686.57, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (71, 6, 6, 7944.70, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (72, 7, 7, -1480.97, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (73, 7, 7, -2390.93, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (74, 11, 17, 9892.40, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (75, 11, 17, 8790.90, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');

```
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (76,
2, 18, 8187.90, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (77,
2, 18, 5517.10, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (78,
8, 19, -1225.85, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (79,
8, 19, -1803.49, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (80,
10, 20, 5834.99, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (81,
10, 20, 9721.07, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (82,
12, 21, 9344.13, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (83,
12, 21, 5136.06, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (84,
12, 22, -2965.82, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (85,
12, 22, -2884.77, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (86,
10, 23, -2058.69, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (87,
10, 23, -2046.96, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (88,
```

8, 24, 6000.71, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (89, 8, 24, 9625.76, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (90, 6, 25, -2799.74, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (91, 6, 25, -2941.99, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (92, 11, 26, -2690.89, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (93, 11, 26, -2673.43, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (94, 14, 27, 7355.36, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (95, 14, 27, 8801.22, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (96, 13, 28, -2715.76, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (97, 13, 28, -2888.52, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (98, 1, 29, -2392.60, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (99, 1, 29, -1653.64, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (100, 5, 30, -1734.48, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');

```
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (101,
5, 30, -1034.80, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (102,
3, 31, 5898.56, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (103,
3, 31, 9471.04, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (104,
7, 32, 5860.68, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (105,
7, 32, 6954.00, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (107,
4, 33, -1787.12, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (108,
9, 34, 8603.36, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (109,
9, 34, 6462.55, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (110,
15, 35, -1555.21, '2025-05-15', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (112,
15, 36, 9845.99, '2025-05-15', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (113,
15, 36, 9896.40, '2025-05-05', 'Доход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (115,
9, 37, -2823.74, '2025-05-05', 'Расход за май 2025', '2025-05-13
19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id,
amount, transaction_date, note, created_at, updated_at) VALUES (116,
```

4, 38, 6570.70, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (118, 3, 39, -2924.06, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (119, 3, 39, -2661.09, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (121, 5, 40, 6738.73, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (124, 13, 42, 6031.64, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (125, 13, 42, 9208.93, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-05-13 19:09:04.924032');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (106, 13, 33, -1167.06, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-06-13 19:17:03.193865');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (111, 33, 35, -1975.79, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-06-13 19:17:03.193865');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (114, 12, 37, -1474.36, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-06-13 19:17:03.193865');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (117, 42, 38, 8103.15, '2025-05-05', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-06-13 19:17:03.193865');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (120, 32, 40, 7601.33, '2025-05-15', 'Доход за май 2025', '2025-05-13 19:09:04.924032', '2025-06-13 19:17:03.193865');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (122, 22, 41, -2033.75, '2025-05-15', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-06-13 19:17:03.193865');
INSERT INTO finance.finances (finance_id, user_id, category_id, amount, transaction_date, note, created_at, updated_at) VALUES (123, 43, 41, -1139.60, '2025-05-05', 'Расход за май 2025', '2025-05-13 19:09:04.924032', '2025-06-13 19:17:03.193865');

```
--
-- TOC entry 5141 (class 0 OID 26711)
-- Dependencies: 232
-- Data for Name: habit_categories; Type: TABLE DATA; Schema: habits;
Owner: postgres
--

INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (1, 1, 'Спорт', '2025-05-13
15:52:43.665677', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (2, 2, 'Саморазвитие', '2025-05-13
23:56:54.113403', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (3, 3, 'Здоровье', '2025-05-13
10:30:26.973926', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (4, 4, 'Домашние дела', '2025-05-13
01:45:37.207153', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (5, 5, 'Рукоделие', '2025-05-13
21:08:37.227885', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (6, 6, 'Медитация', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (7, 7, 'Чтение', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (8, 8, 'Прогулки', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (9, 9, 'Изучение языков', '2025-05-
13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (10, 10, 'Планирование', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (11, 11, 'Фитнес', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (12, 12, 'Кулинария', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (13, 13, 'Творчество', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_categories (category_id, user_id, name,
created_at, updated_at) VALUES (14, 14, 'Уборка', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
```

```
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (15, 15, 'Саморазвитие', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (16, 16, 'Утренние ритуалы', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (17, 17, 'Физическая активность', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (18, 18, 'Чтение и учеба', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (19, 19, 'Здоровое питание', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (20, 20, 'Медитация и релаксация', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (21, 21, 'Продуктивность', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (22, 22, 'Личное развитие', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (23, 23, 'Финансовая дисциплина', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (24, 24, 'Творчество', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (25, 25, 'Сон и отдых', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (26, 26, 'Социальные связи', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (27, 27, 'Рабочие привычки', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (28, 28, 'Экология и осознанность', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (29, 29, 'Спорт и фитнес', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (30, 30, 'Самоорганизация', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (31, 31, 'Уход за собой', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
```

```
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (32, 32, 'Изучение языков', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (33, 33, 'Планирование дня', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (34, 34, 'Хобби и увлечения', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (35, 35, 'Духовные практики', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (36, 36, 'Работа над проектами', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (37, 37, 'Физическое здоровье', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (38, 38, 'Чтение книг', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (39, 39, 'Приготовление еды', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (40, 40, 'Ментальное здоровье', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (41, 41, 'Тренировки', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (42, 42, 'Обучение новым навыкам', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (43, 43, 'Экономия времени', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (44, 44, 'Творческие проекты', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (45, 45, 'Семейное время', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (46, 46, 'Рабочая эффективность', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (47, 47, 'Осознанное потребление', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (48, 48, 'Фитнес и спорт', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
```

```
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (49, 49, 'Ежедневное планирование', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');
INSERT INTO habits.habit_categories (category_id, user_id, name, created_at, updated_at) VALUES (50, 50, 'Личная мотивация', '2025-06-13 18:46:48.046688', '2025-06-13 18:46:48.046688');


--
-- TOC entry 5162 (class 0 OID 27718)
-- Dependencies: 255
-- Data for Name: habit_frequencies; Type: TABLE DATA; Schema: habits; Owner: postgres
--

INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (1, 'Ежедневно', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (2, 'Каждые два дня', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (3, 'Еженедельно', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (4, 'Ежемесячно', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (5, 'Каждые 3 дня', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (6, 'Каждые 5 дней', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (7, 'Дважды в неделю', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (8, 'Раз в две недели', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (9, 'Раз в квартал', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (10, 'Раз в полгода', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (11, 'Ежегодно', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (12, 'По будням', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (13, 'По выходным', '2025-05-13 12:24:28.911238');
```

```
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (14, 'По необходимости', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_frequencies (frequency_id, name, created_at) VALUES (15, 'Случайно', '2025-05-13 12:24:28.911238');


--
-- TOC entry 5145 (class 0 OID 26744)
-- Dependencies: 236
-- Data for Name: habit_logs; Type: TABLE DATA; Schema: habits; Owner: postgres
--

INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (1, 1, '2025-04-01', true, '30 минут', '2025-04-01 00:00:35.984369', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (2, 2, '2025-04-15', true, '20 страниц', '2025-04-15 00:00:31.283756', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (3, 3, '2025-05-01', false, 'Забыл', '2025-05-01 00:00:05.226033', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (4, 4, '2025-04-20', true, 'Полил все цветы', '2025-04-20 00:00:14.842872', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (5, 5, '2025-05-01', true, 'Свитер почти готов', '2025-05-01 00:00:31.905121', '2025-05-13 01:08:12.8578');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (6, 6, '2025-05-06', true, '10 минут утром', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (7, 7, '2025-05-07', false, 'Не успел', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (8, 8, '2025-05-08', true, 'Прогулка в парке', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (9, 9, '2025-05-09', true, '50 слов выучено', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
```

INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (10, 10, '2025-05-10', true, 'План на день готов', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (11, 11, '2025-05-11', false, 'Пропустил тренировку', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (12, 12, '2025-05-12', true, 'Приготовил пасту', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (13, 13, '2025-05-13', true, 'Нарисовал эскиз', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (14, 14, '2025-05-14', true, 'Уборка завершена', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (15, 15, '2025-05-15', false, 'Не начал курс', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (16, 1, '2025-06-01', true, 'Завершена утренняя пробежка', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (17, 2, '2025-06-01', false, 'Пропущено из-за встречи', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (18, 3, '2025-06-01', true, 'Прочитано 10 страниц', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (19, 4, '2025-06-01', false, NULL, '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (20, 5, '2025-06-01', true, 'Медитировал 10 минут', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (21, 6, '2025-06-02', true, 'Выпито 2 литра воды', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (22, 7, '2025-

06-02', false, 'Слишком устал', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (23, 8, '2025-06-02', true, 'Практиковался на гитаре', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (24, 9, '2025-06-02', true, 'Написано 500 слов', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (25, 10, '2025-06-02', false, NULL, '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (26, 11, '2025-06-03', true, 'Завершена тренировка', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (27, 12, '2025-06-03', false, 'Пропущено из-за дождя', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (28, 13, '2025-06-03', true, 'Изучал испанский', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (29, 14, '2025-06-03', true, 'Приготовил здоровую еду', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (30, 15, '2025-06-03', false, 'Забыл записать', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (31, 1, '2025-06-04', false, NULL, '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (32, 2, '2025-06-04', true, 'Выполнена задача', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (33, 3, '2025-06-04', true, 'Прочитана глава', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (34, 4, '2025-06-04', false, 'Занятый график', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');

INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (35, 5, '2025-06-04', true, 'Медитировал', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (36, 6, '2025-06-05', true, 'Хорошо гидратировался', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (37, 7, '2025-06-05', false, NULL, '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (38, 8, '2025-06-05', true, 'Играл 30 минут', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (39, 9, '2025-06-05', true, 'Написал пост в блоге', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (40, 10, '2025-06-05', false, 'Пропущена сессия', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (41, 11, '2025-06-06', true, 'Тренировка в зале', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (42, 12, '2025-06-06', true, 'Пройдено 5 км', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (43, 13, '2025-06-06', false, 'Сегодня нет времени', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (44, 14, '2025-06-06', true, 'Приготовил обед', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (45, 15, '2025-06-06', true, 'Организовал рабочий стол', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (46, 1, '2025-06-07', true, 'Пробежал 3 км', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (47, 2, '2025-

```
06-07', false, NULL, '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (48, 3, '2025-06-07', true, 'Закончил книгу', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (49, 4, '2025-06-07', false, 'Отложено', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');
INSERT INTO habits.habit_logs (log_id, habit_id, log_date, is_completed, note, created_at, updated_at) VALUES (50, 5, '2025-06-07', true, 'Сессия медитации', '2025-06-13 18:42:56.624226', '2025-06-13 18:44:18.787642');


--
-- TOC entry 5143 (class 0 OID 26726)
-- Dependencies: 234
-- Data for Name: habits; Type: TABLE DATA; Schema: habits; Owner: postgres
--

INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (1, 1, 1, 'Утренняя зарядка', '2025-04-01', '2025-06-01', '2025-04-01 00:00:15.425355', '2025-05-13 12:24:28.911238', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (2, 2, 2, 'Чтение книг', '2025-04-15', '2025-05-15', '2025-04-15 00:00:36.626724', '2025-05-13 12:24:28.911238', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (3, 3, 3, 'Пить воду', '2025-05-01', '2025-06-01', '2025-05-01 00:00:09.606167', '2025-05-13 12:24:28.911238', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (4, 4, 4, 'Полив цветов', '2025-04-20', '2025-05-20', '2025-04-20 00:00:42.125709', '2025-05-13 12:24:28.911238', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (5, 5, 5, 'Вязание', '2025-05-01', '2025-06-01', '2025-05-01 00:00:49.422987', '2025-05-13 12:24:28.911238', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (6, 6, 6, 'Медитация 10 минут', '2025-05-06', '2025-07-06', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (7, 7, 7, 'Чтение 30 минут', '2025-05-07', '2025-06-07', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 2);
```

```
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (8, 8, 8, 'Прогулка 5 км', '2025-05-08', '2025-08-08', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (9, 9, 9, 'Изучение испанского', '2025-05-09', '2025-09-09', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (10, 10, 10, 'Планирование дня', '2025-05-10', '2025-06-10', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (11, 11, 11, 'Тренировка в зале', '2025-05-11', '2025-07-11', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 5);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (12, 12, 12, 'Готовка нового блюда', '2025-05-12', '2025-06-12', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 6);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (13, 13, 13, 'Рисование', '2025-05-13', '2025-08-13', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 7);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (14, 14, 14, 'Генеральная уборка', '2025-05-14', '2025-06-14', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 8);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (15, 15, 15, 'Курсы по психологии', '2025-05-15', '2025-09-15', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 9);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (16, 1, 1, 'Бег по утрам', '2025-06-01', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (17, 2, 2, 'Чтение книг (утром)', '2025-06-01', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (18, 3, 3, 'Медитация (утренняя)', '2025-06-10', '2025-12-01', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (19, 4, 4, 'Игра на гитаре (дома)', '2025-06-05', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES
```

(20, 5, 5, 'Йога (утренняя)', '2025-06-01', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (21, 6, 6, 'Плавание (в бассейне)', '2025-06-15', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (22, 7, 7, 'Рисование (акварель)', '2025-06-01', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (23, 8, 8, 'Программирование (Python)', '2025-06-10', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (24, 9, 9, 'Прогулки (в парке)', '2025-06-01', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (25, 10, 10, 'Кулинария (выпечка)', '2025-06-15', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (26, 11, 11, 'Фотография (пейзажи)', '2025-06-01', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (27, 12, 12, 'Танцы (сальса)', '2025-06-10', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (28, 13, 13, 'Фитнес (силовые)', '2025-06-01', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (29, 14, 14, 'Шахматы (онлайн)', '2025-06-15', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (30, 15, 15, 'Садоводство (цветы)', '2025-06-01', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (31, 16, 1, 'Бег (вечерний)', '2025-06-01', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (32, 17, 2, 'Чтение книг (вечером)', '2025-06-10', '2025-12-01', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);

```
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (33, 18, 3, 'Медитация (вечерняя)', '2025-06-15', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (34, 19, 4, 'Игра на гитаре (на улице)', '2025-06-01', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (35, 20, 5, 'Йога (вечерняя)', '2025-06-10', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (36, 21, 6, 'Плавание (открытая вода)', '2025-06-15', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (37, 22, 7, 'Рисование (масло)', '2025-06-01', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (38, 23, 8, 'Программирование (Java)', '2025-06-10', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (39, 24, 9, 'Прогулки (с собакой)', '2025-06-15', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (40, 25, 10, 'Кулинария (супы)', '2025-06-01', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (41, 26, 11, 'Фотография (портреты)', '2025-06-10', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (42, 27, 12, 'Танцы (танго)', '2025-06-15', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (43, 28, 13, 'Фитнес (кардио)', '2025-06-01', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (44, 29, 14, 'Шахматы (с друзьями)', '2025-06-10', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES
```

(45, 30, 15, 'Садоводство (овощи)', '2025-06-15', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (46, 31, 1, 'Бег (утренний)', '2025-06-01', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (47, 32, 2, 'Чтение книг (на работе)', '2025-06-10', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (48, 33, 3, 'Медитация (дневная)', '2025-06-15', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (49, 34, 4, 'Игра на гитаре (электро)', '2025-06-01', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (50, 35, 5, 'Йога (дневная)', '2025-06-10', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (51, 36, 6, 'Плавание (спортзал)', '2025-06-15', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (52, 37, 7, 'Рисование (карандаш)', '2025-06-01', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (53, 38, 8, 'Программирование (JS)', '2025-06-10', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (54, 39, 9, 'Прогулки (лес)', '2025-06-15', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (55, 40, 10, 'Кулинария (десерты)', '2025-06-01', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (56, 41, 11, 'Фотография (макро)', '2025-06-10', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (57, 42, 12, 'Танцы (хип-хоп)', '2025-06-15', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);

```
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (58, 43, 13, 'Фитнес (йога)', '2025-06-01', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (59, 44, 14, 'Шахматы (турнир)', '2025-06-10', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (60, 45, 15, 'Садоводство (деревья)', '2025-06-15', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (61, 46, 1, 'Бег (дальний)', '2025-06-01', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (62, 47, 2, 'Чтение книг (классика)', '2025-06-10', '2025-11-30', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 4);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (63, 48, 3, 'Медитация (глубокая)', '2025-06-15', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 1);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (64, 49, 4, 'Игра на гитаре (акустика)', '2025-06-01', '2025-12-31', '2025-06-13 14:14:00', '2025-06-13 14:14:00', 2);
INSERT INTO habits.habits (habit_id, user_id, category_id, name, start_date, end_date, created_at, updated_at, frequency_id) VALUES (65, 50, 5, 'Йога (расслабляющая)', '2025-06-10', NULL, '2025-06-13 14:14:00', '2025-06-13 14:14:00', 3);


--
-- TOC entry 5158 (class 0 OID 27686)
-- Dependencies: 251
-- Data for Name: task_priorities; Type: TABLE DATA; Schema: todo; Owner: postgres
--

INSERT INTO todo.task_priorities (priority_id, name, created_at) VALUES (1, 'Низкий', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at) VALUES (2, 'Средний', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at) VALUES (3, 'Высокий', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at) VALUES (4, 'Критический', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at) VALUES (5, 'Срочный', '2025-05-13 12:24:28.911238');
```

```
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (6, 'Очень низкий', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (7, 'Средне-высокий', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (8, 'Средне-низкий', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (9, 'Не срочно', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (10, 'Долгосрочный', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (11, 'Второстепенный', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (12, 'Опциональный', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (13, 'Периодический', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (14, 'Тестовый', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_priorities (priority_id, name, created_at)
VALUES (15, 'Экспериментальный', '2025-05-13 12:24:28.911238');


--
-- TOC entry 5157 (class 0 OID 27678)
-- Dependencies: 250
-- Data for Name: task_statuses; Type: TABLE DATA; Schema: todo;
Owner: postgres
--

INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(1, 'Запланировано', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(2, 'В процессе', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(3, 'Завершено', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(4, 'Отложено', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(5, 'Отменено', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(6, 'В ожидании', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(7, 'Проверяется', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(8, 'Не начато', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(9, 'На паузе', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(10, 'В процессе проверки', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(11, 'Готово к тестированию', '2025-05-13 12:24:28.911238');
```

```
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(12, 'Ожидает одобрения', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(13, 'Запланировано на будущее', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(14, 'В разработке', '2025-05-13 12:24:28.911238');
INSERT INTO todo.task_statuses (status_id, name, created_at) VALUES
(15, 'Выполнено частично', '2025-05-13 12:24:28.911238');


--
-- TOC entry 5137 (class 0 OID 26675)
-- Dependencies: 228
-- Data for Name: todo_categories; Type: TABLE DATA; Schema: todo;
Owner: postgres
--

INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (1, 1, 'Работа', '2025-05-13
20:16:27.228041', '2025-05-13 01:08:12.8578');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (2, 2, 'Дом', '2025-05-13
01:49:07.099232', '2025-05-13 01:08:12.8578');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (3, 3, 'Здоровье', '2025-05-13
04:58:49.437116', '2025-05-13 01:08:12.8578');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (4, 4, 'Семья', '2025-05-13
21:16:51.176429', '2025-05-13 01:08:12.8578');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (5, 5, 'Личное', '2025-05-13
10:52:35.732458', '2025-05-13 01:08:12.8578');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (6, 6, 'Учёба', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (7, 7, 'Покупки', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (8, 8, 'Путешествия', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (9, 9, 'Работа', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (10, 10, 'Хобби', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO todo.todo_categories (category_id, user_id, name,
created_at, updated_at) VALUES (11, 11, 'Фитнес', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238');
```

```
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (12, 12, 'Семья', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (13, 13, 'Проекты', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (14, 14, 'Здоровье', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (15, 15, 'Финансы', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (16, 1, 'Рабочие задачи', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (17, 2, 'Личные дела', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (18, 3, 'Учеба', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (19, 4, 'Финансы', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (20, 5, 'Здоровье', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (21, 6, 'Покупки', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (22, 7, 'Путешествия', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (23, 8, 'Хобби', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (24, 9, 'Проекты', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (25, 10, 'Спорт', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (26, 11, 'Семья', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (27, 12, 'Работа', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (28, 13, 'Саморазвитие', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
```

```
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (29, 14, 'Домашние дела', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (30, 15, 'Планирование', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (31, 16, 'Организация встреч', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (32, 17, 'Тренинги', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (33, 18, 'Чтение', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (34, 19, 'Путешествия и отдых', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (35, 20, 'Фитнес', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (36, 21, 'Личное время', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (37, 22, 'Рабочие проекты', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (38, 23, 'Обучение', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (39, 24, 'Финансовое планирование', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (40, 25, 'Здоровый образ жизни', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (41, 26, 'Покупки и бюджет', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (42, 27, 'Путешествия и экскурсии', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (43, 28, 'Творчество', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (44, 29, 'Карьера', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (45, 30, 'Семейные дела', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
```

INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (46, 31, 'Рабочие встречи', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (47, 32, 'Самообразование', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (48, 33, 'Дом и быт', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (49, 34, 'Планирование отпуска', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (50, 35, 'Физическая активность', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (51, 36, 'Личные проекты', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (52, 37, 'Рабочие отчеты', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (53, 38, 'Курсы и тренинги', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (54, 39, 'Чтение и учеба', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (55, 40, 'Путешествия и приключения', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (56, 41, 'Фитнес и здоровье', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (57, 42, 'Личное развитие', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (58, 43, 'Домашние задачи', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (59, 44, 'Финансовые цели', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (60, 45, 'Покупки и планирование', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (61, 46, 'Рабочие задачи 2', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (62, 47, 'Саморазвитие и учеба', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');

```
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (63, 48, 'Семейные мероприятия', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (64, 49, 'Организация поездок', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');
INSERT INTO todo.todo_categories (category_id, user_id, name, created_at, updated_at) VALUES (65, 50, 'Спорт и активный отдых', '2025-06-13 18:40:25.483164', '2025-06-13 18:40:25.483164');


--
-- TOC entry 5139 (class 0 OID 26689)
-- Dependencies: 230
-- Data for Name: todos; Type: TABLE DATA; Schema: todo; Owner: postgres
--

INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (1, 1, 1, 'Подготовить отчет', '2025-05-02', false, NULL, '2025-05-02 00:00:09.415239', '2025-05-13 12:31:51.479661', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (2, 2, 2, 'Прибраться в комнате', '2025-05-03', true, '2025-05-03', '2025-05-03 00:00:50.398117', '2025-05-13 12:31:51.479661', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (4, 4, 4, 'Купить подарок детям', '2025-05-05', true, '2025-05-05', '2025-05-05 00:00:51.02753', '2025-05-13 12:31:51.479661', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (3, 3, 3, 'Пройти обследование', '2025-05-04', false, '2025-05-13', '2025-05-04 00:00:00.301096', '2025-05-13 14:48:53.151557', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (5, 5, 5, 'Прочитать книгу', '2025-05-06', false, '2025-05-05', '2025-05-06 00:00:48.833832', '2025-05-13 14:49:24.559416', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (6, 6, 6, 'Сдать курсовую', '2025-05-16', false, NULL, '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (7, 7, 7, 'Купить продукты', '2025-05-17',
```

true, '2025-05-17', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (8, 8, 8, 'Забронировать отель', '2025-05-18', false, NULL, '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 4);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (9, 9, 9, 'Подготовить презентацию', '2025-05-19', true, '2025-05-19', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 5);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (10, 10, 10, 'Поиграть на гитаре', '2025-05-20', false, NULL, '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (11, 11, 11, 'Пройти 10 км', '2025-05-21', true, '2025-05-21', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (12, 12, 12, 'Созвониться с родителями', '2025-05-22', false, NULL, '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (13, 13, 13, 'Завершить проект', '2025-05-23', true, '2025-05-23', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 4);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (14, 14, 14, 'Посетить врача', '2025-05-24', false, NULL, '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 5);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (15, 15, 15, 'Составить бюджет', '2025-05-25', true, '2025-05-25', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (16, 1, 1, 'Подготовить презентацию для встречи', '2025-06-20', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (17, 2, 2, 'Купить продукты на неделю',

'2025-06-22', true, '2025-06-15', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (18, 3, 3, 'Записаться на курсы английского', '2025-07-01', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (19, 4, 4, 'Позвонить клиенту', '2025-06-25', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (20, 5, 5, 'Проверить отчет по проекту', '2025-07-10', true, '2025-06-14', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (21, 6, 6, 'Организовать встречу команды', '2025-06-30', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (22, 7, 7, 'Зарегистрироваться на вебинар', '2025-07-15', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (23, 8, 8, 'Оплатить коммунальные услуги', '2025-06-28', true, '2025-06-13', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (24, 9, 9, 'Забронировать билеты на концерт', '2025-07-20', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (25, 10, 10, 'Подготовить документы для визы', '2025-08-01', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (26, 11, 11, 'Пройти техосмотр автомобиля', '2025-07-05', true, '2025-06-15', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (27, 12, 12, 'Обновить резюме', '2025-07-

25', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (28, 13, 13, 'Запланировать отпуск', '2025-08-10', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (29, 14, 14, 'Купить подарок на день рождения', '2025-06-25', true, '2025-06-14', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (30, 15, 15, 'Провести аудит кода', '2025-07-30', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (31, 16, 1, 'Записаться к врачу', '2025-06-20', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (32, 17, 2, 'Починить ноутбук', '2025-07-10', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (33, 18, 3, 'Прочитать книгу по Python', '2025-08-15', true, '2025-06-13', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (34, 19, 4, 'Организовать семейный ужин', '2025-06-30', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (35, 20, 5, 'Подготовить отчет за квартал', '2025-07-20', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (36, 21, 6, 'Пройти онлайн-курс', '2025-08-05', true, '2025-06-15', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (37, 22, 7, 'Обновить подписку на сервис',

'2025-06-25', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (38, 23, 8, 'Проверить почту', '2025-06-20', true, '2025-06-14', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (39, 24, 9, 'Запланировать тренировку', '2025-07-01', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (40, 25, 10, 'Подготовить материалы для встречи', '2025-07-15', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (41, 26, 11, 'Купить новую одежду', '2025-06-30', true, '2025-06-13', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (42, 27, 12, 'Провести уборку дома', '2025-06-25', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (43, 28, 13, 'Записаться на мастер-класс', '2025-07-10', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (44, 29, 14, 'Обновить профиль на сайте', '2025-08-01', true, '2025-06-15', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (45, 30, 15, 'Проверить бюджет на месяц', '2025-07-05', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (46, 31, 1, 'Забронировать отель', '2025-08-10', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (47, 32, 2, 'Провести собрание команды',

'2025-07-20', true, '2025-06-14', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (48, 33, 3, 'Пройти тестирование', '2025-06-30', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (49, 34, 4, 'Оформить подписку на журнал', '2025-07-15', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (50, 35, 5, 'Подготовить план проекта', '2025-08-05', true, '2025-06-13', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (51, 36, 6, 'Проверить оборудование', '2025-07-25', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (52, 37, 7, 'Запланировать встречу с клиентом', '2025-06-25', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (53, 38, 8, 'Купить билеты на поезд', '2025-07-10', true, '2025-06-15', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (54, 39, 9, 'Организовать вебинар', '2025-08-15', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (55, 40, 10, 'Провести ревизию документов', '2025-07-20', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (56, 41, 11, 'Записаться на тренинг', '2025-06-30', true, '2025-06-14', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (57, 42, 12, 'Проверить отчеты за месяц',

'2025-07-05', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (58, 43, 13, 'Организовать тимбилдинг', '2025-08-01', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (59, 44, 14, 'Обновить программное обеспечение', '2025-07-15', true, '2025-06-13', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (60, 45, 15, 'Провести анализ данных', '2025-06-25', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (61, 46, 1, 'Подготовить материалы для тренинга', '2025-07-30', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (62, 47, 2, 'Провести тестирование ПО', '2025-08-05', true, '2025-06-15', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (63, 48, 3, 'Организовать встречу с партнером', '2025-07-10', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 1);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (64, 49, 4, 'Проверить контракты', '2025-06-30', false, NULL, '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 2);
INSERT INTO todo.todos (todo_id, user_id, category_id, task, due_date, is_completed, completed_date, created_at, updated_at, task_priority_id) VALUES (65, 50, 5, 'Подготовить отчет для руководства', '2025-08-10', true, '2025-06-14', '2025-06-13 18:37:49.375373', '2025-06-13 18:37:49.375373', 3);

--
-- TOC entry 5161 (class 0 OID 27710)
-- Dependencies: 254
-- Data for Name: expense_categories; Type: TABLE DATA; Schema: trips; Owner: postgres
--

```
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (1, 'Еда', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (2, 'Проживание', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (3, 'Транспорт', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (4, 'Развлечения', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (5, 'Прочее', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (6, 'Развлечения', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (7, 'Сувениры', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (8, 'Медицина', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (9, 'Страховка', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (10, 'Аренда транспорта', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (11, 'Парковка', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (12, 'Топливо', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (13, 'Общественный транспорт', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (14, 'Экскурсии', '2025-05-13 12:24:28.911238');
INSERT INTO trips.expense_categories (category_id, name, created_at)
VALUES (15, 'Прочее', '2025-05-13 12:24:28.911238');


--
-- TOC entry 5160 (class 0 OID 27702)
-- Dependencies: 253
-- Data for Name: transportation_types; Type: TABLE DATA; Schema:
trips; Owner: postgres
--

INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (1, 'Самолет', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (2, 'Поезд', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (3, 'Автобус', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (4, 'Машина', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (5, 'Такси', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (6, 'Корабль', '2025-05-13 12:24:28.911238');
```

```
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (7, 'Метро', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (8, 'Велосипед', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (9, 'Самокат', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (10, 'Пешком', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (11, 'Автостоп', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (12, 'Трамвай', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (13, 'Троллейбус', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (14, 'Фуникулёр', '2025-05-13 12:24:28.911238');
INSERT INTO trips.transportation_types (type_id, name, created_at)
VALUES (15, 'Паром', '2025-05-13 12:24:28.911238');


--
-- TOC entry 5155 (class 0 OID 26880)
-- Dependencies: 247
-- Data for Name: trip_expenses; Type: TABLE DATA; Schema: trips;
Owner: postgres
--

INSERT INTO trips.trip_expenses (expense_id, route_id, amount,
expense_date, note, created_at, updated_at, expense_category_id)
VALUES (1, 1, 50.00, '2025-05-01', 'Обед в поезде', '2025-05-01
00:00:22.630686', '2025-05-13 12:24:28.911238', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount,
expense_date, note, created_at, updated_at, expense_category_id)
VALUES (2, 2, 200.00, '2025-05-02', 'Отель в Питере', '2025-05-02
00:00:15.038531', '2025-05-13 12:24:28.911238', 2);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount,
expense_date, note, created_at, updated_at, expense_category_id)
VALUES (3, 3, 100.00, '2025-05-01', 'Такси в аэропорту', '2025-06-
15 00:00:13.54257', '2025-05-13 12:41:05.09709', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount,
expense_date, note, created_at, updated_at, expense_category_id)
VALUES (4, 4, 80.00, '2025-05-01', 'Экскурсия', '2025-06-16
00:00:22.928544', '2025-05-13 12:41:05.09709', 4);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount,
expense_date, note, created_at, updated_at, expense_category_id)
VALUES (5, 5, 30.00, '2025-05-01', 'Ужин', '2025-07-05
00:00:48.523726', '2025-05-13 12:41:05.09709', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount,
expense_date, note, created_at, updated_at, expense_category_id)
VALUES (6, 6, 100.00, '2025-10-01', 'Обед в кафе', '2025-05-13
12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
```

```
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (7, 7, 300.00, '2025-11-01', 'Отель в Крыму', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 5);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (8, 8, 150.00, '2025-12-01', 'Такси в Новосибирске', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (9, 9, 200.00, '2026-01-01', 'Экскурсия в Калининграде', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 14);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (10, 10, 50.00, '2026-02-01', 'Ужин в Волгограде', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (11, 11, 500.00, '2026-03-01', 'Проживание на Алтае', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 5);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (12, 12, 120.00, '2026-04-01', 'Сувениры в Иркутске', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 7);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (13, 13, 80.00, '2026-05-01', 'Транспорт в Перми', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 13);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (14, 14, 90.00, '2026-06-01', 'Обед в Самаре', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (15, 15, 110.00, '2026-07-01', 'Экскурсия в Уфе', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 14);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (16, 1, 1250.50, '2025-06-01', 'Обед в ресторане', '2025-06-01 12:30:00', '2025-06-01 12:30:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (17, 1, 350.00, '2025-06-01', 'Музей', '2025-06-01 15:45:00', '2025-06-01 15:45:00', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (18, 2, 780.25, '2025-06-02', 'Сувениры', '2025-06-02 10:20:00', '2025-06-02 10:20:00', 4);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id)
```

```
VALUES (19, 2, 1200.00, '2025-06-02', 'Экскурсия', '2025-06-02 14:00:00', '2025-06-02 14:00:00', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (20, 3, 450.75, '2025-06-03', 'Завтрак', '2025-06-03 09:15:00', '2025-06-03 09:15:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (21, 3, 600.00, '2025-06-03', 'Такси', '2025-06-03 18:30:00', '2025-06-03 18:30:00', 2);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (22, 4, 890.50, '2025-06-04', 'Ужин', '2025-06-04 20:00:00', '2025-06-04 20:00:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (23, 4, 250.00, '2025-06-04', 'Билеты в театр', '2025-06-04 19:00:00', '2025-06-04 19:00:00', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (24, 5, 1500.00, '2025-06-05', 'Аренда велосипедов', '2025-06-05 10:00:00', '2025-06-05 10:00:00', 5);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (25, 5, 320.75, '2025-06-05', 'Кофе и десерты', '2025-06-05 16:45:00', '2025-06-05 16:45:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (26, 6, 420.00, '2025-06-06', 'Общественный транспорт', '2025-06-06 08:30:00', '2025-06-06 08:30:00', 2);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (27, 6, 980.50, '2025-06-06', 'Обед с видом на море', '2025-06-06 13:15:00', '2025-06-06 13:15:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (28, 7, 670.25, '2025-06-07', 'Вход в аквапарк', '2025-06-07 11:00:00', '2025-06-07 11:00:00', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (29, 7, 540.00, '2025-06-07', 'Фотографии', '2025-06-07 15:30:00', '2025-06-07 15:30:00', 4);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (30, 8, 380.75, '2025-06-08', 'Завтрак в кафе', '2025-06-08 09:45:00', '2025-06-08 09:45:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (31, 8, 1250.00, '2025-06-08', 'Подарки родным', '2025-06-08 17:20:00', '2025-06-08 17:20:00', 4);
```

```
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (32, 9, 290.50, '2025-06-09', 'Мороженое', '2025-06-09 14:10:00', '2025-06-09 14:10:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (33, 9, 850.00, '2025-06-09', 'Билеты на концерт', '2025-06-09 20:00:00', '2025-06-09 20:00:00', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (34, 10, 430.75, '2025-06-10', 'Обед в парке', '2025-06-10 13:00:00', '2025-06-10 13:00:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (35, 10, 620.00, '2025-06-10', 'Такси в аэропорт', '2025-06-10 18:45:00', '2025-06-10 18:45:00', 2);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (36, 11, 780.50, '2025-06-11', 'Ужин с друзьями', '2025-06-11 19:30:00', '2025-06-11 19:30:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (37, 11, 350.00, '2025-06-11', 'Музей современного искусства', '2025-06-11 11:15:00', '2025-06-11 11:15:00', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (38, 12, 420.75, '2025-06-12', 'Завтрак в отеле', '2025-06-12 08:30:00', '2025-06-12 08:30:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (39, 12, 950.00, '2025-06-12', 'Экскурсия по городу', '2025-06-12 10:00:00', '2025-06-12 10:00:00', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (40, 13, 580.50, '2025-06-13', 'Обед в кафе', '2025-06-13 13:45:00', '2025-06-13 13:45:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (41, 13, 320.00, '2025-06-13', 'Сувениры', '2025-06-13 16:20:00', '2025-06-13 16:20:00', 4);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (42, 14, 670.75, '2025-06-14', 'Ужин с видом на город', '2025-06-14 20:00:00', '2025-06-14 20:00:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (43, 14, 450.00, '2025-06-14', 'Такси до отеля', '2025-06-14 22:30:00', '2025-06-14 22:30:00', 2);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id)
```

```
VALUES (44, 15, 380.50, '2025-06-15', 'Завтрак в постель', '2025-06-15 09:00:00', '2025-06-15 09:00:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (45, 15, 1250.00, '2025-06-15', 'Шоппинг', '2025-06-15 12:00:00', '2025-06-15 12:00:00', 4);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (46, 16, 290.75, '2025-06-16', 'Кофе брейк', '2025-06-16 11:30:00', '2025-06-16 11:30:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (47, 16, 850.00, '2025-06-16', 'Билеты в кино', '2025-06-16 19:00:00', '2025-06-16 19:00:00', 3);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (48, 17, 430.50, '2025-06-17', 'Обед на пляже', '2025-06-17 13:15:00', '2025-06-17 13:15:00', 1);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (49, 17, 620.00, '2025-06-17', 'Аренда зонтика', '2025-06-17 14:30:00', '2025-06-17 14:30:00', 5);
INSERT INTO trips.trip_expenses (expense_id, route_id, amount, expense_date, note, created_at, updated_at, expense_category_id) VALUES (50, 18, 780.75, '2025-06-18', 'Ужин в ресторане', '2025-06-18 20:45:00', '2025-06-18 20:45:00', 1);


--
-- TOC entry 5153 (class 0 OID 26859)
-- Dependencies: 244
-- Data for Name: trip_routes; Type: TABLE DATA; Schema: trips; Owner: postgres
--

INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (1, 1, 1, 'Москва', 700.00, 500.00, '2025-05-01', '2025-05-01', '2025-05-01 00:00:12.853545', '2025-05-13 12:24:28.911238', 2);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (2, 1, 2, 'Санкт-Петербург', 50.00, 200.00, '2025-05-02', '2025-05-09', '2025-05-02 00:00:49.829356', '2025-05-13 12:24:28.911238', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (3, 2, 1, 'Ростов', 1200.00, 3000.00, '2025-06-15', '2025-06-15', '2025-06-15 00:00:48.216098', '2025-05-13 12:24:28.911238', 1);
```

```
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (4, 2, 2, 'Сочи', 20.00, 500.00, '2025-06-16', '2025-06-21', '2025-06-16 00:00:34.268767', '2025-05-13 12:24:28.911238', 5);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (5, 3, 1, 'Казань', 800.00, 600.00, '2025-07-05', '2025-07-11', '2025-07-05 00:00:27.810083', '2025-05-13 12:24:28.911238', 2);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (6, 6, 1, 'Екатеринбург', 1400.00, 800.00, '2025-10-01', '2025-10-08', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 2);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (7, 7, 1, 'Симферополь', 1800.00, 2500.00, '2025-11-01', '2025-11-10', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (8, 8, 1, 'Новосибирск', 3000.00, 3500.00, '2025-12-01', '2025-12-07', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (9, 9, 1, 'Калининград', 1200.00, 2000.00, '2026-01-01', '2026-01-08', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (10, 10, 1, 'Волгоград', 1000.00, 600.00, '2026-02-01', '2026-02-06', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 2);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (11, 11, 1, 'Горно-Алтайск', 3500.00, 4000.00, '2026-03-01', '2026-03-10', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (12, 12, 1, 'Иркутск', 4200.00, 4500.00, '2026-04-01', '2026-04-08', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 1);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (13, 13, 1, 'Пермь', 1400.00, 700.00, '2026-05-01', '2026-05-06', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 2);
```

```
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (14, 14, 1, 'Самара', 1000.00, 600.00, '2026-06-01', '2026-06-08', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 2);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (15, 15, 1, 'Уфа', 1200.00, 800.00, '2026-07-01', '2026-07-07', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238', 2);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (16, 16, 1, 'Лиссабон, Португалия', 900.50, 1200.00, '2025-06-14', '2025-06-15', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (17, 16, 2, 'Порту, Португалия', 300.75, 400.00, '2025-06-16', '2025-06-17', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (18, 17, 1, 'Барселона, Испания', 1100.20, 1500.00, '2025-06-18', '2025-06-19', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (19, 17, 2, 'Валенсия, Испания', 350.30, 500.00, '2025-06-20', '2025-06-21', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (20, 18, 1, 'Афины, Греция', 1300.40, 1800.00, '2025-06-22', '2025-06-23', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (21, 18, 2, 'Салоники, Греция', 500.60, 700.00, '2025-06-24', '2025-06-25', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (22, 19, 1, 'Стокгольм, Швеция', 800.70, 1100.00, '2025-06-26', '2025-06-27', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (23, 19, 2, 'Гётеборг, Швеция', 400.80, 600.00, '2025-06-28', '2025-06-29', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
```

```
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (24, 20, 1, 'Копенгаген, Дания', 700.90, 1000.00, '2025-06-30', '2025-07-01', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (25, 20, 2, 'Оденсе, Дания', 200.10, 300.00, '2025-07-02', '2025-07-03', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (26, 21, 1, 'Брюссель, Бельгия', 900.20, 1300.00, '2025-07-04', '2025-07-05', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (27, 21, 2, 'Антверпен, Бельгия', 50.30, 100.00, '2025-07-06', '2025-07-07', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (28, 22, 1, 'Женева, Швейцария', 1100.40, 1600.00, '2025-07-08', '2025-07-09', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (29, 22, 2, 'Цюрих, Швейцария', 300.50, 500.00, '2025-07-10', '2025-07-11', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (30, 23, 1, 'Милан, Италия', 1200.60, 1700.00, '2025-07-12', '2025-07-13', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (31, 23, 2, 'Флоренция, Италия', 400.70, 600.00, '2025-07-14', '2025-07-15', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (32, 24, 1, 'Варна, Болгария', 800.80, 1100.00, '2025-06-14', '2025-06-15', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (33, 24, 2, 'София, Болгария', 450.90, 700.00, '2025-06-16', '2025-06-17', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
```

```
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (34, 25, 1, 'Белград, Сербия', 1000.10, 1400.00, '2025-06-18', '2025-06-19', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (35, 25, 2, 'Нови-Сад, Сербия', 90.20, 200.00, '2025-06-20', '2025-06-21', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (36, 26, 1, 'Загреб, Хорватия', 1100.30, 1500.00, '2025-06-22', '2025-06-23', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (37, 26, 2, 'Сплит, Хорватия', 300.40, 500.00, '2025-06-24', '2025-06-25', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (38, 27, 1, 'Будапешт, Венгрия', 900.50, 1300.00, '2025-06-26', '2025-06-27', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (39, 27, 2, 'Дебрецен, Венгрия', 220.60, 400.00, '2025-06-28', '2025-06-29', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (40, 28, 1, 'Любляна, Словения', 800.70, 1200.00, '2025-06-30', '2025-07-01', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (41, 28, 2, 'Марибор, Словения', 150.80, 300.00, '2025-07-02', '2025-07-03', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (42, 29, 1, 'Братислава, Словакия', 1000.90, 1400.00, '2025-07-04', '2025-07-05', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (43, 29, 2, 'Кошице, Словакия', 400.10, 600.00, '2025-07-06', '2025-07-07', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
```

INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (44, 30, 1, 'Таллин, Эстония', 900.20, 1300.00, '2025-07-08', '2025-07-09', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (45, 30, 2, 'Тарту, Эстония', 180.30, 300.00, '2025-07-10', '2025-07-11', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (46, 31, 1, 'Вильнюс, Литва', 1100.40, 1600.00, '2025-07-12', '2025-07-13', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (47, 31, 2, 'Каунас, Литва', 100.50, 200.00, '2025-07-14', '2025-07-15', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (48, 32, 1, 'Рига, Латвия', 900.60, 1300.00, '2025-06-14', '2025-06-15', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (49, 32, 2, 'Даугавпилс, Латвия', 200.70, 400.00, '2025-06-16', '2025-06-17', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);
INSERT INTO trips.trip_routes (route_id, trip_id, location_order, location_name, distance_km, cost, arrival_date, departure_date, created_at, updated_at, transportation_type_id) VALUES (50, 33, 1, 'Кишенёв, Молдова', 1000.80, 1400.00, '2025-06-18', '2025-06-19', '2025-06-13 17:14:00', '2025-06-13 17:14:00', 3);

--
-- TOC entry 5151 (class 0 OID 26846)
-- Dependencies: 242
-- Data for Name: trips; Type: TABLE DATA; Schema: trips; Owner: postgres
--

INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (1, 1, 'Путешествие в Санкт-Петербург', '2025-05-01', '2025-05-10', '2025-05-01 00:00:32.463107', '2025-05-13 01:08:12.8578');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (2, 2, 'Поездка в Сочи',

'2025-06-15', '2025-06-22', '2025-06-15 00:00:07.199335', '2025-05-13 01:08:12.8578');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (3, 3, 'Отдых в Казани', '2025-07-05', '2025-07-12', '2025-07-05 00:00:02.808951', '2025-05-13 01:08:12.8578');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (4, 4, 'Экскурсия в Москву', '2025-08-01', '2025-08-20', '2025-08-01 00:00:36.652013', '2025-05-13 01:08:12.8578');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (5, 5, 'Поход на Байкал', '2025-09-10', '2025-09-18', '2025-09-10 00:00:08.886786', '2025-05-13 01:08:12.8578');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (6, 6, 'Поездка в Екатеринбург', '2025-10-01', '2025-10-08', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (7, 7, 'Отдых в Крыму', '2025-11-01', '2025-11-10', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (8, 8, 'Экскурсия в Новосибирск', '2025-12-01', '2025-12-07', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (9, 9, 'Поездка в Калининград', '2026-01-01', '2026-01-08', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (10, 10, 'Путешествие в Волгоград', '2026-02-01', '2026-02-06', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (11, 11, 'Отдых на Алтае', '2026-03-01', '2026-03-10', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (12, 12, 'Поездка в Иркутск', '2026-04-01', '2026-04-08', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (13, 13, 'Экскурсия в Пермь', '2026-05-01', '2026-05-06', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (14, 14, 'Путешествие в Самару', '2026-06-01', '2026-06-08', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');

INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (15, 15, 'Отдых в Уфе', '2026-07-01', '2026-07-07', '2025-05-13 12:24:28.911238', '2025-05-13 12:24:28.911238');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (16, 16, 'Отпуск в Греции', '2025-07-01', '2025-07-15', '2025-06-01 10:00:00', '2025-06-01 10:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (17, 17, 'Деловая поездка в Берлин', '2025-07-05', '2025-07-08', '2025-06-02 11:00:00', '2025-06-02 11:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (18, 18, 'Горный поход', '2025-07-10', '2025-07-20', '2025-06-03 12:00:00', '2025-06-03 12:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (19, 19, 'Пляжный отдых в Турции', '2025-07-15', '2025-07-25', '2025-06-04 13:00:00', '2025-06-04 13:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (20, 20, 'Фестиваль в Барселоне', '2025-07-20', '2025-07-27', '2025-06-05 14:00:00', '2025-06-05 14:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (21, 21, 'Круиз по Средиземному морю', '2025-08-01', '2025-08-15', '2025-06-06 15:00:00', '2025-06-06 15:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (22, 22, 'Гастрономический тур по Италии', '2025-08-05', '2025-08-12', '2025-06-07 16:00:00', '2025-06-07 16:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (23, 23, 'Экскурсия по Праге', '2025-08-10', '2025-08-13', '2025-06-08 17:00:00', '2025-06-08 17:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (24, 24, 'Сёрфинг в Португалии', '2025-08-15', '2025-08-25', '2025-06-09 18:00:00', '2025-06-09 18:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (25, 25, 'Конференция в Лондоне', '2025-08-20', '2025-08-23', '2025-06-10 19:00:00', '2025-06-10 19:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (26, 26, 'Романтический уикенд в Париже', '2025-09-01', '2025-09-04', '2025-06-11 20:00:00', '2025-06-11 20:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (27, 27, 'Сафари в Кении',

'2025-09-05', '2025-09-15', '2025-06-12 21:00:00', '2025-06-12 21:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (28, 28, 'Горнолыжный курорт в Альпах', '2025-09-10', '2025-09-20', '2025-06-13 22:00:00', '2025-06-13 22:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (29, 29, 'Экотуризм в Норвегии', '2025-09-15', '2025-09-25', '2025-06-14 23:00:00', '2025-06-14 23:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (30, 30, 'Шопинг в Милане', '2025-09-20', '2025-09-25', '2025-06-15 00:00:00', '2025-06-15 00:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (31, 31, 'Йога-тур в Индию', '2025-10-01', '2025-10-15', '2025-06-16 01:00:00', '2025-06-16 01:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (32, 32, 'Фотоэкспедиция в Исландию', '2025-10-05', '2025-10-12', '2025-06-17 02:00:00', '2025-06-17 02:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (33, 33, 'Семейный отдых в Диснейленде', '2025-10-10', '2025-10-17', '2025-06-18 03:00:00', '2025-06-18 03:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (34, 34, 'Деловой визит в Нью-Йорк', '2025-10-15', '2025-10-20', '2025-06-19 04:00:00', '2025-06-19 04:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (35, 35, 'Культурный тур по Японии', '2025-10-20', '2025-11-05', '2025-06-20 05:00:00', '2025-06-20 05:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (36, 36, 'Велосипедный тур по Нидерландам', '2025-11-01', '2025-11-10', '2025-06-21 06:00:00', '2025-06-21 06:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (37, 37, 'Свадебное путешествие на Мальдивы', '2025-11-05', '2025-11-15', '2025-06-22 07:00:00', '2025-06-22 07:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (38, 38, 'Сплав по реке в Канаде', '2025-11-10', '2025-11-20', '2025-06-23 08:00:00', '2025-06-23 08:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (39, 39, 'Рождественские ярмарки в Германии', '2025-12-01', '2025-12-08', '2025-06-24 09:00:00', '2025-06-24 09:00:00');

```
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (40, 40, 'Новый год в Дубае', '2025-12-25', '2026-01-05', '2025-06-25 10:00:00', '2025-06-25 10:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (41, 41, 'Экскурсия по древним городам Мексики', '2026-01-10', '2026-01-20', '2025-06-26 11:00:00', '2025-06-26 11:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (42, 42, 'Сноркелинг на Большом Барьерном рифе', '2026-01-15', '2026-01-25', '2025-06-27 12:00:00', '2025-06-27 12:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (43, 43, 'Гастротур по Таиланду', '2026-02-01', '2026-02-15', '2025-06-28 13:00:00', '2025-06-28 13:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (44, 44, 'Фототур по Марокко', '2026-02-05', '2026-02-12', '2025-06-29 14:00:00', '2025-06-29 14:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (45, 45, 'Серфинг в Индонезии', '2026-02-10', '2026-02-25', '2025-06-30 15:00:00', '2025-06-30 15:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (46, 46, 'Паломничество в Иерусалим', '2026-03-01', '2026-03-10', '2025-07-01 16:00:00', '2025-07-01 16:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (47, 47, 'Винный тур по Франции', '2026-03-05', '2026-03-15', '2025-07-02 17:00:00', '2025-07-02 17:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (48, 48, 'Треккинг в Непале', '2026-03-10', '2026-03-25', '2025-07-03 18:00:00', '2025-07-03 18:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (49, 49, 'Культурный обмен в Южной Корее', '2026-03-15', '2026-03-30', '2025-07-04 19:00:00', '2025-07-04 19:00:00');
INSERT INTO trips.trips (trip_id, user_id, name, start_date, end_date, created_at, updated_at) VALUES (50, 50, 'Яхтинг в Хорватии', '2026-04-01', '2026-04-15', '2025-07-05 20:00:00', '2025-07-05 20:00:00');


--
-- TOC entry 5163 (class 0 OID 27726)
-- Dependencies: 256
-- Data for Name: user_roles; Type: TABLE DATA; Schema: user; Owner: postgres
```

```
--

INSERT INTO "user".user_roles (role_id, name, created_at) VALUES (1,
'Администратор', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES (2,
'Пользователь', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES (3,
'Модератор', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES (4,
'Гость', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES (5,
'Редактор', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES (6,
'Аналитик', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES (7,
'Тестировщик', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES (8,
'Разработчик', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES (9,
'Менеджер', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES
(10, 'Дизайнер', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES
(11, 'Контент-менеджер', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES
(12, 'Маркетолог', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES
(13, 'Администратор БД', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES
(14, 'Системный администратор', '2025-05-13 12:24:28.911238');
INSERT INTO "user".user_roles (role_id, name, created_at) VALUES
(15, 'Поддержка', '2025-05-13 12:24:28.911238');


--
-- TOC entry 5131 (class 0 OID 26496)
-- Dependencies: 222
-- Data for Name: users; Type: TABLE DATA; Schema: user; Owner:
postgres
--

INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (1, 'ivan_ivanov',
'ivan@example.com', 'Иван', 'Иванов', '2025-05-13 12:24:28.911238',
1);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (2, 'maria_petrova',
'maria@example.com', 'Мария', 'Петрова', '2025-05-13
12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (3, 'алексей_смирнов',
```

'alexey@example.com', 'Алексей', 'Смирнов', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (4, 'елена_кузнецова', 'elena@example.com', 'Елена', 'Кузнецова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (5, 'дмитрий_соколов', 'dmitry@example.com', 'Дмитрий', 'Соколов', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (6, 'anna_morozova', 'anna@example.com', 'Анна', 'Морозова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (7, 'pavel_volkov', 'pavel@example.com', 'Павел', 'Волков', '2025-05-13 12:24:28.911238', 3);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (8, 'olga_fedorova', 'olga@example.com', 'Ольга', 'Федорова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (9, 'sergey_kovalev', 'sergey@example.com', 'Сергей', 'Ковалев', '2025-05-13 12:24:28.911238', 4);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (10, 'natalia_belova', 'natalia@example.com', 'Наталья', 'Белова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (11, 'viktor_egorov', 'viktor@example.com', 'Виктор', 'Егоров', '2025-05-13 12:24:28.911238', 5);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (12, 'ekaterina_smirnova', 'ekaterina@example.com', 'Екатерина', 'Смирнова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (13, 'mikhail_popov', 'mikhail@example.com', 'Михаил', 'Попов', '2025-05-13 12:24:28.911238', 6);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (14, 'tatyana_ivanova', 'tatyana@example.com', 'Татьяна', 'Иванова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (15, 'andrey_zaytsev', 'andrey@example.com', 'Андрей', 'Зайцев', '2025-05-13 12:24:28.911238', 7);

```
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (16, 'alex_sokolov',
'alex.sokolov@example.com', 'Александр', 'Соколов', '2025-05-13
12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (17, 'olga_kuzmina',
'olga.kuzmina@example.com', 'Ольга', 'Кузьмина', '2025-05-13
12:24:28.911238', 3);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (18, 'dmitry_levin',
'dmitry.levin@example.com', 'Дмитрий', 'Левин', '2025-05-13
12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (19, 'natalia_orlova',
'natalia.orlova@example.com', 'Наталья', 'Орлова', '2025-05-13
12:24:28.911238', 4);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (20, 'sergey_moroz',
'sergey.moroz@example.com', 'Сергей', 'Мороз', '2025-05-13
12:24:28.911238', 5);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (21, 'anna_petrenko',
'anna.petrenko@example.com', 'Анна', 'Петренко', '2025-05-13
12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (22, 'viktor_novikov',
'viktor.novikov@example.com', 'Виктор', 'Новиков', '2025-05-13
12:24:28.911238', 6);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (23, 'elena_smirnova',
'elena.smirnova@example.com', 'Елена', 'Смирнова', '2025-05-13
12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (24, 'mikhail_gusev',
'mikhail.gusev@example.com', 'Михаил', 'Гусев', '2025-05-13
12:24:28.911238', 7);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (25, 'tatyana_vasileva',
'tatyana.vasileva@example.com', 'Татьяна', 'Васильева', '2025-05-13
12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (26, 'andrey_pavlov',
'andrey.pavlov@example.com', 'Андрей', 'Павлов', '2025-05-13
12:24:28.911238', 8);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (27, 'irina_frolova',
'irina.frolova@example.com', 'Ирина', 'Фролова', '2025-05-13
12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name,
last_name, updated_at, role_id) VALUES (28, 'pavel_krylov',
```

'pavel.krylov@example.com', 'Павел', 'Крылов', '2025-05-13 12:24:28.911238', 9);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (29, 'julia_romanova', 'julia.romanova@example.com', 'Юлия', 'Романова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (30, 'roman_zotov', 'roman.zotov@example.com', 'Роман', 'Зотов', '2025-05-13 12:24:28.911238', 10);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (31, 'ekaterina_bondarenko', 'ekaterina.bondarenko@example.com', 'Екатерина', 'Бондаренко', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (32, 'igor_sergeev', 'igor.sergeev@example.com', 'Игорь', 'Сергеев', '2025-05-13 12:24:28.911238', 11);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (33, 'maria_ivanova2', 'maria.ivanova2@example.com', 'Мария', 'Иванова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (34, 'alexey_kuznetsov', 'alexey.kuznetsov@example.com', 'Алексей', 'Кузнецов', '2025-05-13 12:24:28.911238', 12);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (35, 'olga_petrova2', 'olga.petrova2@example.com', 'Ольга', 'Петрова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (36, 'dmitry_smirnov', 'dmitry.smirnov@example.com', 'Дмитрий', 'Смирнов', '2025-05-13 12:24:28.911238', 13);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (37, 'natalia_kuzmina', 'natalia.kuzmina@example.com', 'Наталья', 'Кузьмина', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (38, 'sergey_orlov', 'sergey.orlov@example.com', 'Сергей', 'Орлов', '2025-05-13 12:24:28.911238', 14);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (39, 'anna_levina', 'anna.levina@example.com', 'Анна', 'Левина', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (40, 'viktor_morozov', 'viktor.morozov@example.com', 'Виктор', 'Морозов', '2025-05-13 12:24:28.911238', 15);

```
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (41, 'elena_novikova', 'elena.novikova@example.com', 'Елена', 'Новикова', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (44, 'andrey_pavlov2', 'andrey.pavlov2@example.com', 'Андрей', 'Павлов', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (46, 'pavel_krylov2', 'pavel.krylov2@example.com', 'Павел', 'Крылов', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (49, 'ekaterina_bondar', 'ekaterina.bondar@example.com', 'Екатерина', 'Бондарь', '2025-05-13 12:24:28.911238', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (48, 'roman_zotova', 'roman.zotova@example.com', 'Роман', 'Зотов', '2025-06-13 17:07:55.897985', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (50, 'igor_sergeeva', 'igor.sergeeva@example.com', 'Игорь', 'Сергеев', '2025-06-13 17:07:55.897985', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (42, 'mikhail_guseva', 'mikhail.guseva@example.com', 'Михаил', 'Гусев', '2025-06-13 17:08:40.322059', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (43, 'tatyana_vasiliev', 'tatyana.vasiliev@example.com', 'Татьяна', 'Васильева', '2025-06-13 17:09:07.038348', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (45, 'irina_frolov', 'irina.frolov@example.com', 'Ирина', 'Фролова', '2025-06-13 17:09:07.038348', 2);
INSERT INTO "user".users (user_id, username, email, first_name, last_name, updated_at, role_id) VALUES (47, 'julia_romanov', 'julia.romanov@example.com', 'Юлия', 'Романова', '2025-06-13 17:09:07.038348', 2);


--
-- TOC entry 5347 (class 0 OID 0)
-- Dependencies: 239
-- Name: course_topics_topic_id_seq; Type: SEQUENCE SET; Schema: course; Owner: postgres
--

SELECT pg_catalog.setval('course.course_topics_topic_id_seq', 2, true);
```

```
--
-- TOC entry 5348 (class 0 OID 0)
-- Dependencies: 237
-- Name: courses_course_id_seq; Type: SEQUENCE SET; Schema: course;
Owner: postgres
--

SELECT pg_catalog.setval('course.courses_course_id_seq', 50, true);


--
-- TOC entry 5349 (class 0 OID 0)
-- Dependencies: 223
-- Name: finance_categories_category_id_seq; Type: SEQUENCE SET;
Schema: finance; Owner: postgres
--

SELECT
pg_catalog.setval('finance.finance_categories_category_id_seq',
122, true);


--
-- TOC entry 5350 (class 0 OID 0)
-- Dependencies: 225
-- Name: finances_finance_id_seq; Type: SEQUENCE SET; Schema:
finance; Owner: postgres
--

SELECT pg_catalog.setval('finance.finances_finance_id_seq', 214,
true);


--
-- TOC entry 5351 (class 0 OID 0)
-- Dependencies: 231
-- Name: habit_categories_category_id_seq; Type: SEQUENCE SET;
Schema: habits; Owner: postgres
--

SELECT pg_catalog.setval('habits.habit_categories_category_id_seq',
15, true);


--
-- TOC entry 5352 (class 0 OID 0)
-- Dependencies: 235
-- Name: habit_logs_log_id_seq; Type: SEQUENCE SET; Schema: habits;
Owner: postgres
```

```
--

SELECT pg_catalog.setval('habits.habit_logs_log_id_seq', 15, true);


--
-- TOC entry 5353 (class 0 OID 0)
-- Dependencies: 233
-- Name: habits_habit_id_seq; Type: SEQUENCE SET; Schema: habits;
Owner: postgres
--

SELECT pg_catalog.setval('habits.habits_habit_id_seq', 15, true);


--
-- TOC entry 5354 (class 0 OID 0)
-- Dependencies: 227
-- Name: todo_categories_category_id_seq; Type: SEQUENCE SET;
Schema: todo; Owner: postgres
--

SELECT pg_catalog.setval('todo.todo_categories_category_id_seq',
15, true);


--
-- TOC entry 5355 (class 0 OID 0)
-- Dependencies: 229
-- Name: todos_todo_id_seq; Type: SEQUENCE SET; Schema: todo; Owner:
postgres
--

SELECT pg_catalog.setval('todo.todos_todo_id_seq', 15, true);


--
-- TOC entry 5356 (class 0 OID 0)
-- Dependencies: 258
-- Name: expense_categories_category_id_seq; Type: SEQUENCE SET;
Schema: trips; Owner: postgres
--

SELECT
pg_catalog.setval('trips.expense_categories_category_id_seq', 15,
true);


--
-- TOC entry 5357 (class 0 OID 0)
-- Dependencies: 246
```

```
-- Name: trip_expenses_expense_id_seq; Type: SEQUENCE SET; Schema:
trips; Owner: postgres
--

SELECT pg_catalog.setval('trips.trip_expenses_expense_id_seq', 15,
true);


--
-- TOC entry 5358 (class 0 OID 0)
-- Dependencies: 243
-- Name: trip_routes_route_id_seq; Type: SEQUENCE SET; Schema:
trips; Owner: postgres
--

SELECT pg_catalog.setval('trips.trip_routes_route_id_seq', 15,
true);


--
-- TOC entry 5359 (class 0 OID 0)
-- Dependencies: 241
-- Name: trips_trip_id_seq; Type: SEQUENCE SET; Schema: trips;
Owner: postgres
--

SELECT pg_catalog.setval('trips.trips_trip_id_seq', 15, true);


--
-- TOC entry 5360 (class 0 OID 0)
-- Dependencies: 221
-- Name: users_user_id_seq; Type: SEQUENCE SET; Schema: user; Owner:
postgres
--

SELECT pg_catalog.setval('"user".users_user_id_seq', 5, true);


--
-- TOC entry 4935 (class 2606 OID 27699)
-- Name: course_statuses course_statuses_pkey; Type: CONSTRAINT;
Schema: course; Owner: postgres
--

ALTER TABLE ONLY course.course_statuses
    ADD CONSTRAINT course_statuses_pkey PRIMARY KEY (status_id);


--
-- TOC entry 4913 (class 2606 OID 26816)
```

```
-- Name: course_topics course_topics_pkey; Type: CONSTRAINT; Schema:
course; Owner: postgres
--

ALTER TABLE ONLY course.course_topics
    ADD CONSTRAINT course_topics_pkey PRIMARY KEY (topic_id);


--
-- TOC entry 4908 (class 2606 OID 26801)
-- Name: courses courses_pkey; Type: CONSTRAINT; Schema: course;
Owner: postgres
--

ALTER TABLE ONLY course.courses
    ADD CONSTRAINT courses_pkey PRIMARY KEY (course_id);


--
-- TOC entry 4910 (class 2606 OID 26921)
-- Name: courses courses_unique; Type: CONSTRAINT; Schema: course;
Owner: postgres
--

ALTER TABLE ONLY course.courses
    ADD CONSTRAINT courses_unique UNIQUE (user_id, title);


--
-- TOC entry 4874 (class 2606 OID 26518)
-- Name: finance_categories finance_categories_pkey; Type:
CONSTRAINT; Schema: finance; Owner: postgres
--

ALTER TABLE ONLY finance.finance_categories
    ADD CONSTRAINT finance_categories_pkey PRIMARY KEY
(category_id);


--
-- TOC entry 4929 (class 2606 OID 27226)
-- Name: finance_types finance_types_pkey; Type: CONSTRAINT; Schema:
finance; Owner: postgres
--

ALTER TABLE ONLY finance.finance_types
    ADD CONSTRAINT finance_types_pkey PRIMARY KEY (type_id);


--
-- TOC entry 4876 (class 2606 OID 26535)
```

```
-- Name: finances finances_pkey; Type: CONSTRAINT; Schema: finance;
Owner: postgres
--

ALTER TABLE ONLY finance.finances
    ADD CONSTRAINT finances_pkey PRIMARY KEY (finance_id);


--
-- TOC entry 4891 (class 2606 OID 26716)
-- Name: habit_categories habit_categories_pkey; Type: CONSTRAINT;
Schema: habits; Owner: postgres
--

ALTER TABLE ONLY habits.habit_categories
    ADD CONSTRAINT habit_categories_pkey PRIMARY KEY (category_id);


--
-- TOC entry 4893 (class 2606 OID 26718)
-- Name: habit_categories habit_categories_unique; Type: CONSTRAINT;
Schema: habits; Owner: postgres
--

ALTER TABLE ONLY habits.habit_categories
    ADD CONSTRAINT habit_categories_unique UNIQUE (user_id, name);


--
-- TOC entry 4941 (class 2606 OID 27723)
-- Name: habit_frequencies habit_frequencies_pkey; Type: CONSTRAINT;
Schema: habits; Owner: postgres
--

ALTER TABLE ONLY habits.habit_frequencies
    ADD    CONSTRAINT    habit_frequencies_pkey    PRIMARY    KEY
(frequency_id);


--
-- TOC entry 4901 (class 2606 OID 26752)
--  Name:  habit_logs  habit_logs_pkey;  Type:  CONSTRAINT;  Schema:
habits; Owner: postgres
--

ALTER TABLE ONLY habits.habit_logs
    ADD CONSTRAINT habit_logs_pkey PRIMARY KEY (log_id);


--
-- TOC entry 4896 (class 2606 OID 26732)
```

```
-- Name: habits habits_pkey; Type: CONSTRAINT; Schema: habits;
Owner: postgres
--

ALTER TABLE ONLY habits.habits
    ADD CONSTRAINT habits_pkey PRIMARY KEY (habit_id);


--
-- TOC entry 4898 (class 2606 OID 26923)
-- Name: habits habits_unique; Type: CONSTRAINT; Schema: habits;
Owner: postgres
--

ALTER TABLE ONLY habits.habits
    ADD CONSTRAINT habits_unique UNIQUE (user_id, name);


--
-- TOC entry 4906 (class 2606 OID 26754)
-- Name: habit_logs unique_habit_log; Type: CONSTRAINT; Schema:
habits; Owner: postgres
--

ALTER TABLE ONLY habits.habit_logs
    ADD CONSTRAINT unique_habit_log UNIQUE (habit_id, log_date);


--
-- TOC entry 4933 (class 2606 OID 27691)
-- Name: task_priorities task_priorities_pkey; Type: CONSTRAINT;
Schema: todo; Owner: postgres
--

ALTER TABLE ONLY todo.task_priorities
    ADD CONSTRAINT task_priorities_pkey PRIMARY KEY (priority_id);


--
-- TOC entry 4931 (class 2606 OID 27683)
-- Name: task_statuses task_statuses_pkey; Type: CONSTRAINT; Schema:
todo; Owner: postgres
--

ALTER TABLE ONLY todo.task_statuses
    ADD CONSTRAINT task_statuses_pkey PRIMARY KEY (status_id);


--
-- TOC entry 4881 (class 2606 OID 26680)
```

```
-- Name: todo_categories todo_categories_pkey; Type: CONSTRAINT;
Schema: todo; Owner: postgres
--

ALTER TABLE ONLY todo.todo_categories
    ADD CONSTRAINT todo_categories_pkey PRIMARY KEY (category_id);


--
-- TOC entry 4887 (class 2606 OID 26697)
-- Name: todos todos_pkey; Type: CONSTRAINT; Schema: todo; Owner:
postgres
--

ALTER TABLE ONLY todo.todos
    ADD CONSTRAINT todos_pkey PRIMARY KEY (todo_id);


--
-- TOC entry 4889 (class 2606 OID 27782)
-- Name: todos todos_unique; Type: CONSTRAINT; Schema: todo; Owner:
postgres
--

ALTER TABLE ONLY todo.todos
    ADD CONSTRAINT todos_unique UNIQUE (user_id, category_id, task);


--
-- TOC entry 4939 (class 2606 OID 27715)
--   Name:   expense_categories   expense_categories_pkey;   Type:
CONSTRAINT; Schema: trips; Owner: postgres
--

ALTER TABLE ONLY trips.expense_categories
    ADD    CONSTRAINT    expense_categories_pkey    PRIMARY    KEY
(category_id);


--
-- TOC entry 4937 (class 2606 OID 27707)
--  Name:  transportation_types  transportation_types_pkey;  Type:
CONSTRAINT; Schema: trips; Owner: postgres
--

ALTER TABLE ONLY trips.transportation_types
    ADD CONSTRAINT transportation_types_pkey PRIMARY KEY (type_id);


--
-- TOC entry 4927 (class 2606 OID 26887)
```

```
-- Name: trip_expenses trip_expenses_pkey; Type: CONSTRAINT; Schema:
trips; Owner: postgres
--

ALTER TABLE ONLY trips.trip_expenses
    ADD CONSTRAINT trip_expenses_pkey PRIMARY KEY (expense_id);


--
-- TOC entry 4922 (class 2606 OID 26865)
-- Name: trip_routes trip_routes_pkey; Type: CONSTRAINT; Schema:
trips; Owner: postgres
--

ALTER TABLE ONLY trips.trip_routes
    ADD CONSTRAINT trip_routes_pkey PRIMARY KEY (route_id);


--
-- TOC entry 4919 (class 2606 OID 26852)
-- Name: trips trips_pkey; Type: CONSTRAINT; Schema: trips; Owner:
postgres
--

ALTER TABLE ONLY trips.trips
    ADD CONSTRAINT trips_pkey PRIMARY KEY (trip_id);


--
-- TOC entry 4924 (class 2606 OID 26867)
-- Name: trip_routes unique_route_order; Type: CONSTRAINT; Schema:
trips; Owner: postgres
--

ALTER TABLE ONLY trips.trip_routes
    ADD CONSTRAINT unique_route_order UNIQUE (trip_id,
location_order);


--
-- TOC entry 4943 (class 2606 OID 27731)
-- Name: user_roles user_roles_pkey; Type: CONSTRAINT; Schema: user;
Owner: postgres
--

ALTER TABLE ONLY "user".user_roles
    ADD CONSTRAINT user_roles_pkey PRIMARY KEY (role_id);


--
-- TOC entry 4868 (class 2606 OID 26510)
```

```
-- Name: users users_email_unique; Type: CONSTRAINT; Schema: user;
Owner: postgres
--

ALTER TABLE ONLY "user".users
    ADD CONSTRAINT users_email_unique UNIQUE (email);


--
-- TOC entry 4870 (class 2606 OID 26506)
-- Name: users users_pkey; Type: CONSTRAINT; Schema: user; Owner:
postgres
--

ALTER TABLE ONLY "user".users
    ADD CONSTRAINT users_pkey PRIMARY KEY (user_id);


--
-- TOC entry 4872 (class 2606 OID 26508)
-- Name: users users_username_unique; Type: CONSTRAINT; Schema:
user; Owner: postgres
--

ALTER TABLE ONLY "user".users
    ADD CONSTRAINT users_username_unique UNIQUE (username);


--
-- TOC entry 4914 (class 1259 OID 27774)
-- Name: idx_course_topics_completed_date; Type: INDEX; Schema:
course; Owner: postgres
--

CREATE INDEX idx_course_topics_completed_date ON
course.course_topics USING btree (completed_date);


--
-- TOC entry 4915 (class 1259 OID 26898)
-- Name: idx_course_topics_course_id; Type: INDEX; Schema: course;
Owner: postgres
--

CREATE INDEX idx_course_topics_course_id ON course.course_topics
USING btree (course_id);


--
-- TOC entry 4916 (class 1259 OID 27822)
```

```
-- Name: idx_course_topics_grade; Type: INDEX; Schema: course;
Owner: postgres
--

CREATE INDEX idx_course_topics_grade ON course.course_topics USING
btree (grade);


--
-- TOC entry 4911 (class 1259 OID 26917)
-- Name: idx_courses_user_id; Type: INDEX; Schema: course; Owner:
postgres
--

CREATE INDEX idx_courses_user_id ON course.courses USING btree
(user_id);


--
-- TOC entry 4877 (class 1259 OID 26894)
-- Name: idx_finances_transaction_date; Type: INDEX; Schema:
finance; Owner: postgres
--

CREATE INDEX idx_finances_transaction_date ON finance.finances USING
btree (transaction_date);


--
-- TOC entry 4878 (class 1259 OID 26893)
-- Name: idx_finances_user_id; Type: INDEX; Schema: finance; Owner:
postgres
--

CREATE INDEX idx_finances_user_id ON finance.finances USING btree
(user_id);


--
-- TOC entry 4894 (class 1259 OID 26981)
-- Name: idx_habit_categories_user_id; Type: INDEX; Schema: habits;
Owner: postgres
--

CREATE INDEX idx_habit_categories_user_id ON
habits.habit_categories USING btree (user_id);


--
-- TOC entry 4902 (class 1259 OID 26897)
```

```
-- Name: idx_habit_logs_habit_id; Type: INDEX; Schema: habits;
Owner: postgres
--

CREATE INDEX idx_habit_logs_habit_id ON habits.habit_logs USING
btree (habit_id);


--
-- TOC entry 4903 (class 1259 OID 27780)
-- Name: idx_habit_logs_is_completed; Type: INDEX; Schema: habits;
Owner: postgres
--

CREATE INDEX idx_habit_logs_is_completed ON habits.habit_logs USING
btree (is_completed);


--
-- TOC entry 4904 (class 1259 OID 26919)
-- Name: idx_habit_logs_log_date; Type: INDEX; Schema: habits;
Owner: postgres
--

CREATE INDEX idx_habit_logs_log_date ON habits.habit_logs USING
btree (log_date);


--
-- TOC entry 4899 (class 1259 OID 26918)
-- Name: idx_habits_user_id; Type: INDEX; Schema: habits; Owner:
postgres
--

CREATE INDEX idx_habits_user_id ON habits.habits USING btree
(user_id);


--
-- TOC entry 4879 (class 1259 OID 26980)
-- Name: idx_todo_categories_user_id; Type: INDEX; Schema: todo;
Owner: postgres
--

CREATE INDEX idx_todo_categories_user_id ON todo.todo_categories
USING btree (user_id);


--
-- TOC entry 4882 (class 1259 OID 27773)
```

```
-- Name: idx_todos_completed_date; Type: INDEX; Schema: todo; Owner:
postgres
--

CREATE INDEX idx_todos_completed_date ON todo.todos USING btree
(completed_date);


--
-- TOC entry 4883 (class 1259 OID 26896)
-- Name: idx_todos_due_date; Type: INDEX; Schema: todo; Owner:
postgres
--

CREATE INDEX idx_todos_due_date ON todo.todos USING btree
(due_date);


--
-- TOC entry 4884 (class 1259 OID 27772)
-- Name: idx_todos_is_completed; Type: INDEX; Schema: todo; Owner:
postgres
--

CREATE INDEX idx_todos_is_completed ON todo.todos USING btree
(is_completed);


--
-- TOC entry 4885 (class 1259 OID 26895)
-- Name: idx_todos_user_id; Type: INDEX; Schema: todo; Owner:
postgres
--

CREATE INDEX idx_todos_user_id ON todo.todos USING btree (user_id);


--
-- TOC entry 4925 (class 1259 OID 26916)
-- Name: idx_trip_expenses_route_id; Type: INDEX; Schema: trips;
Owner: postgres
--

CREATE INDEX idx_trip_expenses_route_id ON trips.trip_expenses USING
btree (route_id);


--
-- TOC entry 4920 (class 1259 OID 26915)
-- Name: idx_trip_routes_trip_id; Type: INDEX; Schema: trips; Owner:
postgres
```

```
--

CREATE INDEX idx_trip_routes_trip_id ON trips.trip_routes USING
btree (trip_id);


--
-- TOC entry 4917 (class 1259 OID 26979)
-- Name: idx_trips_user_id; Type: INDEX; Schema: trips; Owner:
postgres
--

CREATE INDEX idx_trips_user_id ON trips.trips USING btree (user_id);


--
-- TOC entry 4866 (class 1259 OID 26977)
-- Name: idx_users_user_id; Type: INDEX; Schema: user; Owner:
postgres
--

CREATE INDEX idx_users_user_id ON "user".users USING btree
(user_id);


--
-- TOC entry 4978 (class 2620 OID 28730)
-- Name: course_topics course_topics_status_trigger; Type: TRIGGER;
Schema: course; Owner: postgres
--

CREATE TRIGGER course_topics_status_trigger AFTER INSERT OR UPDATE
OF completed_date ON course.course_topics FOR EACH ROW EXECUTE
FUNCTION course.update_course_status();


--
-- TOC entry 4979 (class 2620 OID 26957)
-- Name: course_topics course_topics_updated_at_trigger; Type:
TRIGGER; Schema: course; Owner: postgres
--

CREATE TRIGGER course_topics_updated_at_trigger BEFORE UPDATE ON
course.course_topics FOR EACH ROW EXECUTE FUNCTION
public.update_updated_at();


--
-- TOC entry 4977 (class 2620 OID 26954)
-- Name: courses courses_updated_at_trigger; Type: TRIGGER; Schema:
course; Owner: postgres
```

```
--

CREATE TRIGGER courses_updated_at_trigger BEFORE UPDATE ON course.courses FOR EACH ROW EXECUTE FUNCTION public.update_updated_at();


--
-- TOC entry 4968 (class 2620 OID 26930)
-- Name: finance_categories finance_categories_updated_at_trigger; Type: TRIGGER; Schema: finance; Owner: postgres
--

CREATE TRIGGER finance_categories_updated_at_trigger BEFORE UPDATE ON finance.finance_categories FOR EACH ROW EXECUTE FUNCTION public.update_updated_at();


--
-- TOC entry 4969 (class 2620 OID 27771)
-- Name: finances finances_amount_trigger; Type: TRIGGER; Schema: finance; Owner: postgres
--

CREATE TRIGGER finances_amount_trigger BEFORE INSERT OR UPDATE ON finance.finances FOR EACH ROW EXECUTE FUNCTION finance.check_finance_amount();


--
-- TOC entry 4970 (class 2620 OID 26933)
-- Name: finances finances_updated_at_trigger; Type: TRIGGER; Schema: finance; Owner: postgres
--

CREATE TRIGGER finances_updated_at_trigger BEFORE UPDATE ON finance.finances FOR EACH ROW EXECUTE FUNCTION public.update_updated_at();


--
-- TOC entry 4974 (class 2620 OID 26945)
-- Name: habit_categories habit_categories_updated_at_trigger; Type: TRIGGER; Schema: habits; Owner: postgres
--

CREATE TRIGGER habit_categories_updated_at_trigger BEFORE UPDATE ON habits.habit_categories FOR EACH ROW EXECUTE FUNCTION public.update_updated_at();
```

```
--
-- TOC entry 4976 (class 2620 OID 26951)
-- Name: habit_logs habit_logs_updated_at_trigger; Type: TRIGGER;
Schema: habits; Owner: postgres
--

CREATE TRIGGER habit_logs_updated_at_trigger BEFORE UPDATE ON
habits.habit_logs FOR EACH ROW EXECUTE FUNCTION
public.update_updated_at();


--
-- TOC entry 4975 (class 2620 OID 26948)
-- Name: habits habits_updated_at_trigger; Type: TRIGGER; Schema:
habits; Owner: postgres
--

CREATE TRIGGER habits_updated_at_trigger BEFORE UPDATE ON
habits.habits FOR EACH ROW EXECUTE FUNCTION
public.update_updated_at();


--
-- TOC entry 4971 (class 2620 OID 26939)
-- Name: todo_categories todo_categories_updated_at_trigger; Type:
TRIGGER; Schema: todo; Owner: postgres
--

CREATE TRIGGER todo_categories_updated_at_trigger BEFORE UPDATE ON
todo.todo_categories FOR EACH ROW EXECUTE FUNCTION
public.update_updated_at();


--
-- TOC entry 4972 (class 2620 OID 26709)
-- Name: todos todos_completed_date_trigger; Type: TRIGGER; Schema:
todo; Owner: postgres
--

CREATE TRIGGER todos_completed_date_trigger BEFORE UPDATE ON
todo.todos FOR EACH ROW EXECUTE FUNCTION todo.set_completed_date();


--
-- TOC entry 4973 (class 2620 OID 26942)
-- Name: todos todos_updated_at_trigger; Type: TRIGGER; Schema:
todo; Owner: postgres
--

CREATE TRIGGER todos_updated_at_trigger BEFORE UPDATE ON todo.todos
FOR EACH ROW EXECUTE FUNCTION public.update_updated_at();
```

```
--
-- TOC entry 4982 (class 2620 OID 26966)
-- Name: trip_expenses trip_expenses_updated_at_trigger; Type: TRIGGER; Schema: trips; Owner: postgres
--

CREATE TRIGGER trip_expenses_updated_at_trigger BEFORE UPDATE ON trips.trip_expenses FOR EACH ROW EXECUTE FUNCTION public.update_updated_at();


--
-- TOC entry 4981 (class 2620 OID 26963)
-- Name: trip_routes trip_routes_updated_at_trigger; Type: TRIGGER; Schema: trips; Owner: postgres
--

CREATE TRIGGER trip_routes_updated_at_trigger BEFORE UPDATE ON trips.trip_routes FOR EACH ROW EXECUTE FUNCTION public.update_updated_at();


--
-- TOC entry 4980 (class 2620 OID 26960)
-- Name: trips trips_updated_at_trigger; Type: TRIGGER; Schema: trips; Owner: postgres
--

CREATE TRIGGER trips_updated_at_trigger BEFORE UPDATE ON trips.trips FOR EACH ROW EXECUTE FUNCTION public.update_updated_at();


--
-- TOC entry 4967 (class 2620 OID 26927)
-- Name: users users_updated_at_trigger; Type: TRIGGER; Schema: user; Owner: postgres
--

CREATE TRIGGER users_updated_at_trigger BEFORE UPDATE ON "user".users FOR EACH ROW EXECUTE FUNCTION public.update_updated_at();


--
-- TOC entry 4960 (class 2606 OID 27059)
-- Name: course_topics course_topics_course_id_fkey; Type: FK CONSTRAINT; Schema: course; Owner: postgres
--
```

```
ALTER TABLE ONLY course.course_topics
    ADD CONSTRAINT course_topics_course_id_fkey FOREIGN KEY
(course_id) REFERENCES course.courses(course_id) ON DELETE CASCADE;


--
-- TOC entry 4961 (class 2606 OID 27054)
-- Name: course_topics course_topics_user_id_fkey; Type: FK
CONSTRAINT; Schema: course; Owner: postgres
--

ALTER TABLE ONLY course.course_topics
    ADD CONSTRAINT course_topics_user_id_fkey FOREIGN KEY (user_id)
REFERENCES "user".users(user_id) ON DELETE CASCADE;


--
-- TOC entry 4958 (class 2606 OID 27049)
-- Name: courses courses_user_id_fkey; Type: FK CONSTRAINT; Schema:
course; Owner: postgres
--

ALTER TABLE ONLY course.courses
    ADD CONSTRAINT courses_user_id_fkey FOREIGN KEY (user_id)
REFERENCES "user".users(user_id) ON DELETE CASCADE;


--
-- TOC entry 4959 (class 2606 OID 27739)
-- Name: courses fk_courses_status; Type: FK CONSTRAINT; Schema:
course; Owner: postgres
--

ALTER TABLE ONLY course.courses
    ADD CONSTRAINT fk_courses_status FOREIGN KEY (status_id)
REFERENCES course.course_statuses(status_id);


--
-- TOC entry 4945 (class 2606 OID 26994)
-- Name: finance_categories finance_categories_user_id_fkey; Type:
FK CONSTRAINT; Schema: finance; Owner: postgres
--

ALTER TABLE ONLY finance.finance_categories
    ADD CONSTRAINT finance_categories_user_id_fkey FOREIGN KEY
(user_id) REFERENCES "user".users(user_id) ON DELETE CASCADE;


--
-- TOC entry 4947 (class 2606 OID 27004)
```

```
-- Name: finances finances_category_id_fkey; Type: FK CONSTRAINT;
Schema: finance; Owner: postgres
--

ALTER TABLE ONLY finance.finances
    ADD CONSTRAINT finances_category_id_fkey FOREIGN KEY
(category_id) REFERENCES finance.finance_categories(category_id) ON
DELETE CASCADE;


--
-- TOC entry 4948 (class 2606 OID 26999)
-- Name: finances finances_user_id_fkey; Type: FK CONSTRAINT;
Schema: finance; Owner: postgres
--

ALTER TABLE ONLY finance.finances
    ADD CONSTRAINT finances_user_id_fkey FOREIGN KEY (user_id)
REFERENCES "user".users(user_id) ON DELETE CASCADE;


--
-- TOC entry 4946 (class 2606 OID 27229)
-- Name: finance_categories fk_finance_categories_type; Type: FK
CONSTRAINT; Schema: finance; Owner: postgres
--

ALTER TABLE ONLY finance.finance_categories
    ADD CONSTRAINT fk_finance_categories_type FOREIGN KEY (type_id)
REFERENCES finance.finance_types(type_id);


--
-- TOC entry 4954 (class 2606 OID 27759)
-- Name: habits fk_habits_frequency; Type: FK CONSTRAINT; Schema:
habits; Owner: postgres
--

ALTER TABLE ONLY habits.habits
    ADD CONSTRAINT fk_habits_frequency FOREIGN KEY (frequency_id)
REFERENCES habits.habit_frequencies(frequency_id);


--
-- TOC entry 4953 (class 2606 OID 27029)
-- Name: habit_categories habit_categories_user_id_fkey; Type: FK
CONSTRAINT; Schema: habits; Owner: postgres
--

ALTER TABLE ONLY habits.habit_categories
```

```
    ADD CONSTRAINT habit_categories_user_id_fkey FOREIGN KEY
(user_id) REFERENCES "user".users(user_id) ON DELETE CASCADE;


--
-- TOC entry 4957 (class 2606 OID 27044)
-- Name: habit_logs habit_logs_habit_id_fkey; Type: FK CONSTRAINT;
Schema: habits; Owner: postgres
--

ALTER TABLE ONLY habits.habit_logs
    ADD CONSTRAINT habit_logs_habit_id_fkey FOREIGN KEY (habit_id)
REFERENCES habits.habits(habit_id) ON DELETE CASCADE;


--
-- TOC entry 4955 (class 2606 OID 27039)
-- Name: habits habits_category_id_fkey; Type: FK CONSTRAINT;
Schema: habits; Owner: postgres
--

ALTER TABLE ONLY habits.habits
    ADD CONSTRAINT habits_category_id_fkey FOREIGN KEY (category_id)
REFERENCES habits.habit_categories(category_id) ON DELETE CASCADE;


--
-- TOC entry 4956 (class 2606 OID 27034)
-- Name: habits habits_user_id_fkey; Type: FK CONSTRAINT; Schema:
habits; Owner: postgres
--

ALTER TABLE ONLY habits.habits
    ADD CONSTRAINT habits_user_id_fkey FOREIGN KEY (user_id)
REFERENCES "user".users(user_id) ON DELETE CASCADE;


--
-- TOC entry 4950 (class 2606 OID 27734)
-- Name: todos fk_todos_task_priority; Type: FK CONSTRAINT; Schema:
todo; Owner: postgres
--

ALTER TABLE ONLY todo.todos
    ADD CONSTRAINT fk_todos_task_priority FOREIGN KEY
(task_priority_id) REFERENCES todo.task_priorities(priority_id);


--
-- TOC entry 4949 (class 2606 OID 27014)
```

```
-- Name: todo_categories todo_categories_user_id_fkey; Type: FK
CONSTRAINT; Schema: todo; Owner: postgres
--

ALTER TABLE ONLY todo.todo_categories
    ADD CONSTRAINT todo_categories_user_id_fkey FOREIGN KEY
(user_id) REFERENCES "user".users(user_id) ON DELETE CASCADE;


--
-- TOC entry 4951 (class 2606 OID 27024)
-- Name: todos todos_category_id_fkey; Type: FK CONSTRAINT; Schema:
todo; Owner: postgres
--

ALTER TABLE ONLY todo.todos
    ADD CONSTRAINT todos_category_id_fkey FOREIGN KEY (category_id)
REFERENCES todo.todo_categories(category_id) ON DELETE CASCADE;


--
-- TOC entry 4952 (class 2606 OID 27019)
-- Name: todos todos_user_id_fkey; Type: FK CONSTRAINT; Schema:
todo; Owner: postgres
--

ALTER TABLE ONLY todo.todos
    ADD CONSTRAINT todos_user_id_fkey FOREIGN KEY (user_id)
REFERENCES "user".users(user_id) ON DELETE CASCADE;


--
-- TOC entry 4965 (class 2606 OID 27754)
-- Name: trip_expenses fk_trip_expenses_category; Type: FK
CONSTRAINT; Schema: trips; Owner: postgres
--

ALTER TABLE ONLY trips.trip_expenses
    ADD CONSTRAINT fk_trip_expenses_category FOREIGN KEY
(expense_category_id) REFERENCES
trips.expense_categories(category_id);


--
-- TOC entry 4963 (class 2606 OID 27749)
-- Name: trip_routes fk_trip_routes_transportation_type; Type: FK
CONSTRAINT; Schema: trips; Owner: postgres
--

ALTER TABLE ONLY trips.trip_routes
```

```
    ADD CONSTRAINT fk_trip_routes_transportation_type FOREIGN KEY
(transportation_type_id)                                REFERENCES
trips.transportation_types(type_id);


--
-- TOC entry 4966 (class 2606 OID 27074)
--  Name:  trip_expenses  trip_expenses_route_id_fkey;  Type:  FK
CONSTRAINT; Schema: trips; Owner: postgres
--

ALTER TABLE ONLY trips.trip_expenses
    ADD   CONSTRAINT   trip_expenses_route_id_fkey   FOREIGN   KEY
(route_id) REFERENCES trips.trip_routes(route_id) ON DELETE CASCADE;


--
-- TOC entry 4964 (class 2606 OID 27069)
-- Name: trip_routes trip_routes_trip_id_fkey; Type: FK CONSTRAINT;
Schema: trips; Owner: postgres
--

ALTER TABLE ONLY trips.trip_routes
    ADD CONSTRAINT trip_routes_trip_id_fkey FOREIGN KEY (trip_id)
REFERENCES trips.trips(trip_id) ON DELETE CASCADE;


--
-- TOC entry 4962 (class 2606 OID 27064)
-- Name: trips trips_user_id_fkey; Type: FK CONSTRAINT; Schema:
trips; Owner: postgres
--

ALTER TABLE ONLY trips.trips
    ADD  CONSTRAINT  trips_user_id_fkey  FOREIGN  KEY  (user_id)
REFERENCES "user".users(user_id) ON DELETE CASCADE;


--
-- TOC entry 4944 (class 2606 OID 27765)
-- Name: users fk_users_role; Type: FK CONSTRAINT; Schema: user;
Owner: postgres
--

ALTER TABLE ONLY "user".users
    ADD CONSTRAINT fk_users_role FOREIGN KEY (role_id) REFERENCES
"user".user_roles(role_id);


-- Completed on 2025-06-16 15:38:18
```

```
--
-- PostgreSQL database dump complete
--
```