Getting Started with C on Ubuntu

1. Login to the Ubuntu desktop with the assigned password.
2. Press Ctrl + Alt + T to open the Terminal.

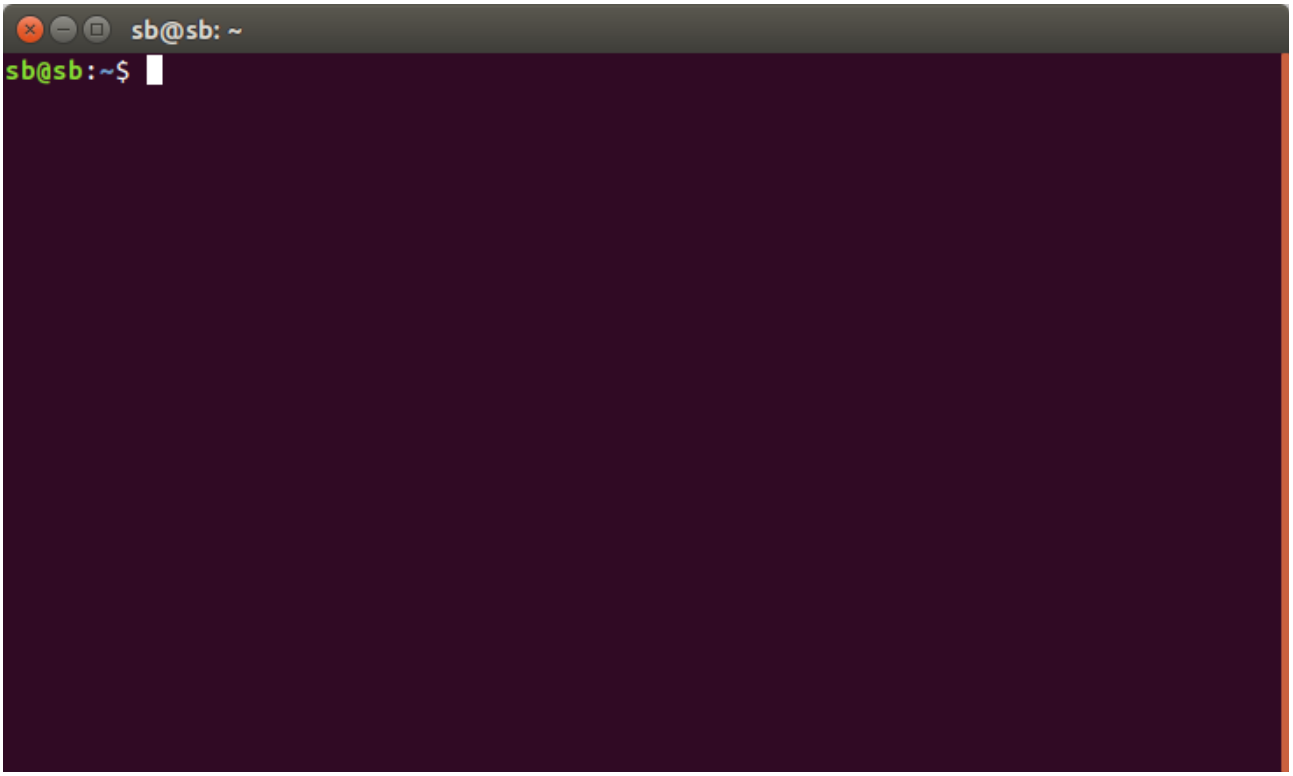

3. Type pwd to view the present working directory.

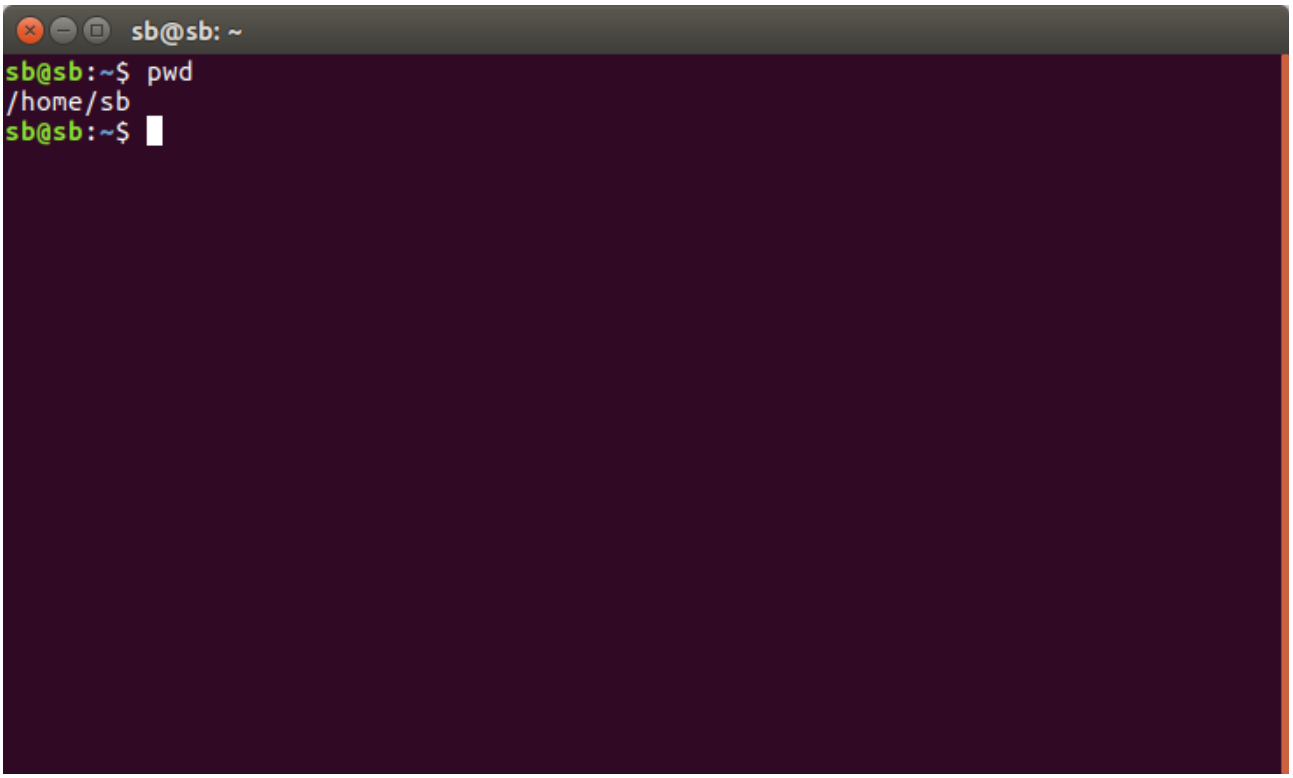

4. Type ls to view the list of files and directories.

```
sb@sb: ~
sb@sb:~$ pwd
/home/sb
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python  Templates
Documents  Dropbox    Music             Public    snap    Videos
sb@sb:~$
```

5. Create a directory with the mkdir command.

```
sb@sb: ~
sb@sb:~$ pwd
/home/sb
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python  Templates
Documents  Dropbox    Music             Public    snap    Videos
sb@sb:~$ mkdir saprativa
sb@sb:~$
```

6. Typing ls once more will show the newly created directory in the list.

```
sb@sb: ~
sb@sb:~$ pwd
/home/sb
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python  Templates
Documents  Dropbox    Music             Public    snap    Videos
sb@sb:~$ mkdir saprativa
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python     snap       Videos
Documents  Dropbox    Music             Public    saprativa  Templates
sb@sb:~$
```

7. Use the cd command to go inside the new directory.

```
sb@sb: ~/saprativa
sb@sb:~$ pwd
/home/sb
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python  Templates
Documents  Dropbox    Music             Public    snap    Videos
sb@sb:~$ mkdir saprativa
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python     snap       Videos
Documents  Dropbox    Music             Public    saprativa  Templates
sb@sb:~$ cd saprativa
sb@sb:~/saprativa$
```

8. Use the gedit command to create the hello.c file.

```
sb@sb: ~/saprativa
sb@sb:~$ pwd
/home/sb
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python  Templates
Documents  Dropbox    Music             Public    snap    Videos
sb@sb:~$ mkdir saprativa
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python     snap       Videos
Documents  Dropbox    Music             Public    saprativa  Templates
sb@sb:~$ cd saprativa
sb@sb:~/saprativa$ gedit hello.c
```

9. Type the program in the editor, save and close the editor.

```
hello.c (~/saprativa) - gedit
Open                                                    Save
#include <stdio.h>

int main()
{
    printf("Hello World!\n");
    return 0;
}
C   Tab Width: 4   Ln 7, Col 2   INS
```

10. Go back to the Terminal and use gcc to compile the program.

```
sb@sb: ~/saprativa
sb@sb:~$ pwd
/home/sb
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python  Templates
Documents  Dropbox    Music             Public    snap    Videos
sb@sb:~$ mkdir saprativa
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python     snap       Videos
Documents  Dropbox    Music             Public    saprativa  Templates
sb@sb:~$ cd saprativa
sb@sb:~/saprativa$ gedit hello.c
sb@sb:~/saprativa$ gcc hello.c
sb@sb:~/saprativa$
```

11. With the ls command you can see that the compiler has created the a.out file.

```
sb@sb: ~/saprativa
sb@sb:~$ pwd
/home/sb
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python  Templates
Documents  Dropbox    Music             Public    snap    Videos
sb@sb:~$ mkdir saprativa
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python     snap       Videos
Documents  Dropbox    Music             Public    saprativa  Templates
sb@sb:~$ cd saprativa
sb@sb:~/saprativa$ gedit hello.c
sb@sb:~/saprativa$ gcc hello.c
sb@sb:~/saprativa$ ls
a.out  hello.c
sb@sb:~/saprativa$
```

12. Run the program to view the output.

```
sb@sb: ~/saprativa
sb@sb:~$ pwd
/home/sb
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python  Templates
Documents  Dropbox    Music             Public    snap    Videos
sb@sb:~$ mkdir saprativa
sb@sb:~$ ls
Desktop    Downloads  examples.desktop  Pictures  python     snap       Videos
Documents  Dropbox    Music             Public    saprativa  Templates
sb@sb:~$ cd saprativa
sb@sb:~/saprativa$ gedit hello.c
sb@sb:~/saprativa$ gcc hello.c
sb@sb:~/saprativa$ ls
a.out  hello.c
sb@sb:~/saprativa$ ./a.out
Hello World!
sb@sb:~/saprativa$
```