
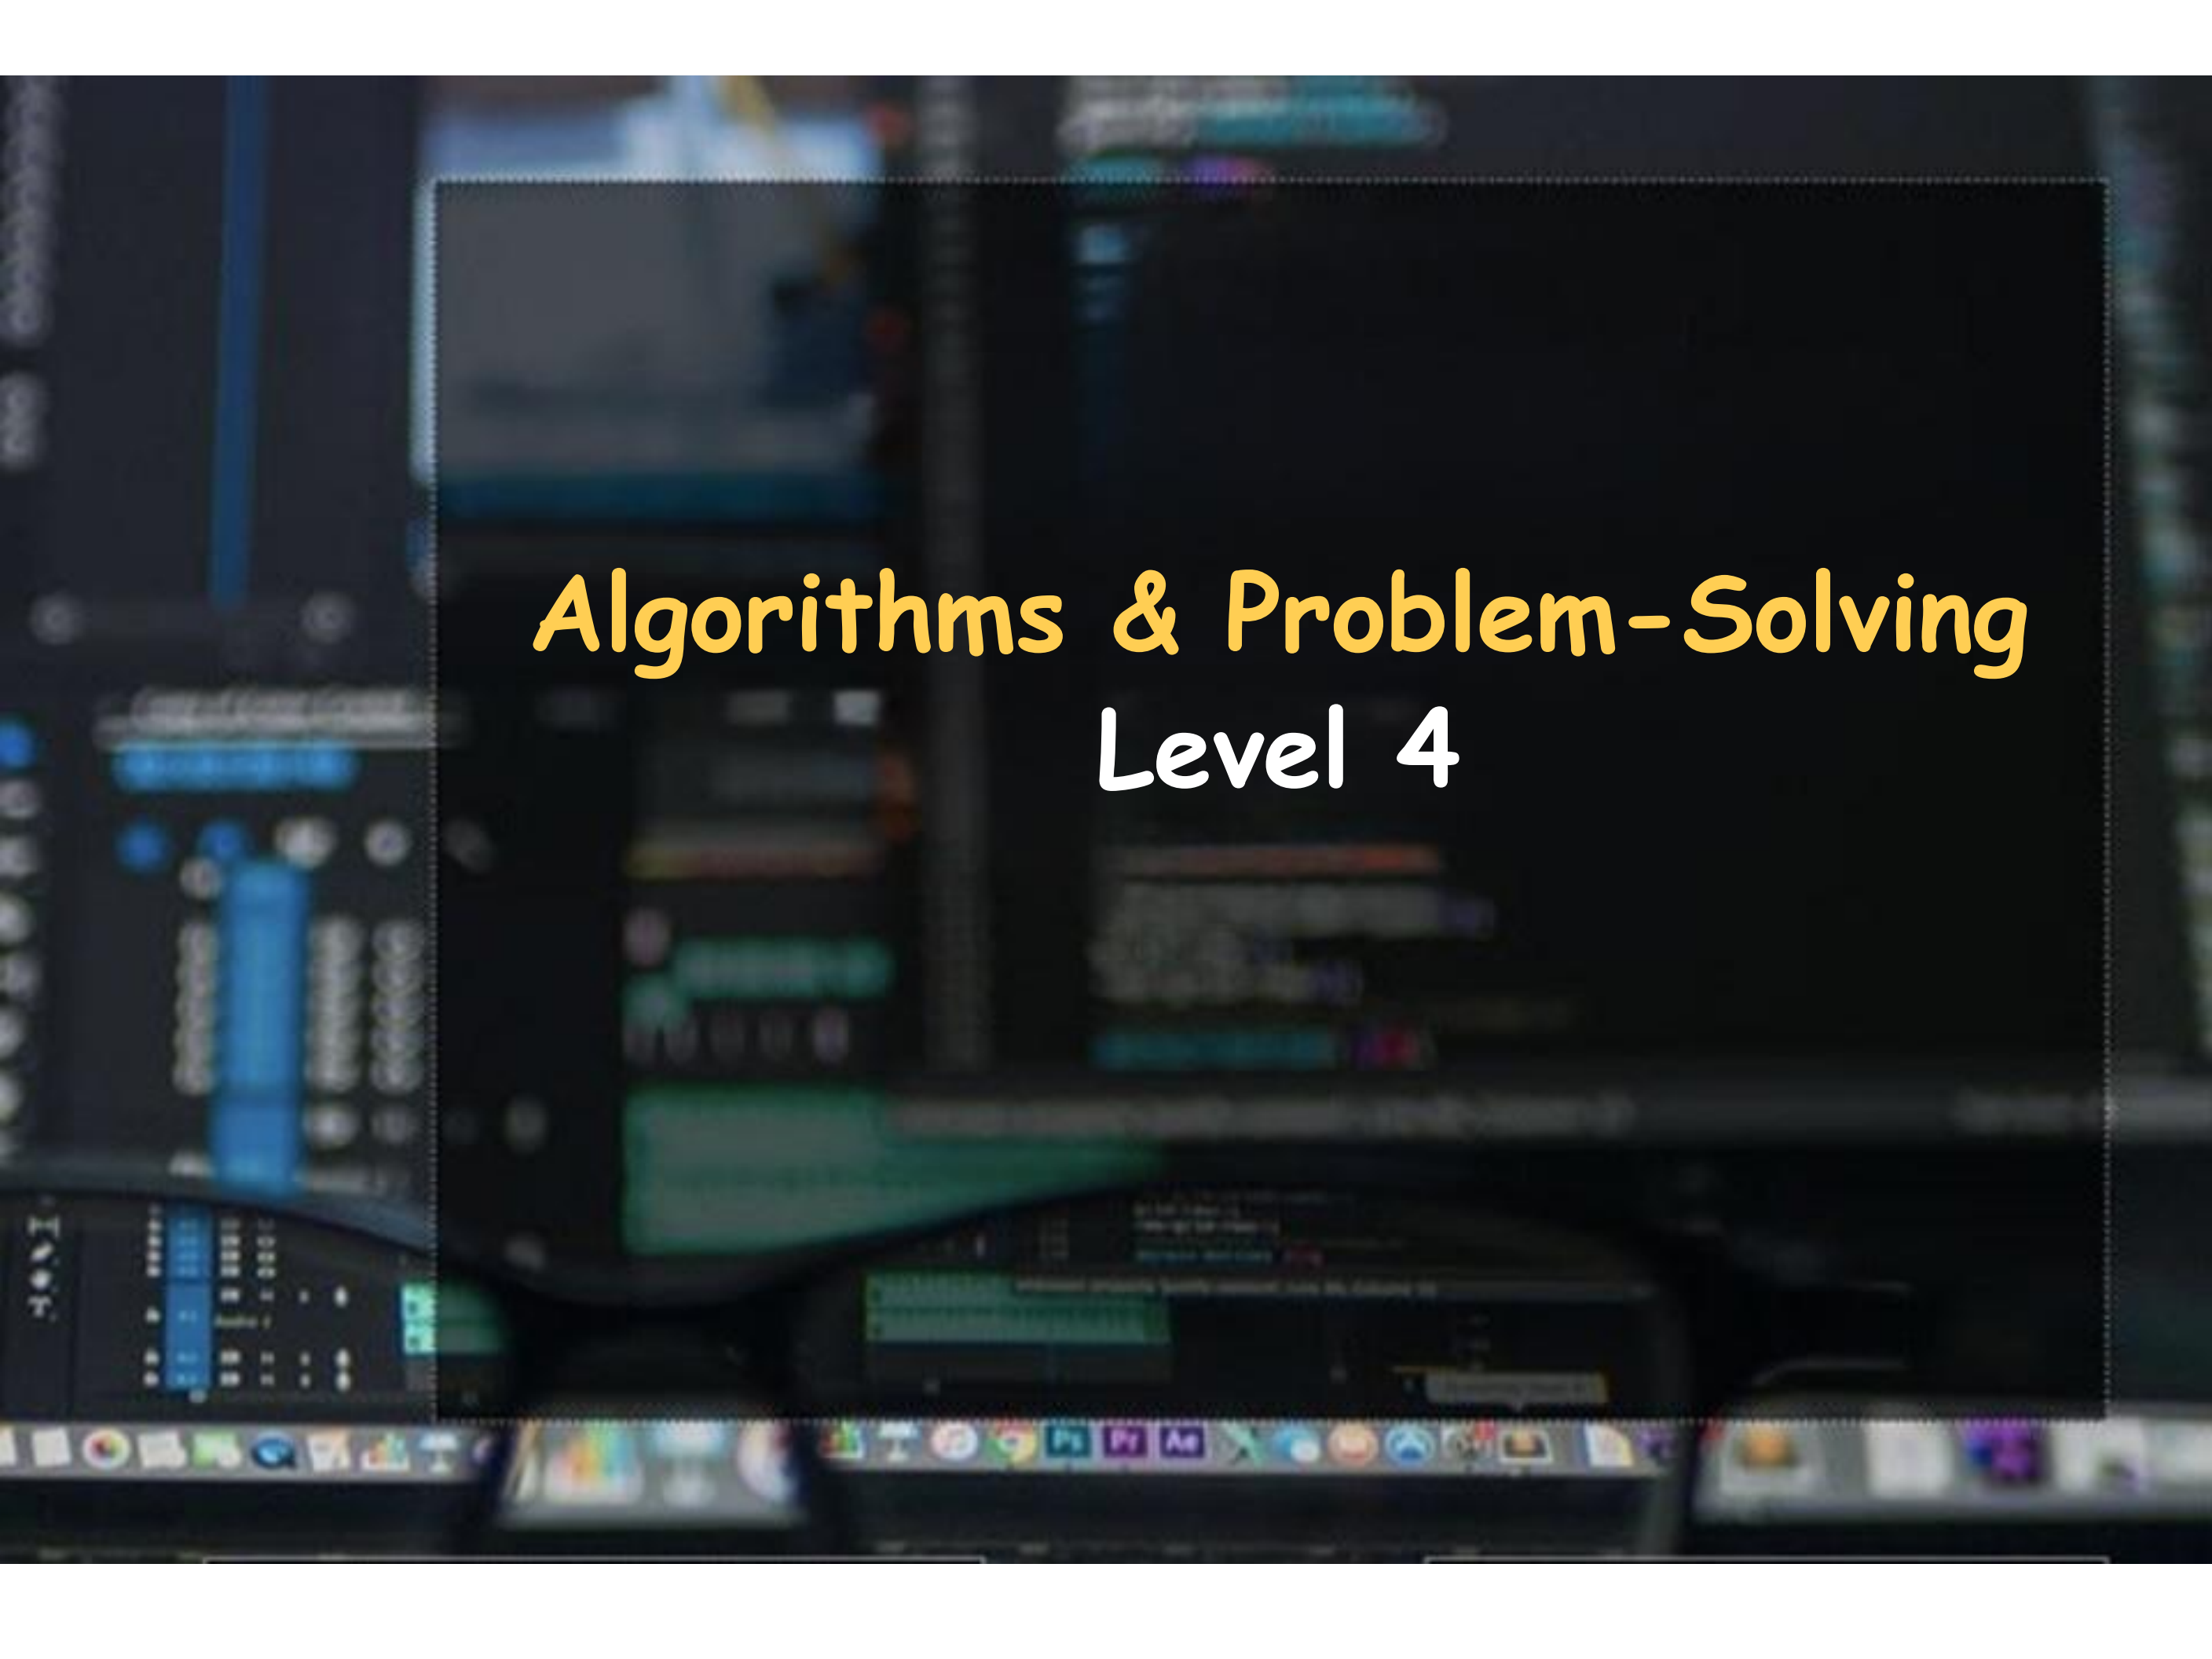


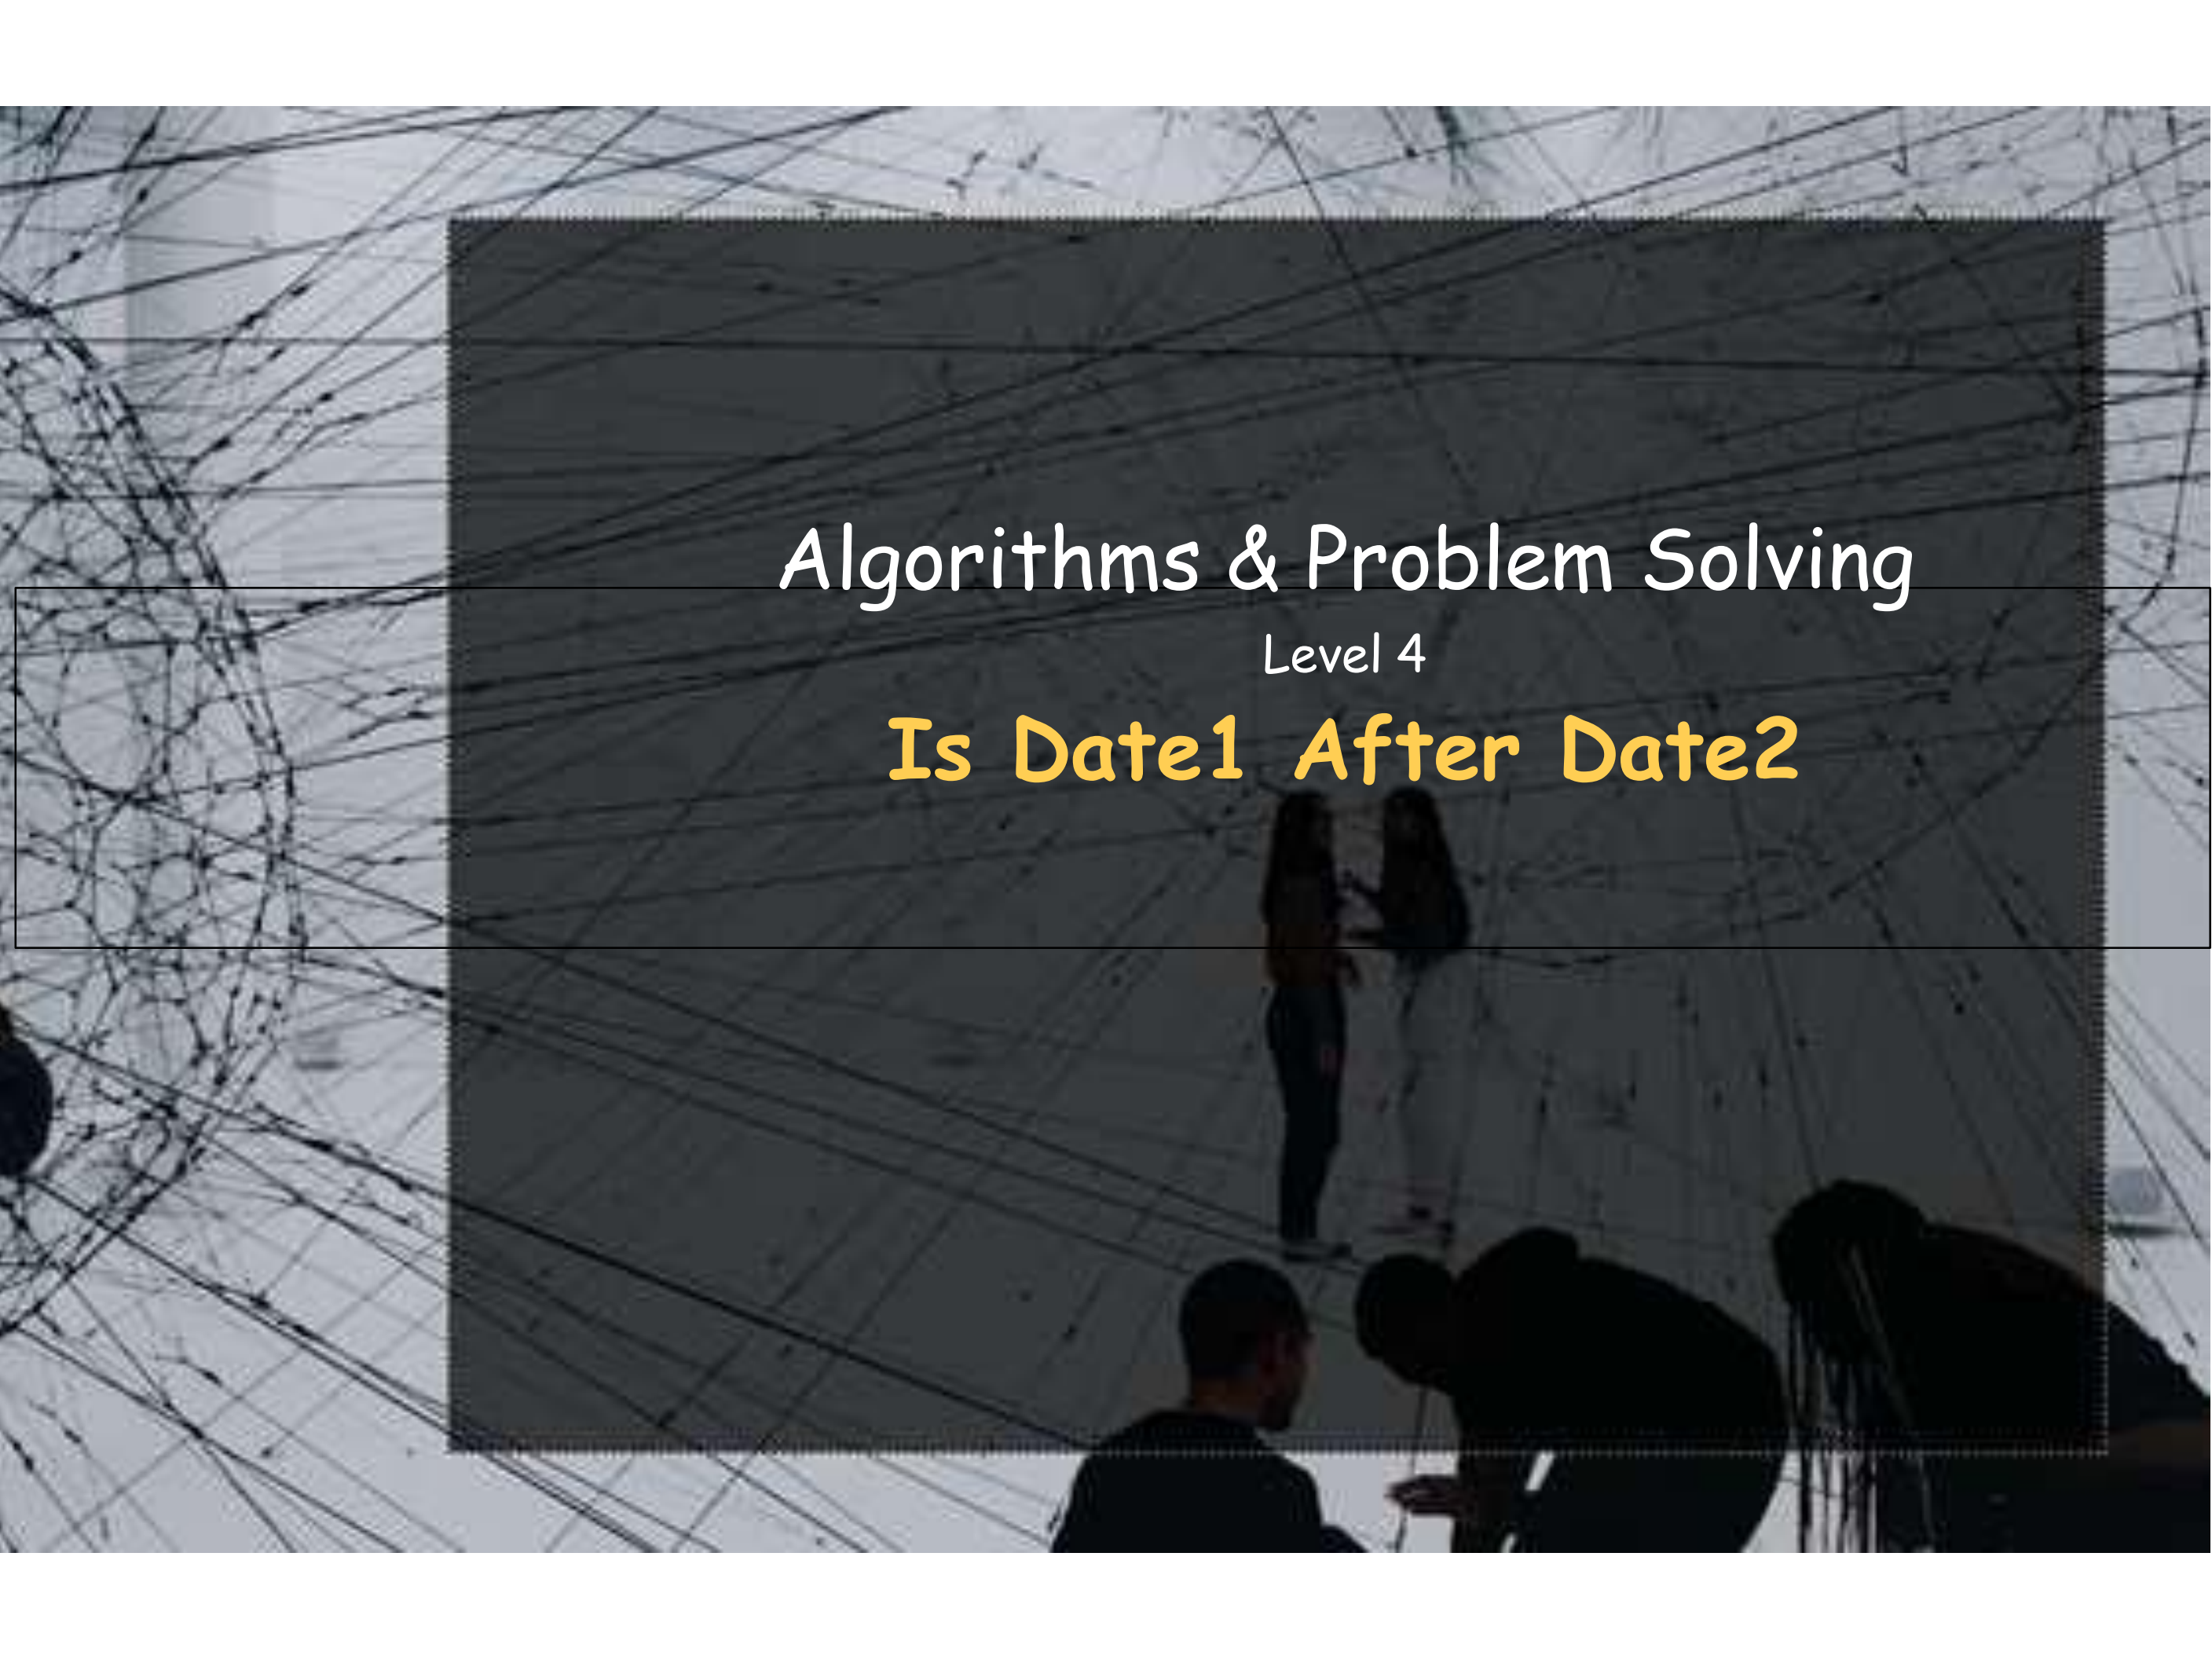

Algorithms & Problem-Solving Level 4

The background of the slide features a complex, abstract network of thin, dark lines crisscrossing over a lighter, textured surface. In the lower portion of the image, there are dark silhouettes of several people, some standing and some appearing to be in a discussion or collaborative work, adding a human element to the technical theme.

Algorithms & Problem Solving

Level 4

Is Date1 After Date2

Definition

■ sDate Structure: A structure containing three values: year, month, and day.

■ Basic Functions:

■ IsDate1BeforeDate2 checks if the first date is before the second.

■ IsDate1EqualDate2 checks if the two dates are equal.

■ IsDate1AfterDate2 checks if the first date is after the second (i.e., neither before nor equal to it).

Procedures

- 1 Requests day, month, and year for the first date
- 2 Requests day, month, and year for the second date
- 3 Performs a precise comparison in the following order: year, month, day
- 4 Prints the appropriate result on the screen



Example:

Enter Date1:

Please enter a Day? 1

Please enter a Month? 1

Please enter a Year? 2022

Enter Date2:

Please enter a Day? 1

Please enter a Month? 1

Please enter a Year? 2000

Yes, Date1 is After Date2.



Note:

- The comparison begins with the year first because it is the highest in chronological order.
- The program does not rely on pre-existing date libraries but on simple mathematical logic.

Summary

- ✓ The program determines if $\text{Date1} > \text{Date2}$ using three structured functions.
- ✓ It relies on comparing values in a logical sequence (year $\rightarrow$ month $\rightarrow$ day).
- ✓ It does not use predefined functions or libraries like `ctime`.

Thank you 😊