




C# Level 1 ErrorProvider

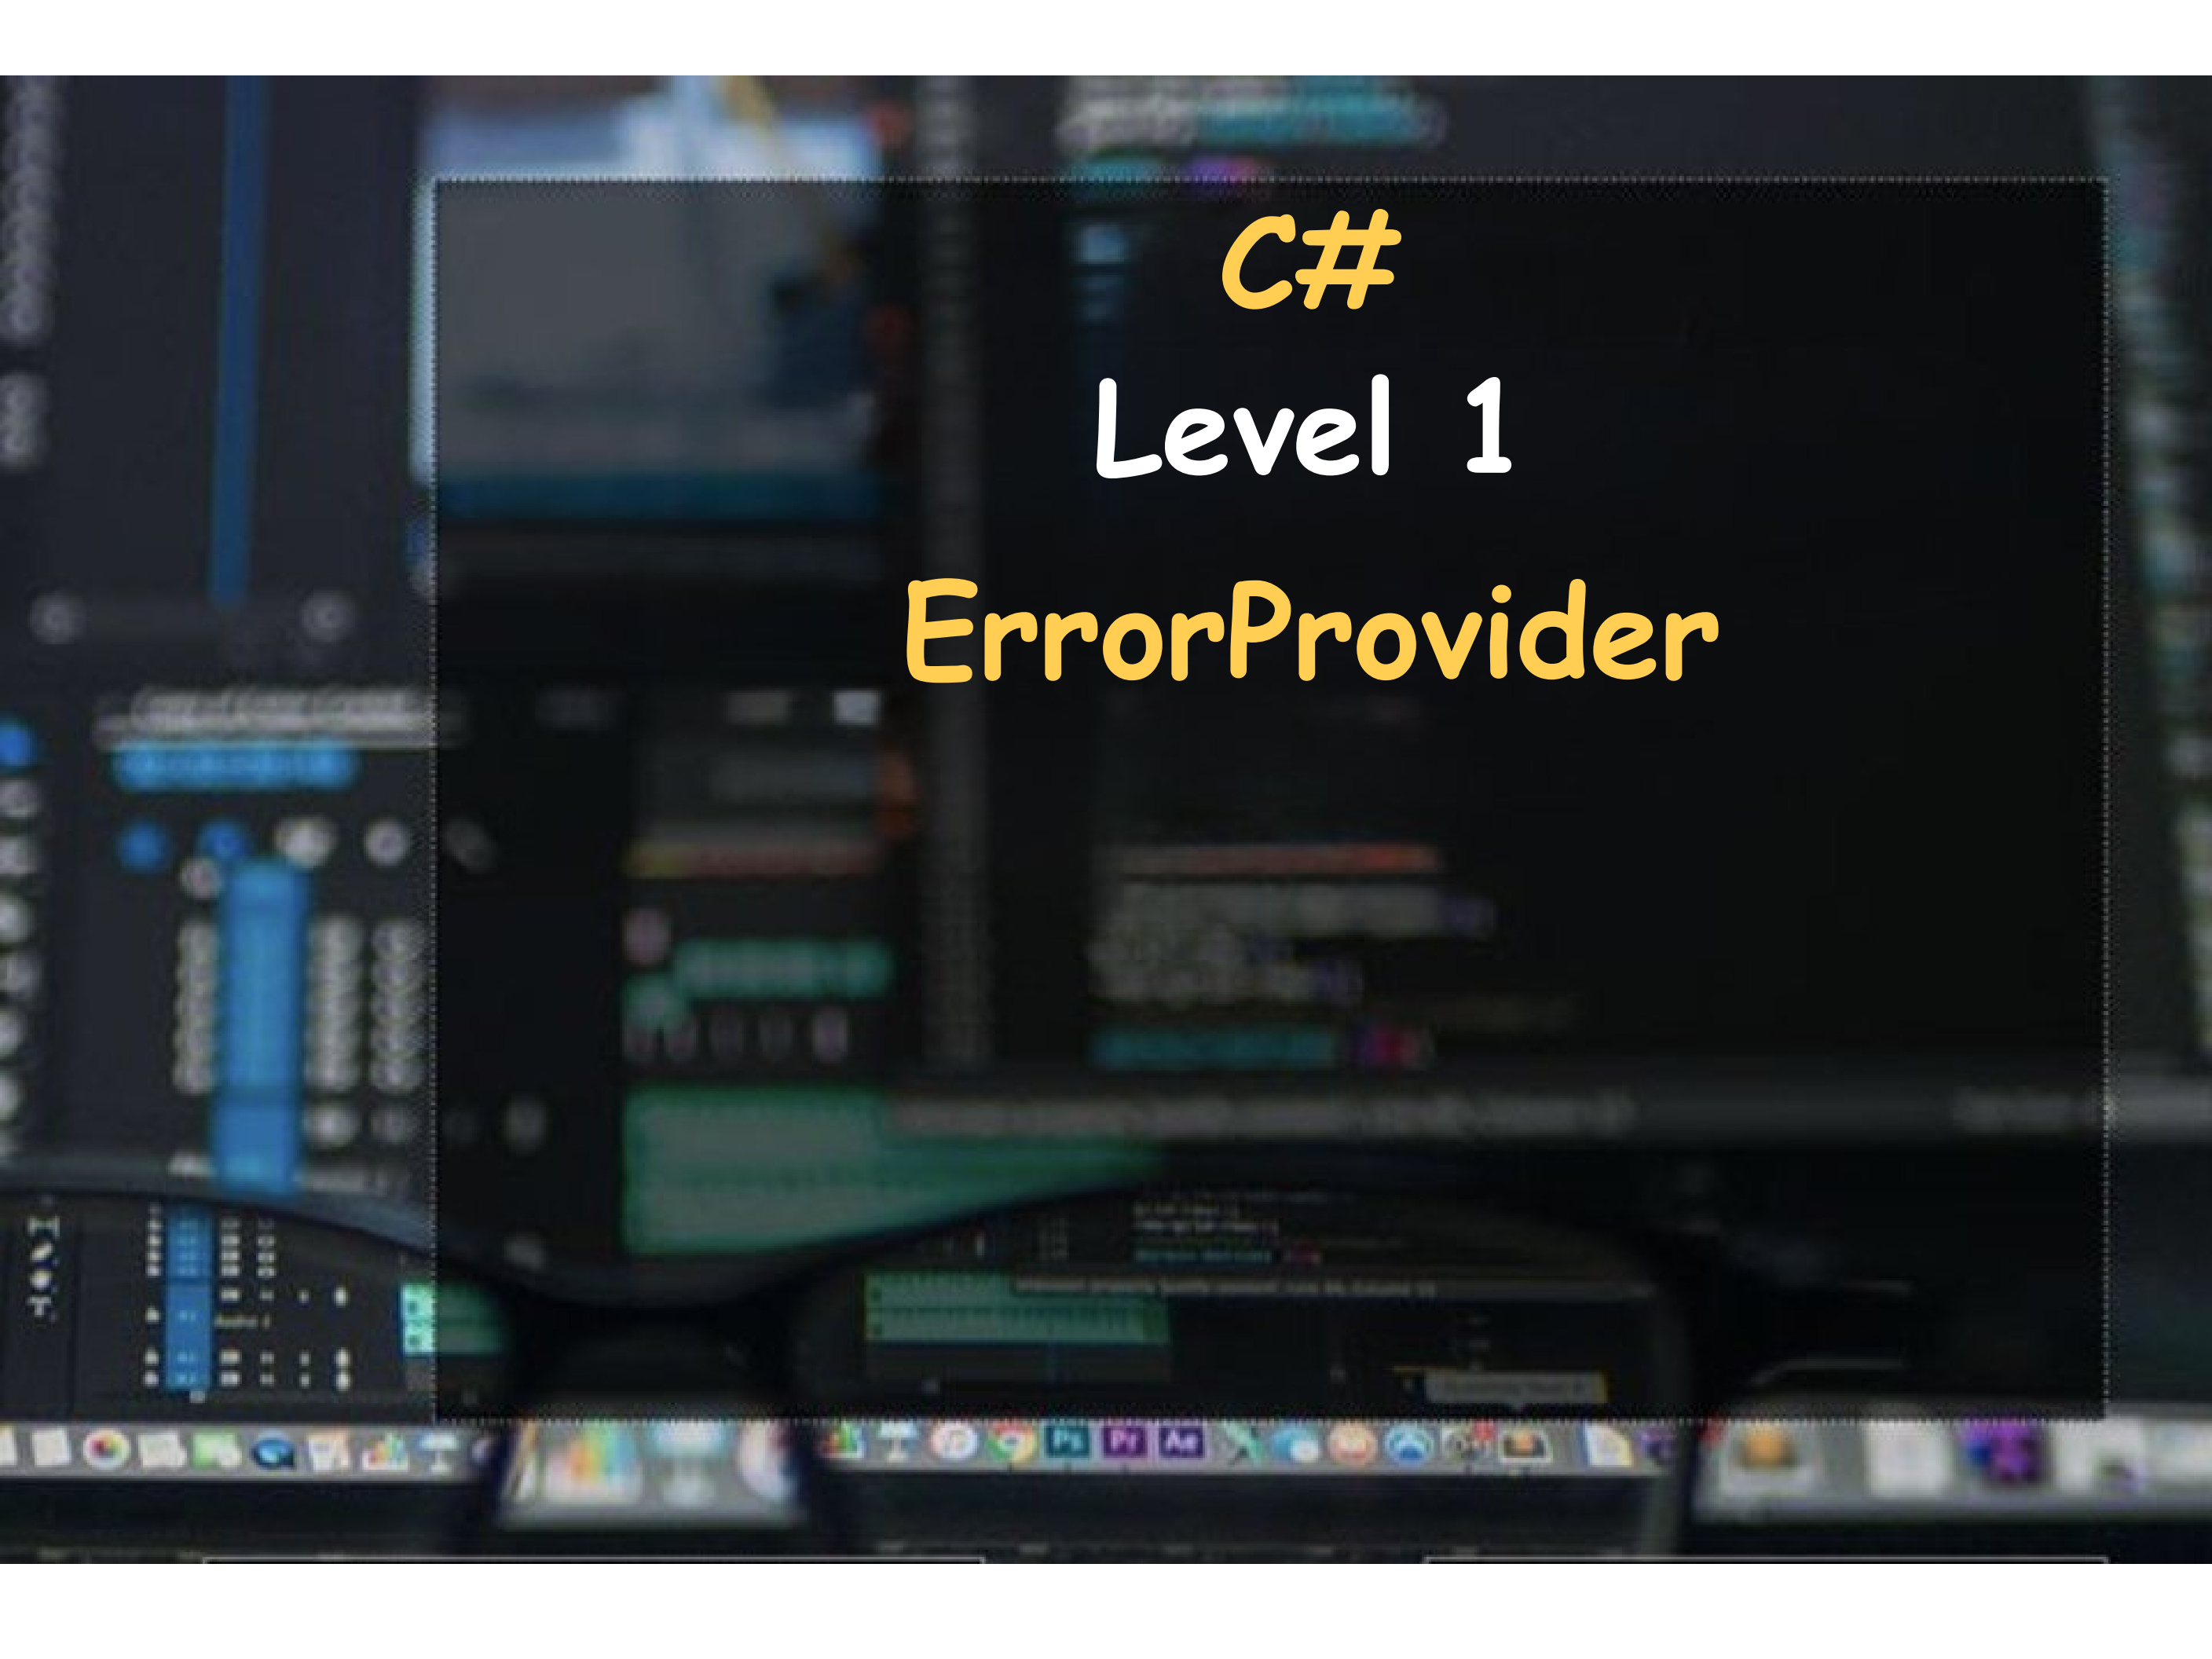

C#

Level 1

ErrorProvider

Definition

 ErrorProvider

 Windows Forms component used to display validation errors next to controls.

Explanation

Validating Event

-  Checks the TextBox input when the user tries to leave the control.

Empty Input Check

-  ``string.IsNullOrEmpty()`` checks whether the TextBox is empty.

Error Handling

-  ``e.Cancel = true`` prevents leaving the control and ``SetError()`` displays the error message.

-  When the input is valid, ``e.Cancel = false`` allows the user to continue and ``SetError()`` clears the error.

Procedure

1. Handle the `Validating` event.
2. Check whether the First Name or Last Name is empty.
3. If invalid, set `e.Cancel = true` and display an error.
4. If valid, set `e.Cancel = false` and clear the error.

💡 Example

```
if (string.IsNullOrEmpty(textBox1.Text))
{
    e.Cancel = true;
    errorProvider1.SetError(textBox1, "First Name should have a value!");
}
else
{
    e.Cancel = false;
    errorProvider1.SetError(textBox1, "");
}
```

➡ Result

- ◆ An error icon appears when the input is empty.
- ◆ The user cannot leave the invalid TextBox until a value is entered.
- ◆ The error disappears when the input becomes valid.

Note

- ◆ ``e.Cancel = true`` → prevents leaving the control.
- ◆ ``e.Cancel = false`` → allows leaving the control.
- ◆ ``setError(control, "")`` → clears the error.

Comparison

 `e.Cancel = true`

- ✓ Used for invalid input.
- ✓ Prevents leaving the control.

 `e.Cancel = false`

- ✓ Used for valid input.
- ✓ Allows the user to continue.

⊘ Warning

◆ Always clear the error message when the input becomes valid, otherwise the error icon may remain visible.

✦✦ Summary

- ✓ `ErrorProvider` → displays validation errors.
- ✓ `Validating` → validates input before leaving a control.
- ✓ `e.Cancel` → controls whether the user can leave the control.
- ✓ `SetError()` → displays or clears the validation error.

Thank you 😊