


The background is a blurred image of a computer monitor. It shows a dark-themed code editor with various lines of code in different colors (blue, green, yellow). At the bottom, a Windows taskbar is visible with several application icons including Chrome, Photoshop, and others. The text is overlaid on the right side of the screen.

C#

Level 1

TrackBar

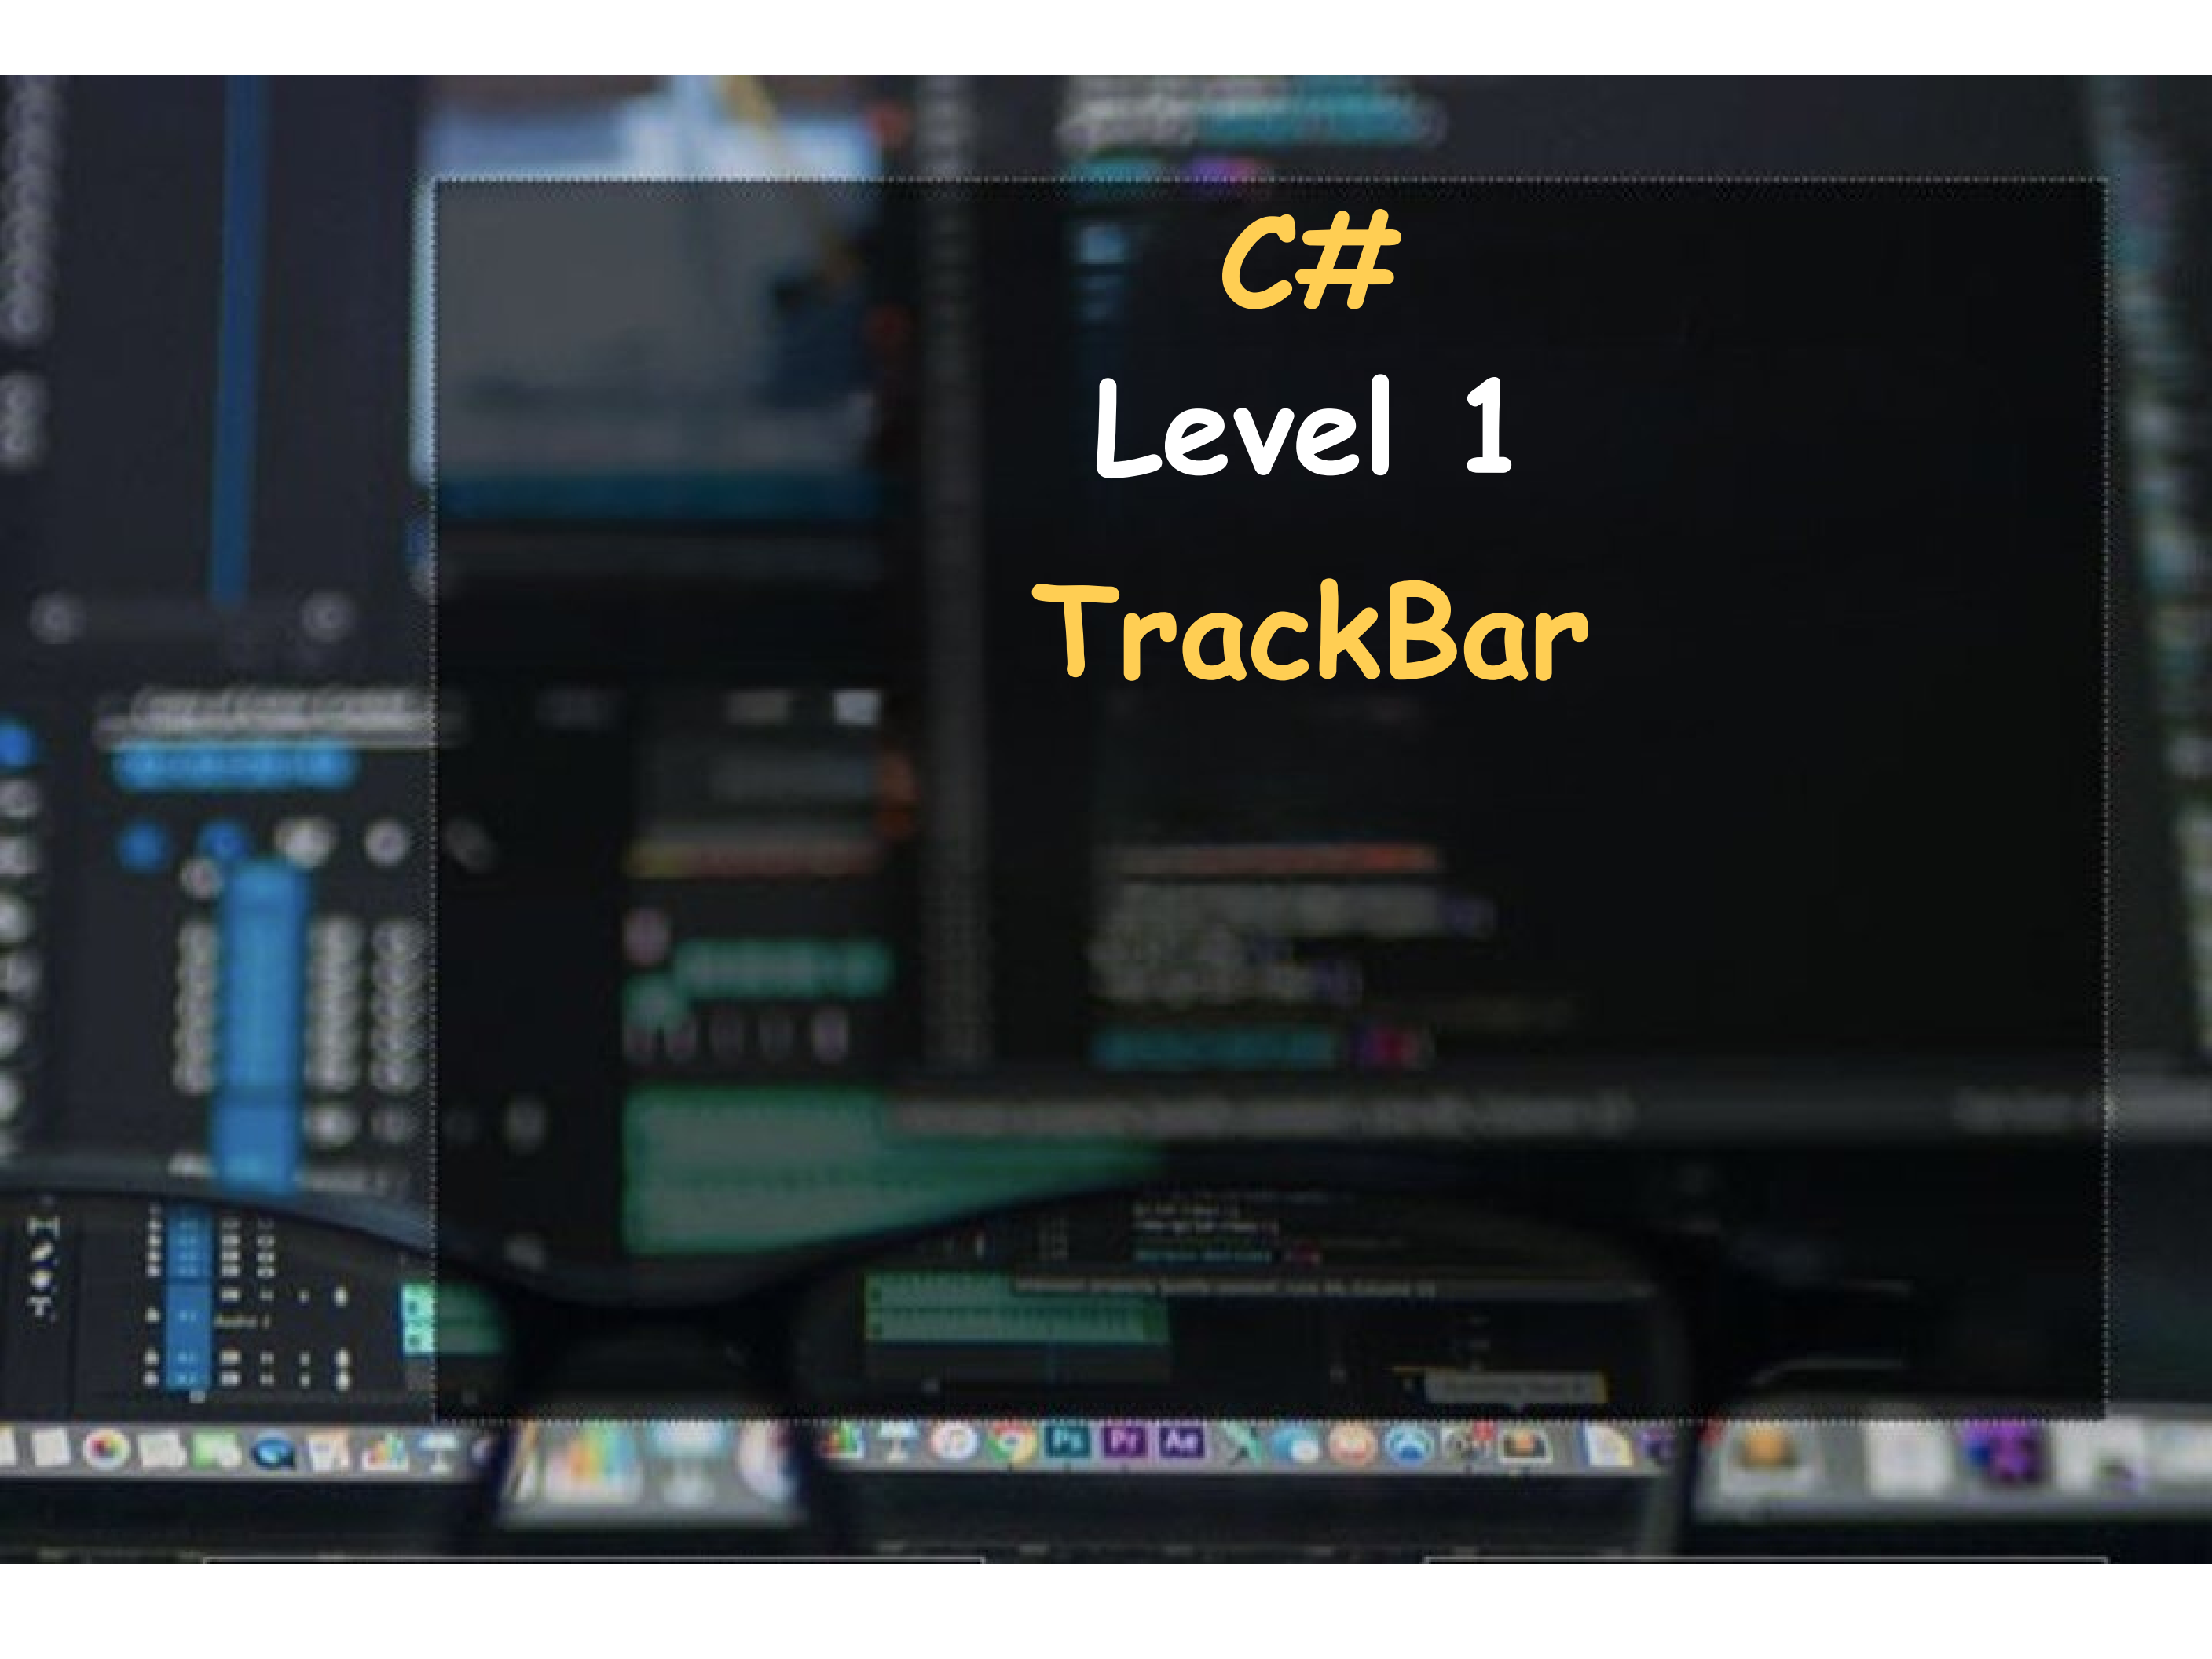

C#

Level 1

TrackBar

Definition

 TrackBar

 Windows Forms control that lets the user select a value by moving a slider.

Explanation

Scroll Event

 Triggered when the user moves the TrackBar.

Current Value

 `trackBar1.Value`` gets the selected value and can be displayed in a ``Label``.

Procedure

1. Add a `TrackBar` to the form.
2. Handle its `Scroll` event.
3. Get the current value using `trackBar1.Value`.
4. Display the value in `label1`.
5. Configure the TrackBar's minimum and maximum values if needed.

💡 Example

```
private void trackBar1_Scroll(object sender, EventArgs e)
{
    label1.Text = $"Value: {trackBar1.Value}";
}
```

➡ Result

Moving the slider updates the Label with the current value.

Note

- ◆ `Value` → current TrackBar position.
- ◆ `Scroll` → detects movement of the TrackBar.
- ◆ `Label.Text` → displays the selected value.



Comparison



TrackBar

- ✓ Lets the user select a value with a slider.
- ✓ Uses `Value` to get the selected value.



Label

- ✓ Displays the selected value.
- ✓ Uses `Text` to set the displayed content.

⊘ Warning

◆ The `Scroll` event must be connected to the `TrackBar` for the event code to run when the slider moves.

✦ Summary

- ✓ `TrackBar` → lets the user select a value.
- ✓ `Value` → gets the current value.
- ✓ `Scroll` → detects slider movement.
- ✓ `Label.Text` → displays the selected value.

Thank you 😊