



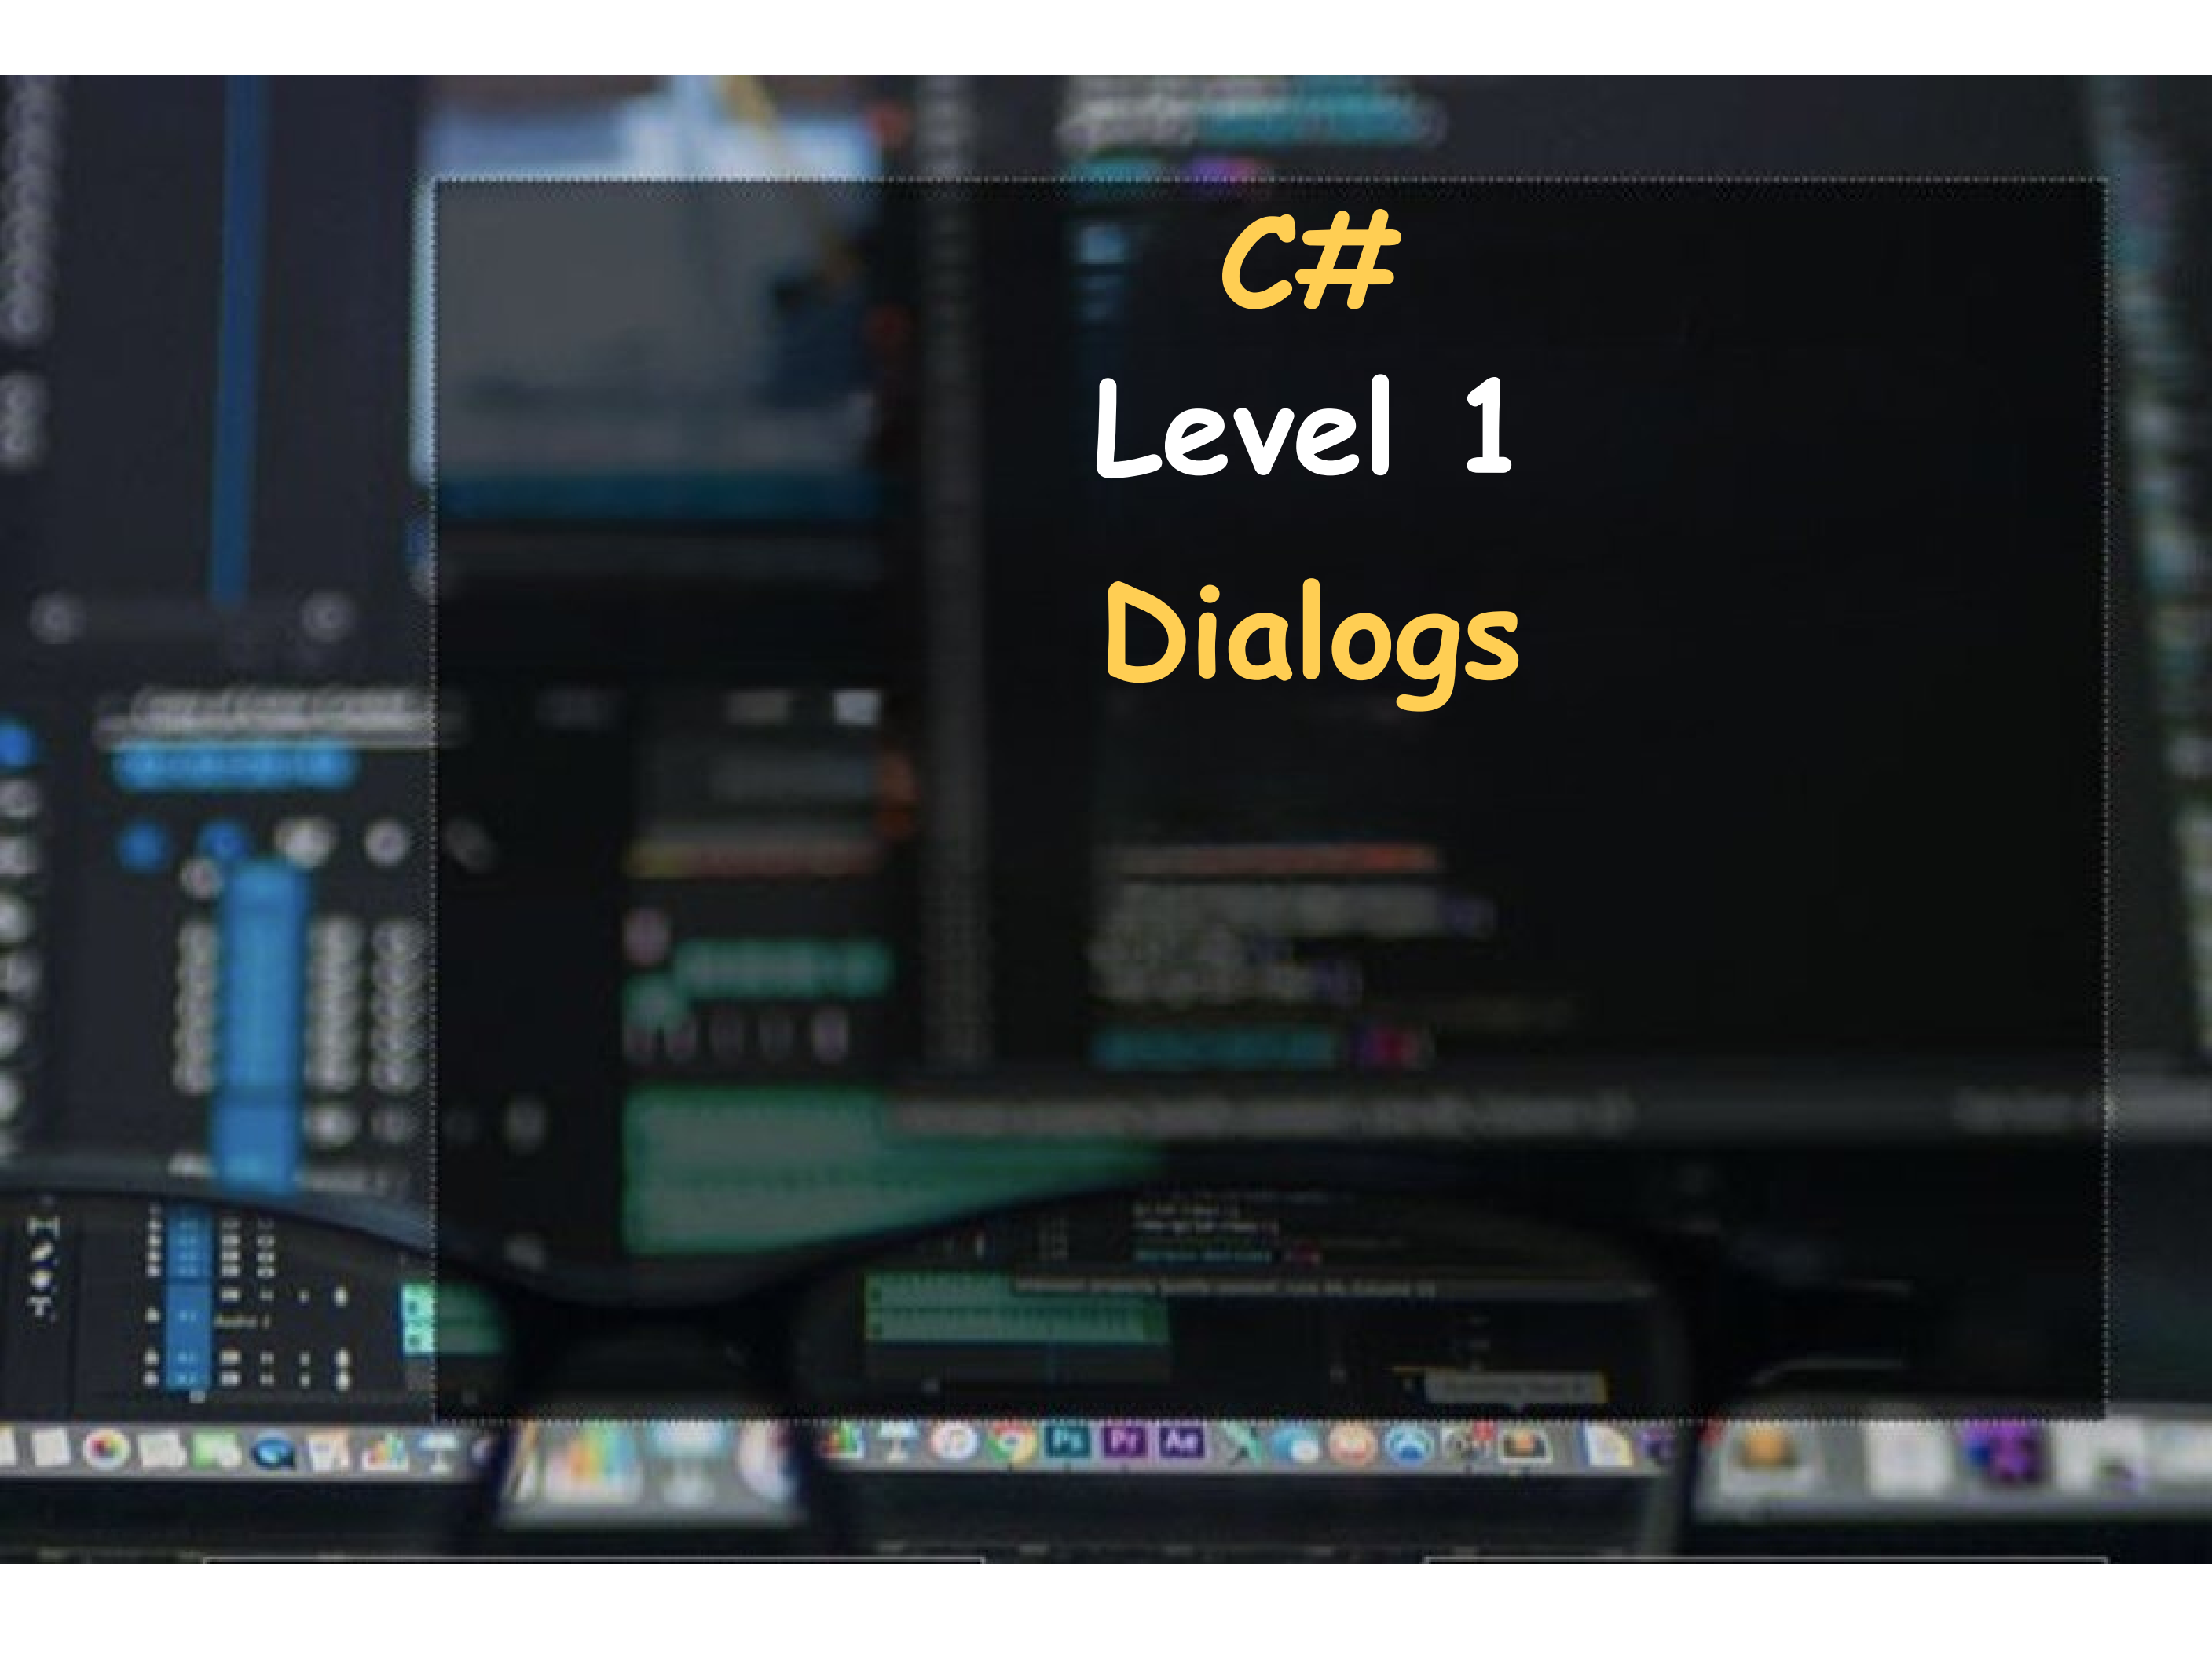

C# Level 1 Dialogs

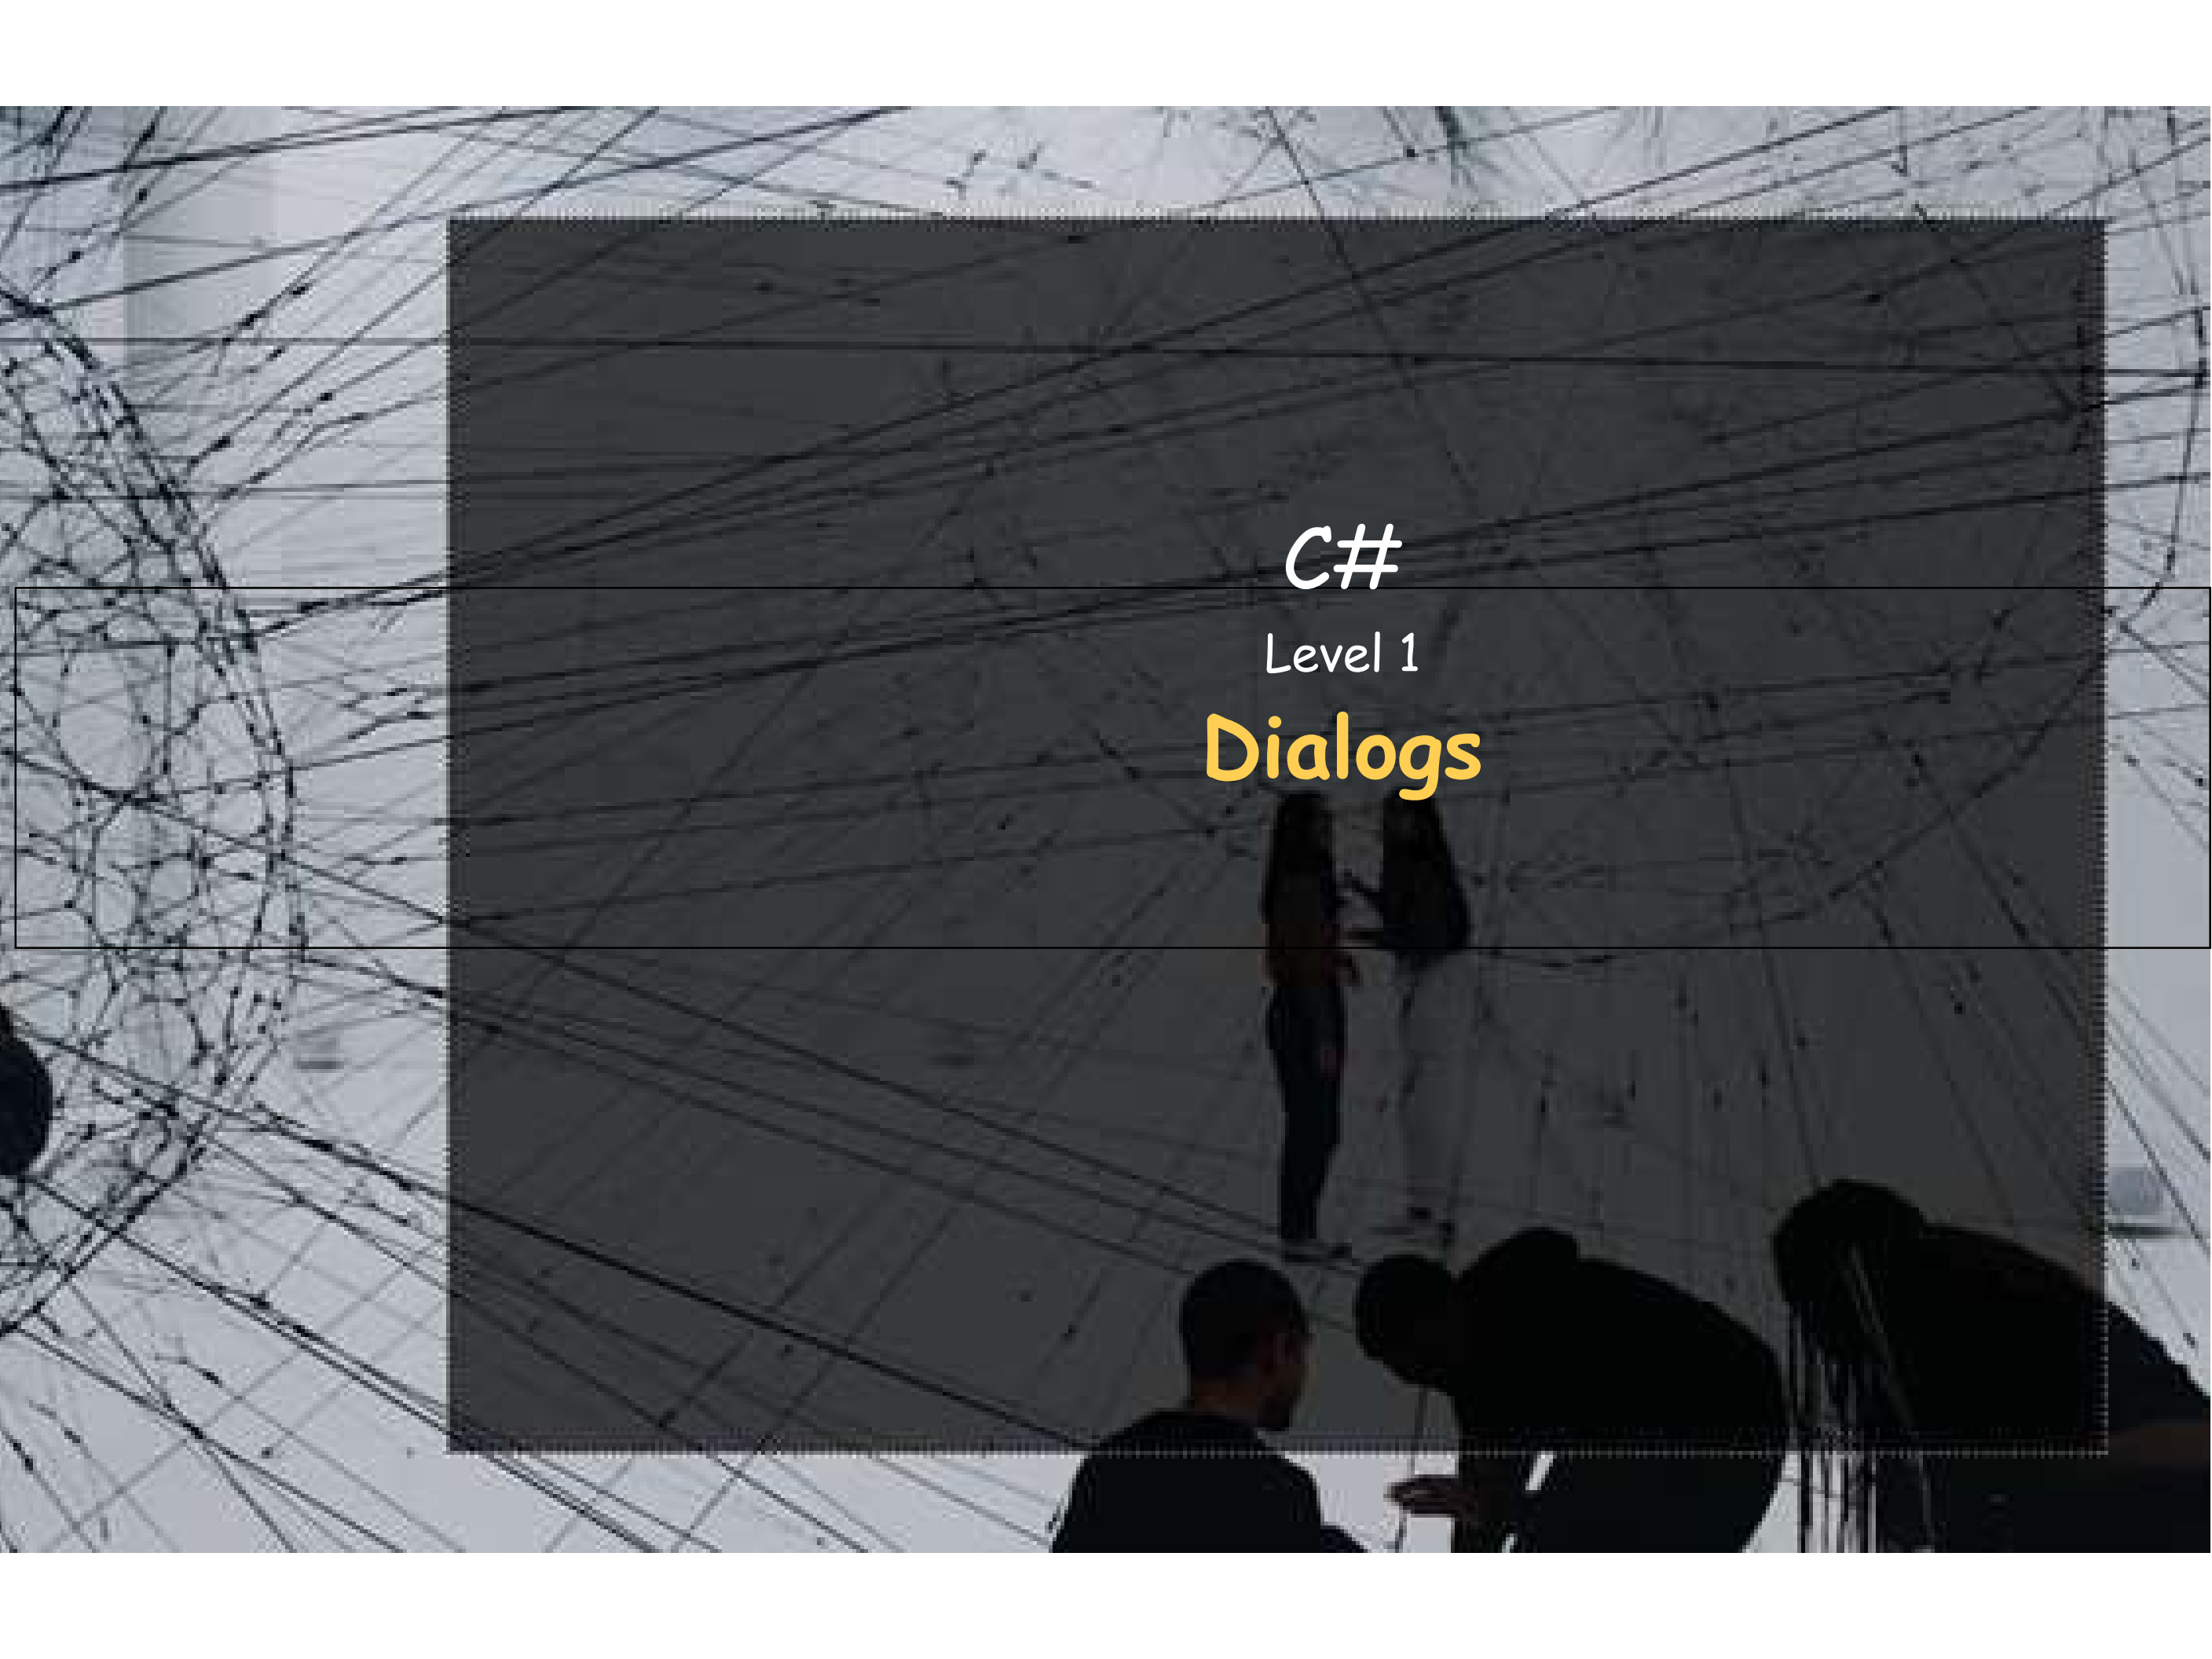

C#

Level 1

Dialogs

Definition

Windows Forms Dialogs

 Standard dialogs that allow the user to interact with files, folders, colors, and fonts.

 Common dialogs include `ColorDialog`, `FolderBrowserDialog`, `FontDialog`, `OpenFileDialog`, and `SaveFileDialog`.

Explanation

ShowDialog()

-  Opens the dialog and waits for the user's response.

-  The result is usually checked with DialogResult.OK before applying the selection.

Explanation

ColorDialog

-  Allows the user to select a color.

-  The selected color is available through `Color` and can be assigned to `BackColor` or `ForeColor`.

Explanation

FolderBrowserDialog

-  Allows the user to select a folder.
-  SelectedPath contains the selected folder path.
-  ShowNewFolderButton allows the user to create a new folder.

Explanation

FontDialog

 Allows the user to select font settings such as font, size, style, effects, and optionally color.

 ShowColor enables color selection.

 ShowApply displays the Apply button.

 Font and Color contain the selected settings.

Explanation

OpenFileDialog

-  Allows the user to select an existing file.
-  FileName contains one selected file path.
-  FileNames contains all selected file paths when Multiselect is enabled.
-  Filter controls the available file types.

Explanation

SaveFileDialog

-  Allows the user to choose a file name and location for saving.
-  FileName contains the selected save path.
-  DefaultExt defines the default file extension.
-  Filter controls the available file types.

Procedure

1. Configure the required dialog properties.
2. Use `ShowDialog()` to open the dialog.
3. Check for `DialogResult.OK`.
4. Get the selected value using the appropriate property.
5. Apply or use the selected value in the program.

💡 Example

◆ ColorDialog

```
if (colorDialog1.ShowDialog() == DialogResult.OK)
{
    textBox1.BackColor = colorDialog1.Color;
}
```

💡 Example

◆ FolderBrowserDialog

```
folderBrowserDialog1.ShowNewFolderButton = true;  
if (folderBrowserDialog1.ShowDialog() == DialogResult.OK)  
{  
    MessageBox.Show(folderBrowserDialog1.SelectedPath);  
}
```

💡 Example

◆ FontDialog

```
fontDialog1.ShowColor = true;  
fontDialog1.Font = textBox1.Font;  
if (fontDialog1.ShowDialog() == DialogResult.OK)  
{  
    textBox1.Font = fontDialog1.Font;  
    textBox1.ForeColor = fontDialog1.Color;  
}
```

💡 Example

◆ OpenFileDialog

```
openFileDialog1.Filter = "Text files (*.txt)|*.txt|All files (*.*)|*.*";  
if (openFileDialog1.ShowDialog() == DialogResult.OK)  
{  
    MessageBox.Show(openFileDialog1.FileName);  
}
```

💡 Example

◆ SaveFileDialog

```
saveFileDialog1.DefaultExt = ".txt";  
saveFileDialog1.Filter = "Text files (*.txt)|*.txt|All files (*.*)|*.*";  
if (saveFileDialog1.ShowDialog() == DialogResult.OK)  
{  
    MessageBox.Show(saveFileDialog1.FileName);  
}
```

Note

Common

 ShowDialog() → opens the dialog and waits for the user's response.

 DialogResult.OK → confirms the user's selection.

ColorDialog

 Color → selected color.

FolderBrowserDialog

 SelectedPath → selected folder path.

 ShowNewFolderButton → allows creating a new folder.

FontDialog

 Font → selected font.

 Color → selected font color.

 ShowColor → enables color selection.

 ShowApply → displays Apply.

 ShowEffects → enables font effects.

Note

OpenFileDialog / SaveFileDialog

-  InitialDirectory → sets the starting folder.
-  Title → sets the dialog title.
-  Filter → defines available file types.
-  FilterIndex → selects the default filter.
-  FileName → selected file path.

OpenFileDialog only

-  Multiselect → allows selecting multiple files.
-  FileNames → contains all selected file paths.

SaveFileDialog only

-  DefaultExt → defines the default file extension.



Comparison



ColorDialog

- ✓ Selects a color.



FontDialog

- ✓ Selects font settings and optionally a color.



FolderBrowserDialog

- ✓ Selects a folder.
- ✓ Returns the path through `SelectedPath`.



OpenFileDialog

- ✓ Selects an existing file.
- ✓ Uses `FileName` or `FileNames`.



SaveFileDialog

- ✓ Selects a file name and save location.
- ✓ Uses `FileName`.

⊘ Warning

- ◆ Always check `DialogResult.OK` before using the selected value.
- ◆ `OpenFileDialog` selects an existing file, while `SaveFileDialog` only chooses the location and name for saving.
- ◆ `SaveFileDialog` does not save the file content automatically; file-writing code is still required.
- ◆ `FolderBrowserDialog` selects a folder, not a file.

✦ Summary

- ✓ `ColorDialog` → selects a color.
- ✓ `FolderBrowserDialog` → selects a folder.
- ✓ `FontDialog` → selects font settings and optionally color.
- ✓ `OpenFileDialog` → selects existing file(s).
- ✓ `SaveFileDialog` → selects a file name and save location.
- ✓ `ShowDialog()` → opens the dialog.
- ✓ `DialogResult.OK` → confirms the selection.

Thank you 😊