




C#

Level 1

TimeSpan

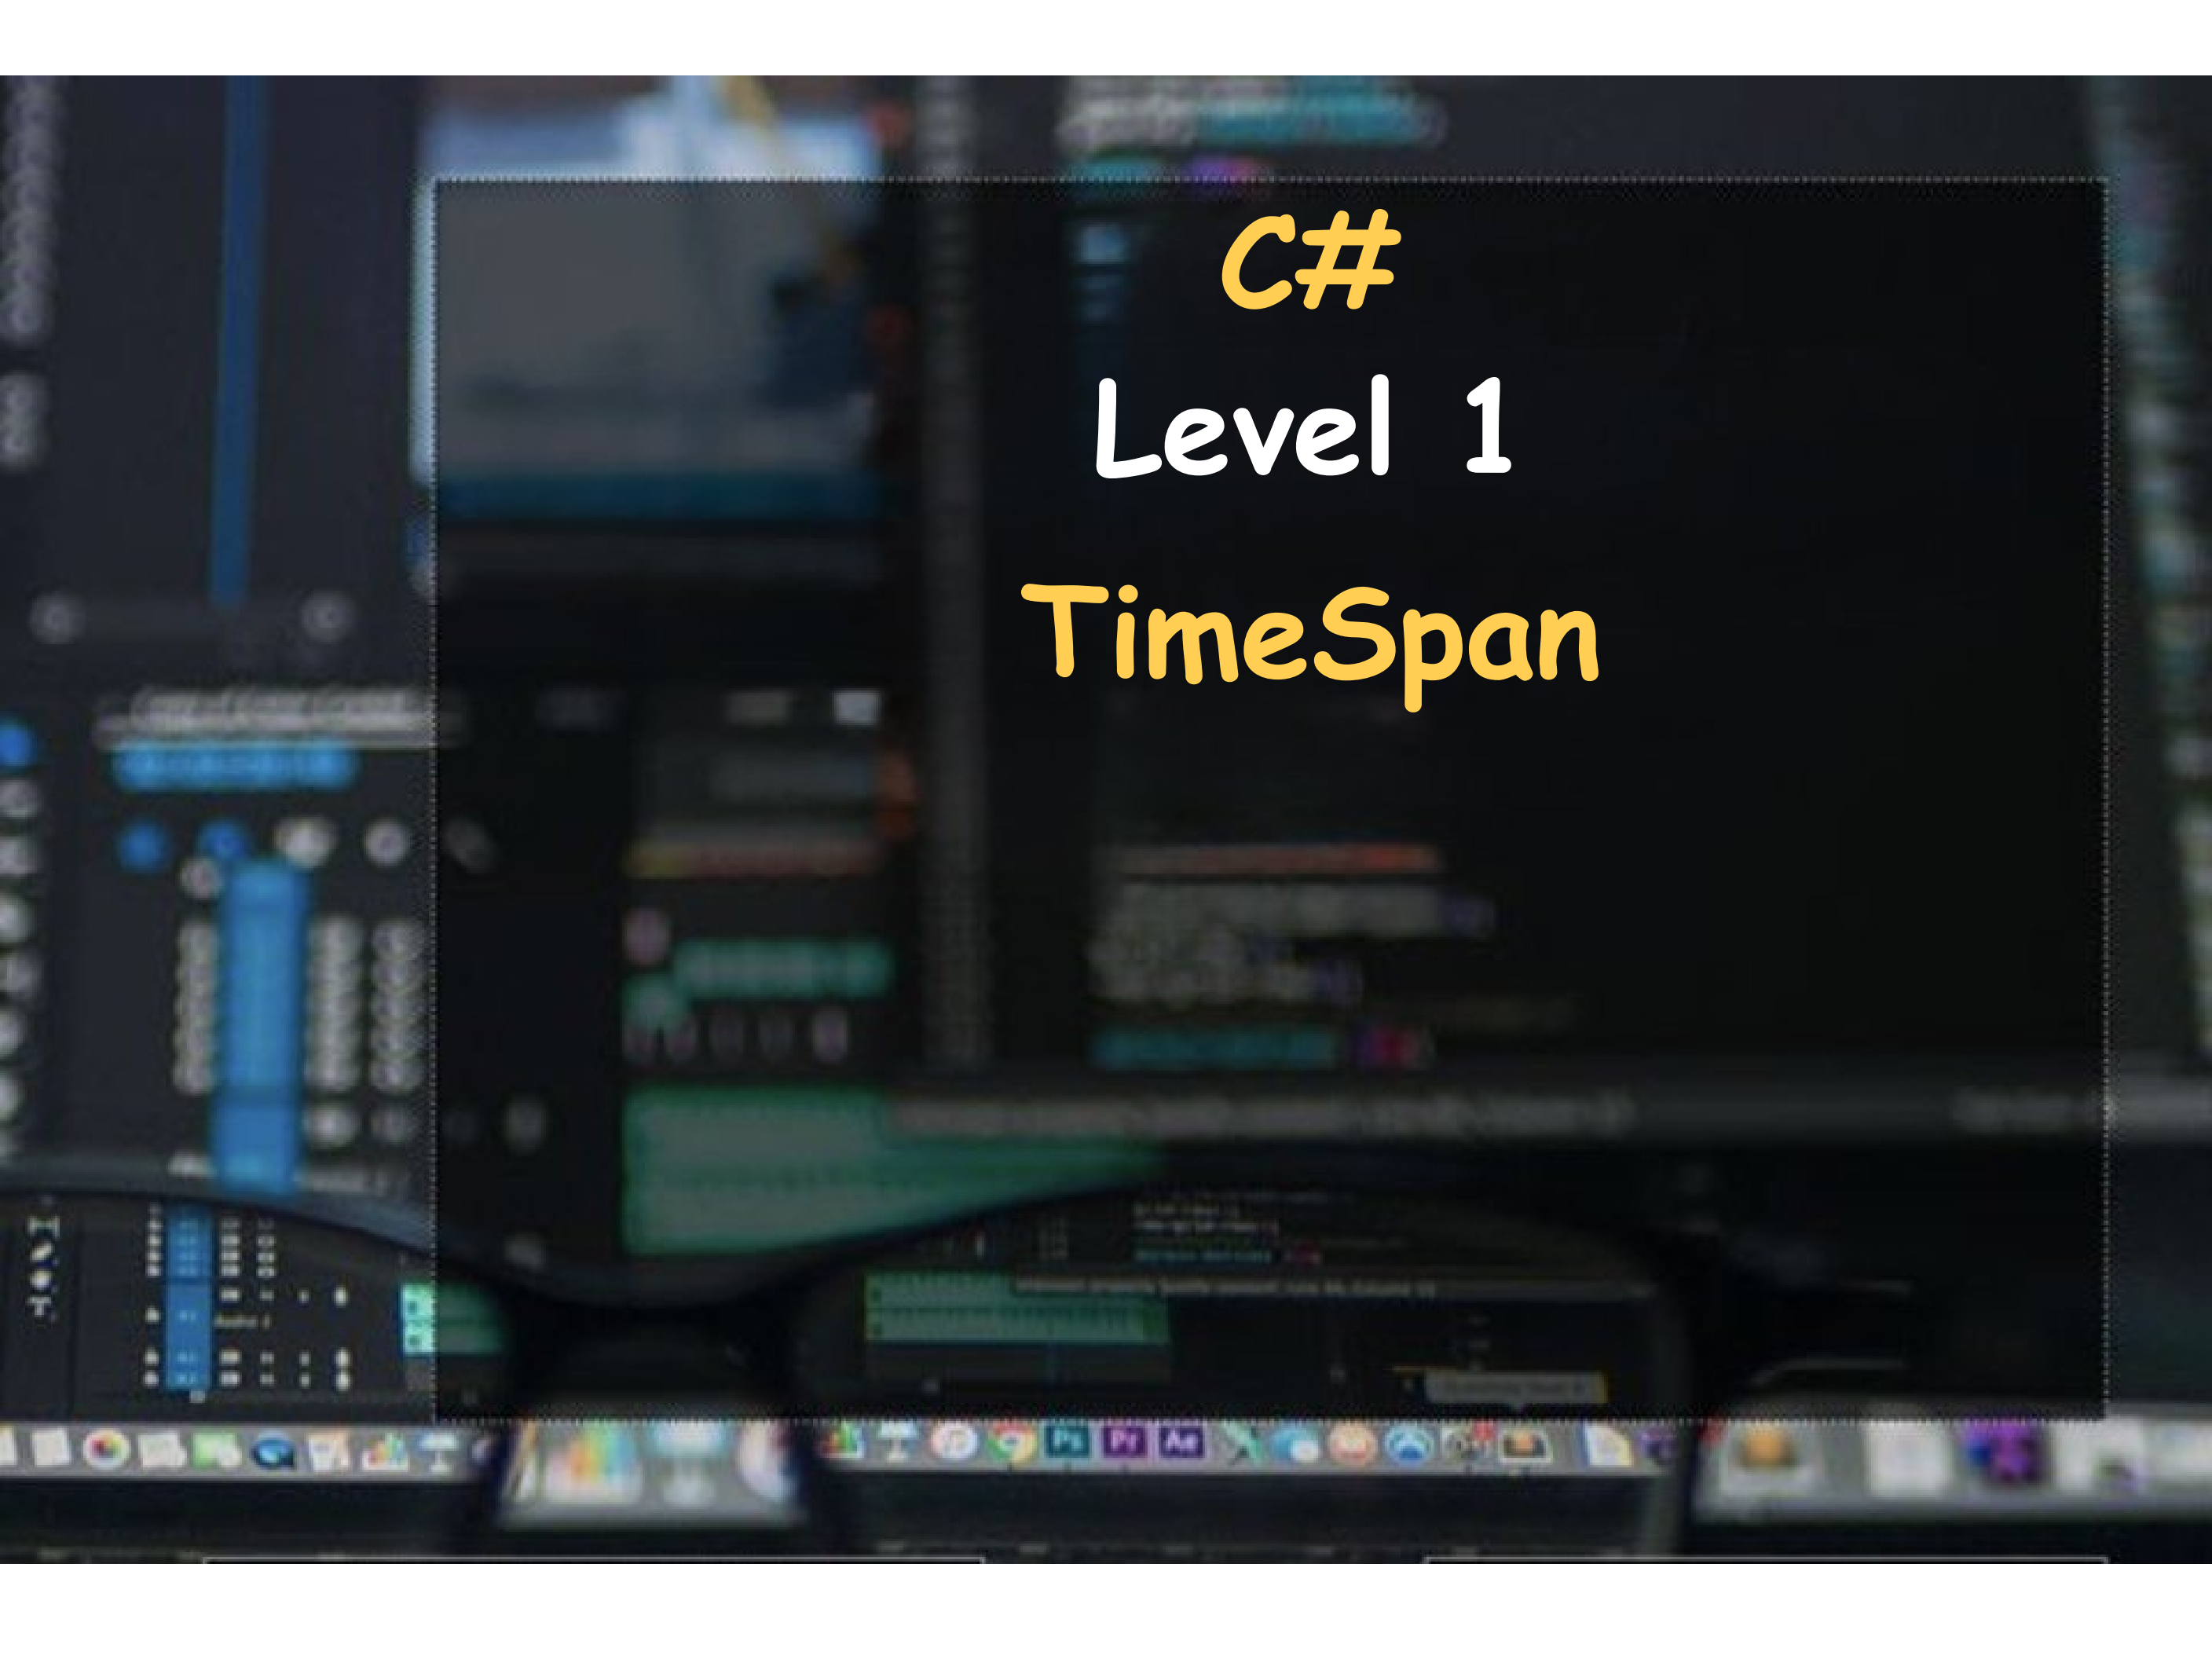

C#

Level 1

TimeSpan

Definition

 TimeSpan

 Represents a time interval or duration, such as days, hours, minutes, and seconds.

Explanation

Creating a TimeSpan

 ``new TimeSpan(49, 25, 34)`` creates a duration of 49 hours, 25 minutes, and 34 seconds.

Reading TimeSpan Values

 ``.Days`` returns the total number of complete days.

 ``.Hours`` returns the remaining hours after complete days.

 ``.Minutes`` returns the remaining minutes.

 ``.Seconds`` returns the remaining seconds.

Adding TimeSpan to DateTime

 ``.dt.Add(ts)`` adds the TimeSpan duration to a ``DateTime``.

 The result is stored in a new ``DateTime`` variable.

Procedures

1. Create a ``DateTime`` object.
2. Create a ``TimeSpan`` duration.
3. Access its days, hours, minutes, and seconds.
4. Add the `TimeSpan` to the `DateTime` using `.Add()``.
5. Print the result.

💡 Example

```
TimeSpan ts = new TimeSpan(49, 25, 34);  
Console.WriteLine(ts);  
Console.WriteLine(ts.Days);  
Console.WriteLine(ts.Hours);  
Console.WriteLine(ts.Minutes);  
Console.WriteLine(ts.Seconds);  
DateTime newDate = dt.Add(ts);  
Console.WriteLine(newDate);
```

➡ Result:

2.01:25:34

2

1

25

34

2023-02-23 01:25:34

Note

- ◆ `TimeSpan` represents a duration, not a specific date or time.
- ◆ A value such as `49` hours is automatically represented as `2` days and `1` hour when accessing `.Days` and `.Hours`.

⊘ Warning

- ◆ `.Hours`` does not return the total number of hours; it returns the hour component remaining after days are removed.
- ◆ For the total duration in hours, use `.TotalHours``.

✦ Summary

- ✓ `TimeSpan` represents a duration.
- ✓ `.Days`, `.Hours`, `.Minutes`, and `.Seconds` retrieve its components.
- ✓ `DateTime.Add(TimeSpan)` adds a duration to a date and returns a new `DateTime`.

Thank you 😊